

PLASMONX: project status



Danilo Giulietti

INFN, Pisa, Italy

On behalf of the PLASMONX Team

Contents

- FLAME lab general layout;
- An overview of the laser system;
- FLAME target area for laser-only experiments;
- Primo esperimento Italiano di LPA
- Self-injection Test Experiment;
- Agenda July '09 – March 2010
- Conclusions

The FLAME laboratory



27th March 2007 –
beginning of construction

23rd June 2008 –

Building completed



The FLAME laboratory - update



12th March 2009 –
delivery of laser


18th May 2009 –
start of Installation of clean room



10th June 2009 –
“Cold” laser installation



The FLAME laboratory – general layout

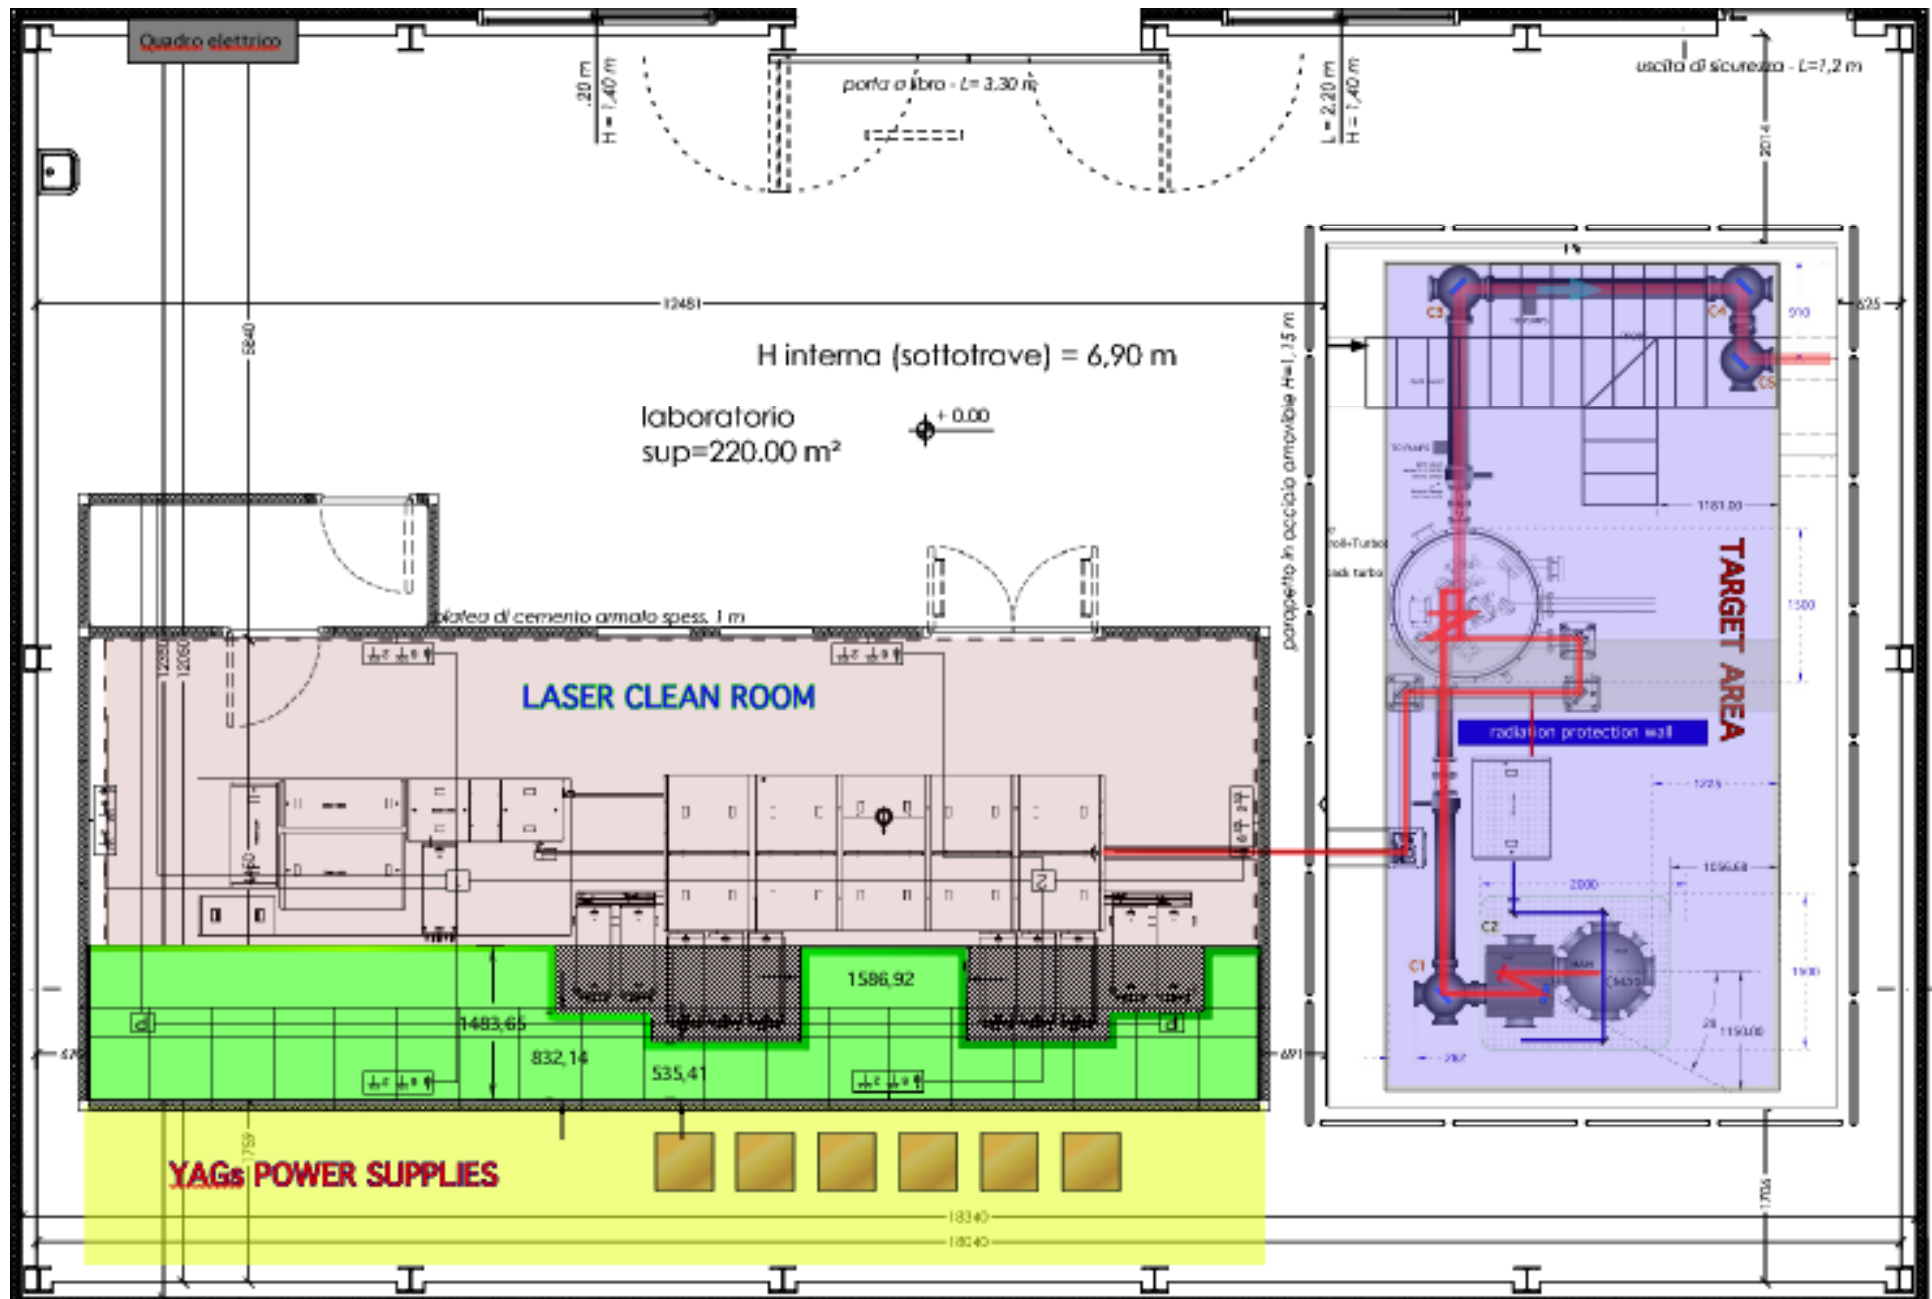

A TOP VIEW OF THE INTERACTION as seen in the optical domain


Laser

Thomson scattering
from plasma electrons
in the high intensity
region

Plasma self-emission
from gas ionisation


Gas-jet nozzle slit

Scattered laser light

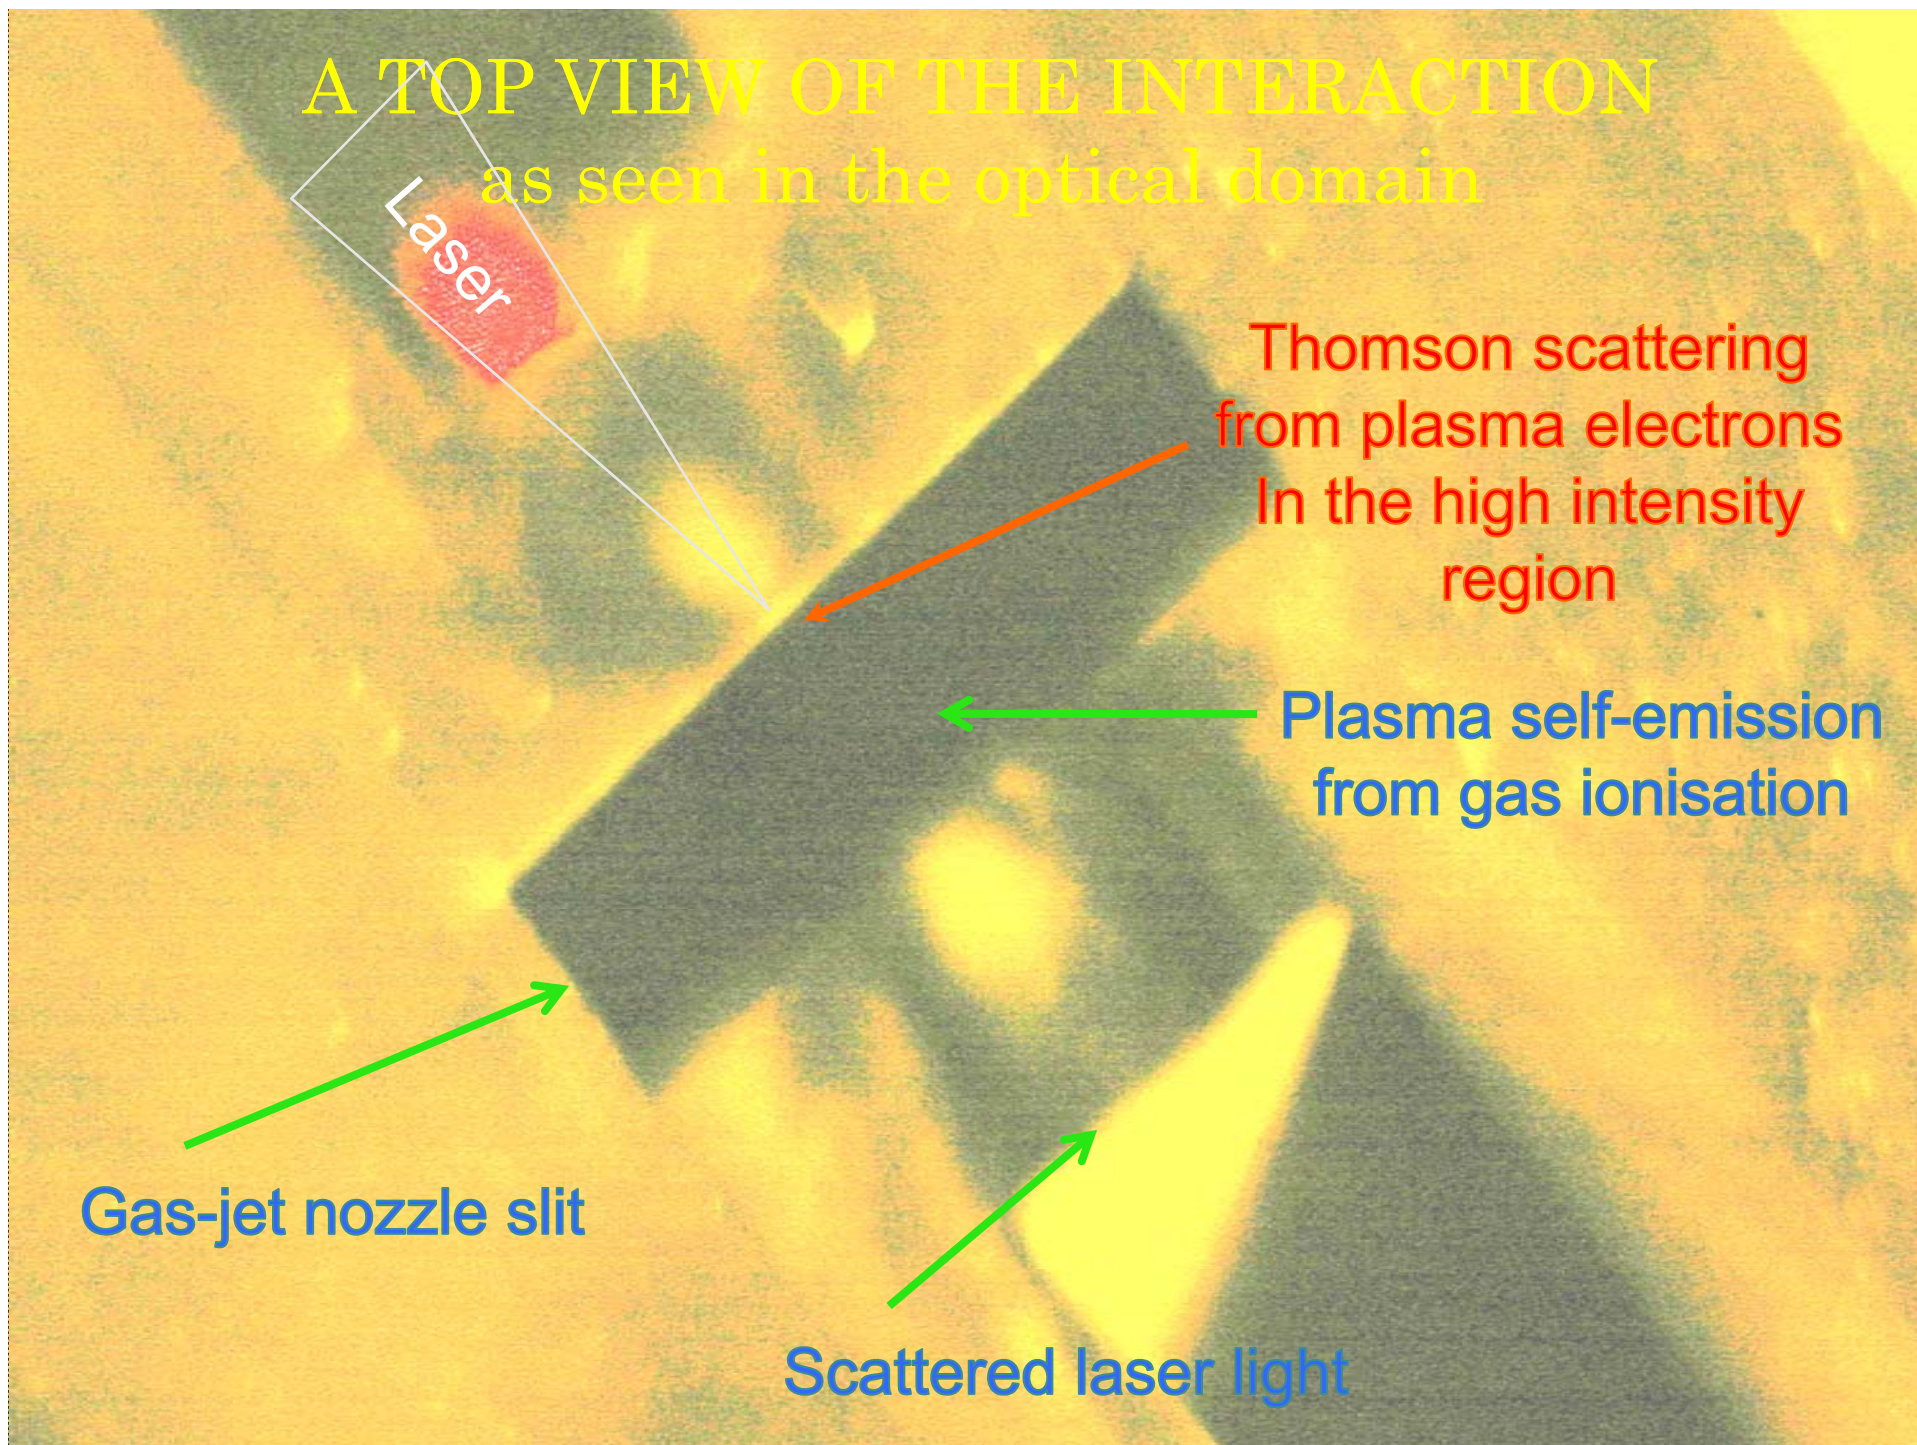


ELECTRON BEAM

He@50 bar

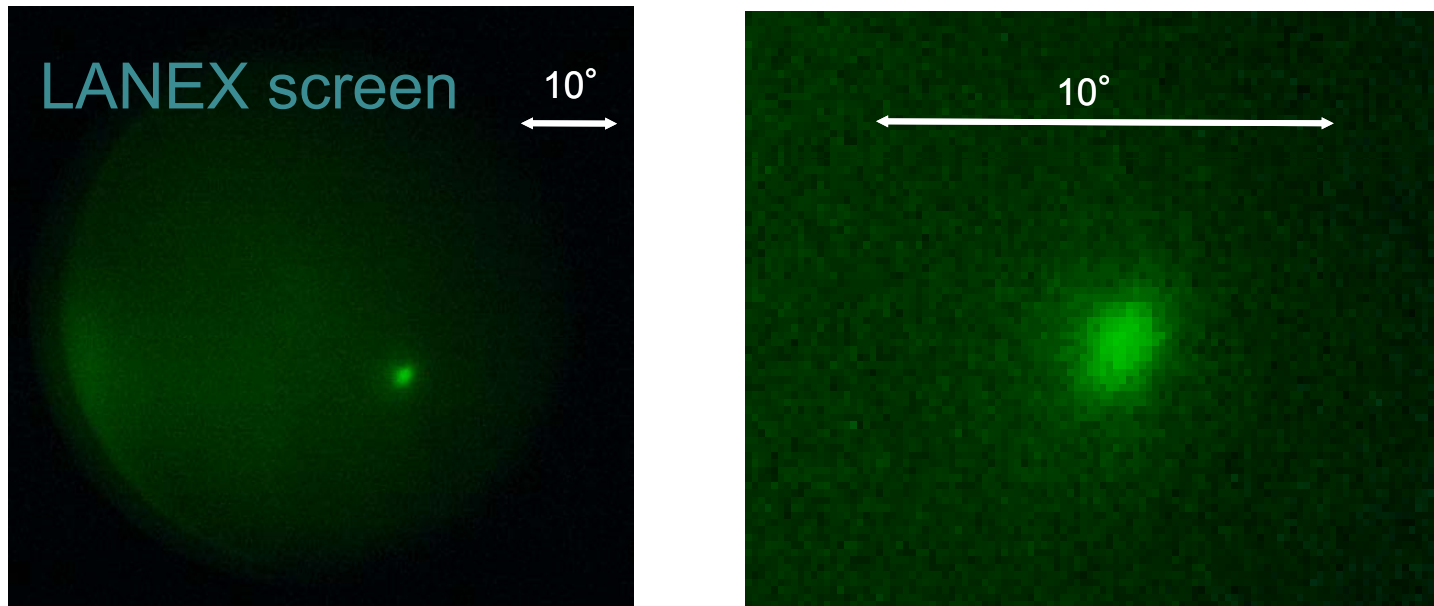

The LANEX screen shows a collimated electron beam.

Electron spectrum

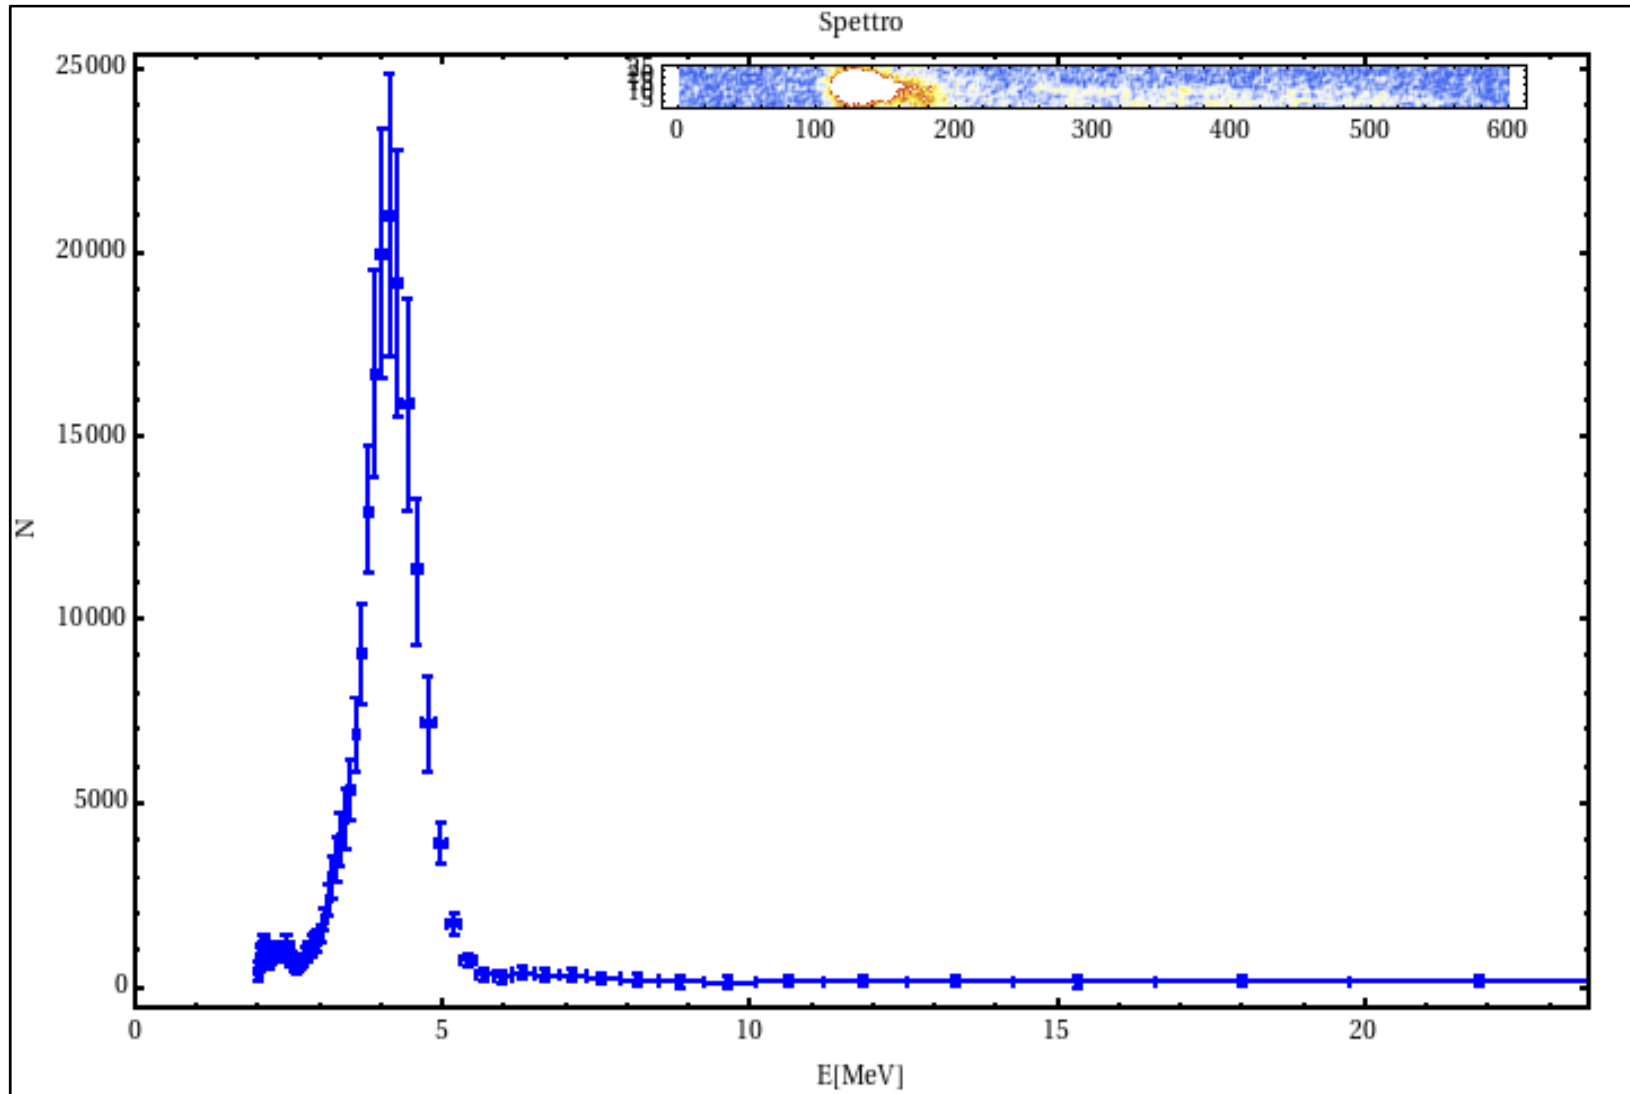


danilo giulietti ULIS 09

FLAME LASER

FLAME laser: specifications


Repetition Rate	10 Hz
Energy (after compression)	up to 6 J (typ. exp. 5.6J)
Wavelength	800 nm
Pulse duration	down to 20 fs (typ. 23 fs)
Peak power	up to 300 TW
ASE contrast	$< 10^{10}$
Pre-pulse contrast	$< 10^{-8}$

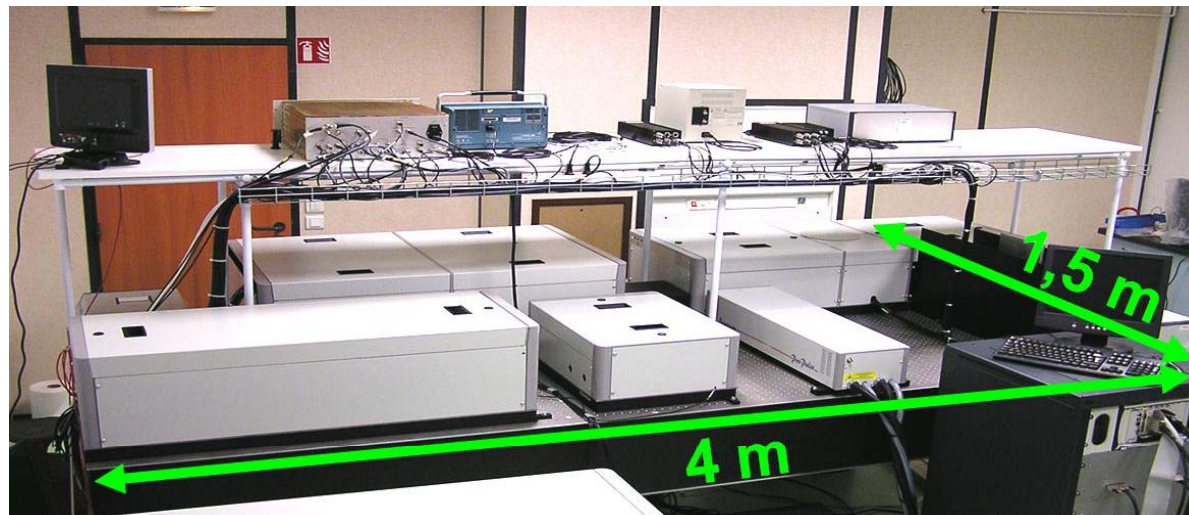

Front end @


FLAME Laser Overview

Compressor




Front end


Power amplifiers

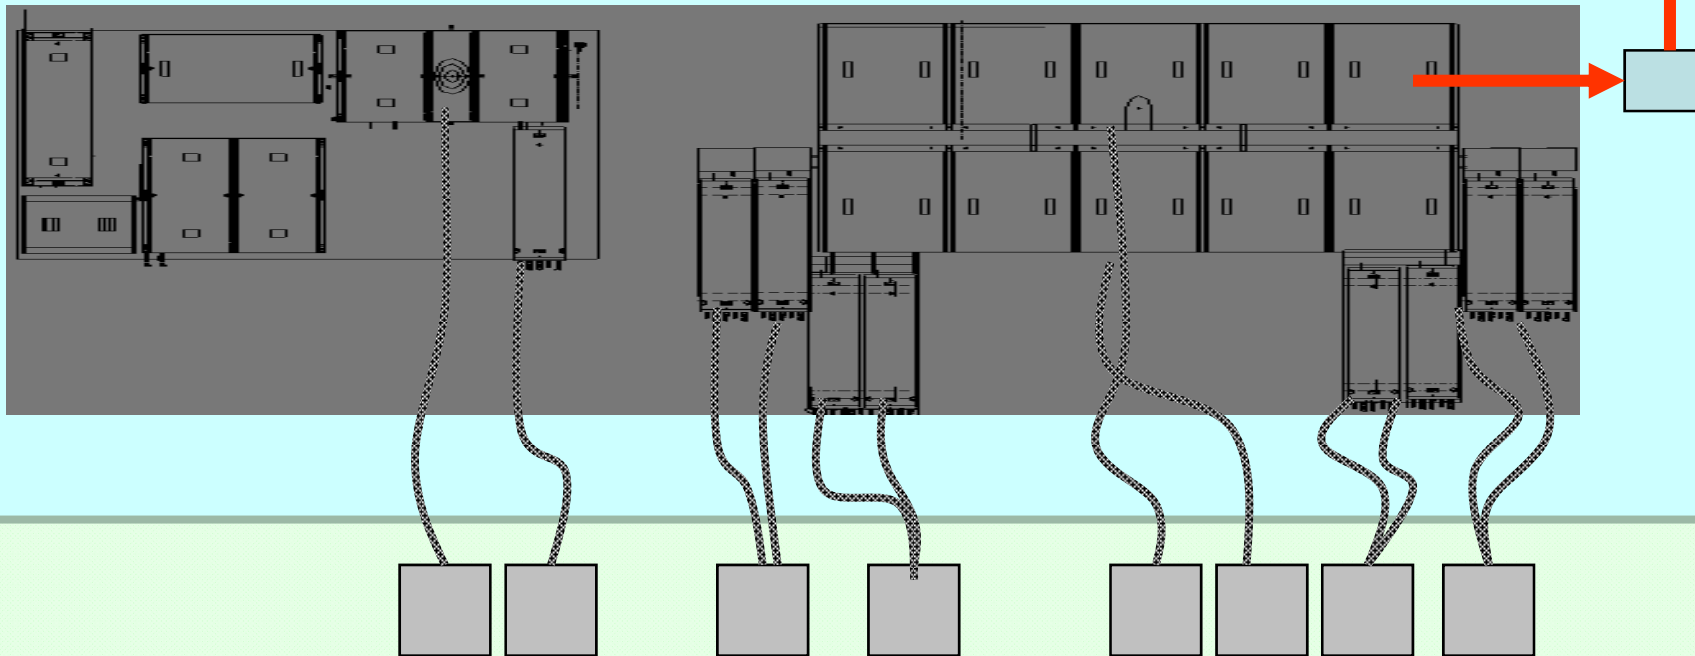


AMPLIFIER #3 – THE POWER AMPLIFIER

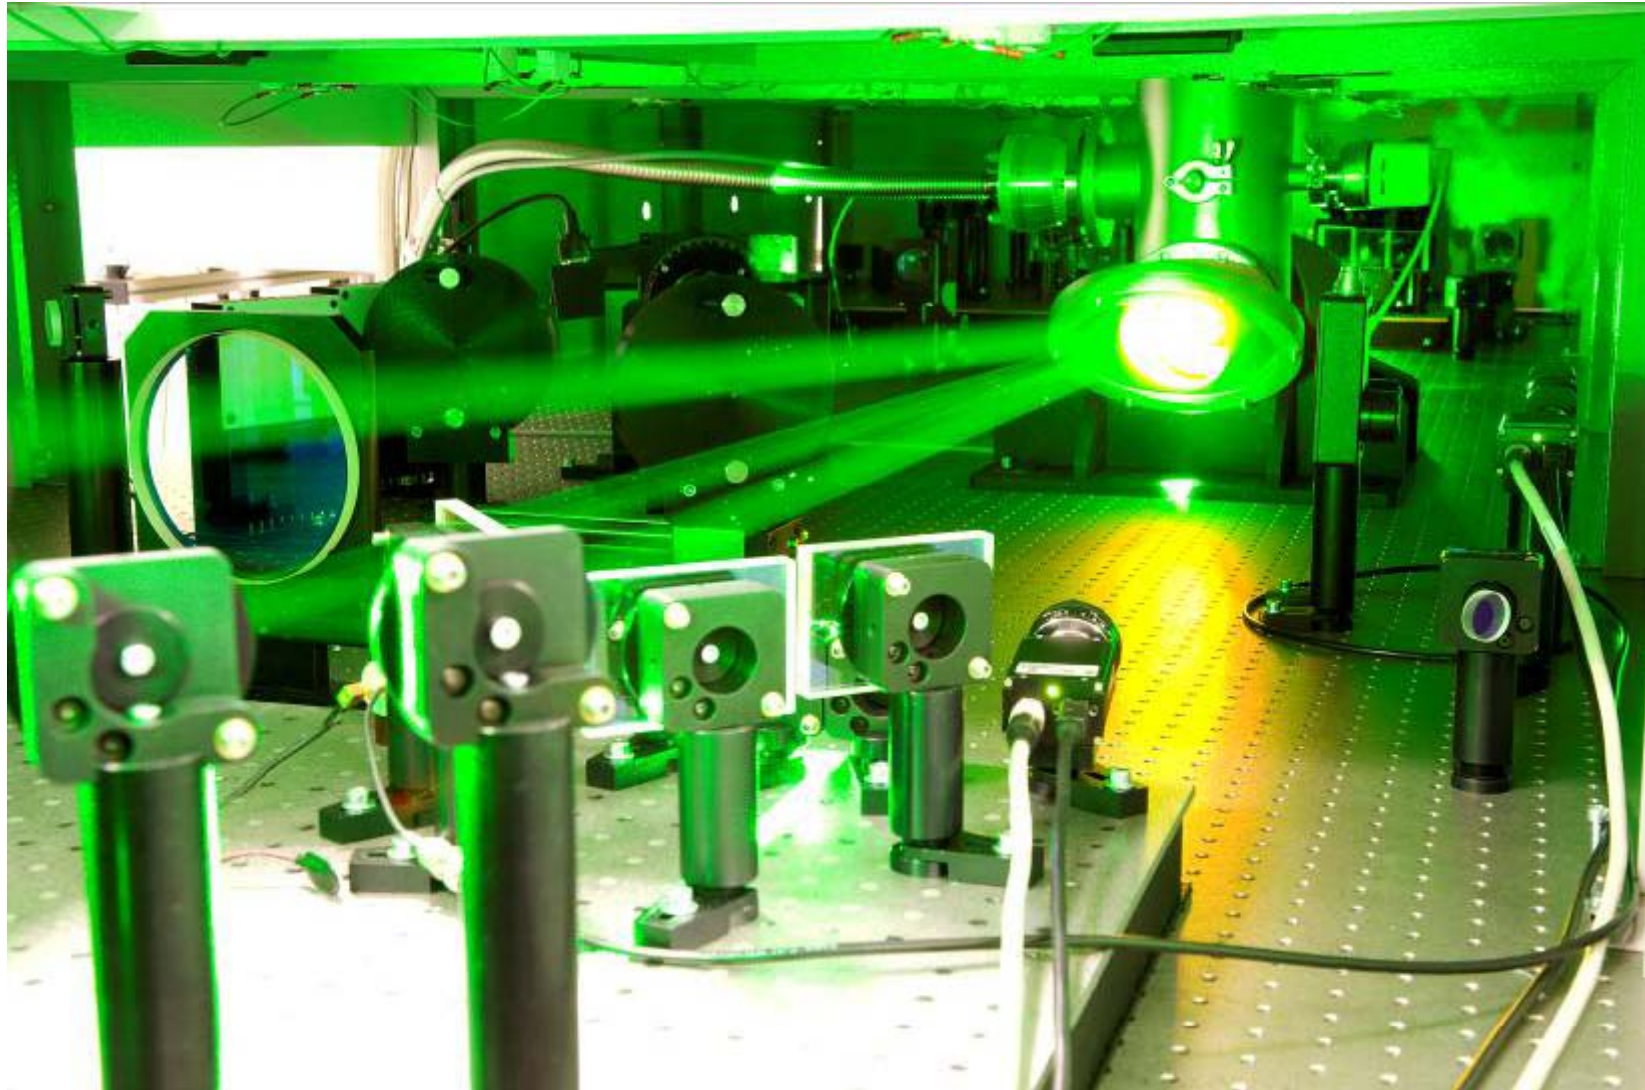


AMPLIFIER #3 – THE POWER AMPLIFIER

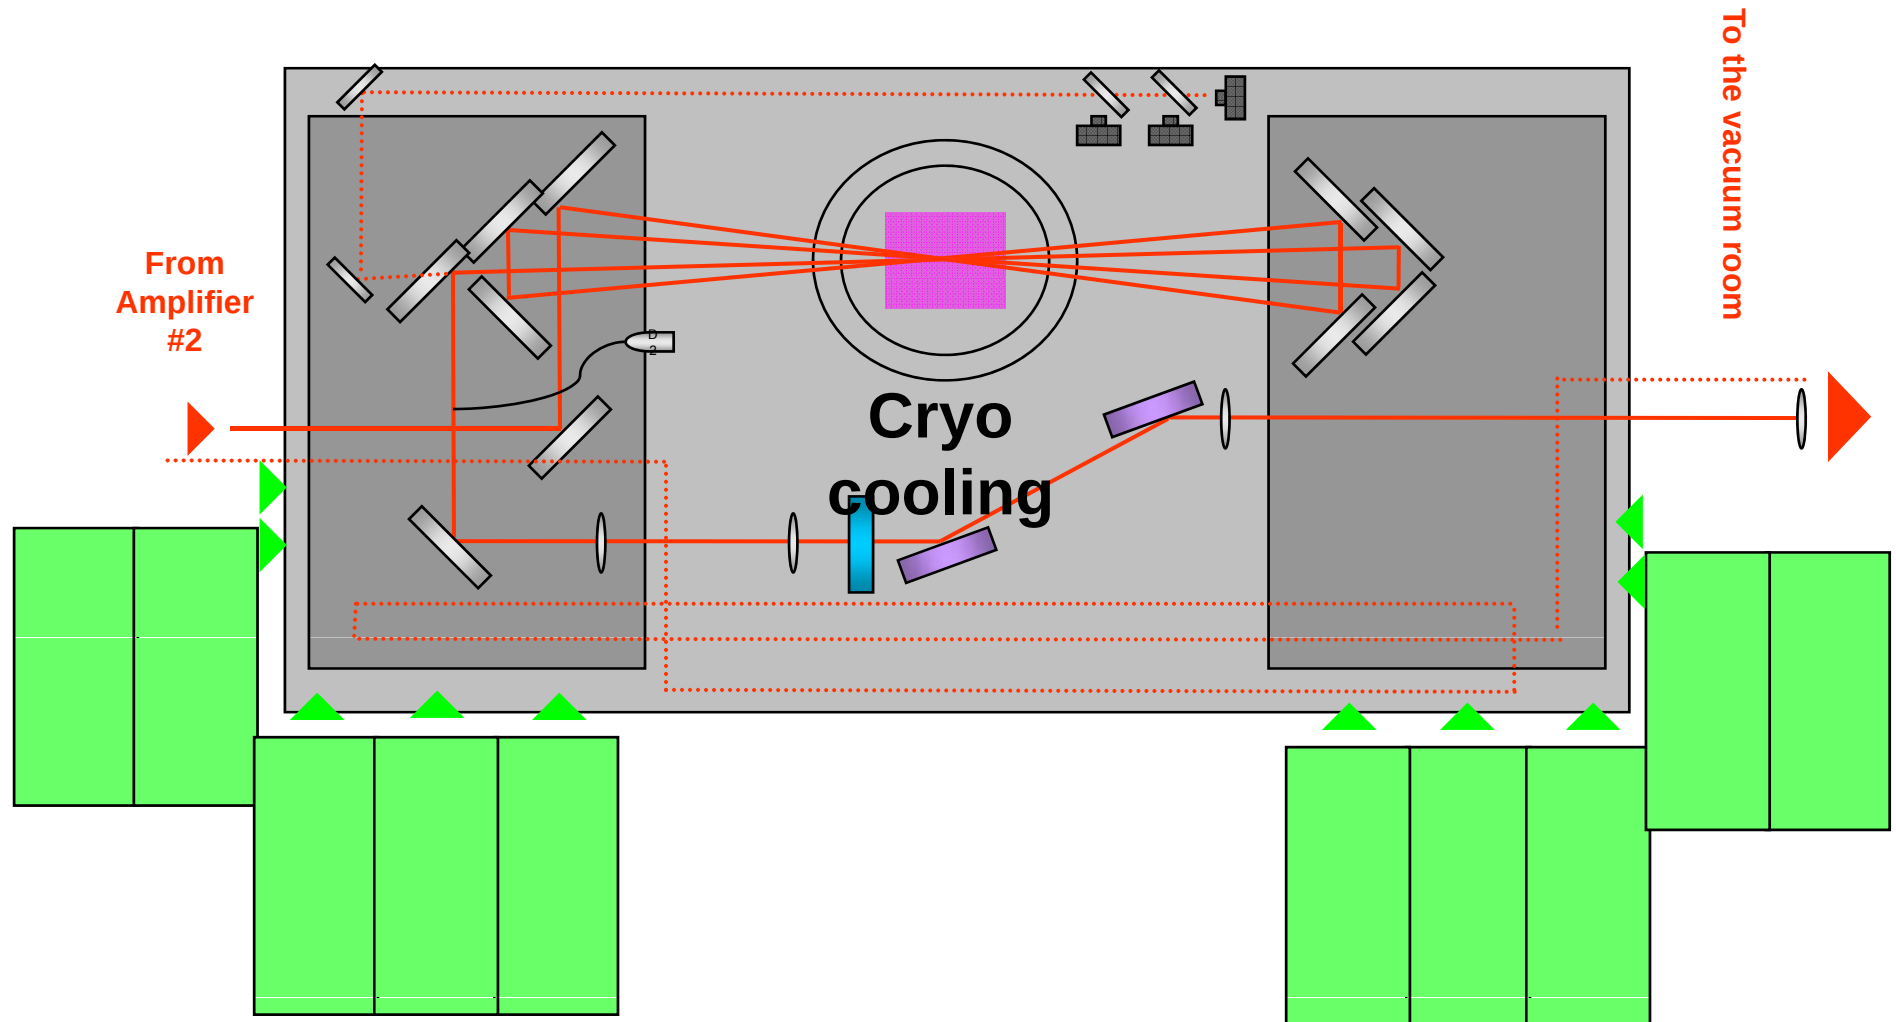

POWER AMPLIFIER – output energy

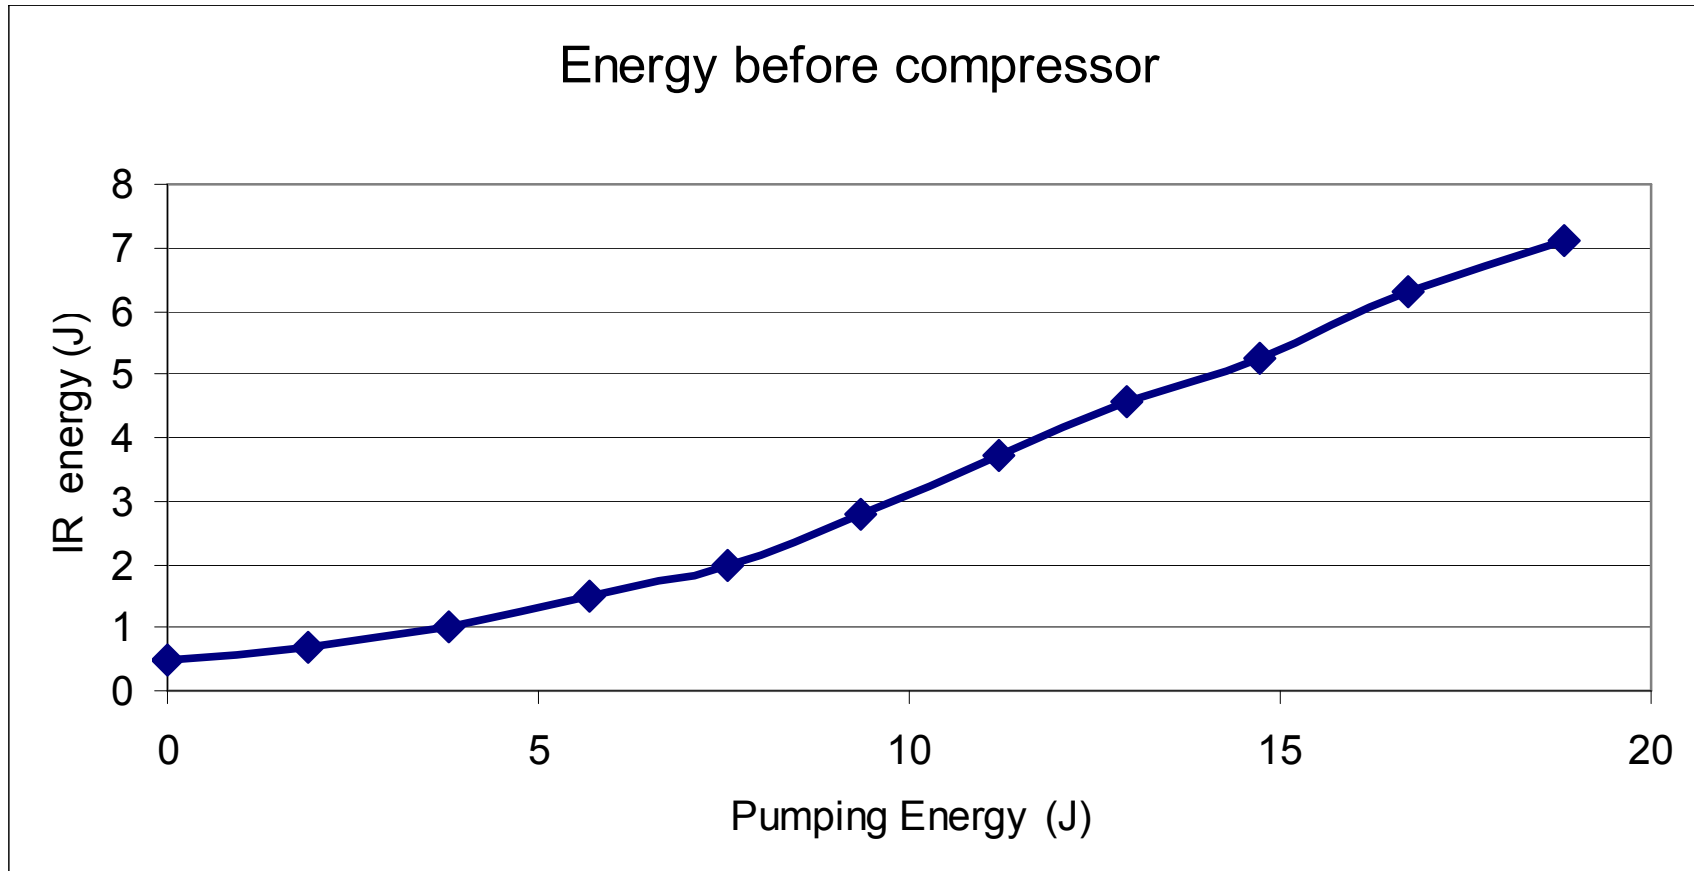


POWER AMPLIFIER – extraction efficiency

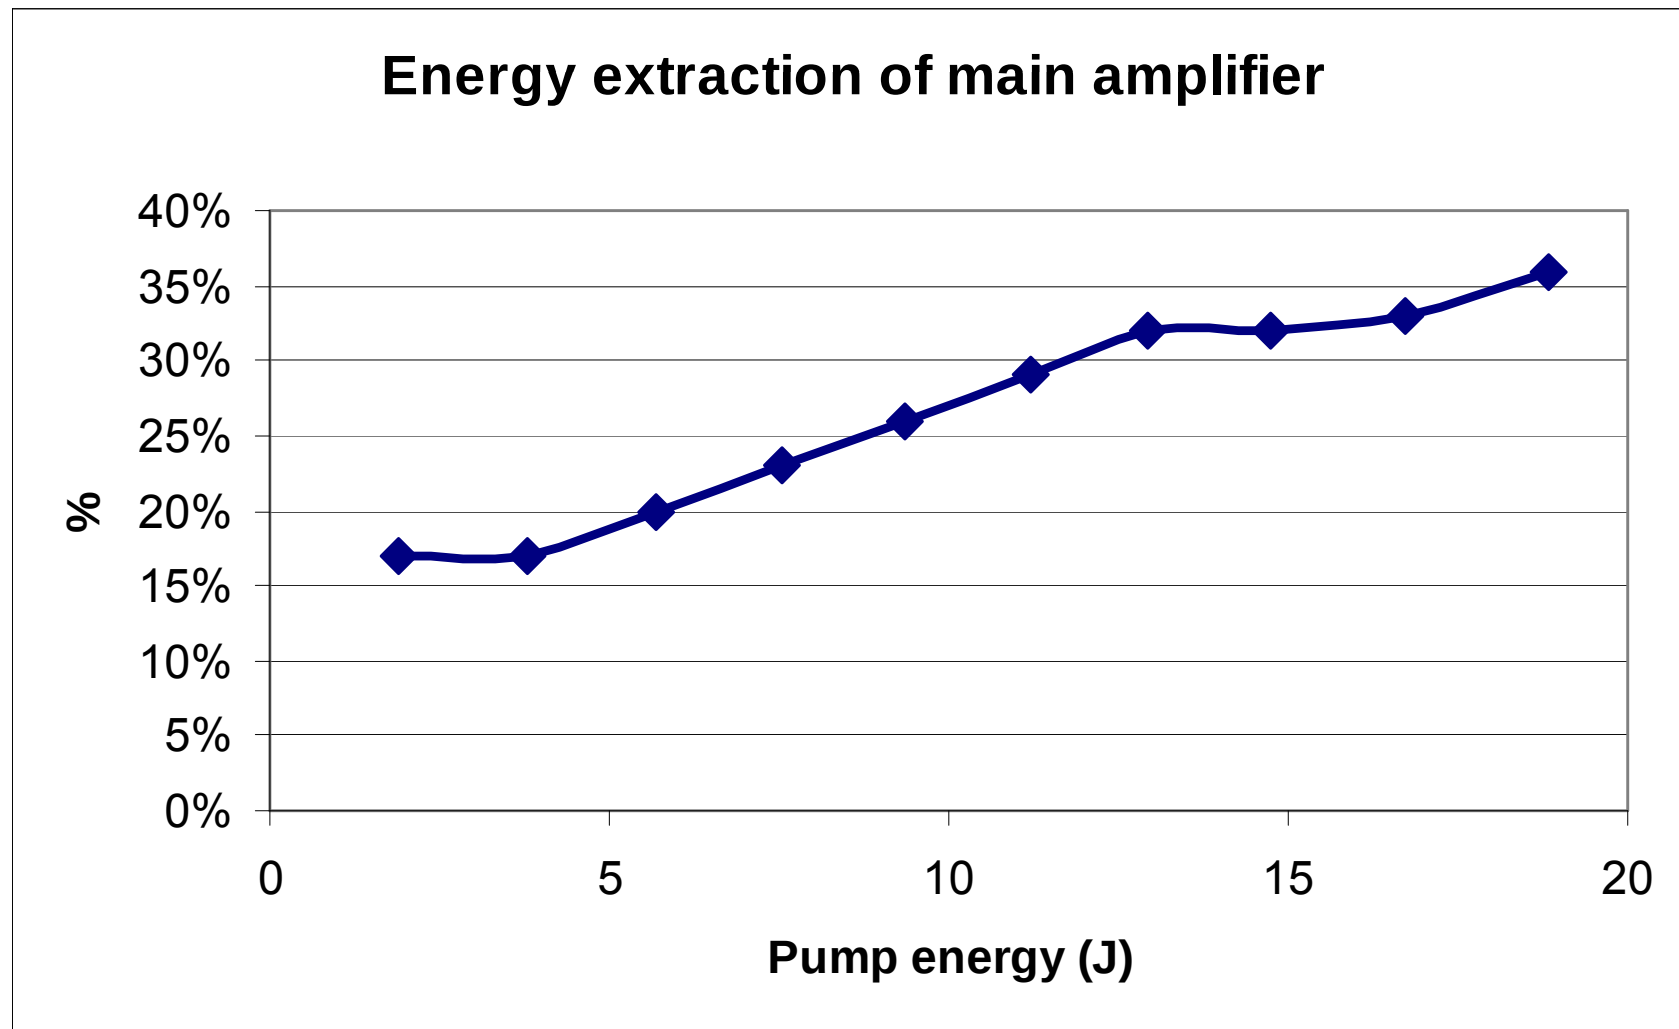


POWER AMPLIFIER - spectrum

7J spectrum

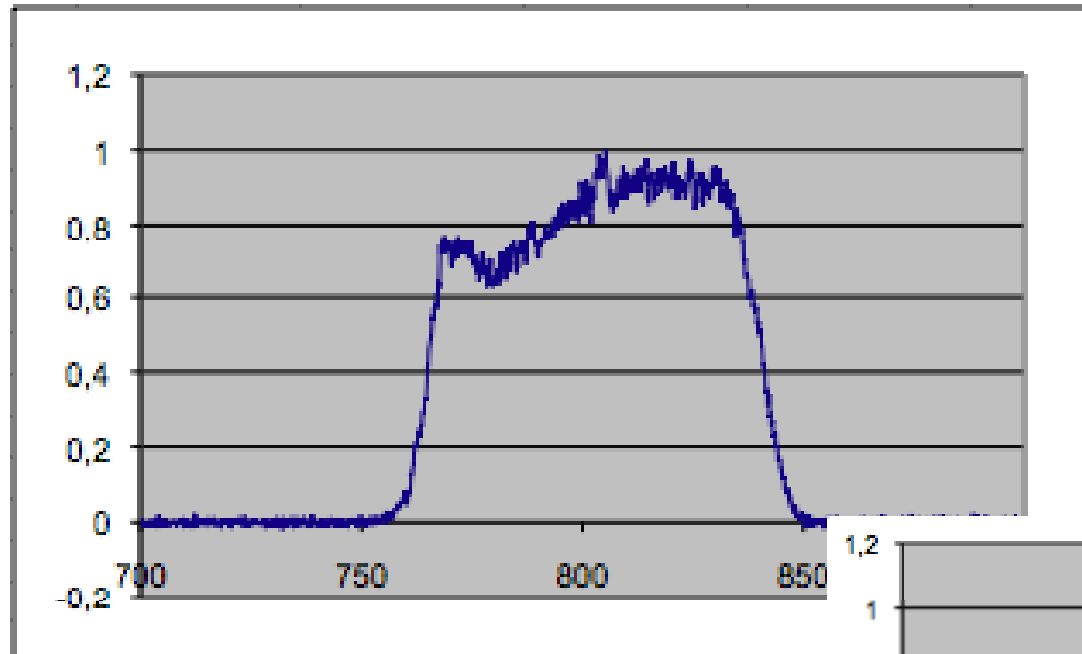


With mazzler

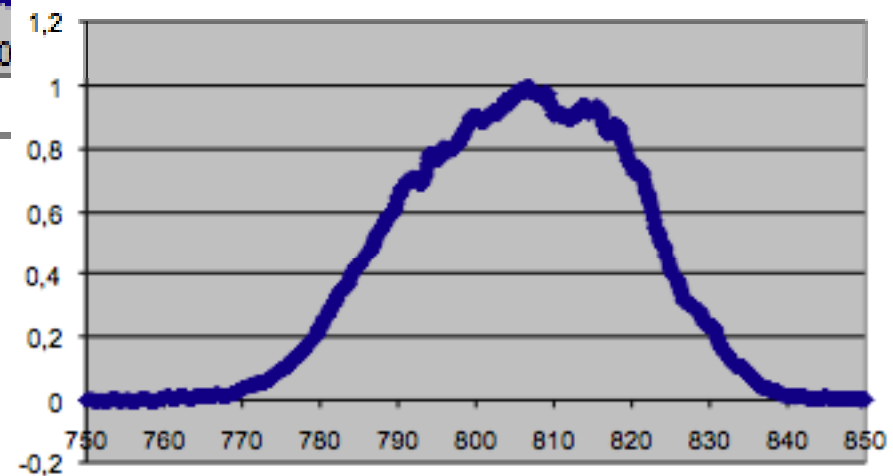

Without mazzler

POWER AMPLIFIER

Pictures of the Ti:Sa crystal inside the cryostat

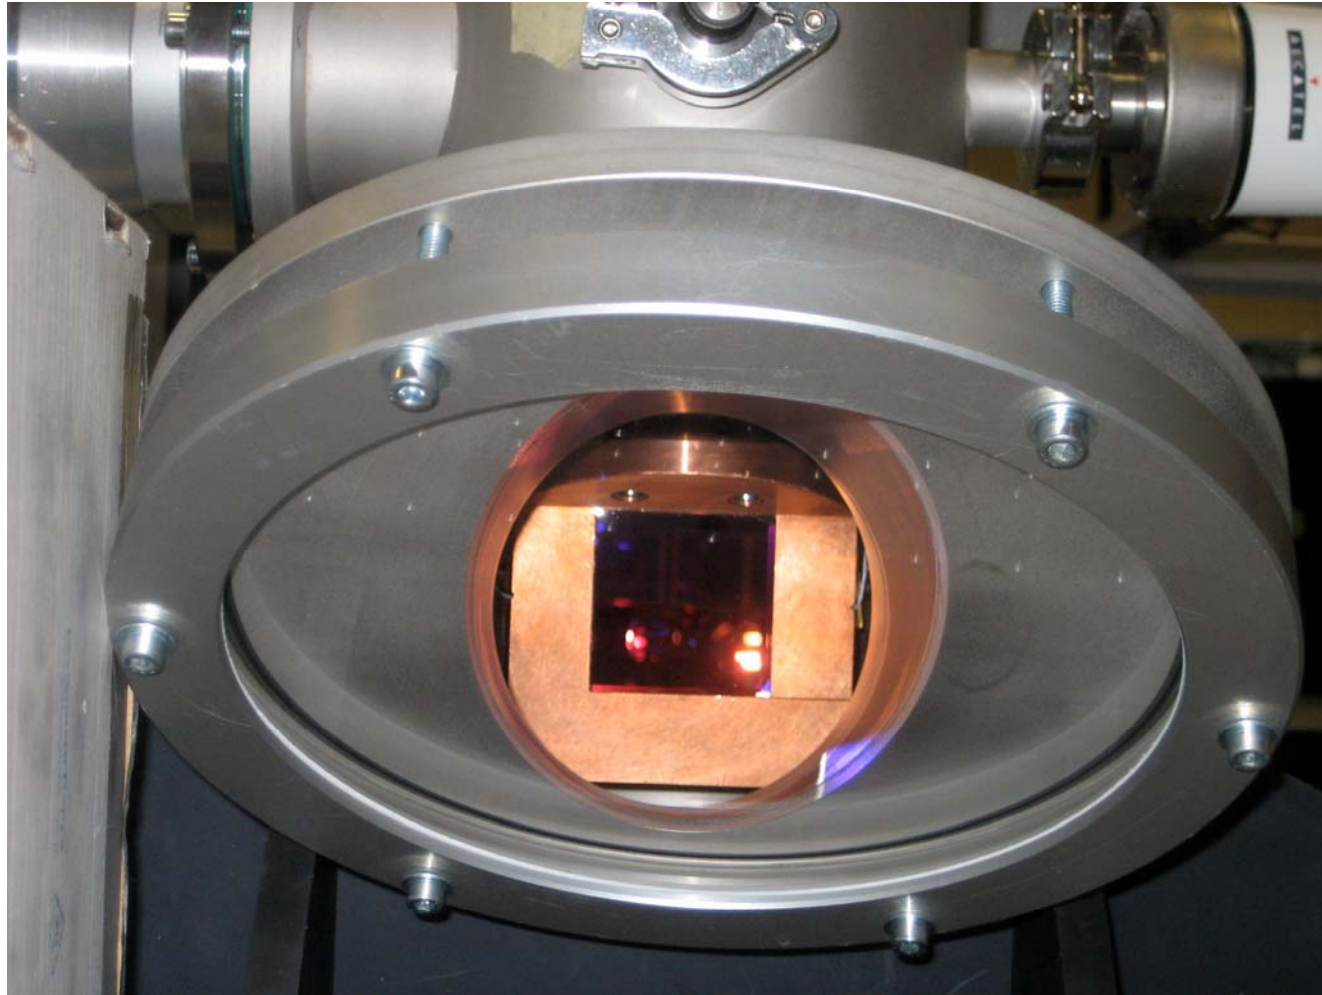


FLAME LASER

Cryo-power amplifier's 5 cm
Ti:Sapphire crystal pumped with
15 J green


Ti:Sa Crystal

Cryostat chamber

Ti:Sa fluorescence

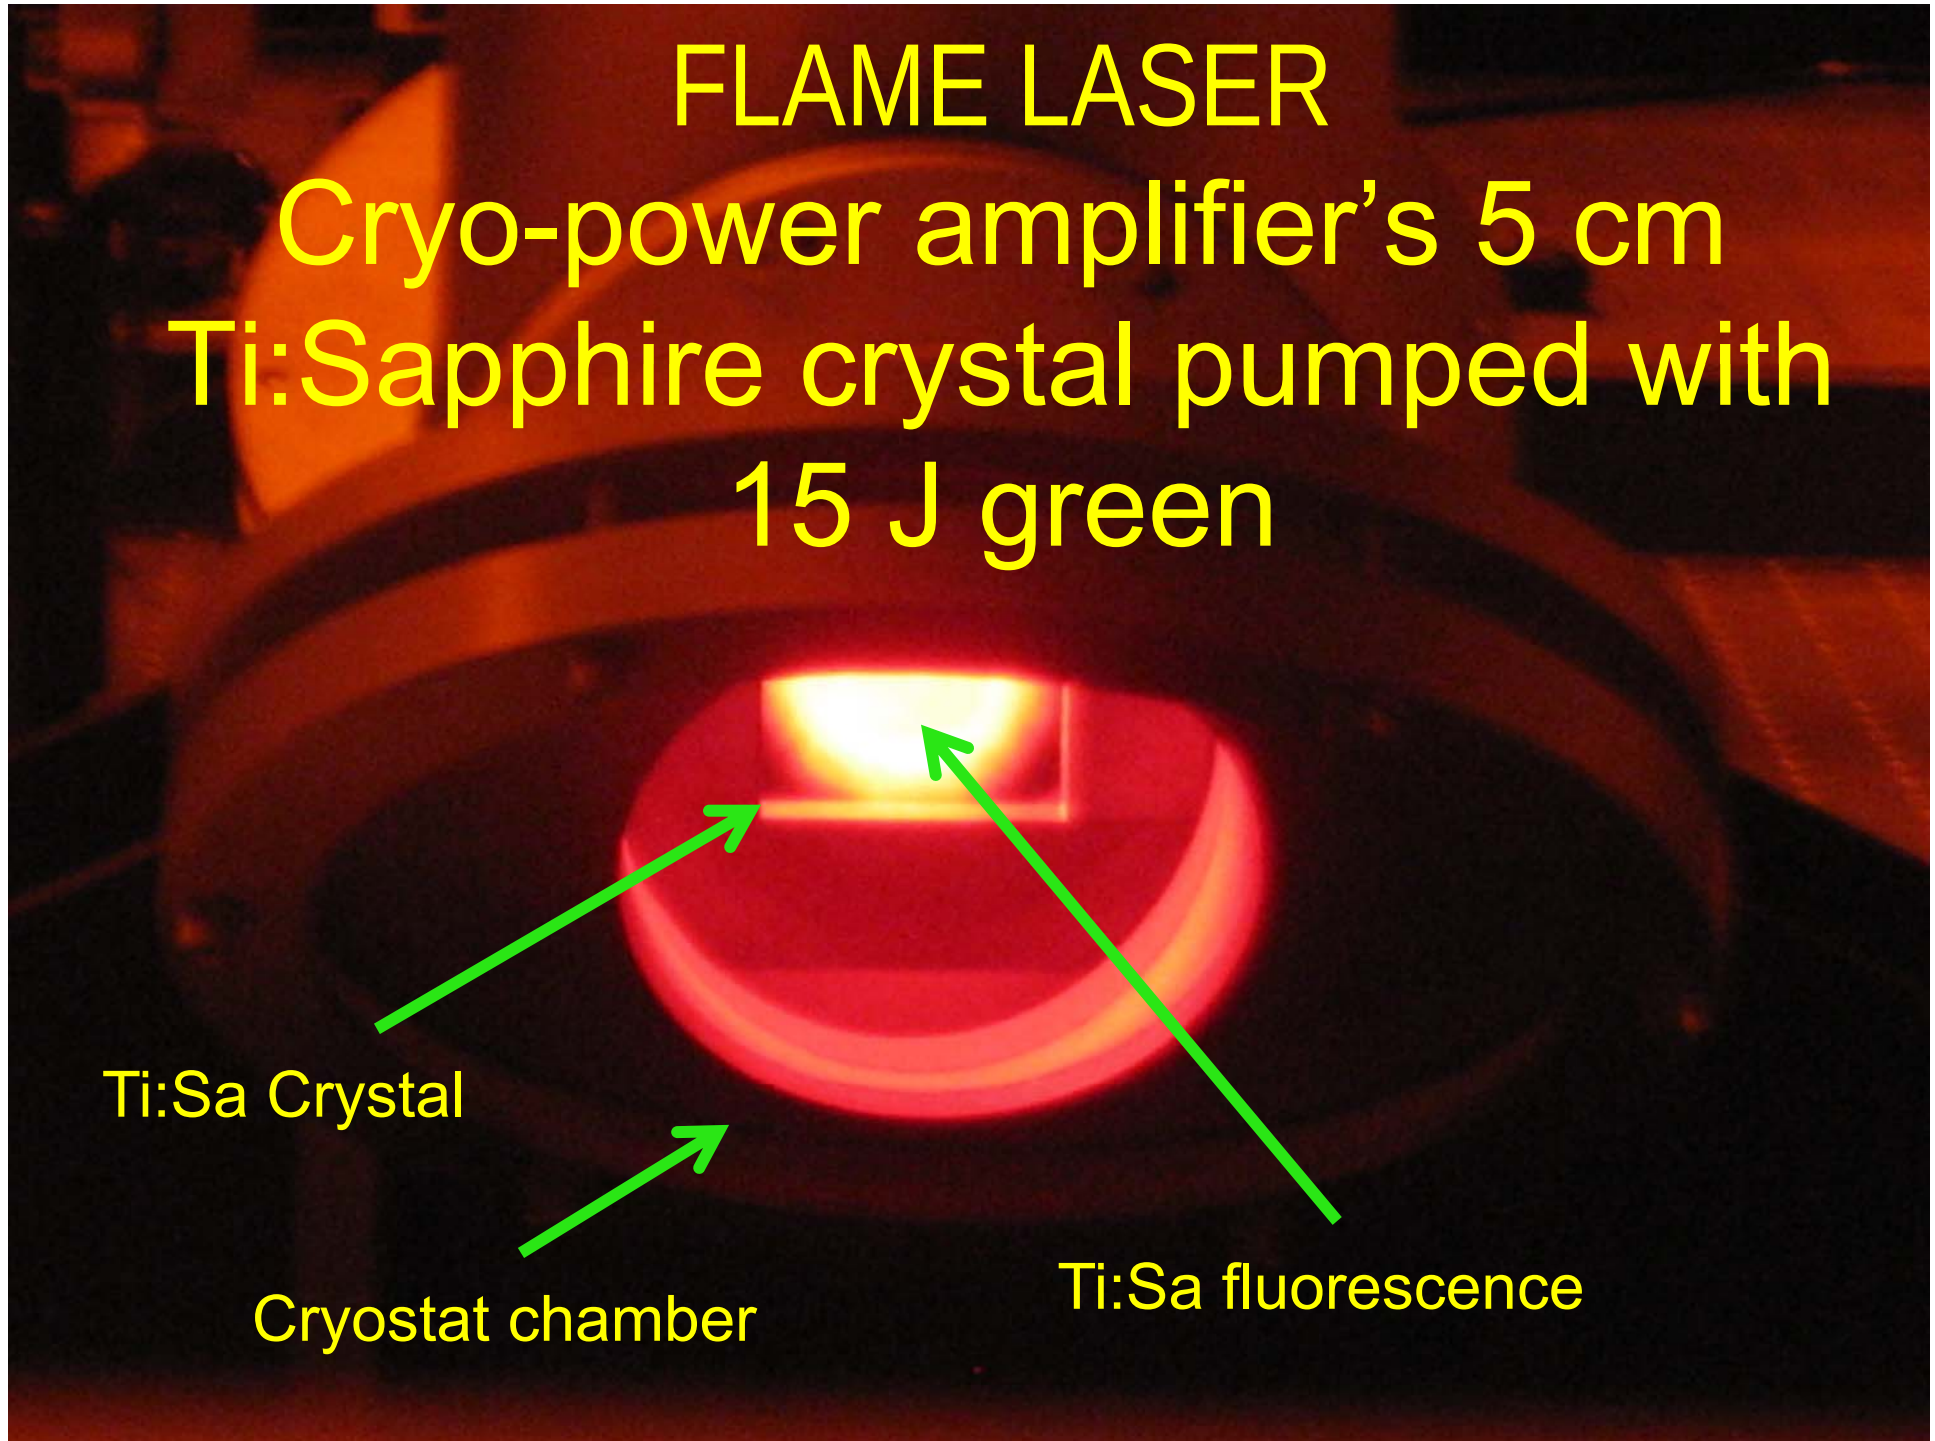

THE COMPRESSOR: spectral control

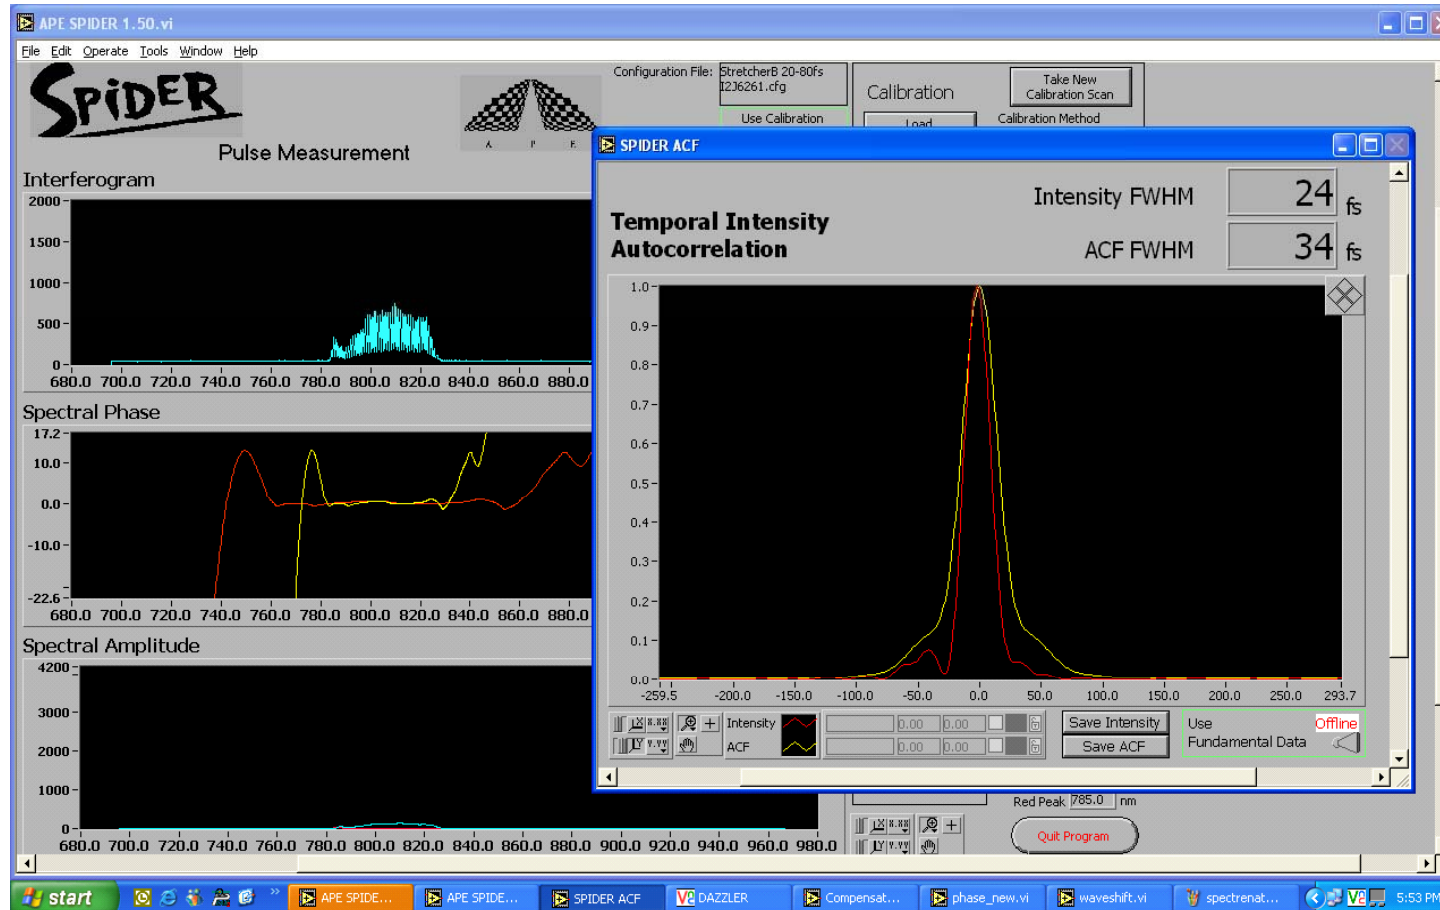


Pulse duration with the **test** compressor

Spider measurements

- natural duration < 55 fs
- corrected duration < 25 fs


THE COMPRESSOR sub-ns contrast

Time Delay (ps)	Contrast Ratio
-1	$2 \cdot 10^{-4}$
-5	$5 \cdot 10^{-8}$
-10	$1 \cdot 10^{-8}$
-150	$1 \cdot 10^{-9}$
-450	$5 \cdot 10^{-11}$

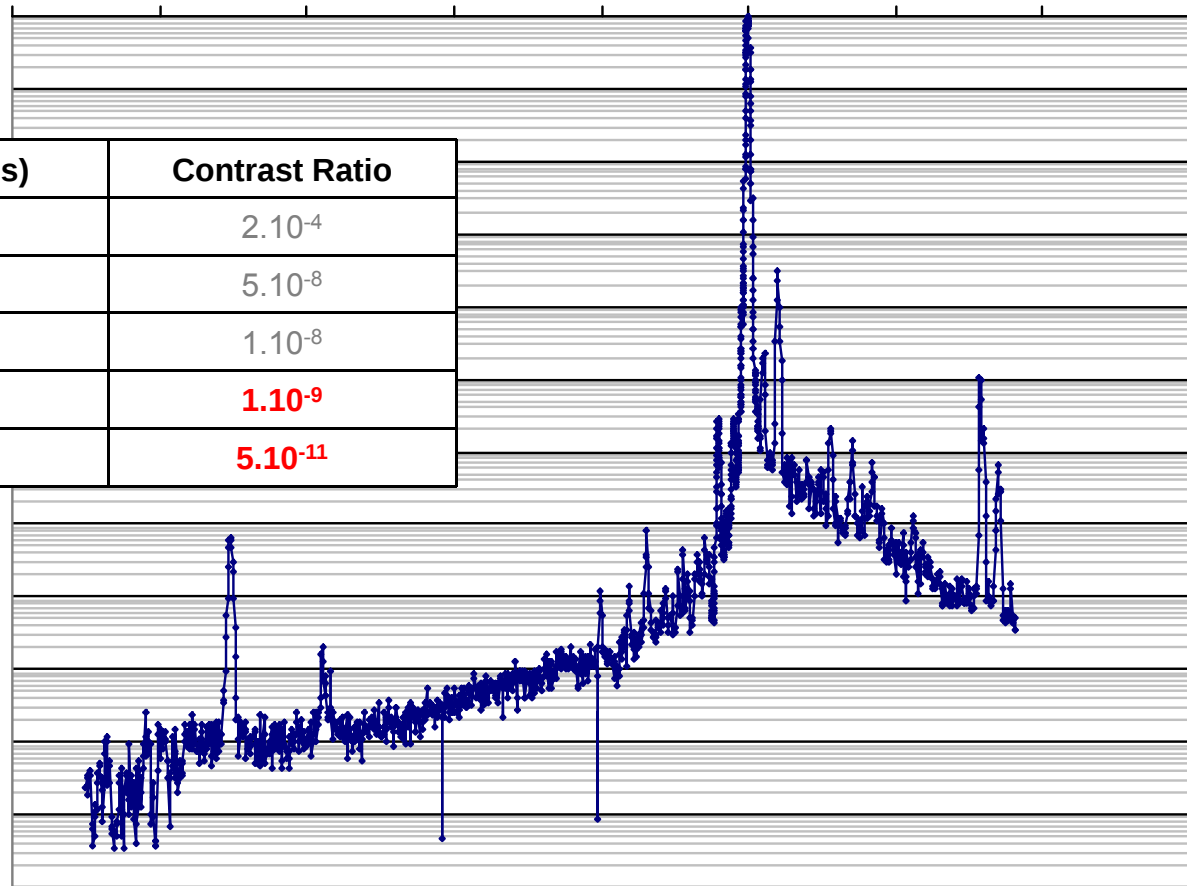

THE COMPRESSOR: ps contrast

Time Delay (ps)	Contrast Ratio
-1	$2 \cdot 10^{-4}$
-5	$1 \cdot 10^{-5}$
-10	$1 \cdot 10^{-6}$
-150	$1 \cdot 10^{-9}$
-450	$5 \cdot 10^{-11}$

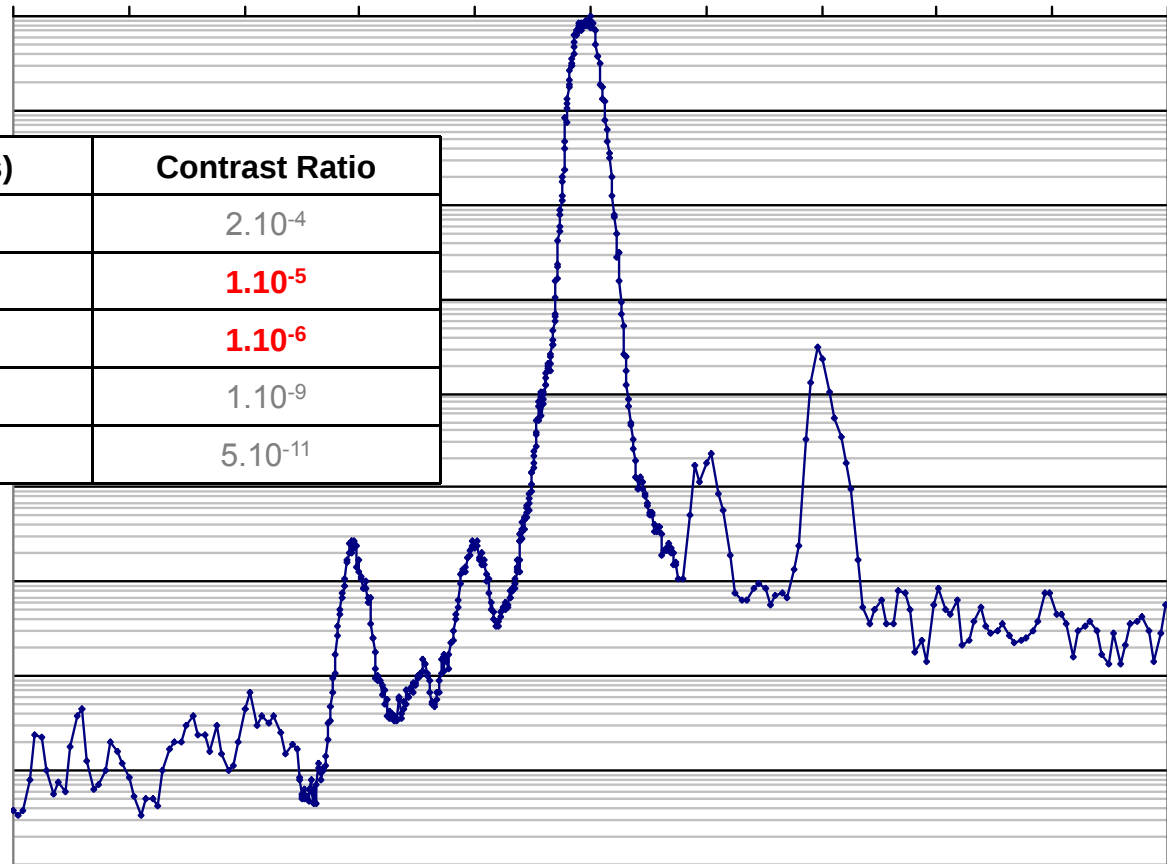

SUMMARY OF FLAME LASER

Summary of performances before shipping

- Energy before compression @ **7 J**
- Vacuum compressor transmission **> 70%**
- Pulse duration @ **< 25 fs**
- ASE Contrast ratio @ **$5 \cdot 10^{-10}$**
- RMS Pulse Stability @ **0.8 %**

- Enhancement of pumping configuration/extraction efficiency;
- Full vacuum compression test to be performed at LNF;

ENHANCING LASER FLEXIBILITY

POLARIZATION CONTROL (S, P, CIRCULAR)

Established contact with manufacturer (limiting factor: diameter and thickness of required crystals);

FREQUENCY CONVERSION (400 nm operation)

Same as above plus recent involvement in « Happie », LASERLAB Joint Research Activity (IPCF-CNR Subcontractor of LULI);

CONTRAST ENHANCEMENT (plasma mirror, frequency doubling); collaboration with CEA-Saclay

ADAPTIVE OPTICS for focal spot quality control and tailoring, collaboration with CLPU-Salamanca

ULTRA-HIGH intensities ($\approx 10^{21}$ W/cm²) with ellipsoidal plasma mirror ...

And more

PRIMO ESPERIMENTO TUTTO ITALIANO DI LPA A PISA

A TOP VIEW OF THE INTERACTION as seen in the optical domain


Laser

Thomson scattering
from plasma electrons
in the high intensity
region

Plasma self-emission
from gas ionisation



Gas-jet nozzle slit

Scattered laser light

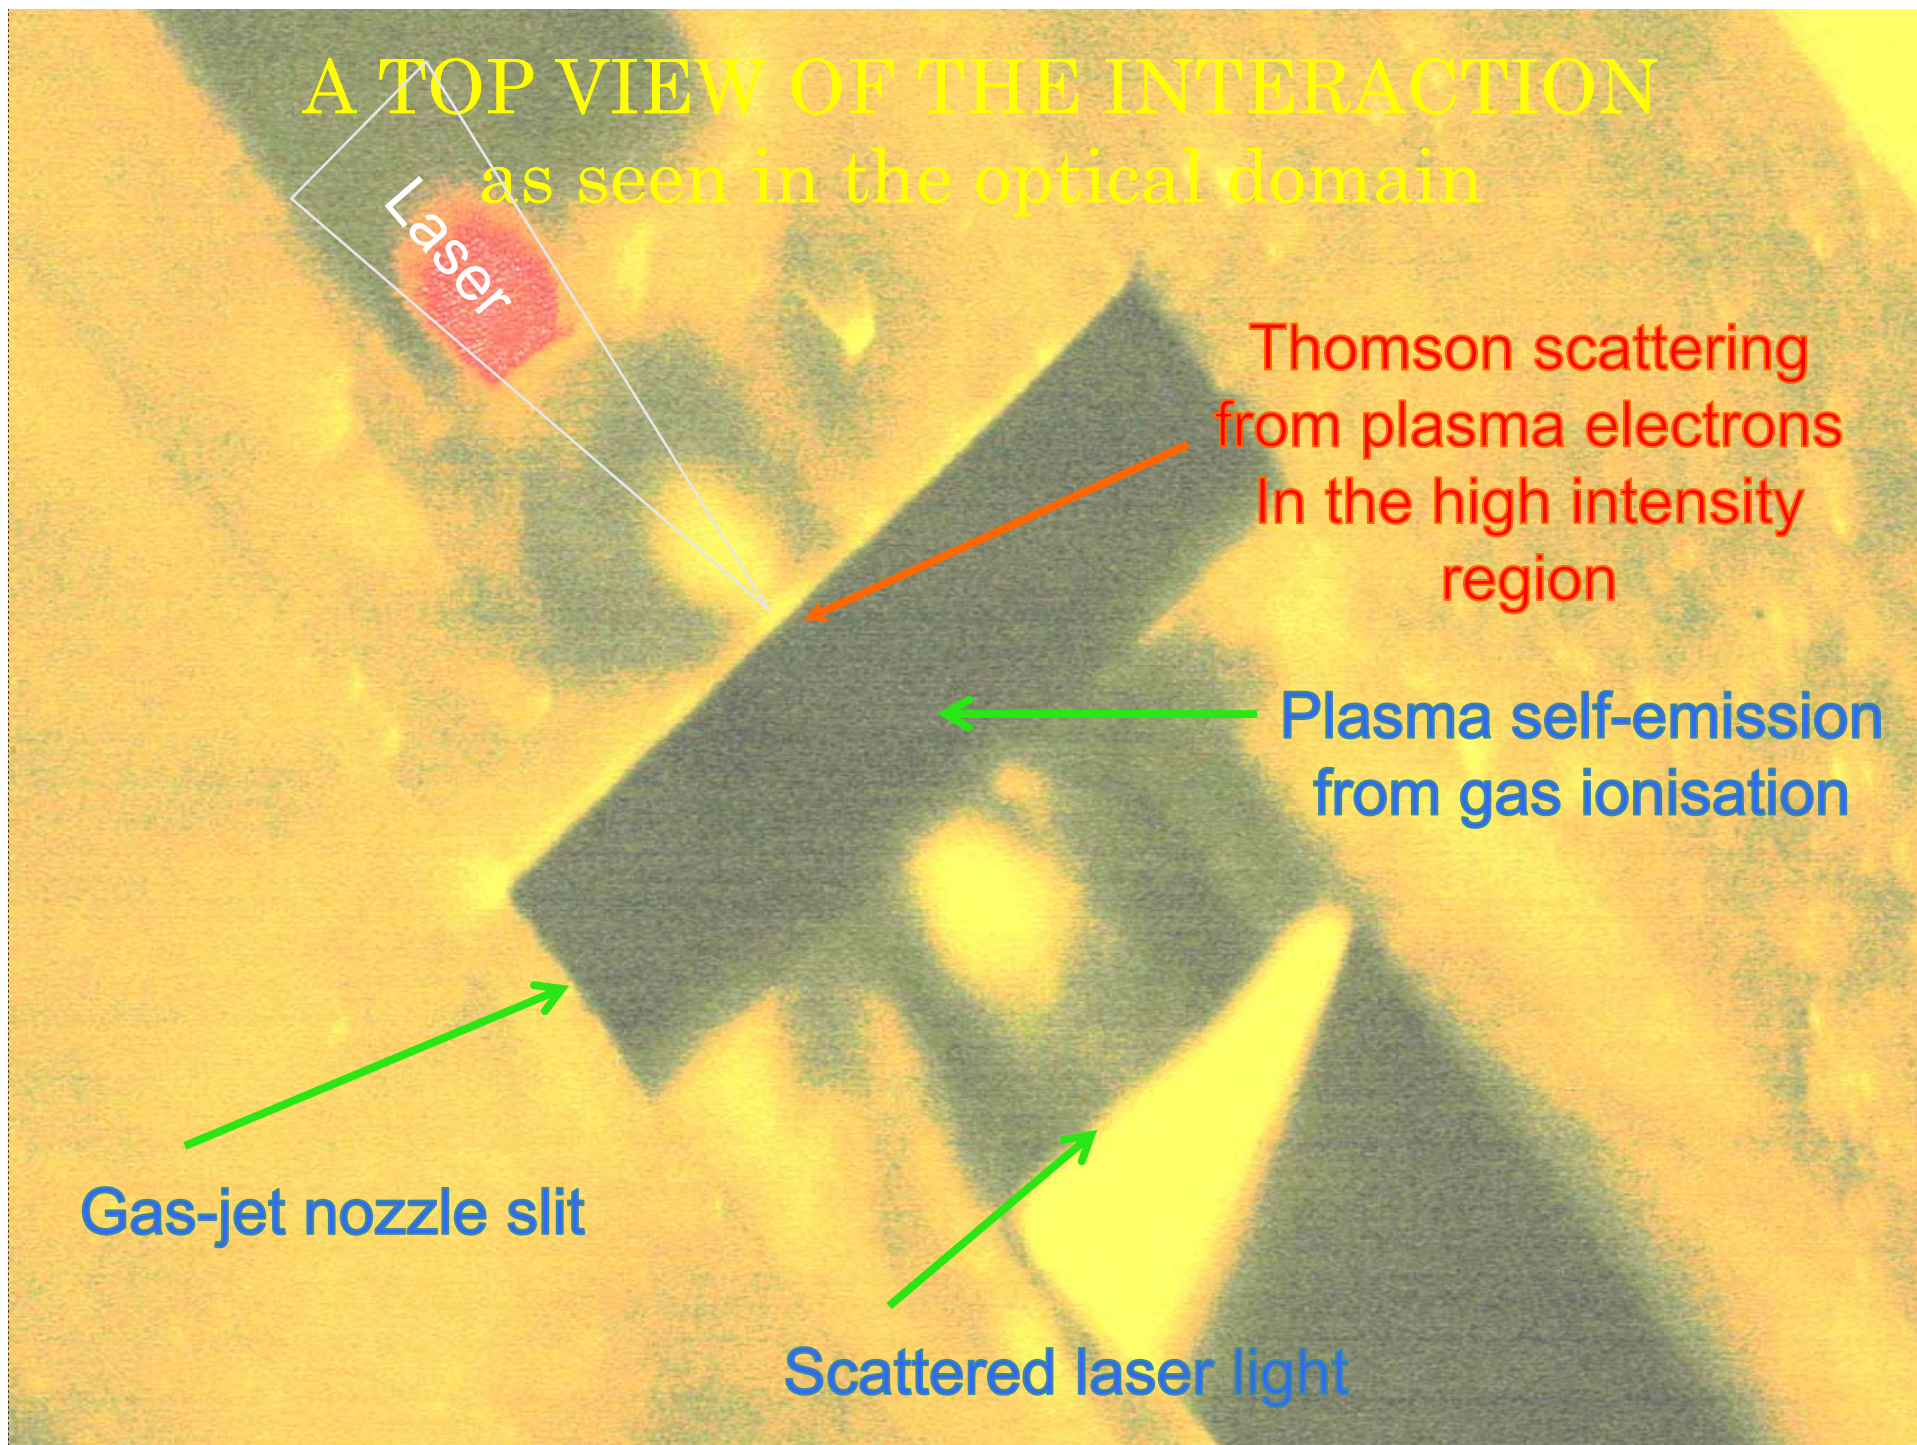


ELECTRON BEAM

He@50 bar

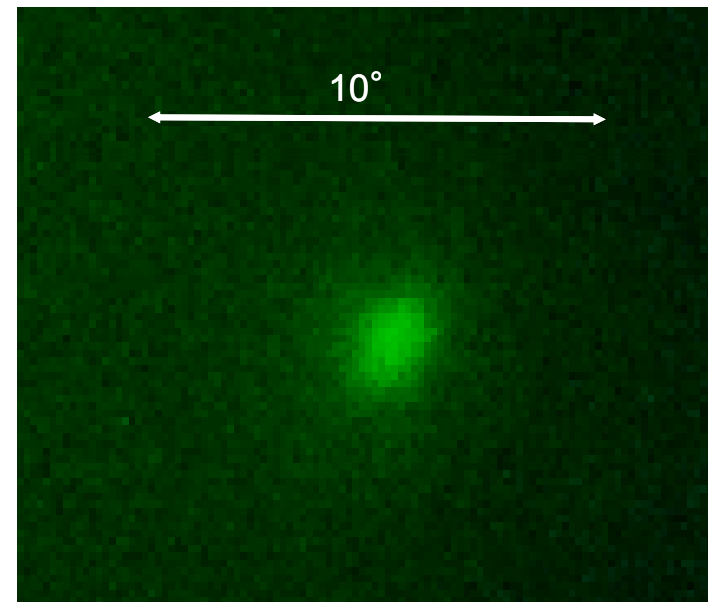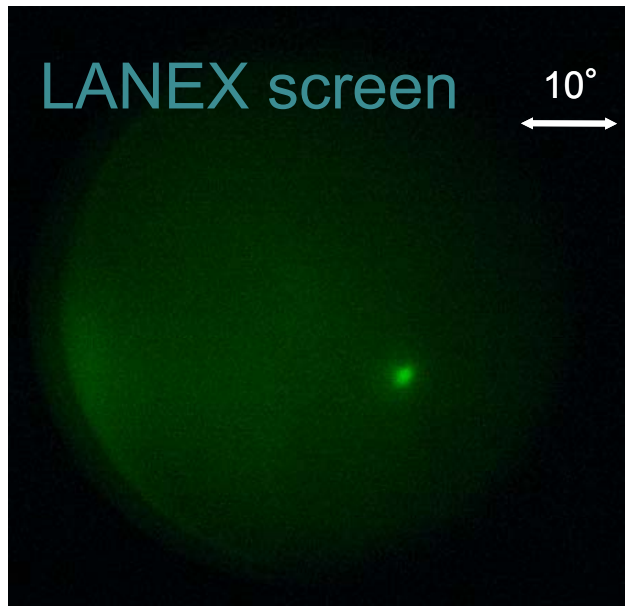

The LANEX screen shows a collimated electron beam.

Electron spectrum

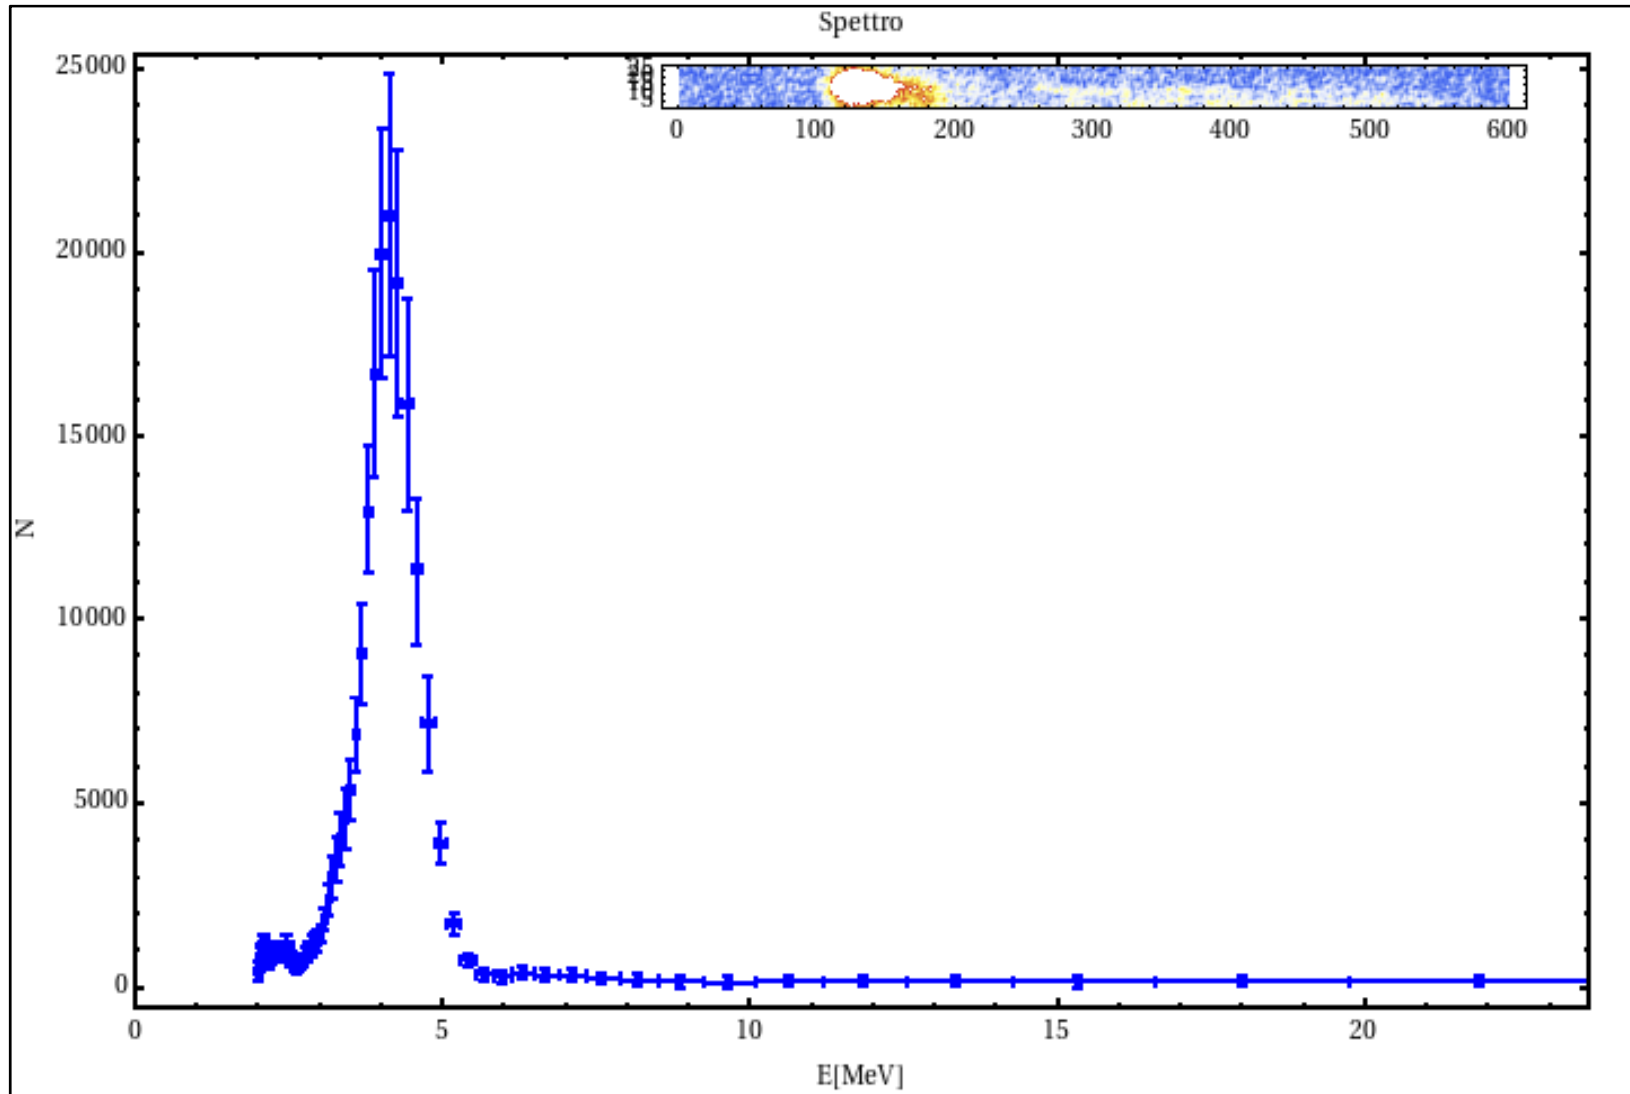


danilo giulietti ULIS 09

Self-Injection test experiment (SITE)

THE “TEST” SELF-INJECTION EXPERIMENT

MAIN TASK: establish performance of the FLAME laser system in real experimental conditions and test target area operations and procedures


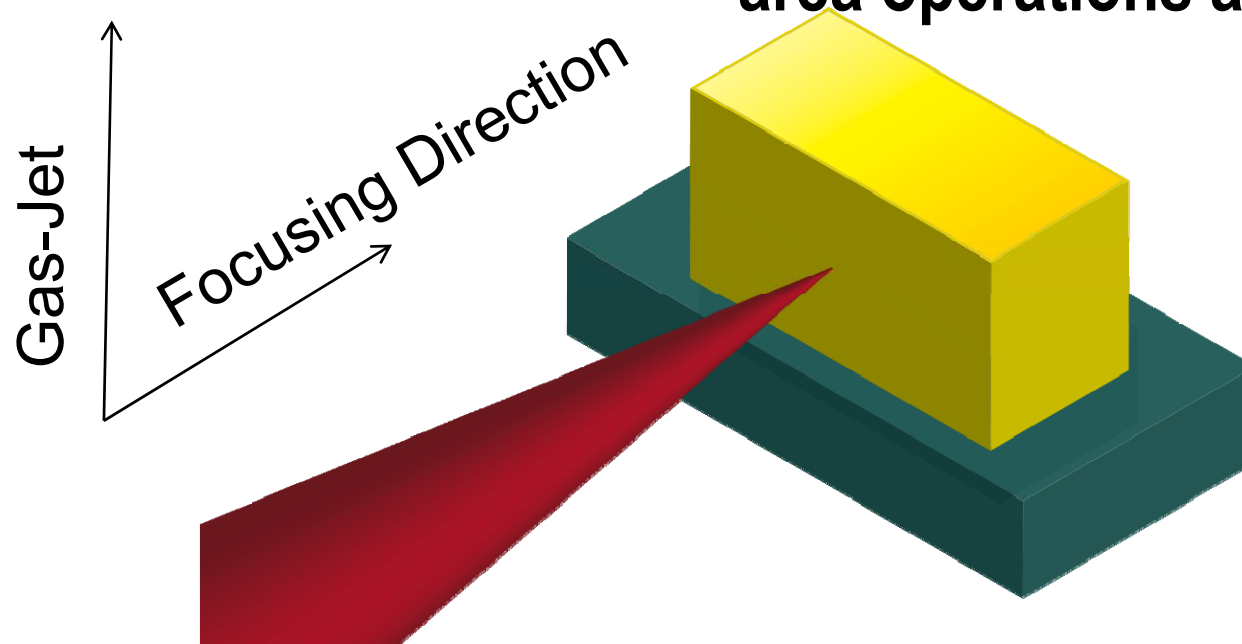


A supersonic gas-jet is used as a target. gas-jet targets have been successfully used and tested in the CEA-Saclay and “pilot| Pisa experiment and offer ideal conditions for both self-injection measurements and laser pulse characterisation via optical probing

Self-injection simulations (di C. BENEDETTI ET AL.,)

- (Half power) FLAME laser

- $P = 150 \text{ TW}$, $\tau_{fwhm} = 24 \text{ fs}$
- waist: $w_0 = 8 \div 40$ ($1/e^2$ radius of the laser intensity profile, $w_{fwhm} \simeq 1.2 w_0$)
- norm. vector potential $a_0 \equiv \frac{e \lambda_{laser}}{mc^2} = 8.5 \cdot 10^{-10} \sqrt{I[\text{W/cm}^2](\lambda[\mu\text{m}])^2} \geq 2$

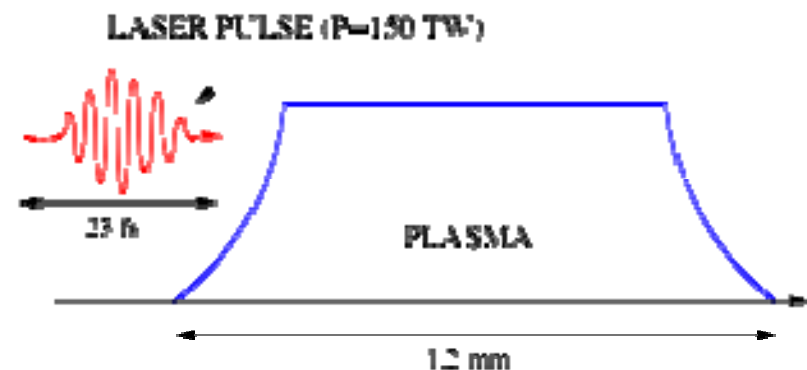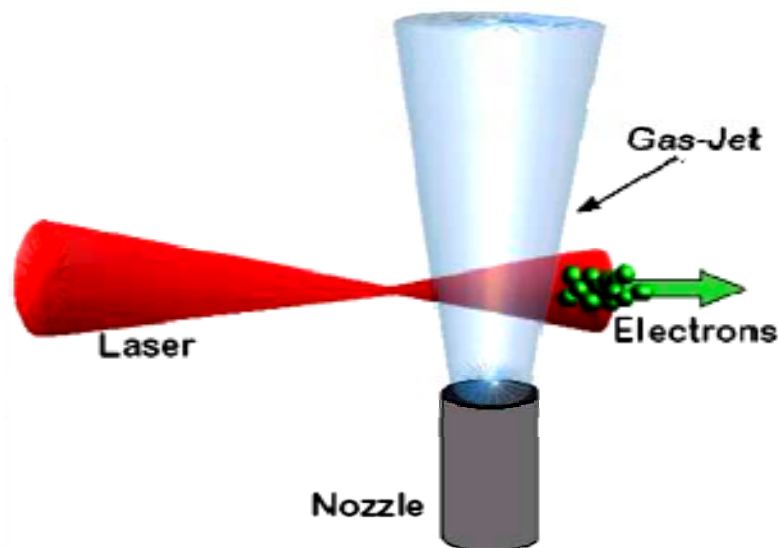


- Two regimes:

1. $w_0 < \lambda_p \Rightarrow$ **Nonlinear 3D regime (bubble)**
2. $w_0 > \lambda_p \Rightarrow$ **Nonlinear “1D-like” regime** (+ properly modulated gas-jet)

SIMULAZIONI self-injection

(di C. BENEDETTI ET AL.,)

- Nonlinear 3D regime (bubble) ^a

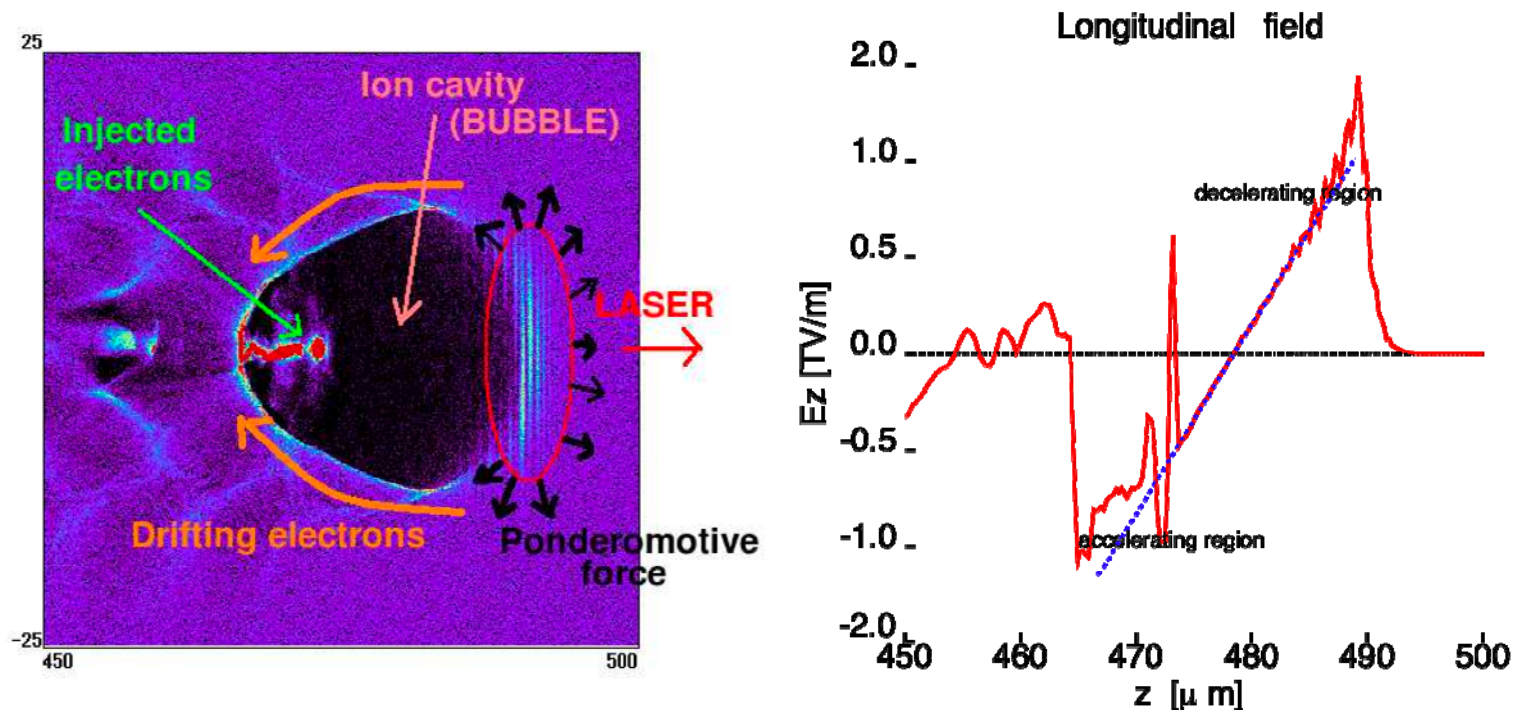

- $R_{bub} \simeq O(\lambda_p) \quad E_z^{(max)} \simeq 100 \sqrt{n_0 [\text{cm}^{-3}] \times a_0} \quad [\text{V/m}]$
- $\begin{cases} v_{elect} \simeq c \\ v_{bub} \simeq c(1 - 3\omega_p^2 / (2\omega_0^2)) < v_{elect} \Rightarrow \text{acc. length is finite + monochromaticity} \end{cases}$

^a S. Gordienko and A. Pukhov, Phys. Plas. 12 (2005) / W. Lu et al. PRSTAB 10 (2007)

SIMULAZIONI ALADYN

(di C. BENEDETTI ET AL.,)

Studies for the SITE

- **Nonlinear 3D regime (bubble):** phenomenological theory [W. Lu & al., PRSTAB 10 (2006)]

- “stability” of the bubble: $k_p R_{bub} \simeq k_p w_0 \simeq 2\sqrt{a_0}$
- dephasing length: $L_d = \frac{2}{3} \frac{\omega_0^2}{\omega_p^2} R_{bub}$
- pump depletion: $L_{pd} = \frac{\omega_0^2}{\omega_p^2} c\tau_{fwhm}$, should be $L_{pd} > \min(L_{gasjet}, L_d)$
- e -energy (dephasing): $W[\text{GeV}] \simeq 1.7 \times \left(\frac{P[\text{TW}]}{100}\right)^{1/3} \left(\frac{10^{18}}{n_p[\text{cm}^{-3}]}\right)^{2/3} \left(\frac{0.8}{\lambda_0[\mu\text{m}]}\right)^{4/3}$
- charge injected: $Q[\text{pC}] \simeq 400 \times \left(\frac{0.8}{\lambda_0[\mu\text{m}]}\right) \left(\frac{P[\text{TW}]}{100}\right)^{1/2}$

- **Nonlinear 3D regime (bubble)** for a FLAME-like laser: $P = 200 \text{ TW}$, $\tau_{fwhm} = 30 \text{ fs}$

Taking the waist w_0 as a free parameter ($R_{bub} \simeq w_0$), we have

- $n_p [\text{cm}^{-3}] \simeq 8.7 \cdot 10^{21} / (w_0[\mu\text{m}])^3$
- $L_d[\mu\text{m}] \simeq 0.13 \times (w_0[\mu\text{m}])^4$
- $L_{pd}[\mu\text{m}] \simeq 1.8 \times (w_0[\mu\text{m}])^3$
- $W[\text{MeV}] \simeq 79 \times \frac{L_{gasjet}[\mu\text{m}]}{(w_0[\mu\text{m}])^2} \left(1 - \frac{3.75 \times (L_{gasjet}[\mu\text{m}])}{(w_0[\mu\text{m}])^4}\right)$ (for $L_d \geq L_{gasjet}/2$)
- $Q \simeq 0.5 \div 0.6 \text{ nC}$


SIMULAZIONI ALADYN

(di C. BENEDETTI ET AL.,)


Studies for the SITE

- 3D sim. "GeV-class" ($L_{gasjet} = 4$ mm)





$ct = 500 \mu\text{m}$

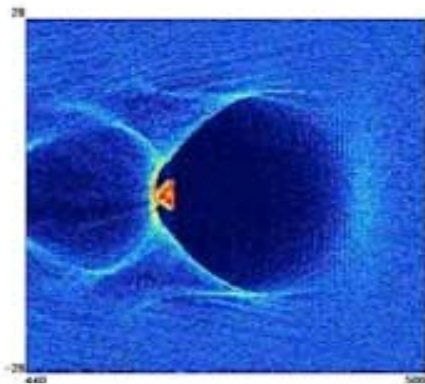


$ct = 2000 \mu\text{m}$

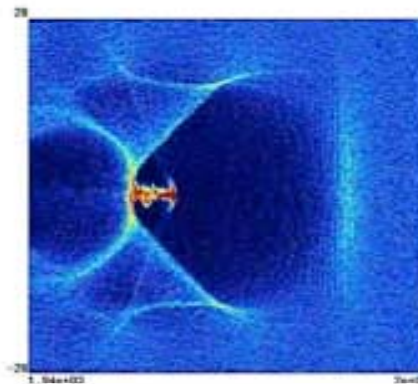


$ct = 3000 \mu\text{m}$

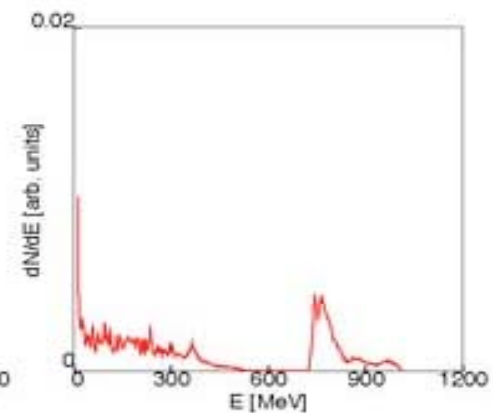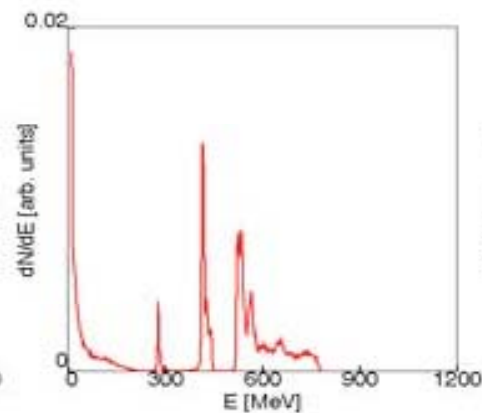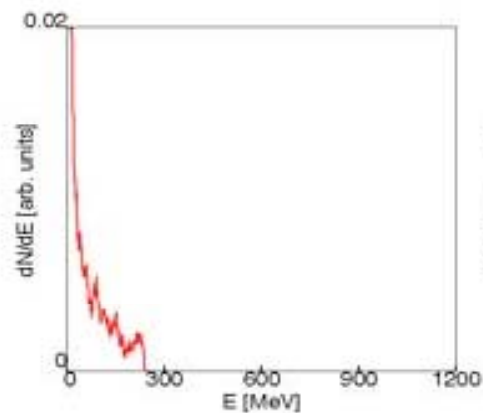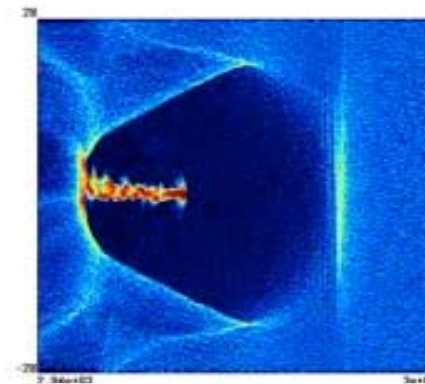

Planned experimental set up

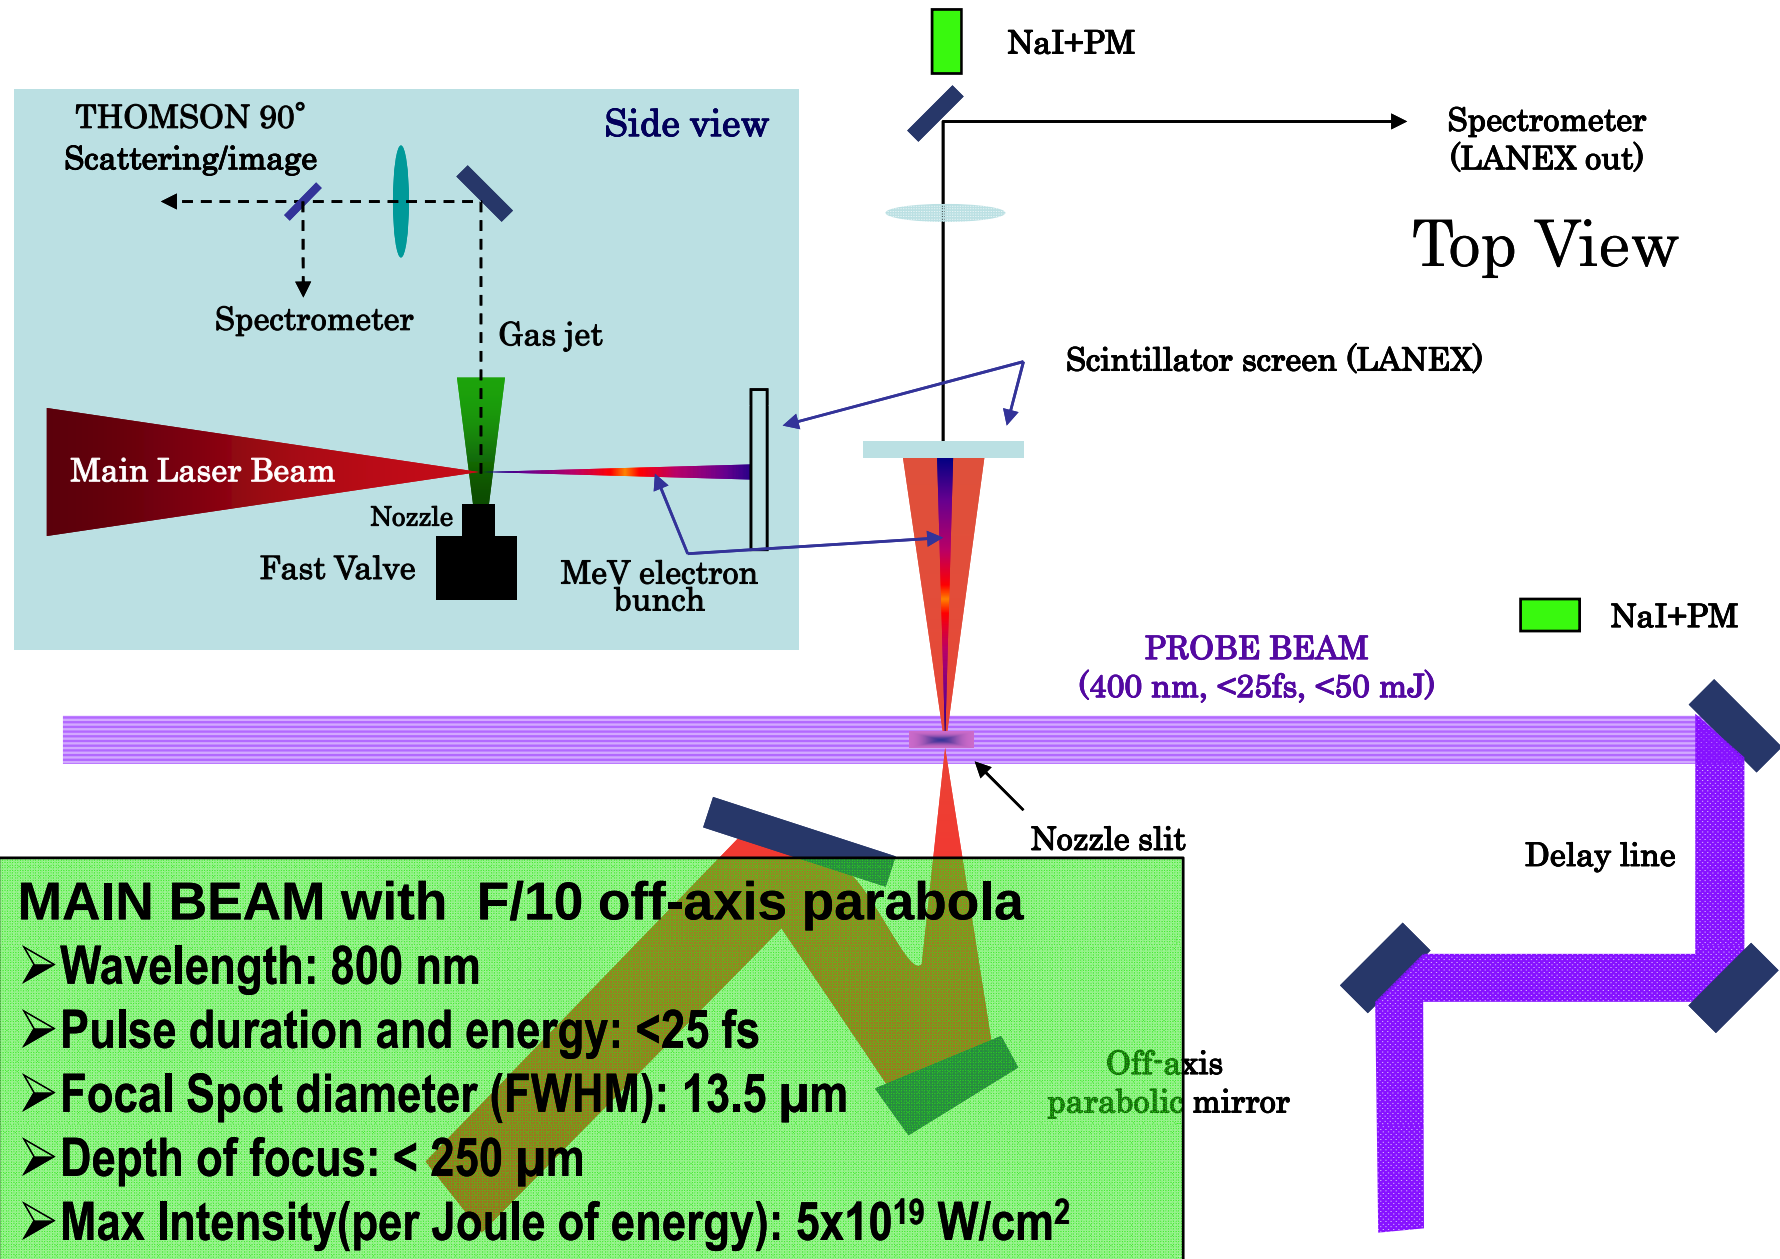

Pulsed gas-Jet nozzle

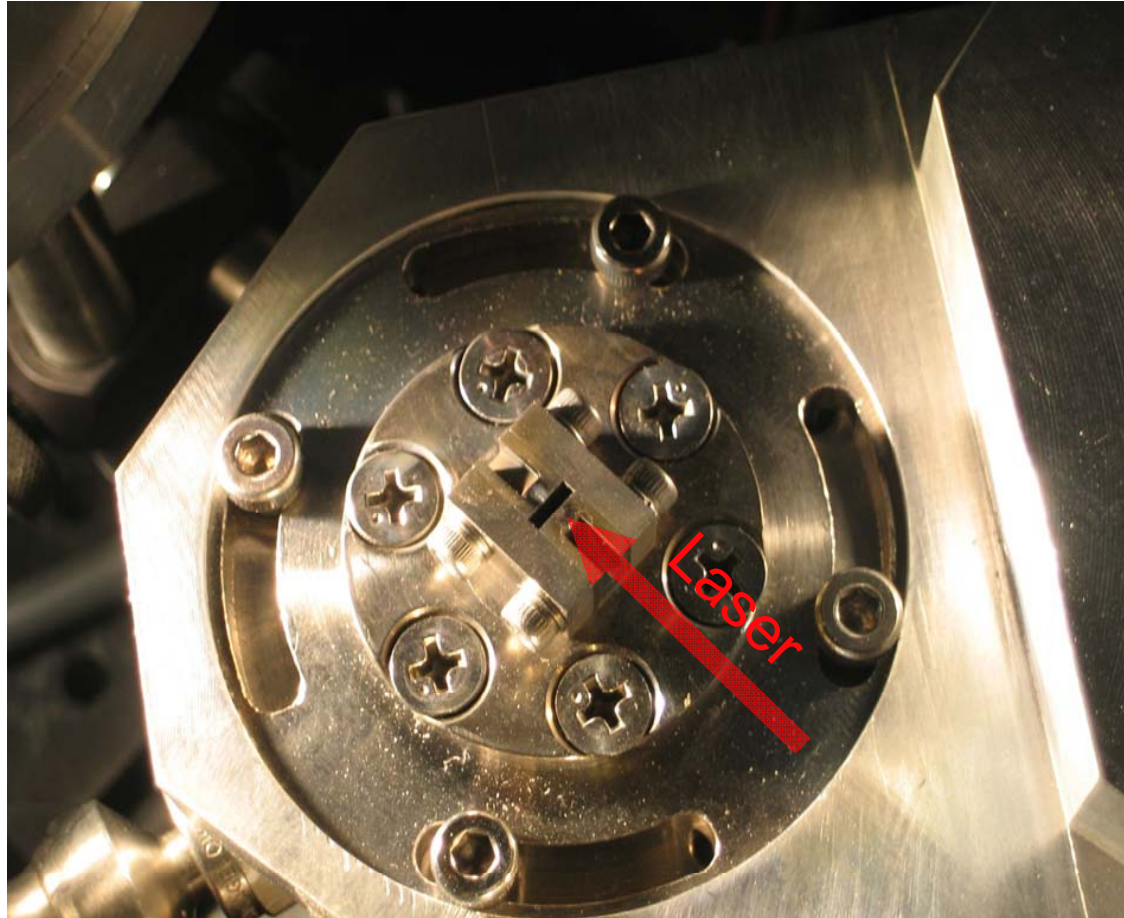

Nozzle size: 4mm x 1.2mm or 10 mm x 4 mm



Possible application of a continuous gas-jet under consideration
(v. talk L. Gialanella, Ven 20. H.11.10)

High-density well-defined gas jet (1)



Shockwave free supersonic nozzle

Gas-Jet nozzle





Nuclear Engineering Research Laboratory
Graduate School of Engineering
University of Tokyo

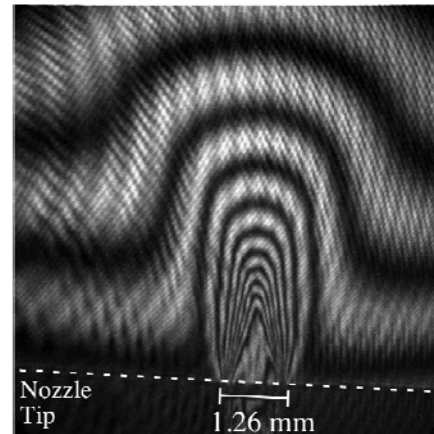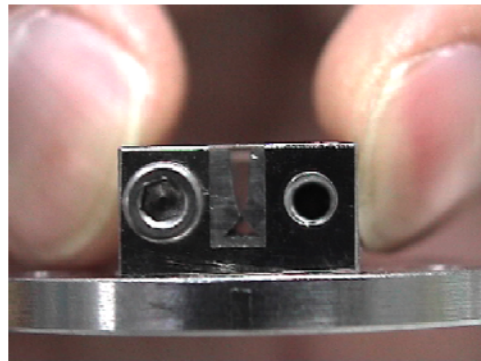

Measured Density Distribution

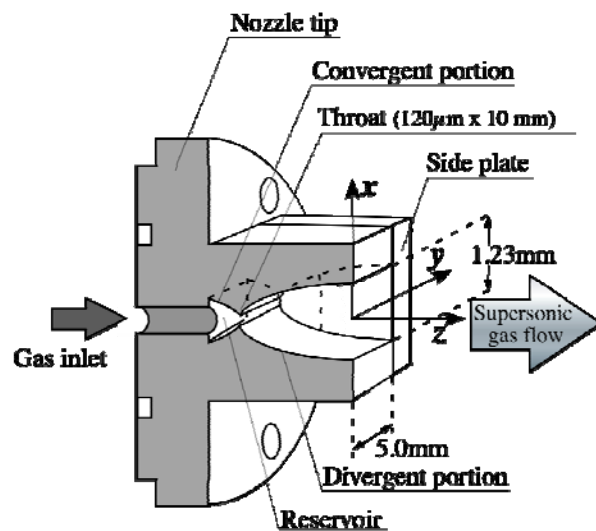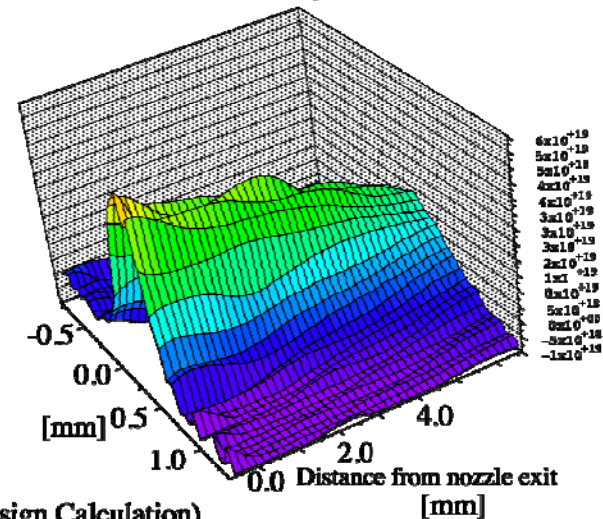

(a) Density Distribution (Design Calculation)

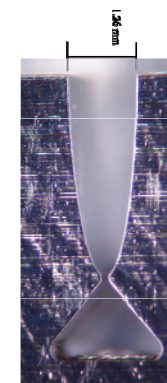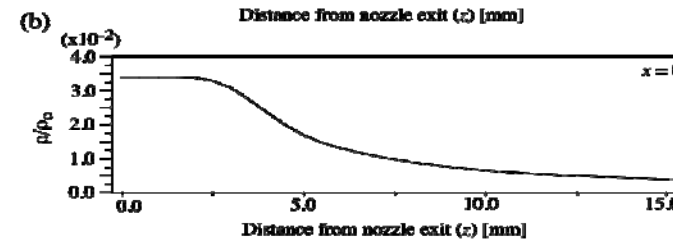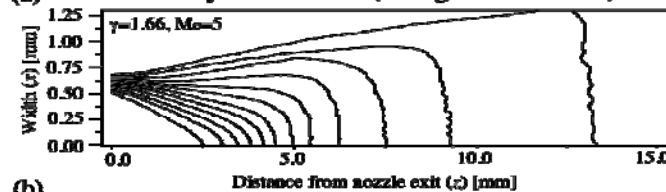


Courtesy of T. Hosokai, Tokyo Institute of Technology


The diagram illustrates the FEL beamline layout, showing the main beam transport line, compressor, interaction chamber, and various diagnostic stations (C1-C5). Key components and dimensions include:

- Main beam (>250 TW) Vacuum transport line:** The central horizontal beamline.
- Compressor vacuum chamber:** Located upstream of the interaction chamber.
- Interaction vacuum chamber:** Contains the OAP (Optical Axis Positioner) and the probe pulse source.
- Probe pulse (2TW) compressor:** A smaller beamline section used for probe pulses.
- Radiation protection wall:** A vertical barrier separating the beamline from the interaction chamber.
- Diagnostic Stations (C1-C5):** Located at various points along the beamline for monitoring and diagnostics.
- Dimensions:** Various distances are marked, such as 1181.00, 1500, 1225, 1056.68, 1150.00, 29, 2000, 262, and 910.
- Other Labels:** "TO PUMPS", "GATE VALVE", "GATE VALVE series 12-1 DN150 (ISO-F) 31VOC", "Adaptor flange ISO-F to ISO-K", "e (roll+Turbo)", and "back turbo".

FLAME Target Area

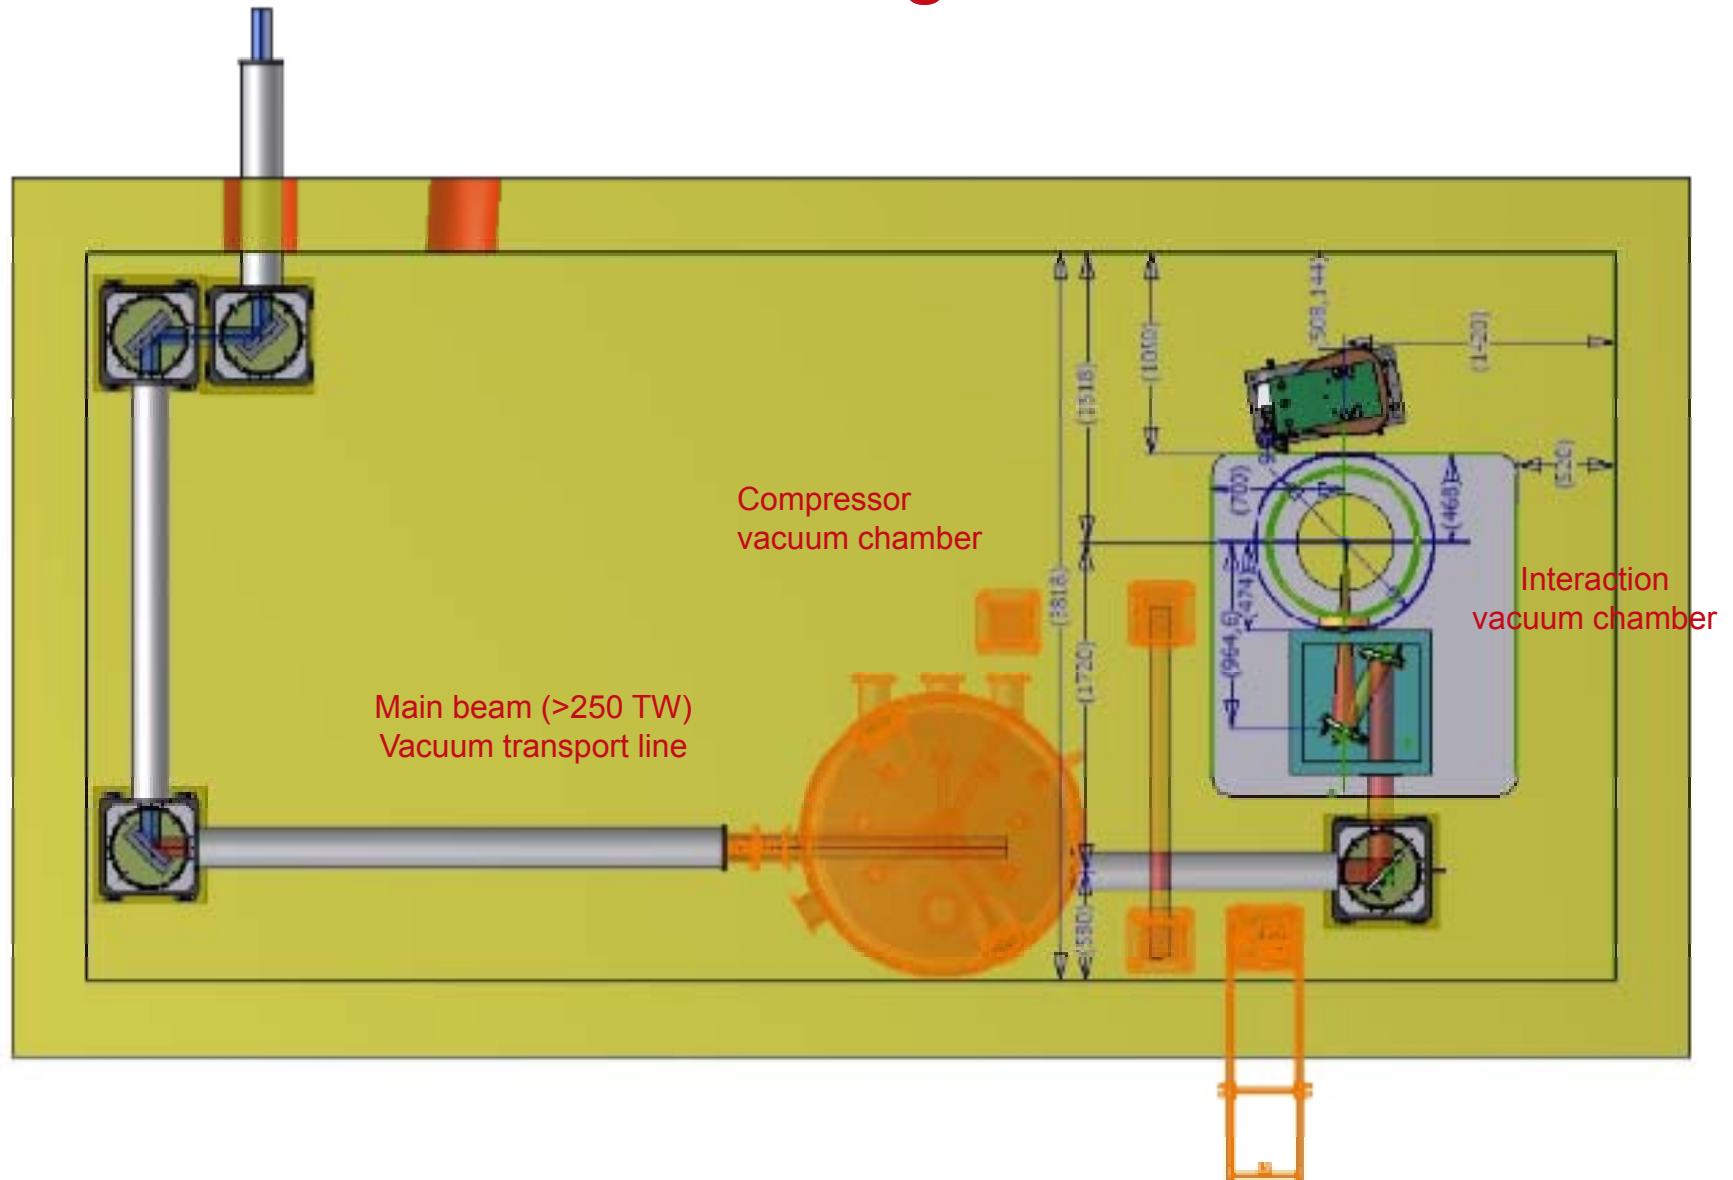


FLAME Target Area

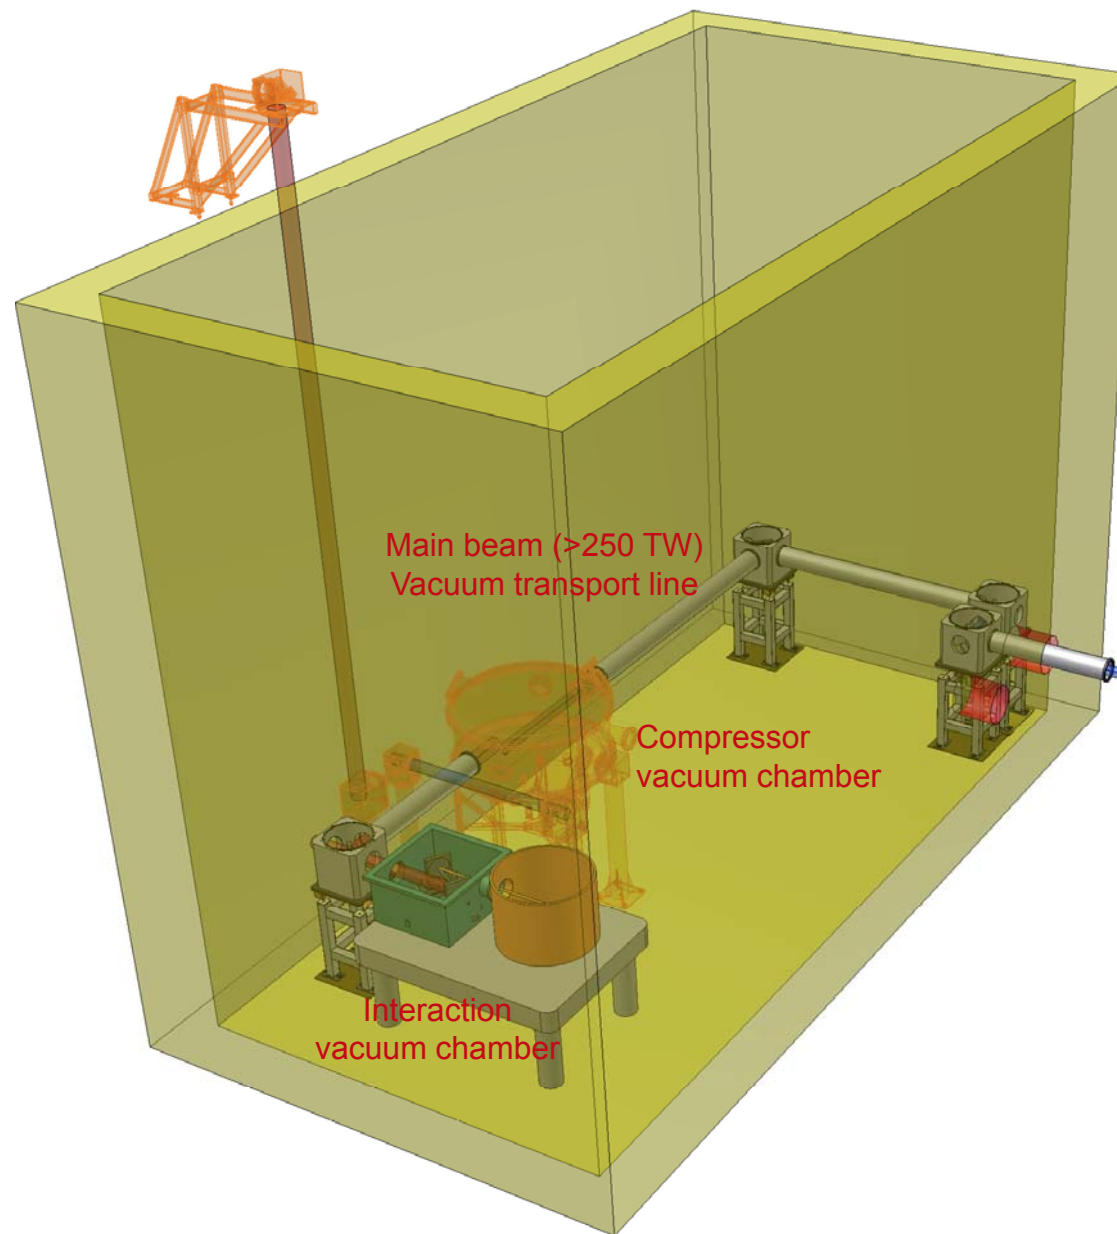


FLAME Target Area

- ✓ Project completed
- ✓ Construction in progress

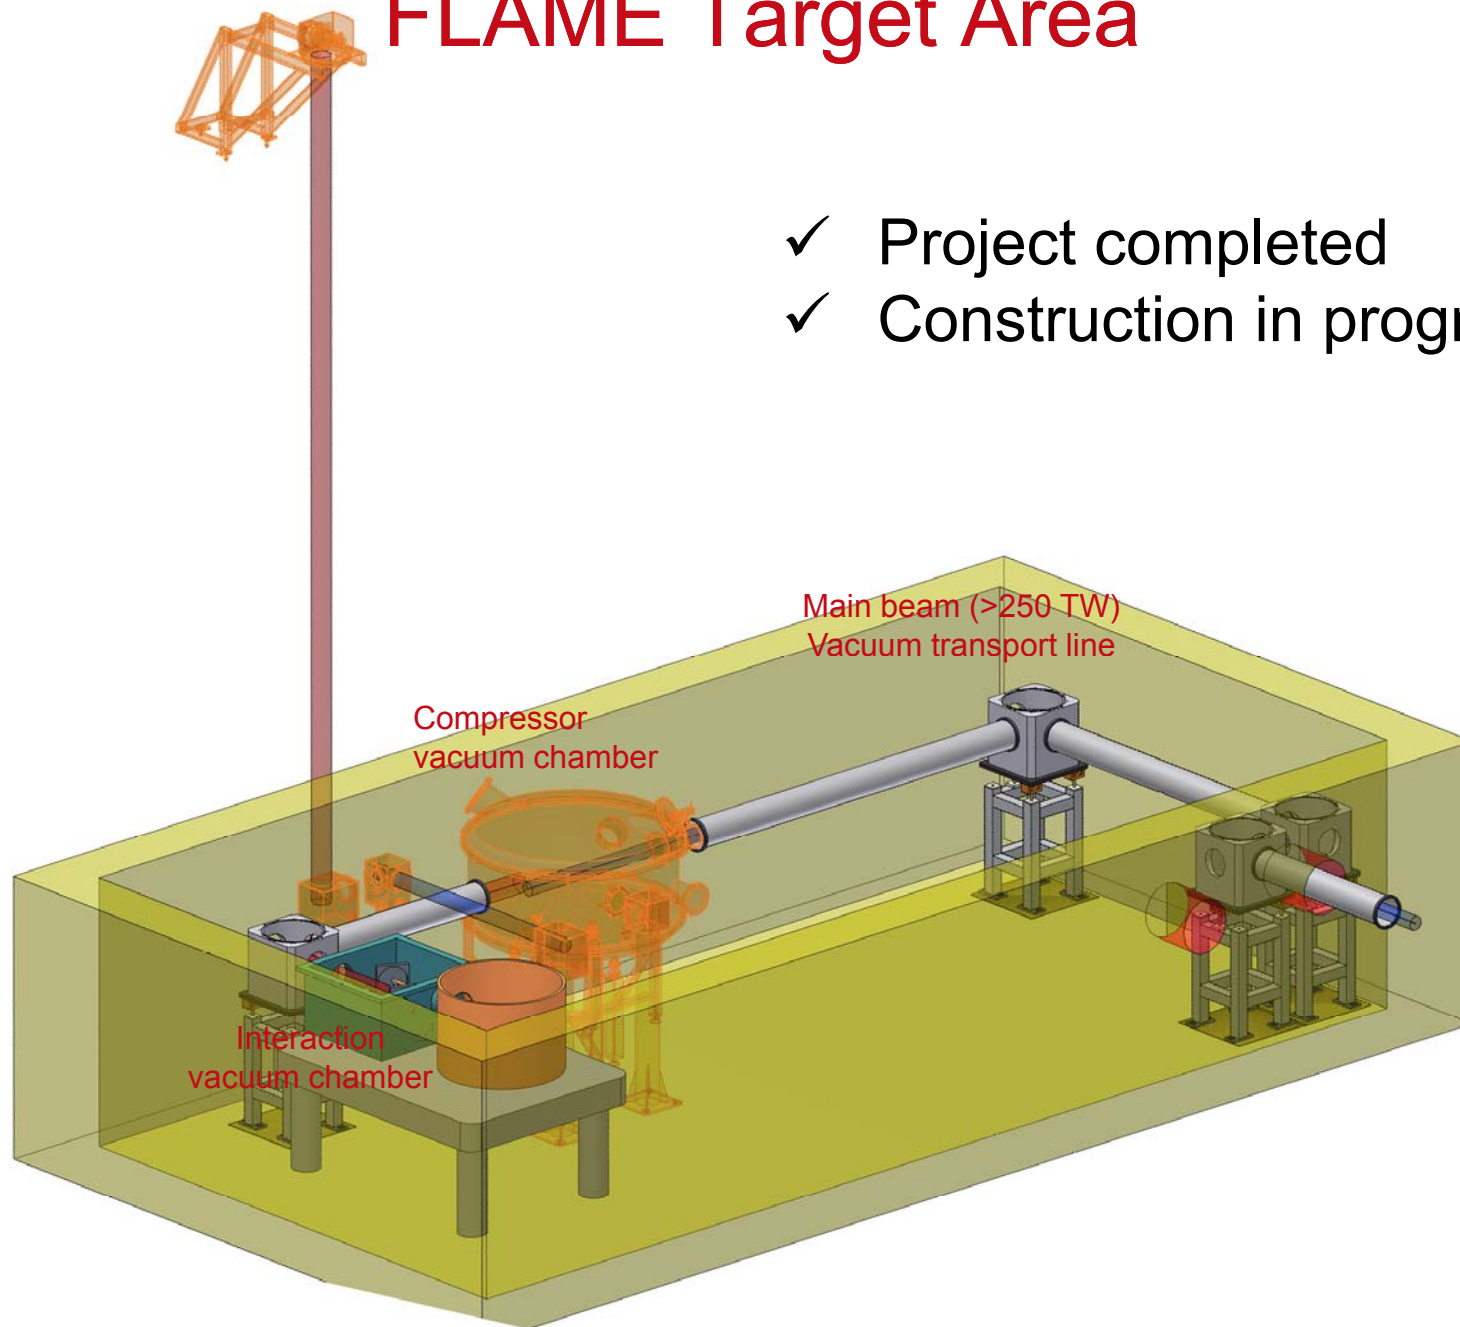

Planned experimental set up

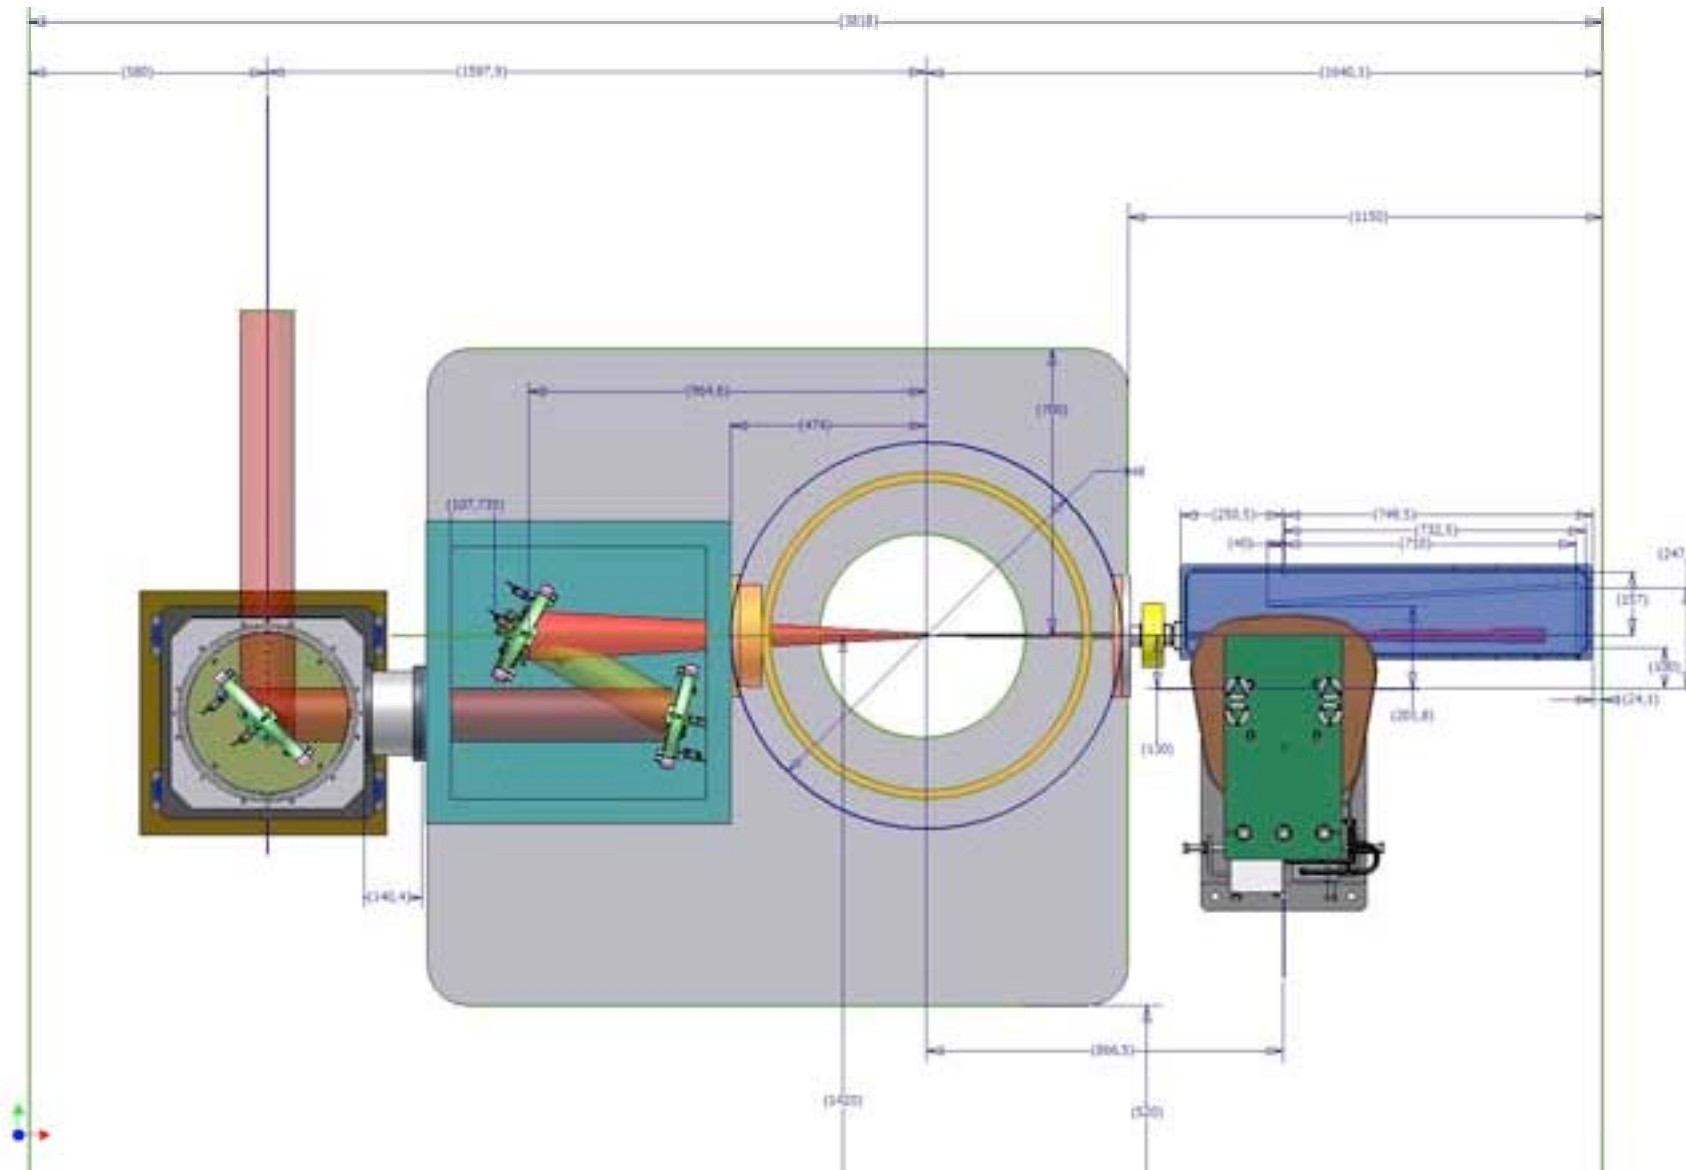

Spettrometro per elettroni

Finalita': misura spettro energetico elettroni accelerati

Energia massima:




- Primi test di prova con $p \approx 10$ MeV, esperimenti a piena potenza possono raggiungere l'energia di 10 GeV
- L'accelerazione di ioni prevede la produzione di protoni con $T \approx 10$ MeV

Risoluzione:

$\approx 1\%$ su largo range

Forma del fascio iniziale:

- Sorgente puntiforme con 1 mrad dispersione angolare iniziale

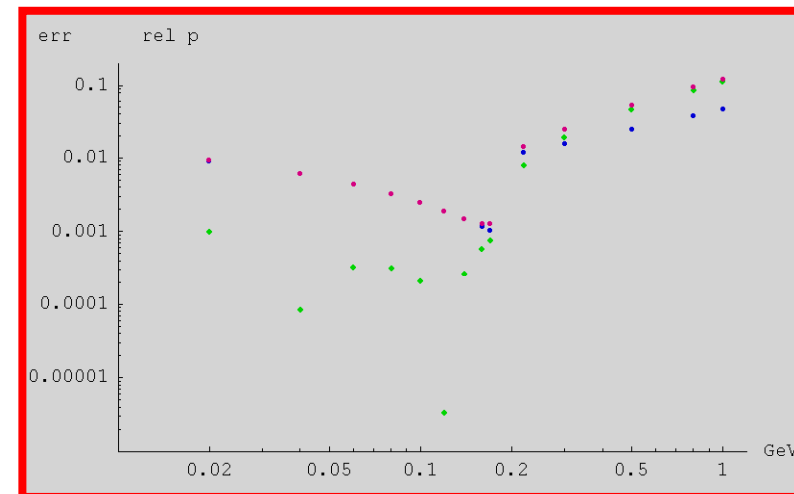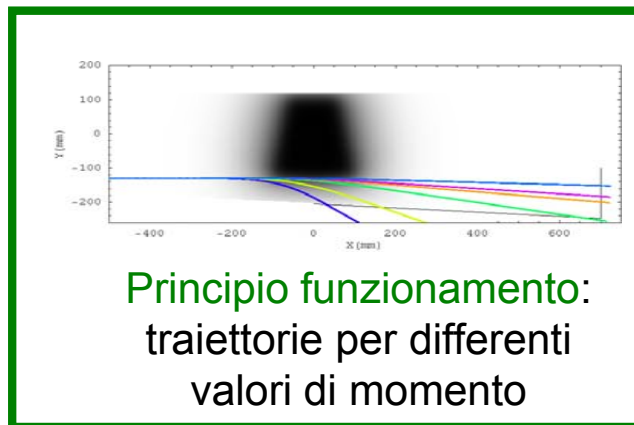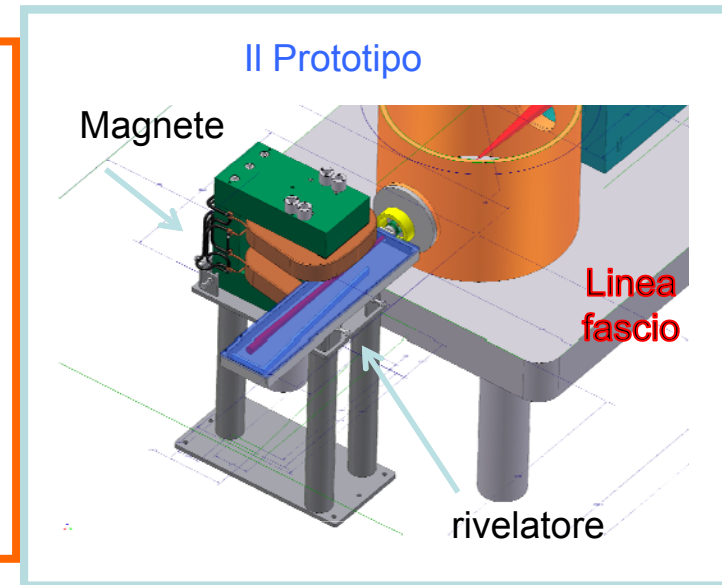

Contact: R. Faccini et al. ,,

Prestazioni previste del prototipo

Errore relativo vs momento

“TEST” EXPERIMENT DIAGNOSTICS

OPTICAL DIAGNOSTICS FOR LASER PROPAGATION STUDIES

Thomson scattering

Femtosecond optical probing

Transmitted and scattered beam spectroscopy

ELECTRON DIAGNOSTICS FOR ELECTRON ACCELERATION MEAS.

Establish self-injection acceleration conditions

Provide benchmarking for modelling


Agenda for next 6-8 months

- Completion and commissioning of subsystems:
 - *Clean room, Cooling network, Ethernet (before end of July '09)
- Full laser installation (Sept. 15th – December 2009, in phases;)
- Assembling of transport line from optical compressor to experimental target chamber (July – September '09)
- Assembling of self injection test experiment diagnostics (September – December '09)
- Laser on (gas-jet) target at >50 TW level Feb-March 2010.

Conclusions



- Installation of main subsystems in progress
Clean room, Laser, Cooling, Conditioning;
- Components of beam transport line in production;
- Design of test experiment completed;
- Construction of electron spectrometer in progress;
-

Schematic layout of electron beam lines for FEL, Plasma Acceleration and Thomson Source experiments


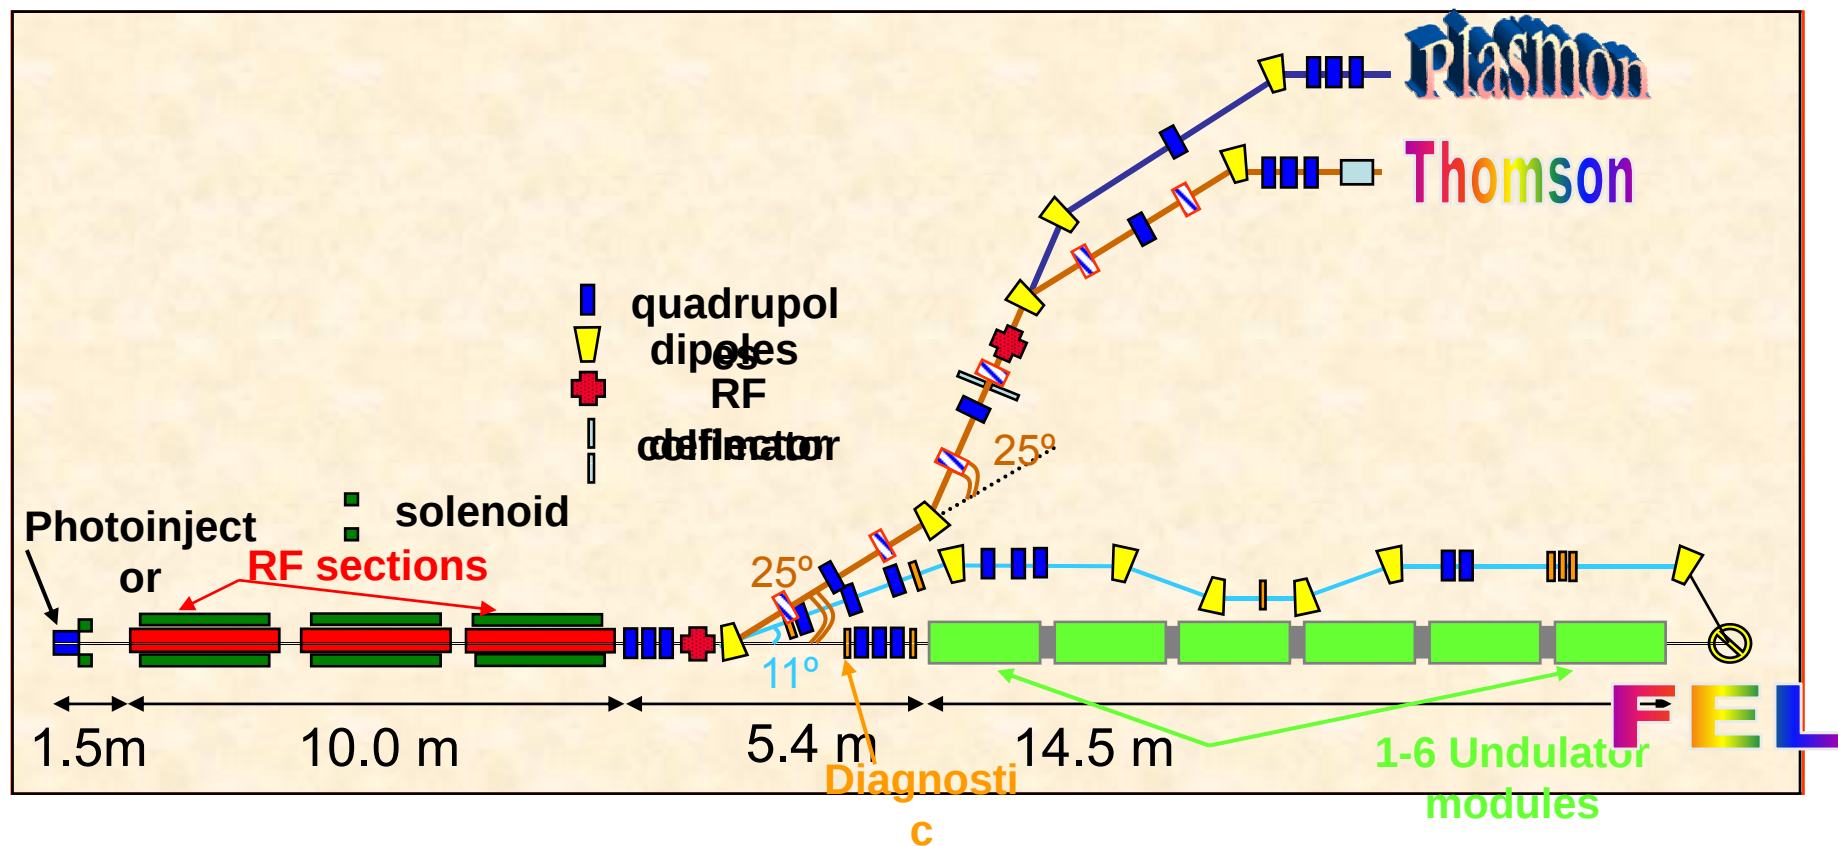


Last-beam line 30-150MeV

Runs with the GA to **minimize** the $\Delta E/E$, the **emittance** and to reach the **needed energy**

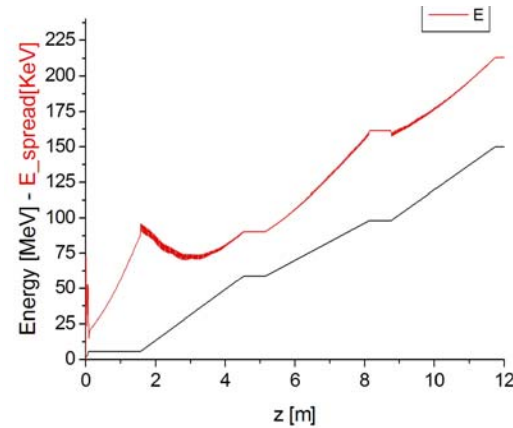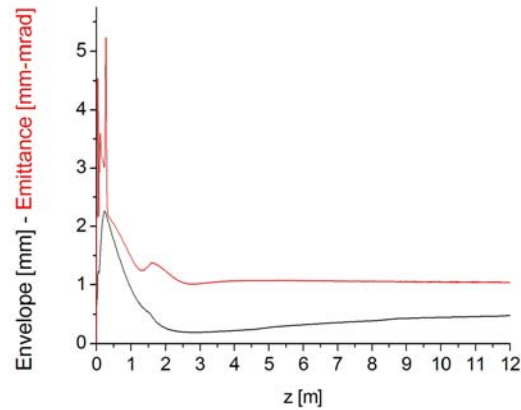


$\Delta\gamma/\gamma$ [%] = **0.1416E+00**
 $\langle E \rangle$ [eV] = **0.1505E+09**
 σ_x [mm] = **0.4825E+00**
 ϵ [mm*mrad] = **0.1041E+01**
 $\langle I \rangle$ [A] = **0.9848E+02**

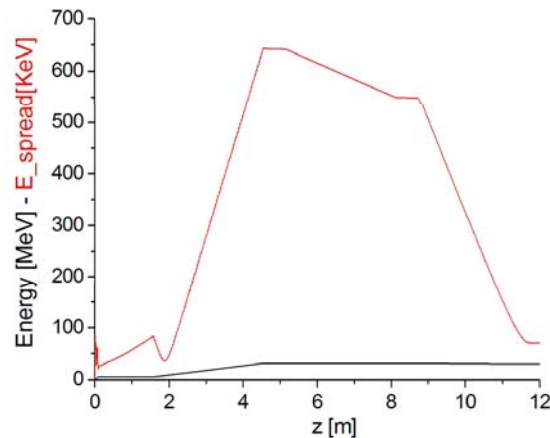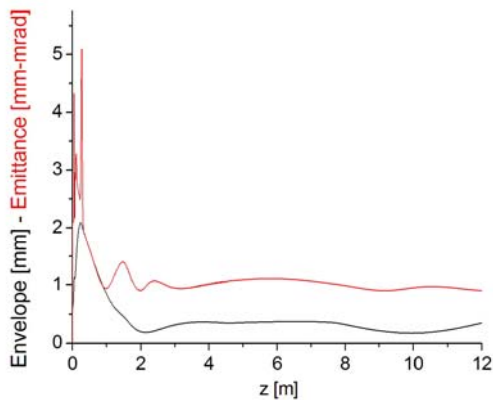


$\Delta\gamma/\gamma$ [%] = **0.2324E+00**
 $\langle E \rangle$ [eV] = **0.3051E+08**
 σ_x [mm] = **0.3501E+00**
 ϵ [mm*mrad] = **0.9015E+00**
 $\langle I \rangle$ [A] = **0.8973E+02**

150MeV


Time step rms emittance vs Time or Z

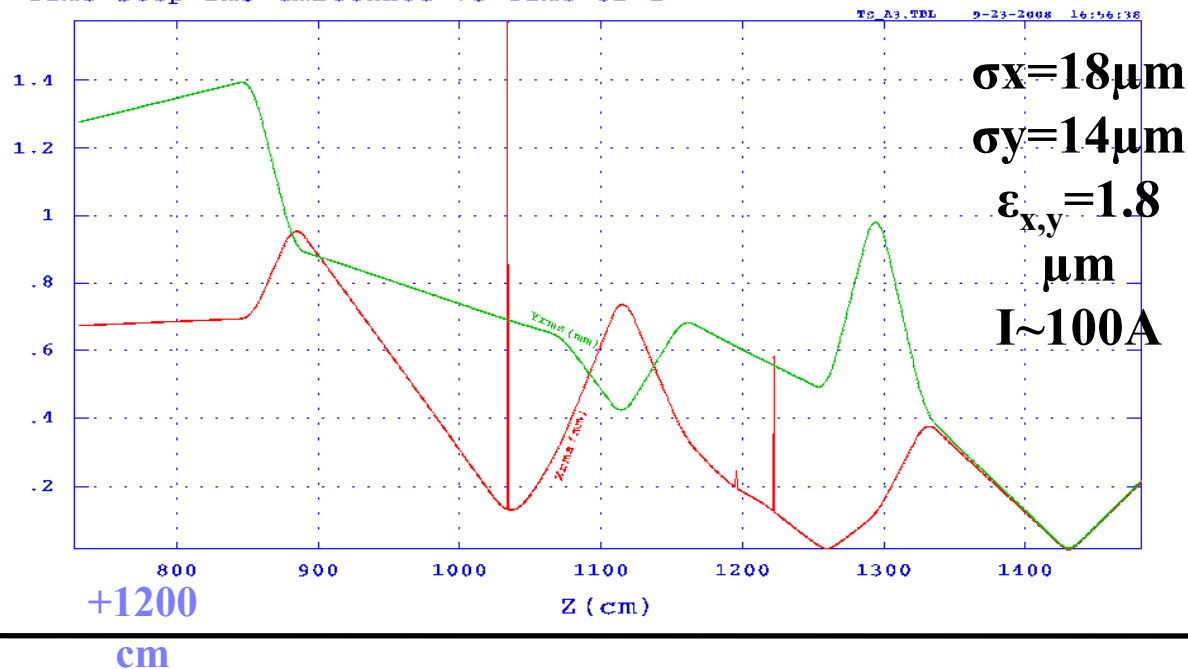


Time step rms emittance vs Time or Z

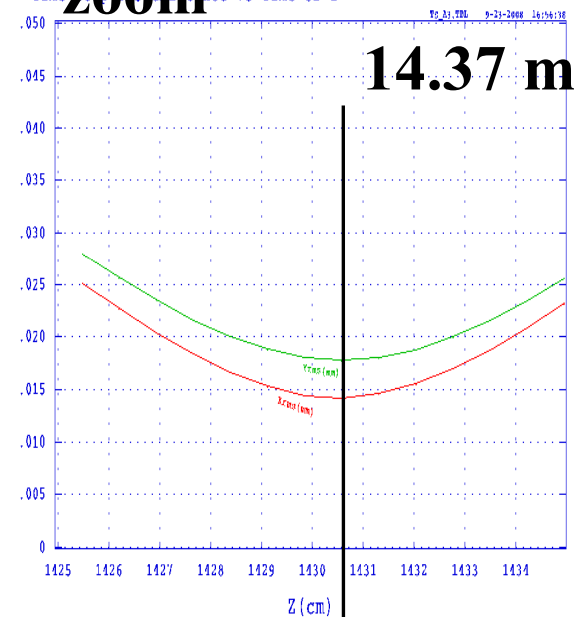

30MeV

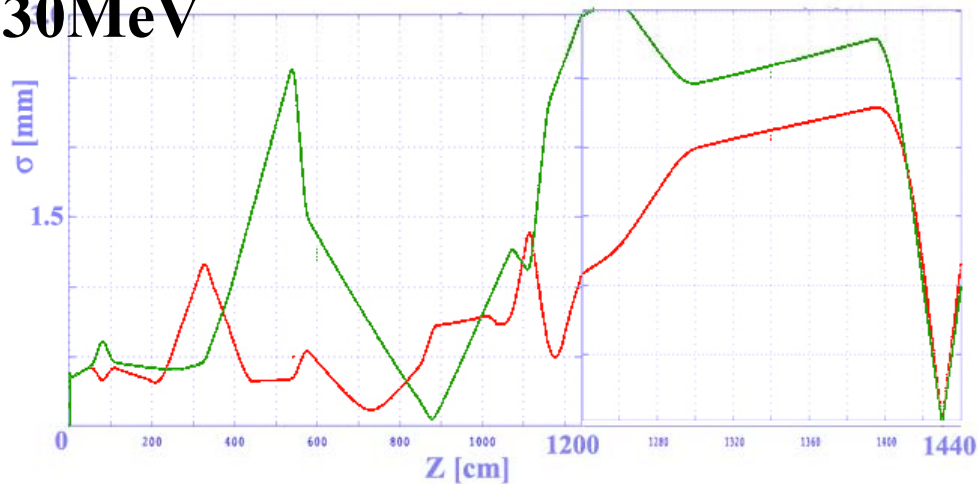


zoom

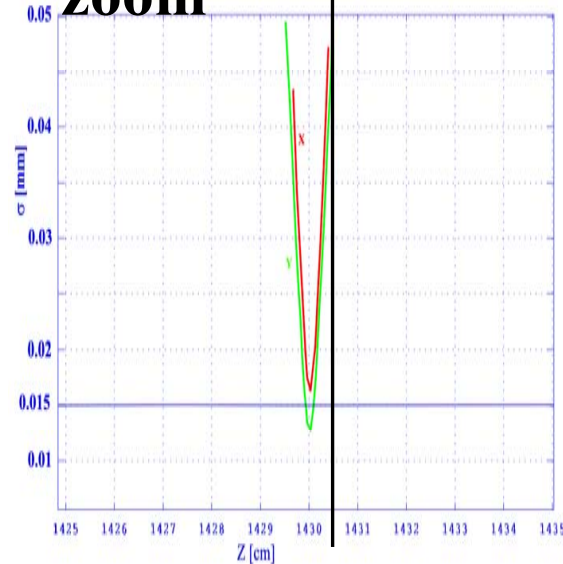


CdS, Milano, 14 luglio
2009

Block diagram with dimensions; scattering area with final focusing magnetic elements, diagnostic devices

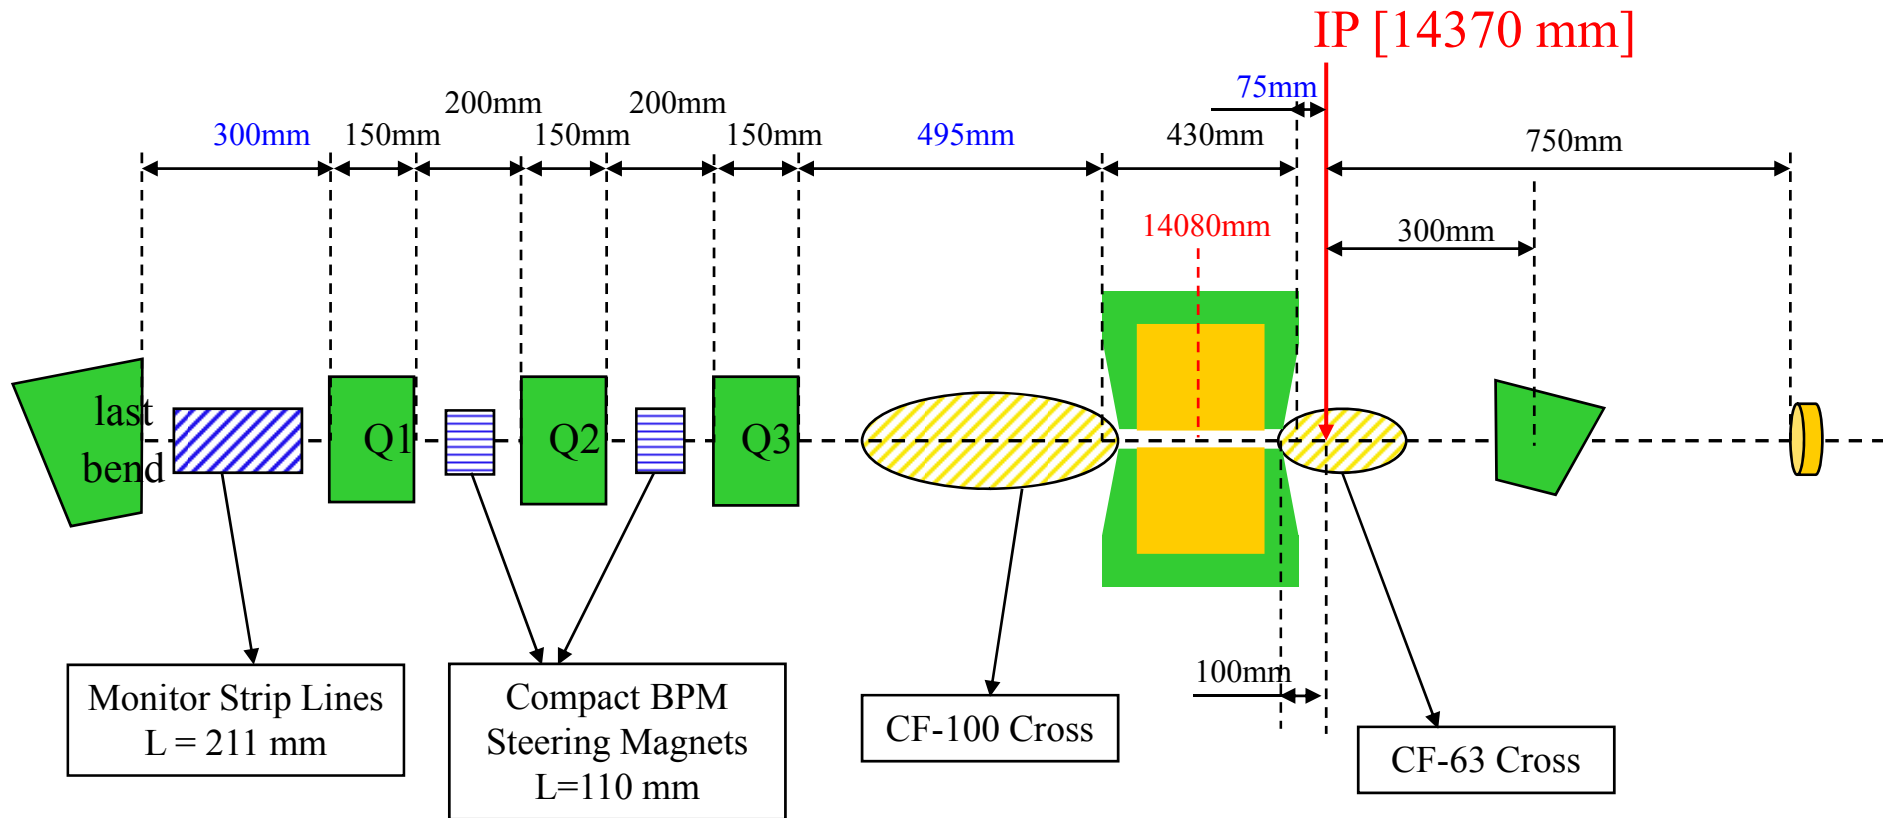

every magnetic element has been designed and specified to the engineering level;
the acquisition procedure of the magnetic elements has started


Schema camera interazione Sorgente Thomson: in blu il fascio di elettroni, in rosso il fascio laser, in nero i raggi X

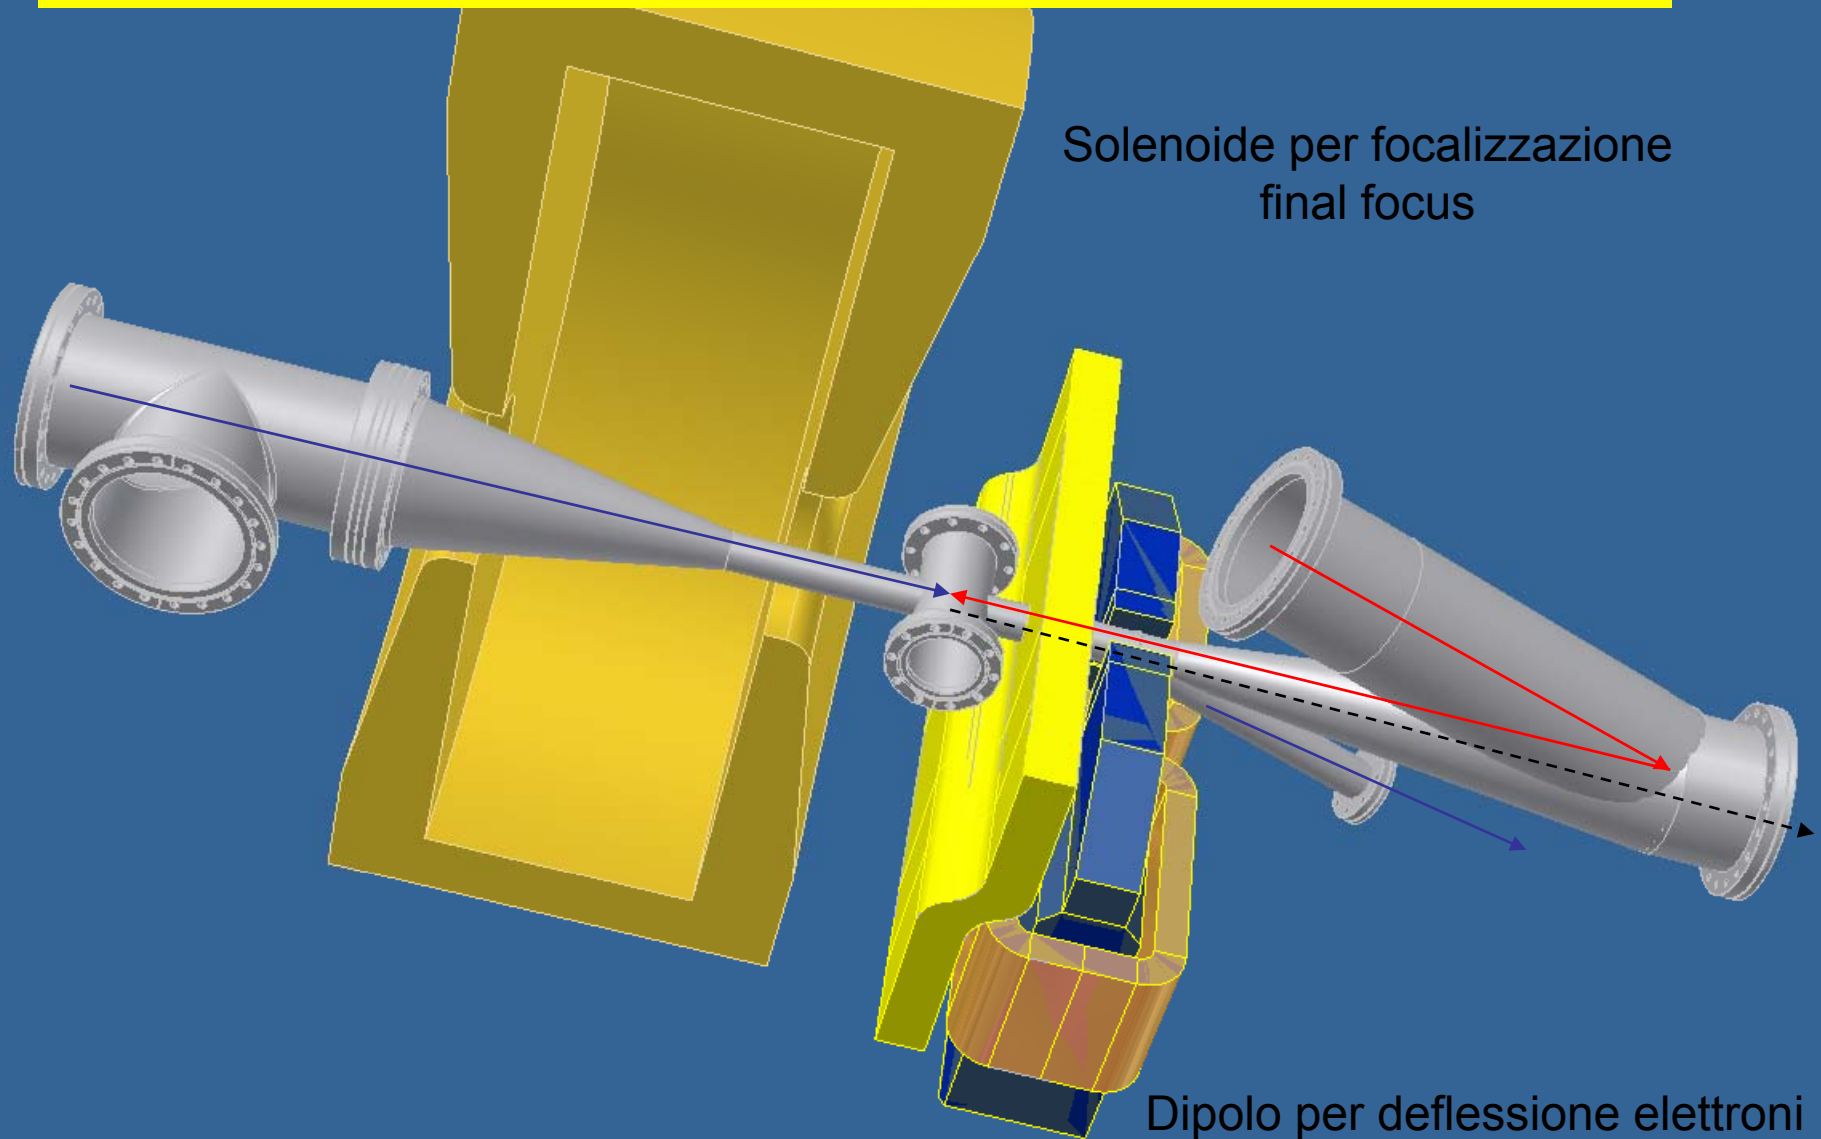

Focusing solenoid

Maximum field = 1.0 [T]

$$(J = 3 \text{ A} \cdot \text{mm}^2)$$

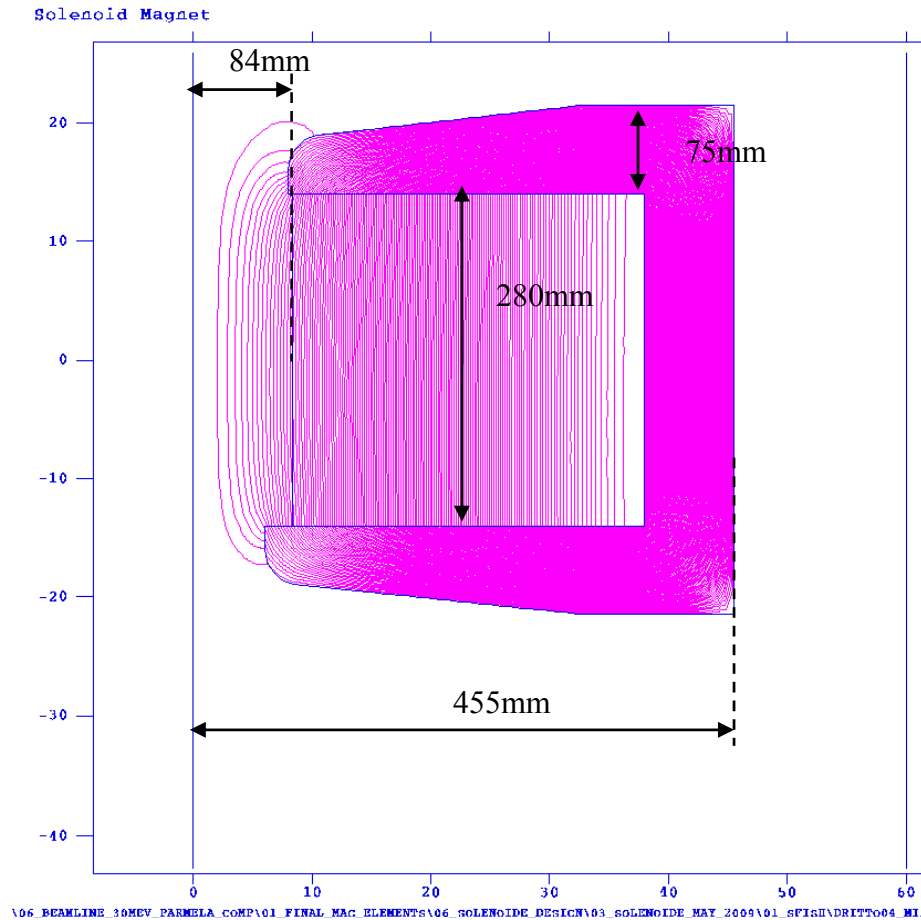


Dumping dipole


200 mm length, center at 300

mm from (IP), $J=2.5 \text{ A} \cdot \text{mm}^2$


no shield since the fringing field results in a beam **deviation** at the IP of the order of **50 μm**

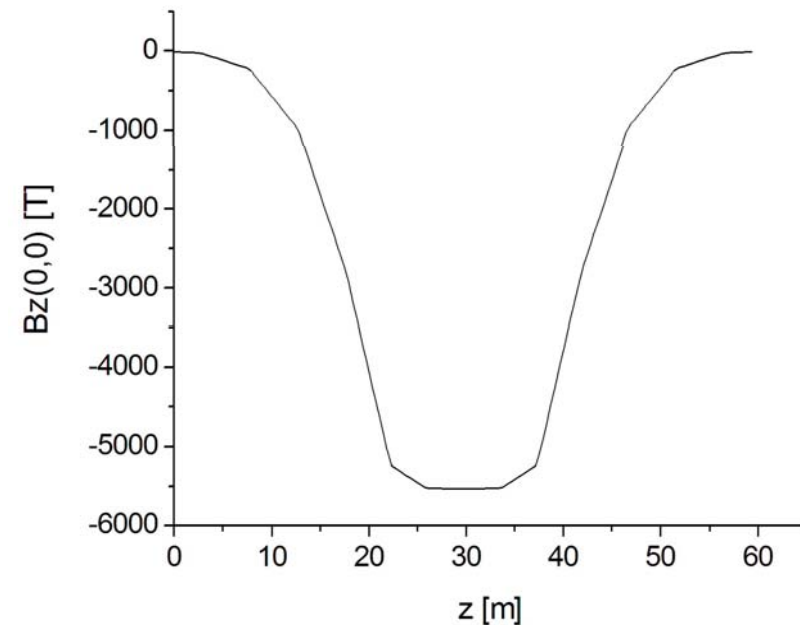


Plane mirror supports

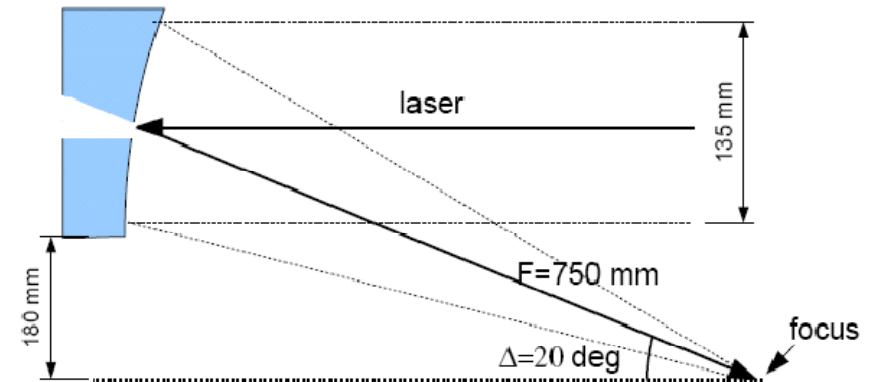

Simulation - Laser temporal profile at IP

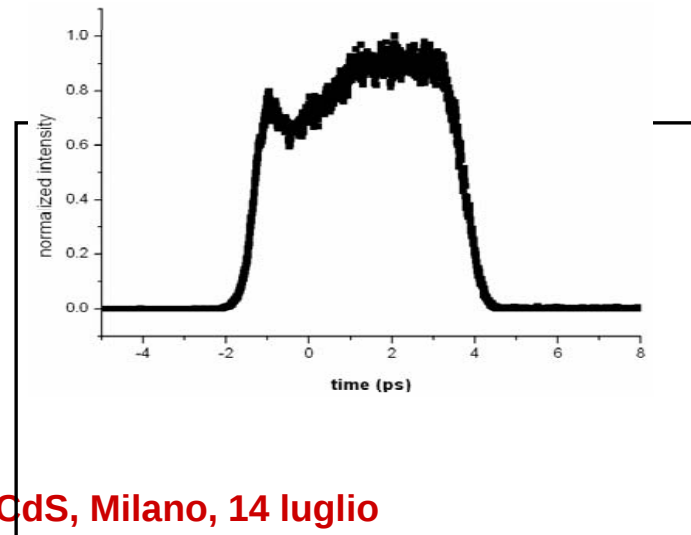


CdS, Milano, 14 luglio
2009

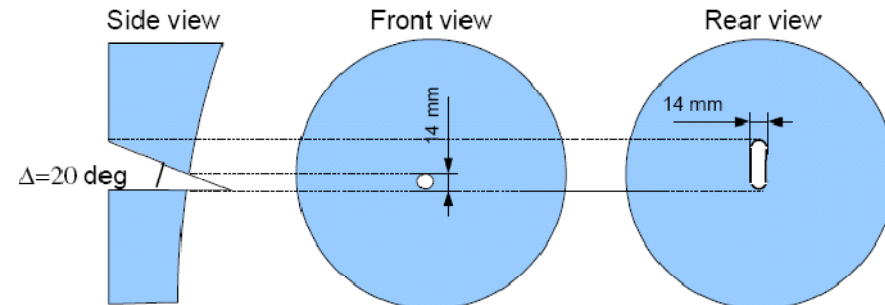

**Delivery from the company
within the end of July 2009**


Electron beam on the Mirror (accidental no beam deflection)

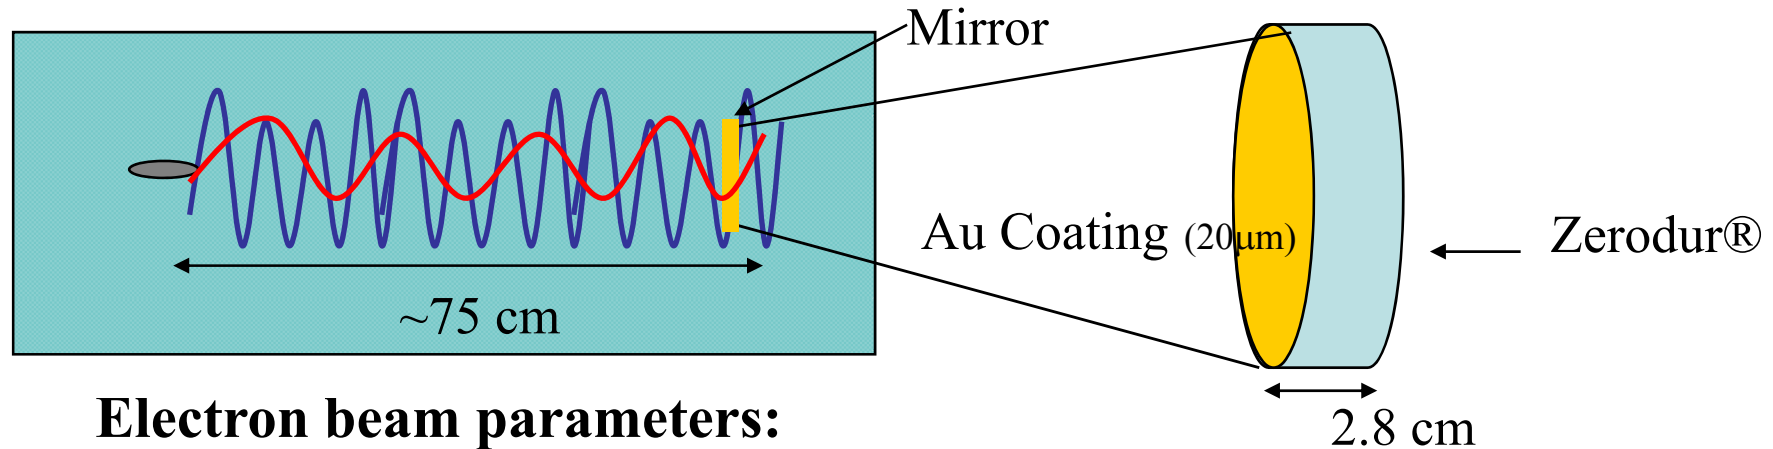

Electron beam parameters:


1.0nC; 30 MeV; $\Delta E/E=0$; $\varepsilon_{x,n}=2$ mm-mrad;
 $r_{\text{beam}}=5$ mm at IP, $x'=2.2$ mrad

10 different FLUKA runs
with 10^6 particle each

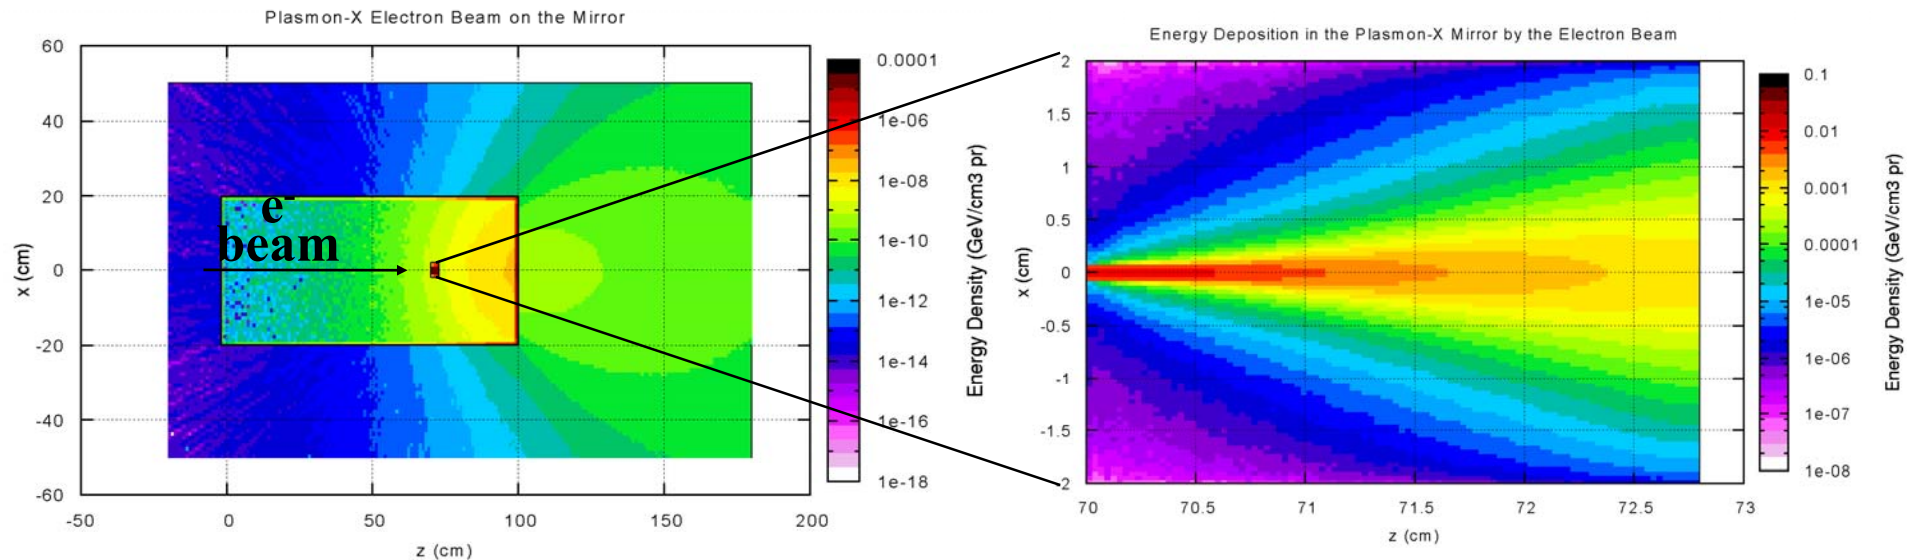

IFEL Interaction


In an FEL energy in the e-beam is transferred to a radiation field

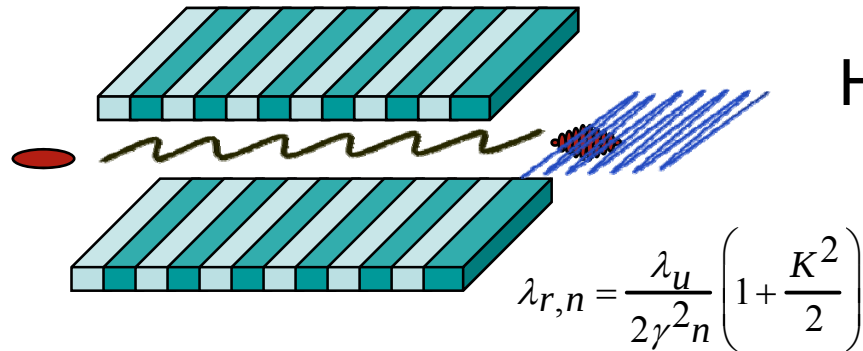

Undulator magnetic field to couple high power radiation with relativistic electrons

$$\gamma_r^2 \cong \frac{\lambda_w}{2 \cdot \lambda} \cdot \left(1 + \frac{K^2}{2} \right)$$

In an IFEL the electron beam absorbs energy from a radiation field.

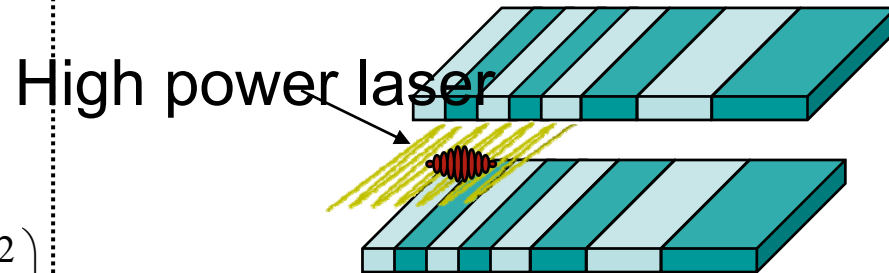

Somewhat arbitrary separation line. Include in IFEL all optical

manipulation schemes:
bunchers, modulators,
laser heater, etc.

Significant energy exchange between the particles and the wave happens when the resonance condition is satisfied.



For large acceleration -> need for undulator tapering

UCLA tapered undulator @ LNF

Use *unique* capabilities of SPARC + FLAME.

- ❑ High brightness beam
- ❑ High power laser in same facility.
- ❑ UCLA has already available and could loan the strongly

	Initial	Final
Period	1.5 cm	5.0 cm
Field Amplitude	0.12 T	0.6 T
Peak K parameter	0.2	2.8
gap	12 mm	12 mm

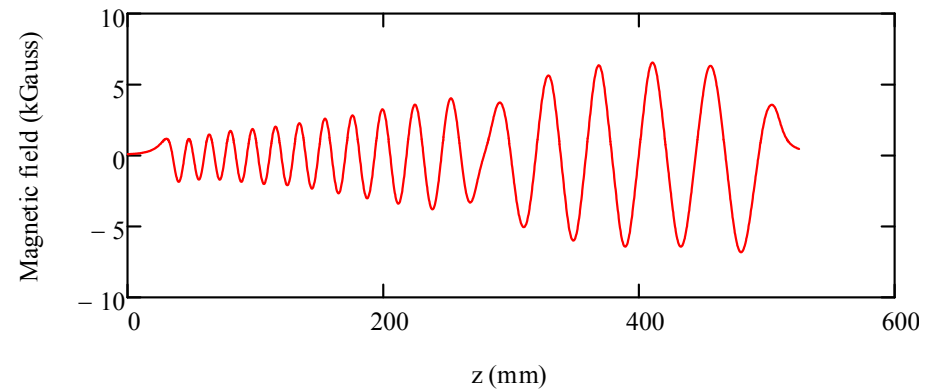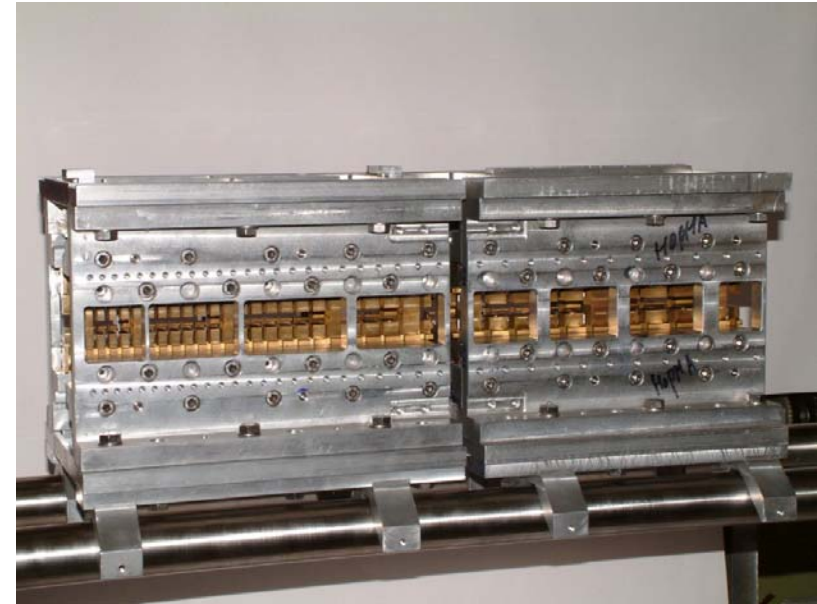



IFEL@LNF experiment

Because of wavelength difference,
simply scaling the Neptune IFEL
experiment is already extremely
interesting.

4.5 MeV $\rightarrow$ 50 MeV) $\times (10.6/0.8)^{1/2}$






(52 MeV $\rightarrow$ 180 MeV)

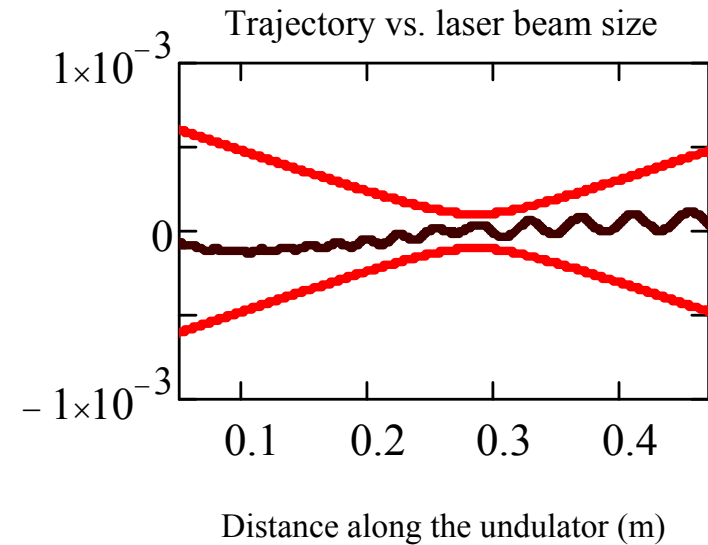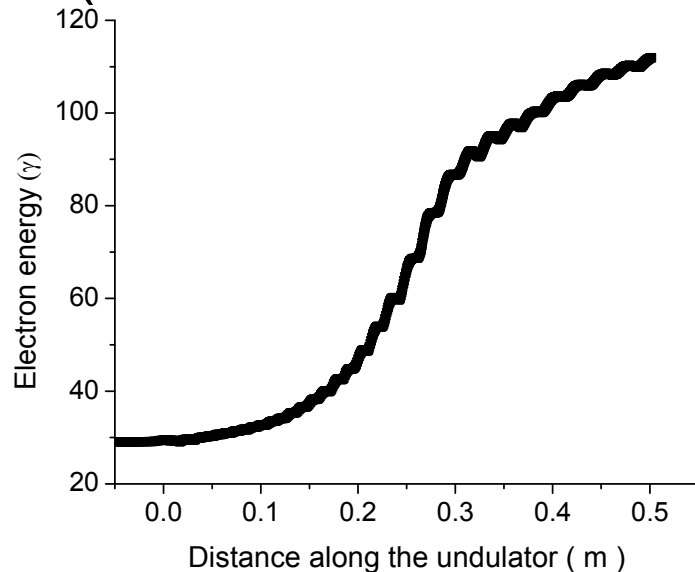

Initial energy	52 MeV
Final energy	180 MeV
Avg gradient	260 MV/m
Final energy spread	1 %
Laser wavelength	800 nm
Laser power	5 TW
Laser spot size (w_0)	0.2 mm

Layout

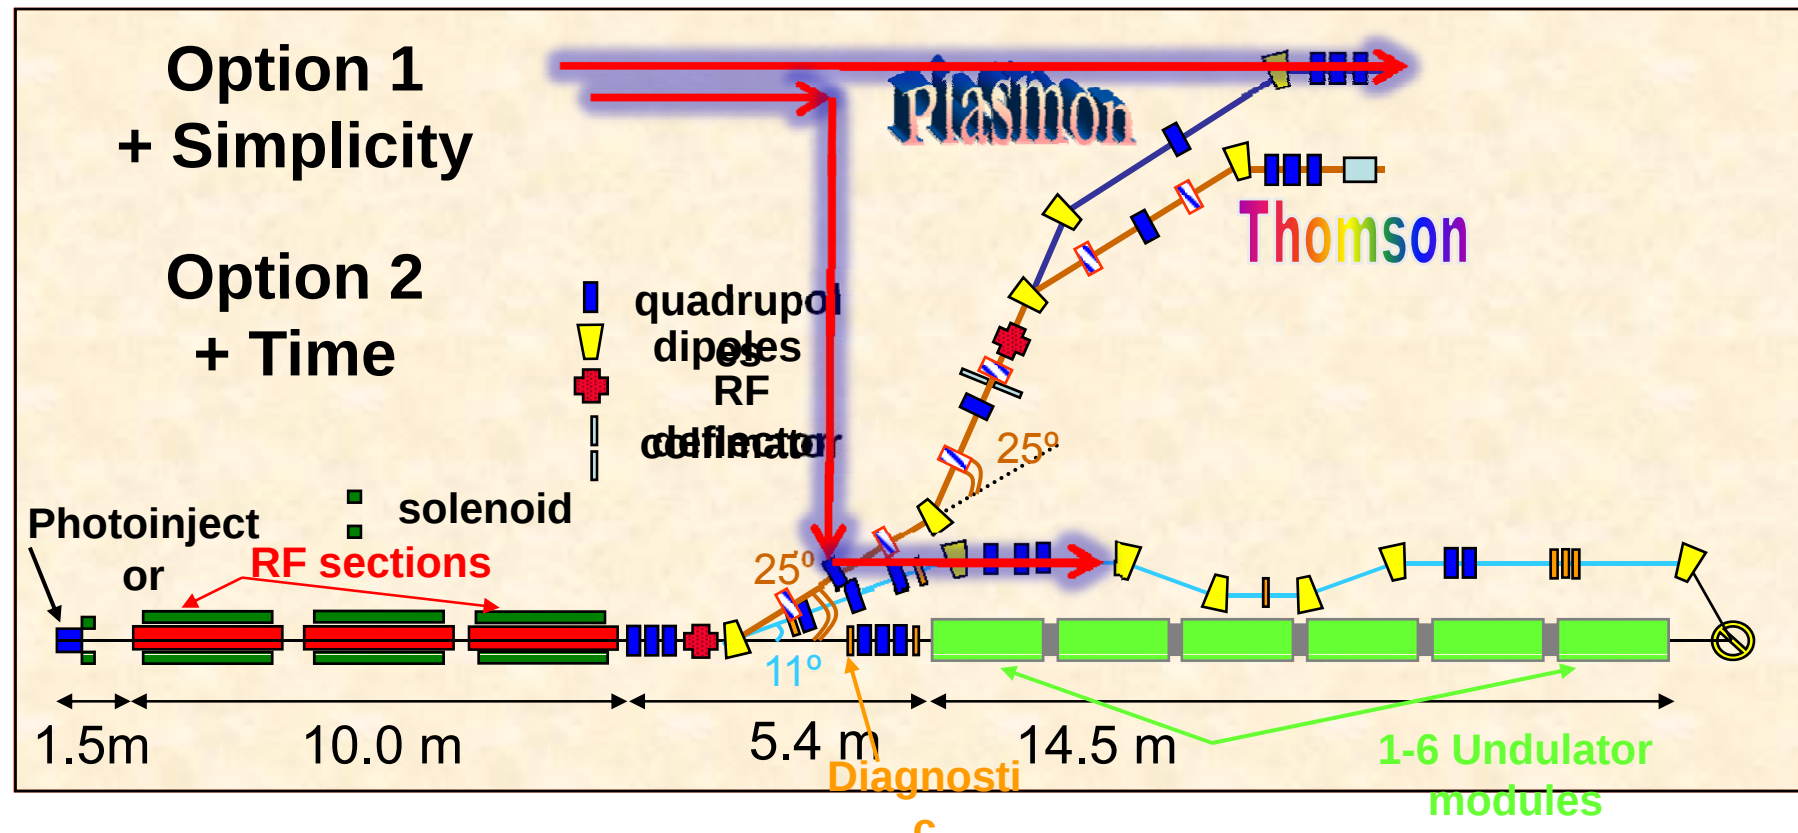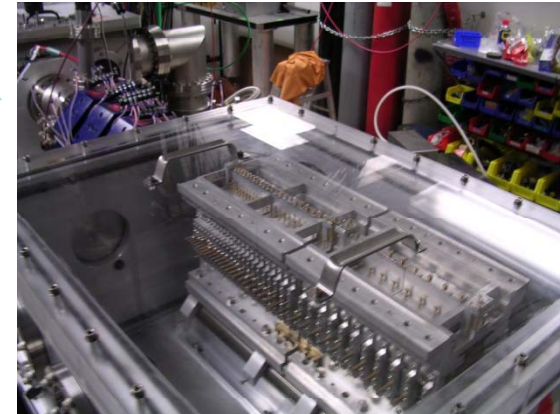
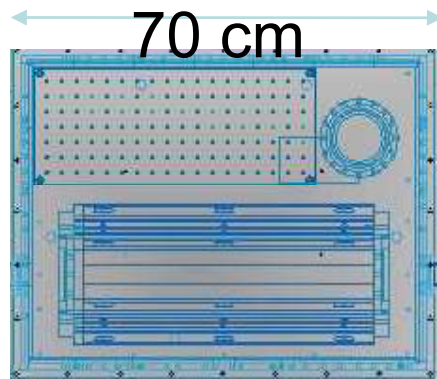


UCLA tapered undulator @ LNF

Use *unique* capabilities of SPARC + FLAME.

- ❑ High brightness beam
- ❑ High power laser in same facility.
- ❑ UCLA has already available and could loan the strongly

	Initial	Final
Period	1.5 cm	5.0 cm
Field Amplitude	0.12 T	0.6 T
Peak K parameter	0.2	2.8
gap	12 mm	12 mm

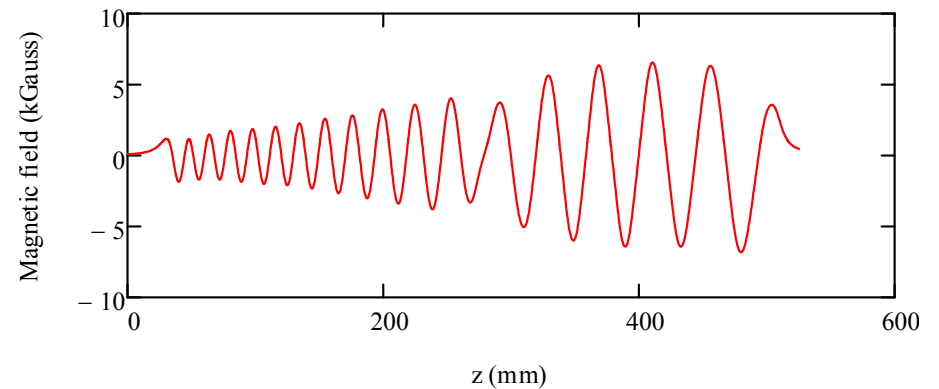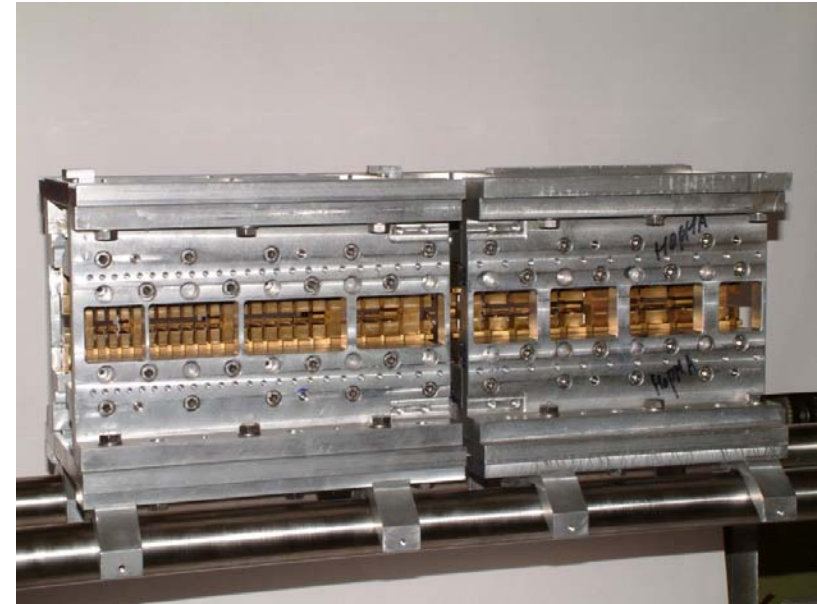

A new helical undulator for a phase-2 IFEL acceleration experiment at SPARC



Assume typical
parameters for
SPARC / FLAME

***Aim at maximum
final energy with 2
m long undulator***

Parameter	Fixed Value
Initial e-beam energy (γ value)	180 MeV
Initial e-beam intrinsic energy spread	0.1% (1σ)
Initial e-beam current	1 kA
Laser wavelength	800 nm
Laser peak power	20 TW
Nominal length of wiggler, L_w	200 cm
Rayleigh range	20 cm
Location of laser waist inside wiggler	100 cm
Resonant phase angle ψ for wiggler	<i>var</i>

Tapering optimization

- Helical undulator to maximize energy exchange (interaction always ON).
- Keep magnetic field amplitude well under the Halbach limit for a gap = 6 mm to ensure technical feasibility.
- Starting from initial energy 180 MeV
- Final energy spread <0.6 %, to be decreased with appropriate choice of resonant phase exit.

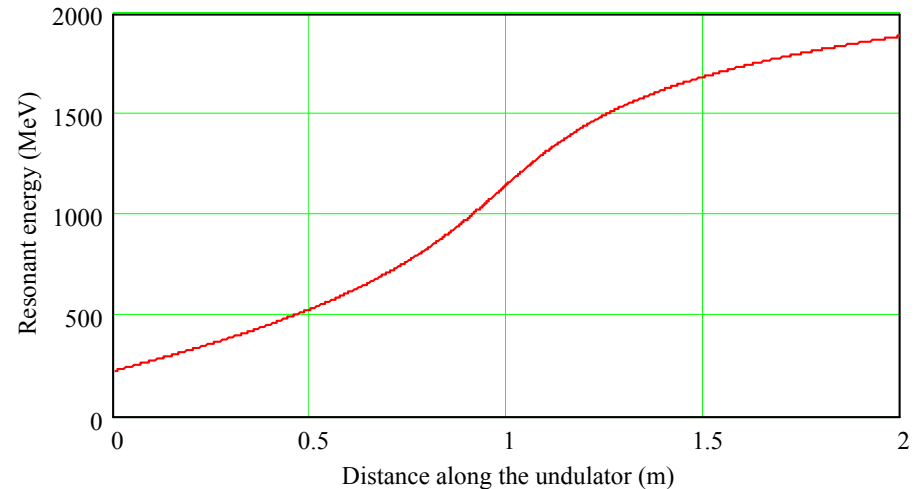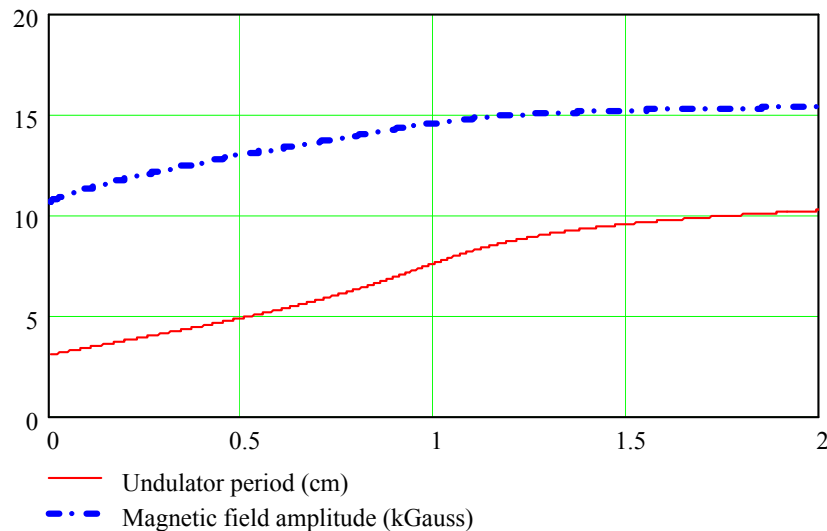

ANAGRAFICA

Ricercatori

Nome CF	Contratto	Qualifica	Aff.	%
1 Cecchetti Carlo Alberto	CCCCLL76H03G702A	Associato Tecnologo	CSN V	50
2 Giulietti Danilo	GLTDNL49E14F513H	Incarico di ricerca Professore	CSN V	80
3 Giulietti Antonio	GLTNTN44H25G148Y	Associato Dirigente di Ricerca	CSN V	50
4 Gamucci Andrea	GMCNDR80R29G702R	Associato Assegnista	CSN V	50
5 Gizzi Leonida Antonio	GZZLDN65A24L086F	Associato Primo Ricercatore	CSN V	50
6 Koester Petra	KSTPRM70D54Z112I	Associato Assegnista	CSN V	50
7 Labate Luca Umberto	LBTLMB71T30H224E	Associato Ricercatore	CSN V	50
8 Pathak Naveen	PTHNNC80L15Z222S	da Associare Dottorando	CSN V	100
9 Vaselli Moreno	VSLMRN39S20G702U	Associato Dirigente di Ricerca	CSN V	30

Numero Totale Ricercatori 9

FTE : 5.1

Capitolo	Descrizione	Parziali		Totale	
		Richiesta	SJ	Richieste	SJ
INTERNO	-- Nuova voce --			+	
	Caratteri rimanenti: 280				
	missioni a LNF; coordinamento con le altre Unità di ricerca del Progetto; congressi e meeting nazionali	35.00	0.00	35.00	0.00
	Caratteri rimanenti: 175				
ESTERO	-- Nuova voce --			+	
	Caratteri rimanenti: 280				
	missioni a: AMPLITUDE TECHNOLOGIES (Evry); Ecole Polytechnique; CEA-Saclay; RAL, Congressi internazionali;	15.00	0.00	15.00	0.00
	Caratteri rimanenti: 126				
CONSUMO	-- Nuova voce --			+	
	Caratteri rimanenti: 280				
	cella per gas target	5.00	0.00		Set -
	Caratteri rimanenti: 259				
	capillari per gas-target	10.00	0.00		Set -
	Caratteri rimanenti: 256				
	radiocromici	10.00	0.00		Set -
	Caratteri rimanenti: 268				
	filtri ottici	5.00	0.00		Set -
	Caratteri rimanenti: 267				

	filtri interferenziali	3.00	0.00	Set	-
	Caratteri rimanenti: 258				
	CR39	2.00	0.00	Set	-
	Caratteri rimanenti: 276				
	gas per gas-target	2.00	0.00	Set	-
	Caratteri rimanenti: 262				
		37.00	0.00		

TRASPORTI	-- Nuova voce --			+
	Caratteri rimanenti: 280			

MANUTENZIONE	-- Nuova voce --			+	
	Caratteri rimanenti: 280				
	componenti ottiche da sostituire per laser Ti:Sa da 2TW	10.00	0.00	Set	-
	Caratteri rimanenti: 224				
		10.00	0.00		

INVENTARIO	-- Nuova voce --			+	
	Caratteri rimanenti: 280				
	monitoraggio focal spot	15.00	0.00	Set	-
	Caratteri rimanenti: 257				
	tavolo ottico	7.00	0.00	Set	-
	Caratteri rimanenti: 267				
	sensore per caratterizzazione fronte d'onda impulso laser	30.00	0.00	Set	-
	Caratteri rimanenti: 222				
	ottiche adattive	30.00	0.00	Set	-
	Caratteri rimanenti: 264				
unità programmabile di ritardi	15.00	0.00	Set	-	
Caratteri rimanenti: 250					
elettronica di sincronizzazione laser ND e Ti:Sa	5.00	0.00	Set	-	
Caratteri rimanenti: 232					
		102.00	0.00		

APPARATI	-- Nuova voce --			+
	Caratteri rimanenti: 280			

	gas jet supersonico, ugello rettangolare, lato minore d=4mm	15.00	0.00			Set	-
	Caratteri rimanenti: 221			15.00	0.00		

LICENZE-SW	-- Nuova voce --					+	
	Caratteri rimanenti: 280						
	Mathematica, Matlab, Kaleidagraph	10.00	0.00			Set	-
	Caratteri rimanenti: 246			10.00	0.00		

Totale NTA-PLASMONX Pisa 224.00

Mod. EC/EN 2

(a cura del responsabile locale)

RICHIESTE IN SEZIONE

PROGETT. CAM. INTERAZ. $e-h\nu$	2 mese-uomo
OFFICINA MECCANICA	1 mese-uomo
ELETTRONICO	1 mese-uomo

SITUAZIONE DELLE PROPOSTE DEL PROGETTO STRATEGICO "NUOVE TECNICHE DI ACCELERAZIONE"
PER IL BILANCIO 2009

- per Sigla -

NOTE	SIGLA	Sez.	INTERNO		ESTERO		CONSUMO		SEM	TRASPORTI		PUB	CALCOLO		MAN.		INVENTARIO		APPARATI		TOT. PARZIALI		GENERALE
			Assegn.	S.J.	Assegn.	Sub-Jud	Assegn.	Sub-Jud		Assegn.	S.J.		Assegn.	S.J.	Ass.	S.J.	Assegn.	Sub-Jud	Assegn.	Sub-Jud	Assegn.	Sub-Jud	
	NTA-PLASMONX	BO	7		5		2														14		14
	NTA-PLASMONX	LNF	10		8		9											96			123		123
	NTA-PLASMONX	MI	15		12		5														32		32
	NTA-PLASMONX	MIB	7		3		3														13		13
	NTA-PLASMONX	NA	3		2		3														8		8
	NTA-PLASMONX	PI	20		7		40								10			90			167		167
	Totale Sigla		62		37		62								10			186			357		357

PREVENTIVO GLOBALE DI SPESA PER L'ANNO 2010

In K€

Struttura	A carico dell'I.N.F.N.													A carico di altri enti
	interno	estero	consumo	trasporti	manutenzione	inventario	apparati	licenze-SW	TOTALI					
BO	5.00	5.00	11.00									21.00		
LNF	10.00	20.00	9.00				34.00	59.50				132.50		
LNS	10.00	5.00	3.00	2.00								20.00		
MI	20.00	15.00	5.00					65.00				105.00		
MIB	8.00	2.00	3.00				5.00					18.00		
NA	12.00	20.00	15.00	2.00	4.00		41.00		4.00			98.00		
PI	35.00	15.00	33.00	2.00	15.00		102.00	15.00	8.00			225.00		
RM1	5.00	5.00	30.00				56.00					96.00		
Totali	105.00	87.00	109.00	6.00	19.00		238.00	139.50	12.00			715.50		

Mod. EC/EN 4

(a cura del responsabile nazionale)