
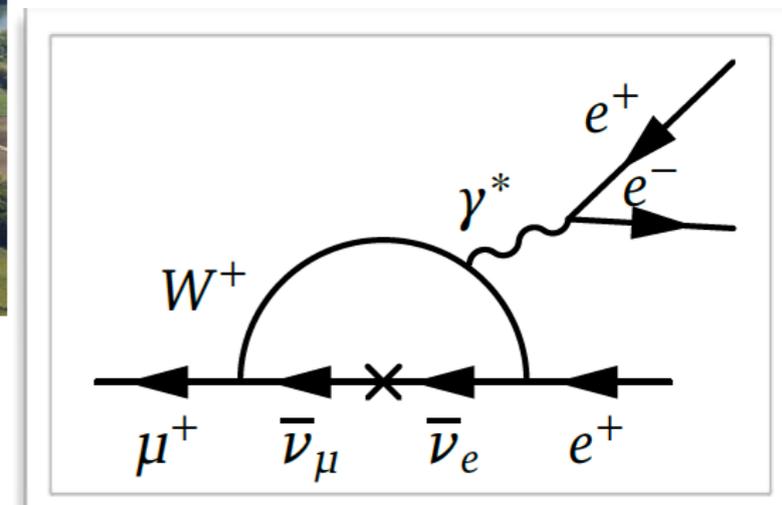


CLFV searches at PSI and future developments

Angela Papa
Paul Scherrer Institute (Switzerland) and University of Pisa/INFN (Italy)
FCCP, 29-31 August 2019
Anacapri, Italy

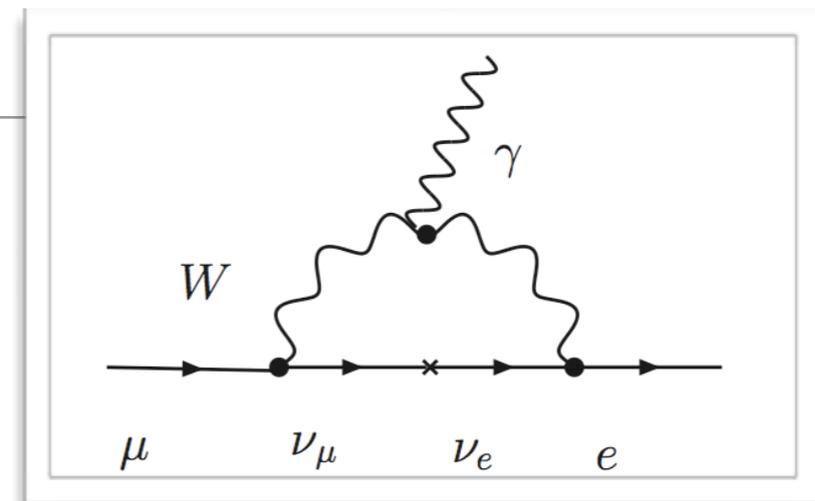


Content

- Introduction: Charged Lepton Flavour violations searches
- Status of the MEGII experiment
- Status of the Mu3e experiment
- The Most Intense DC Muon beams in the World:
future prospects


Charged lepton flavour violation search: Motivation

SM with massive neutrinos (Dirac)

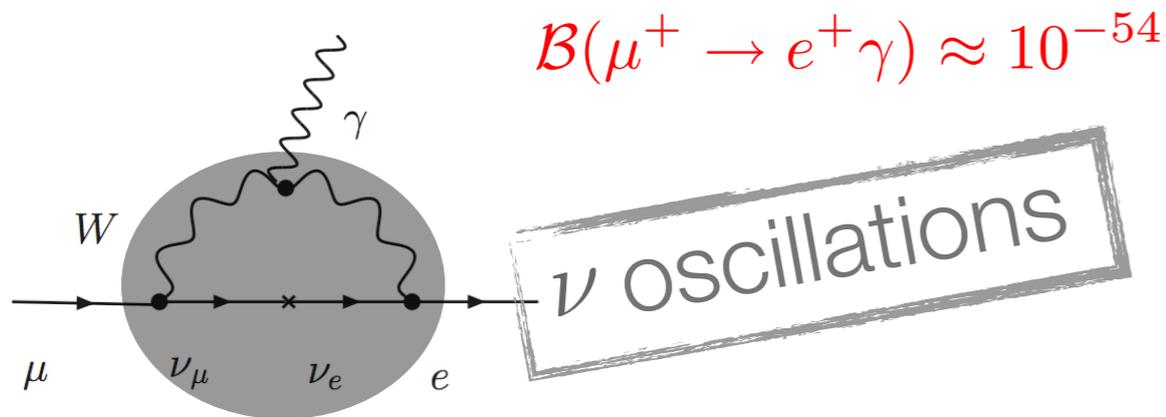


too small to access experimentally

BSM

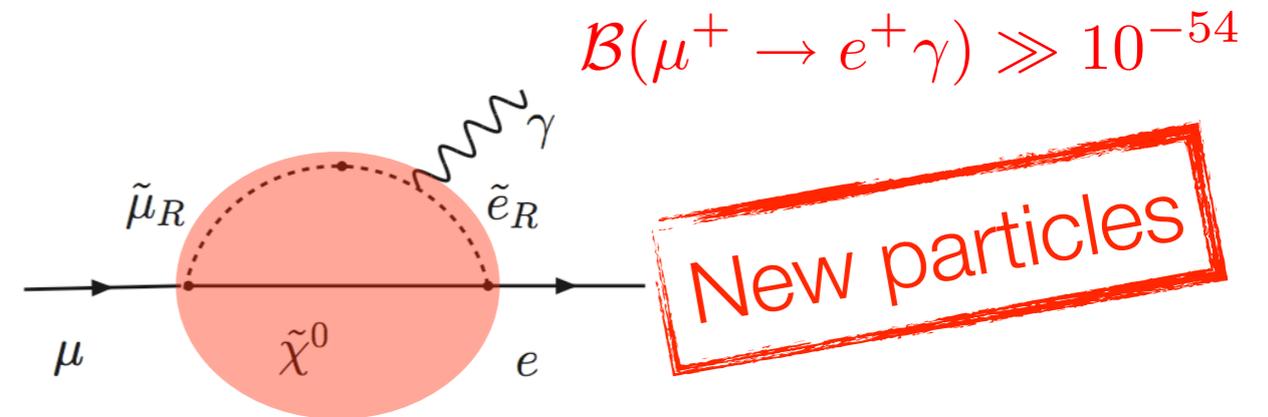


**an experimental evidence:
a clear signature of New Physics NP**
(SM background FREE)

Current upper limits on \mathcal{B}_i

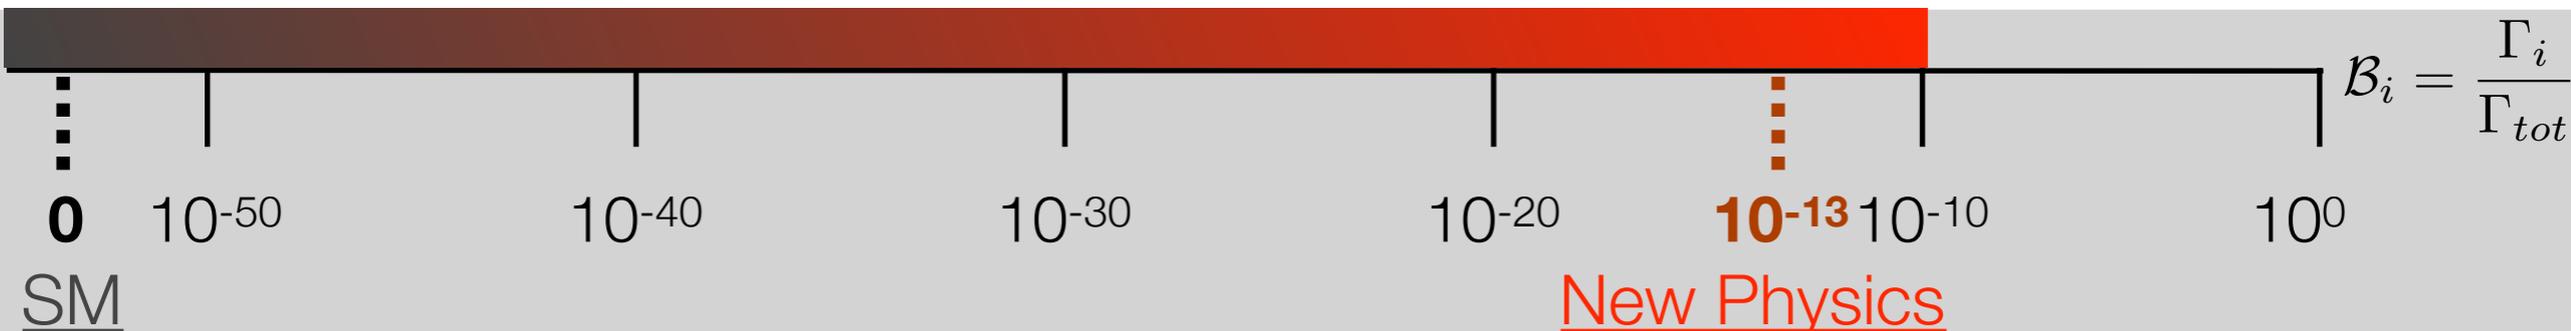


Complementary to “Energy Frontier”

Energy frontier

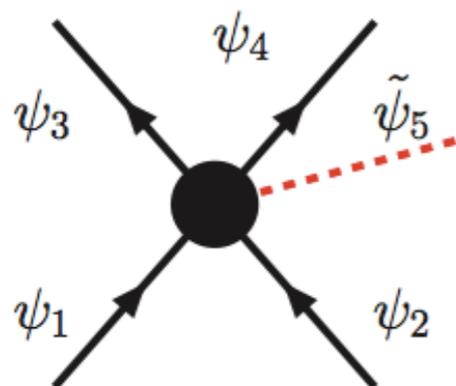




Real BSM particles

Precision and intensity frontier

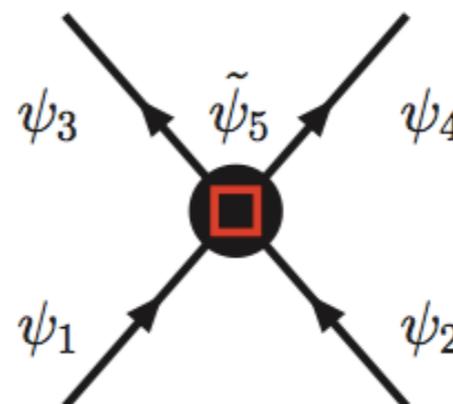

Virtual BSM particles

$$\mathcal{L}_{eff} = \mathcal{L}_{SM} + \sum_{d>4} \frac{c_n^{(d)}}{\Lambda^{d-4}} \mathcal{O}^{(d)}$$

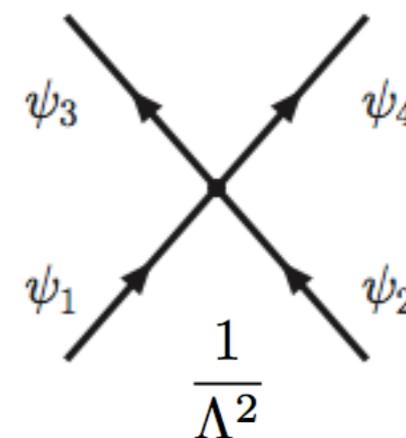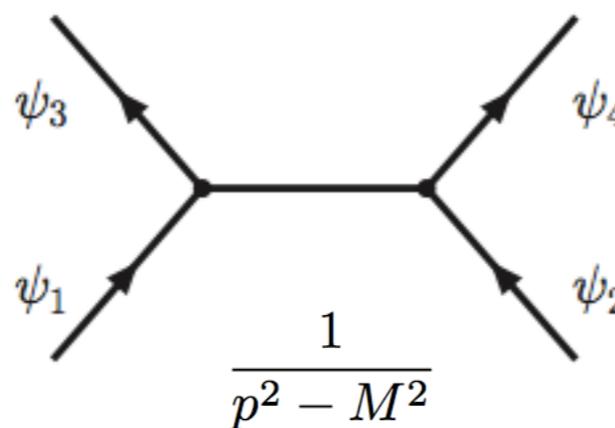

Unveil new physics



Probe energy scale otherwise unreachable





E > 1000 TeV

cLFV searches with muons: Status and prospects

- In the near future impressive sensitivities:

	Current upper limit	Future sensitivity
$\mu \rightarrow e\gamma$	4.2×10^{-13}	$\sim 4 \times 10^{-14}$
$\mu \rightarrow eee$	1.0×10^{-12}	$\sim 1.0 \times 10^{-16}$
$\mu N \rightarrow eN'$	7.0×10^{-13}	few $\times 10^{-17}$



- Strong complementarities among channels: The only way to reveal the mechanism responsible for cLFV

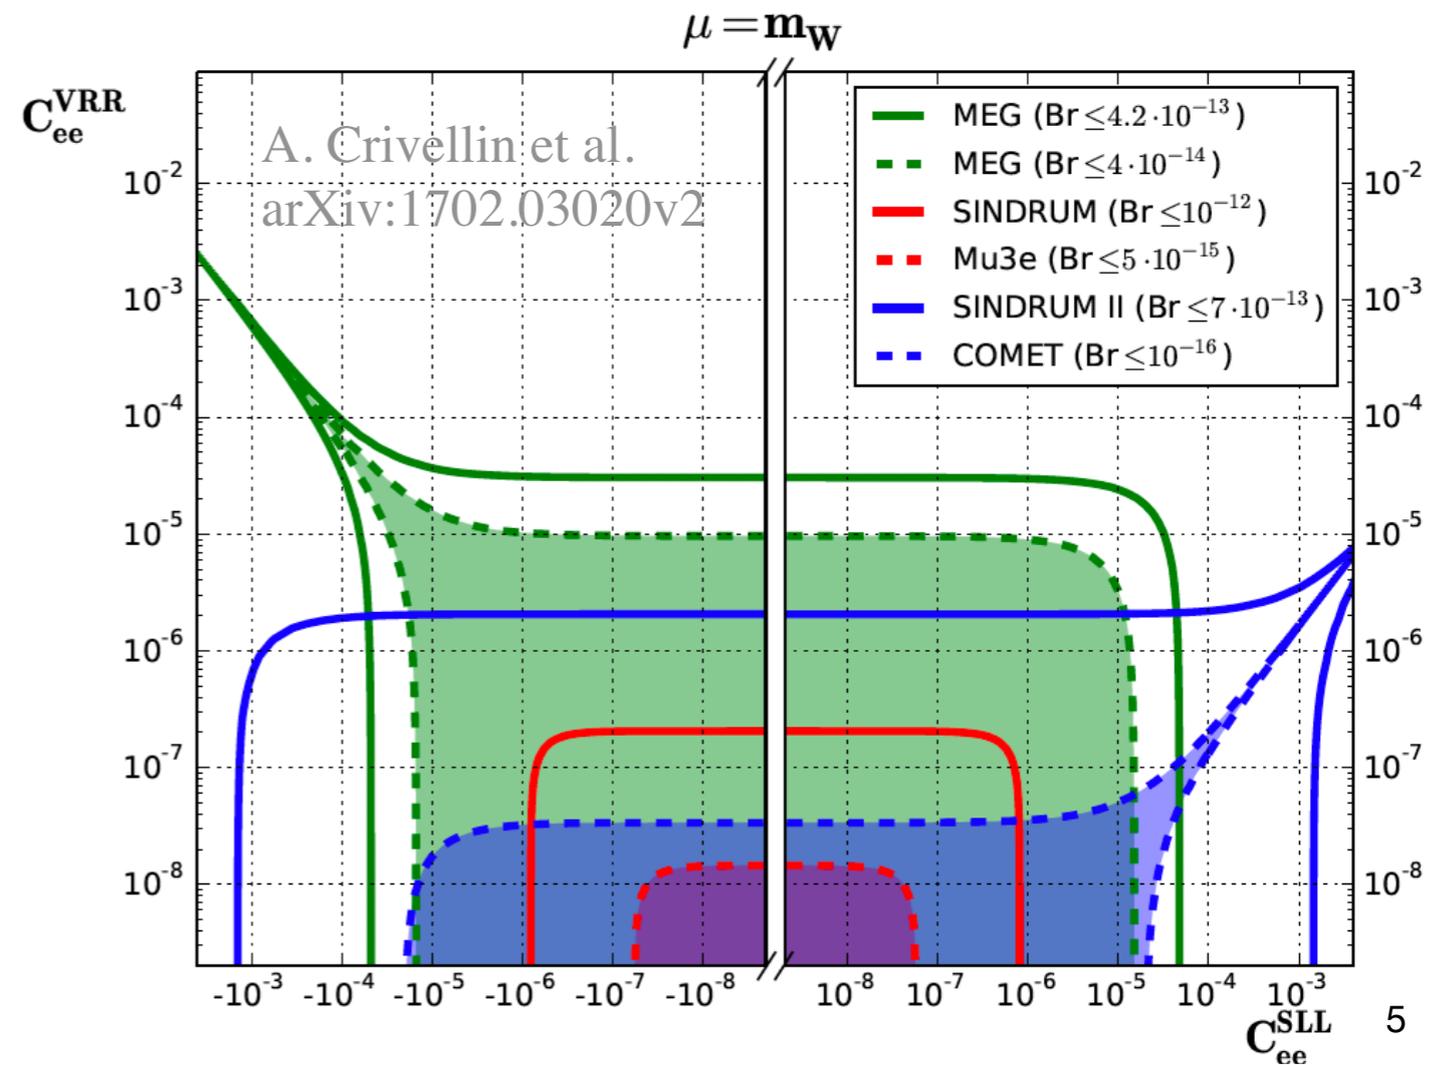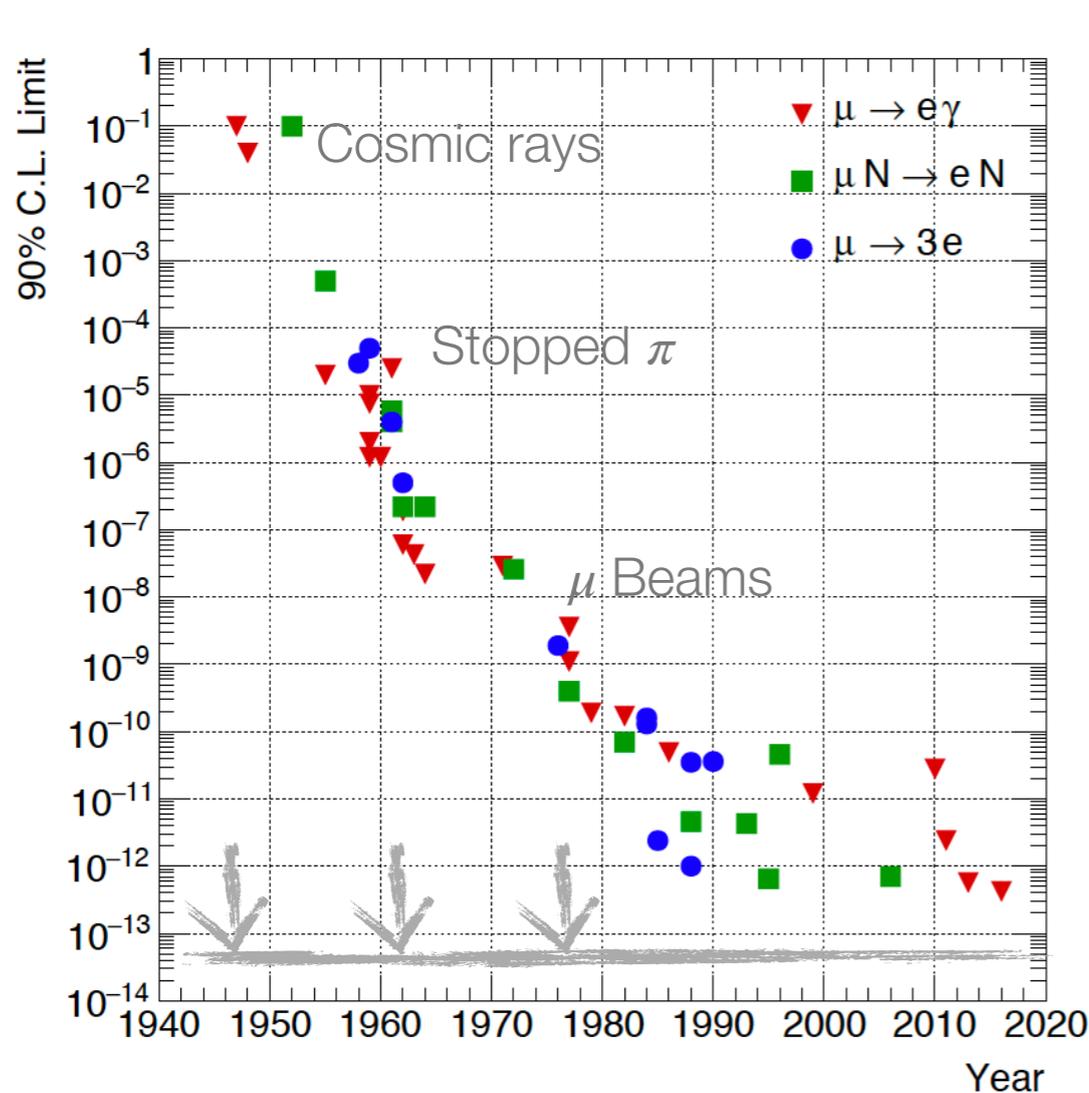


cLFV: “Effective” lagrangian with the k-parameter

- Due to the **extremely-low** accessible **branching ratios**, muon cLFV can strongly **constrain** new physics models and scales

Model independent lagrangian

$\frac{m_\mu}{(\kappa + 1)\Lambda^2} \times$ 	+	$\frac{\kappa}{(\kappa + 1)\Lambda^2} \times$ 
dipole term		contact term
$\mu \rightarrow e\gamma$		
$\mu \rightarrow eee$		
$\mu N \rightarrow eN$		


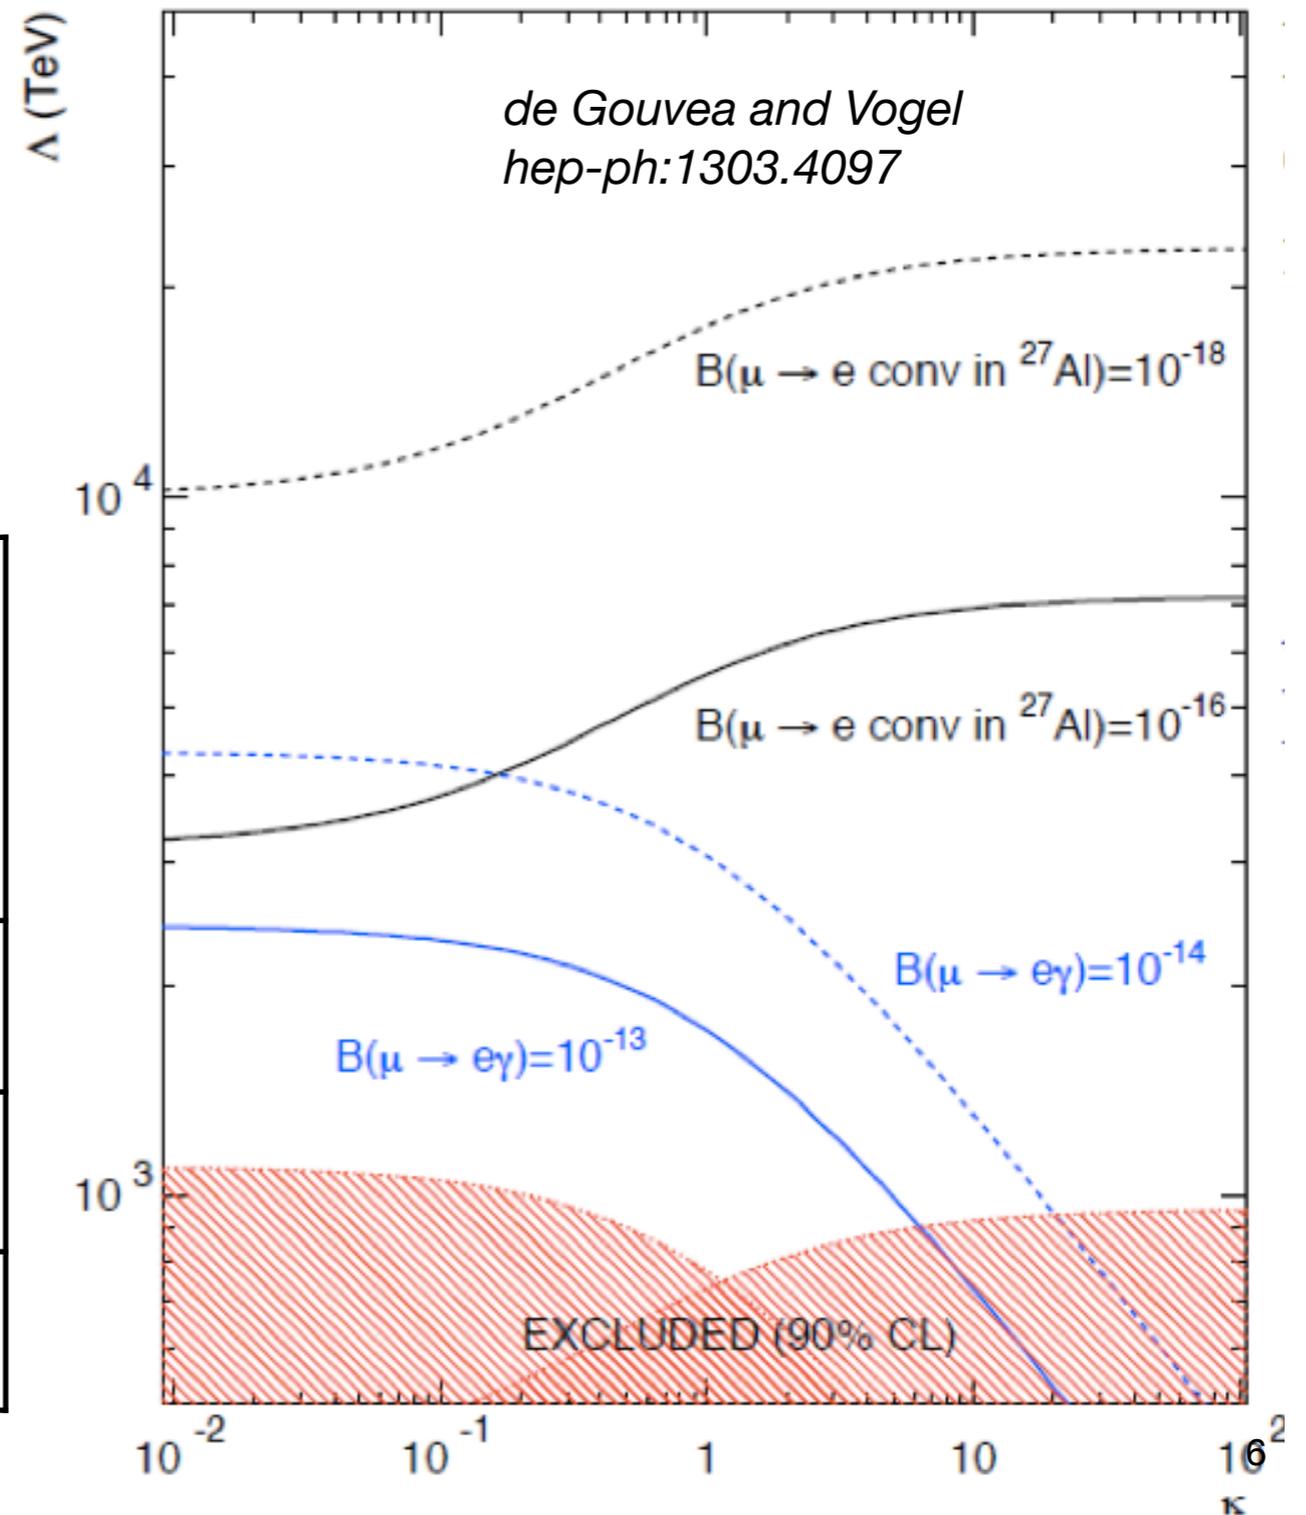


cLFV searches with muons: Status and prospects

- In the near future impressive sensitivities: **Set at PSI**

	Current upper limit	Future sensitivity
$\mu \rightarrow e\gamma$	4.2×10^{-13}	$\sim 4 \times 10^{-14}$
$\mu \rightarrow eee$	1.0×10^{-12}	$\sim 1.0 \times 10^{-16}$
$\mu N \rightarrow eN'$	7.0×10^{-13}	few $\times 10^{-17}$

- Strong complementarities among channels: The only way to reveal the mechanism responsible for cLFV

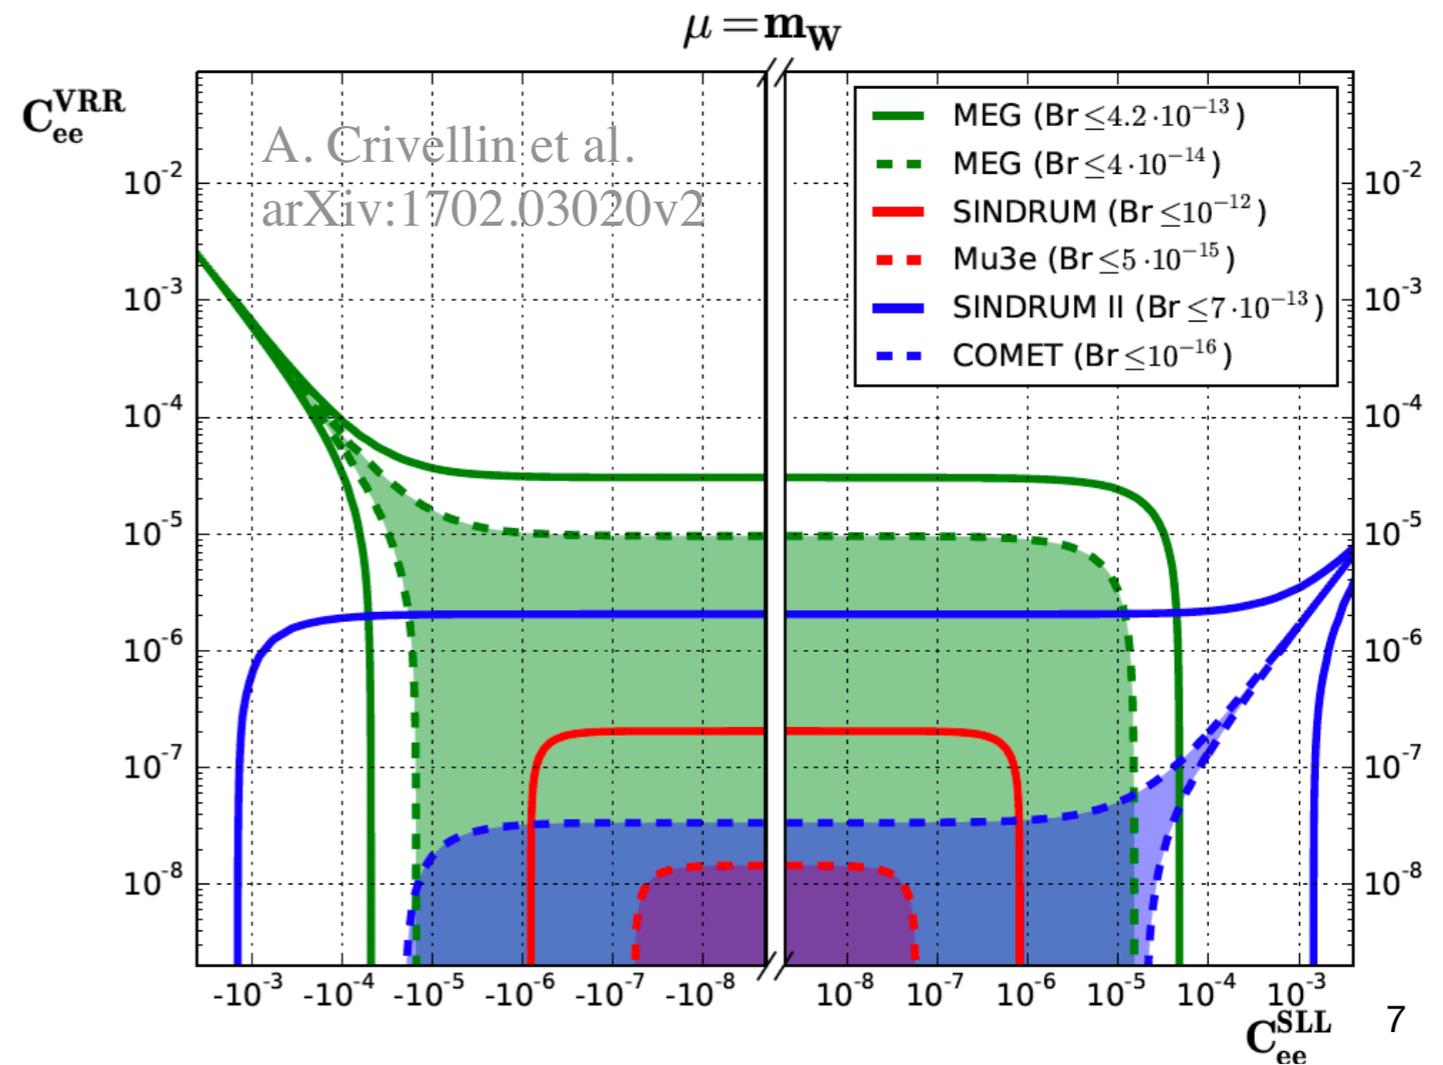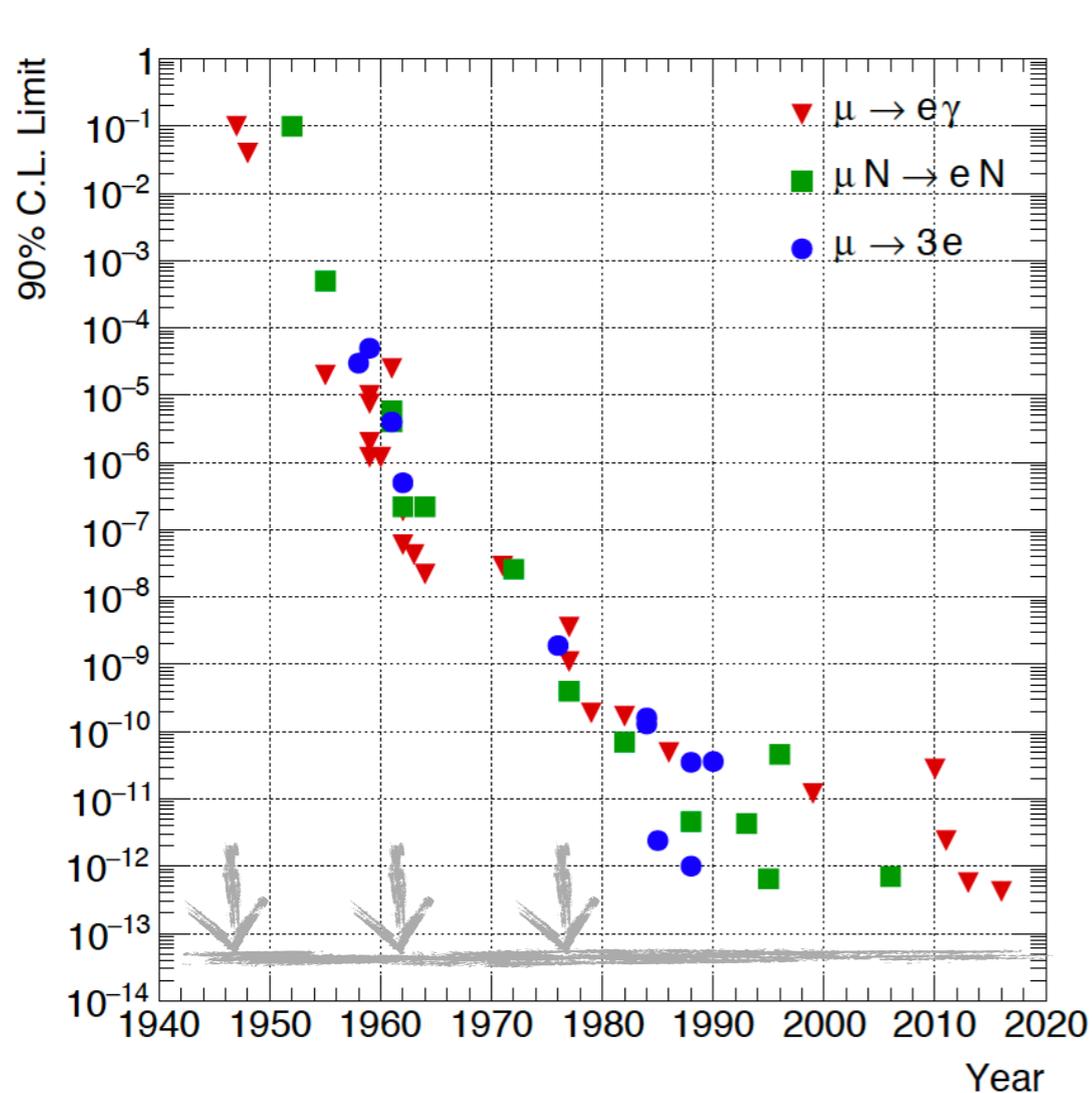

Beam features vs experiment requirements

- Dedicated beam lines for high precision and high sensitive SM test/BSM probe at the world's highest beam intensities

DC or Pulsed?



$I_{\text{beam}} \sim 10^8 - 10^{10} \mu/s$

$I_{\text{beam}} \sim 10^{11} \mu/s$

- DC beam for coincidence experiments
- $\mu \rightarrow e \gamma, \mu \rightarrow e e e$

- Pulse beam for non-coincidence experiments
- μ -e conversion

@ PSI

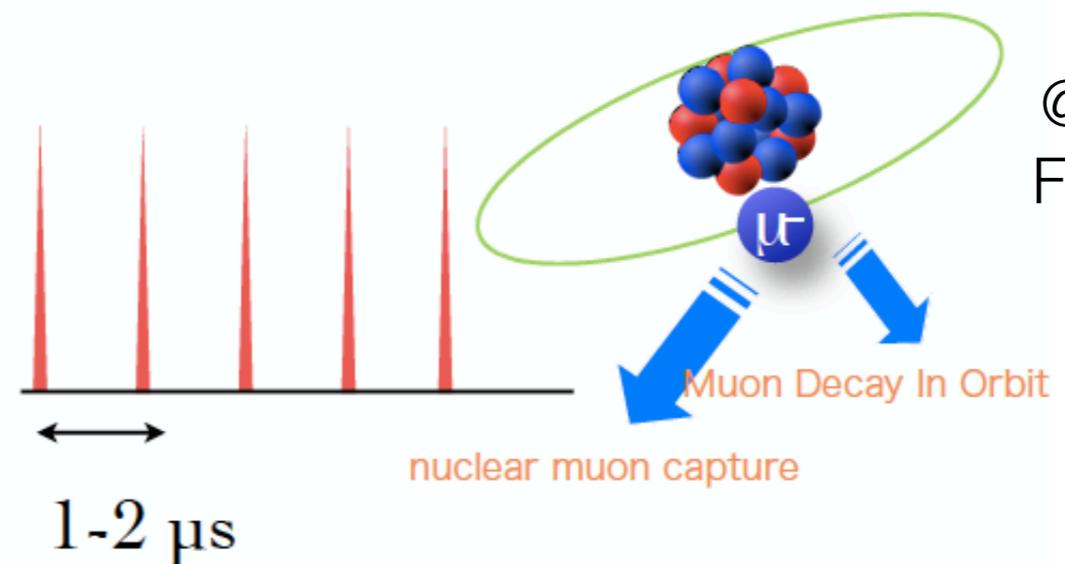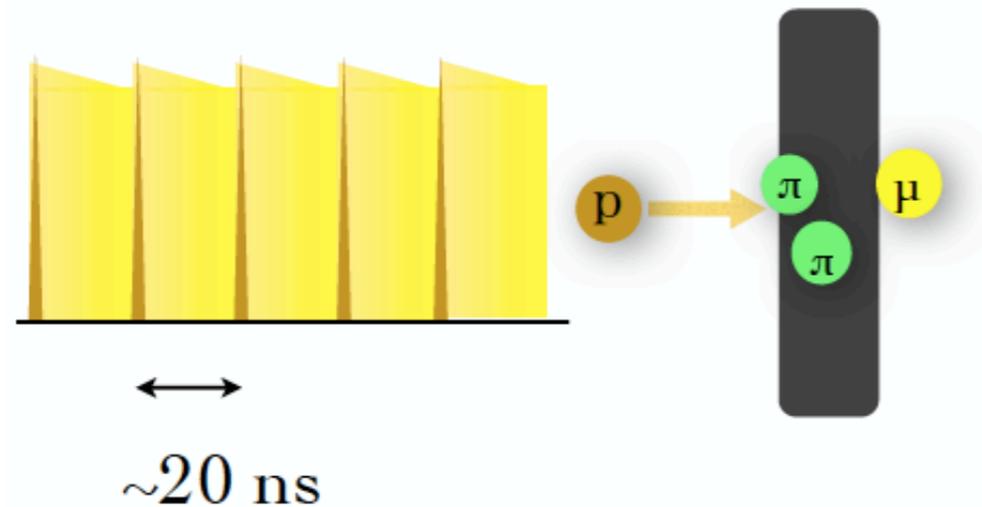

@ JPARC,
FERMILAB

Beam features vs experiment requirements

- Dedicated beam lines for high precision and high sensitive SM test/BSM probe at the world's highest beam intensities

$I_{\text{beam}} \sim 10^8 - 10^{10} \mu/s$

DC or Pulsed?

$I_{\text{beam}} \sim 10^{11} \mu/s$



- DC beam for coincidence experiments

- $\mu \rightarrow e \gamma$, $\mu \rightarrow e e e$

- Pulse beam for non-coincidence experiments

- μ -e conversion


@ PSI

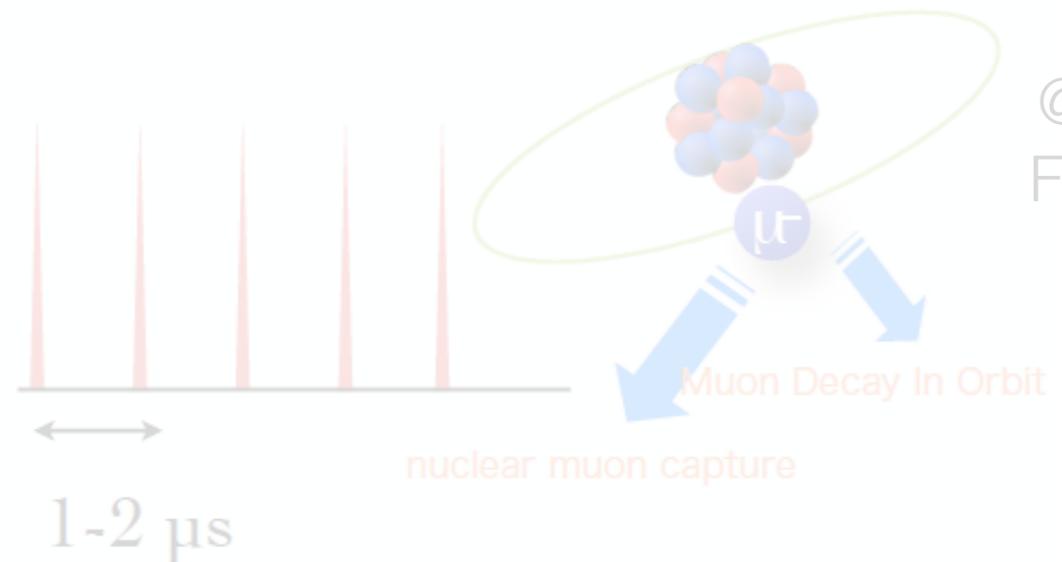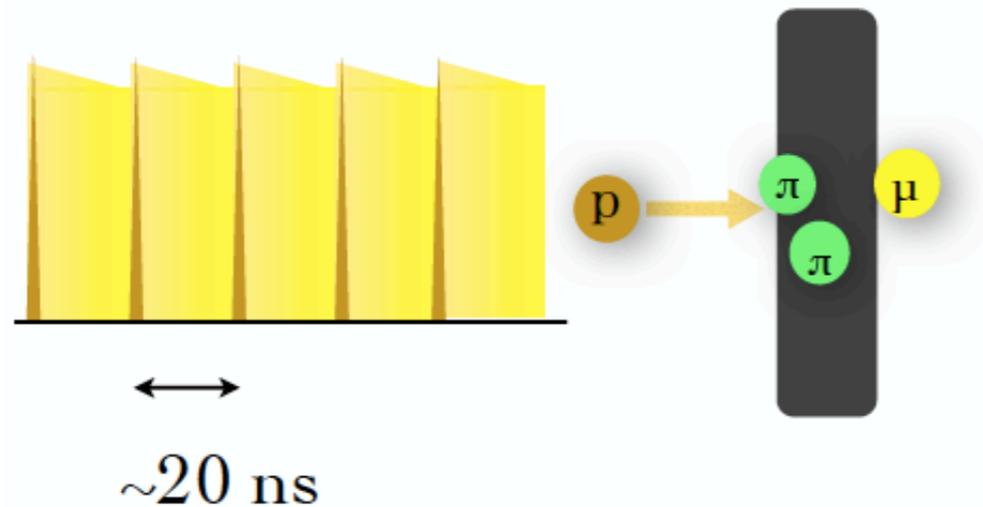

@ JPARC,
FERMILAB

The world's most intense continuous muon beam

- τ ideal probe for NP w. r. t. μ
 - Smaller GIM suppression
 - Stronger coupling
 - Many decays
 - μ most sensitive probe
 - Huge statistics
- PSI delivers the most intense continuous low momentum muon beam in the world (**Intensity Frontiers**)
 - MEG/MEG II/Mu3e beam requirements:
 - Intensity $O(10^8 \text{ muon/s})$, low momentum $p = 29 \text{ MeV}/c$
 - Small straggling and good identification of the decay

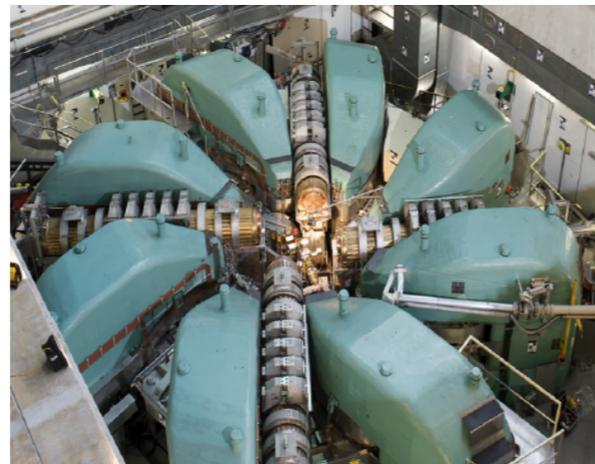


590 MeV proton
ring cyclotron
1.4 MW

PSI landscape



The world's most intense continuous muon beam

- PSI High Intensity Proton Accelerator experimental areas

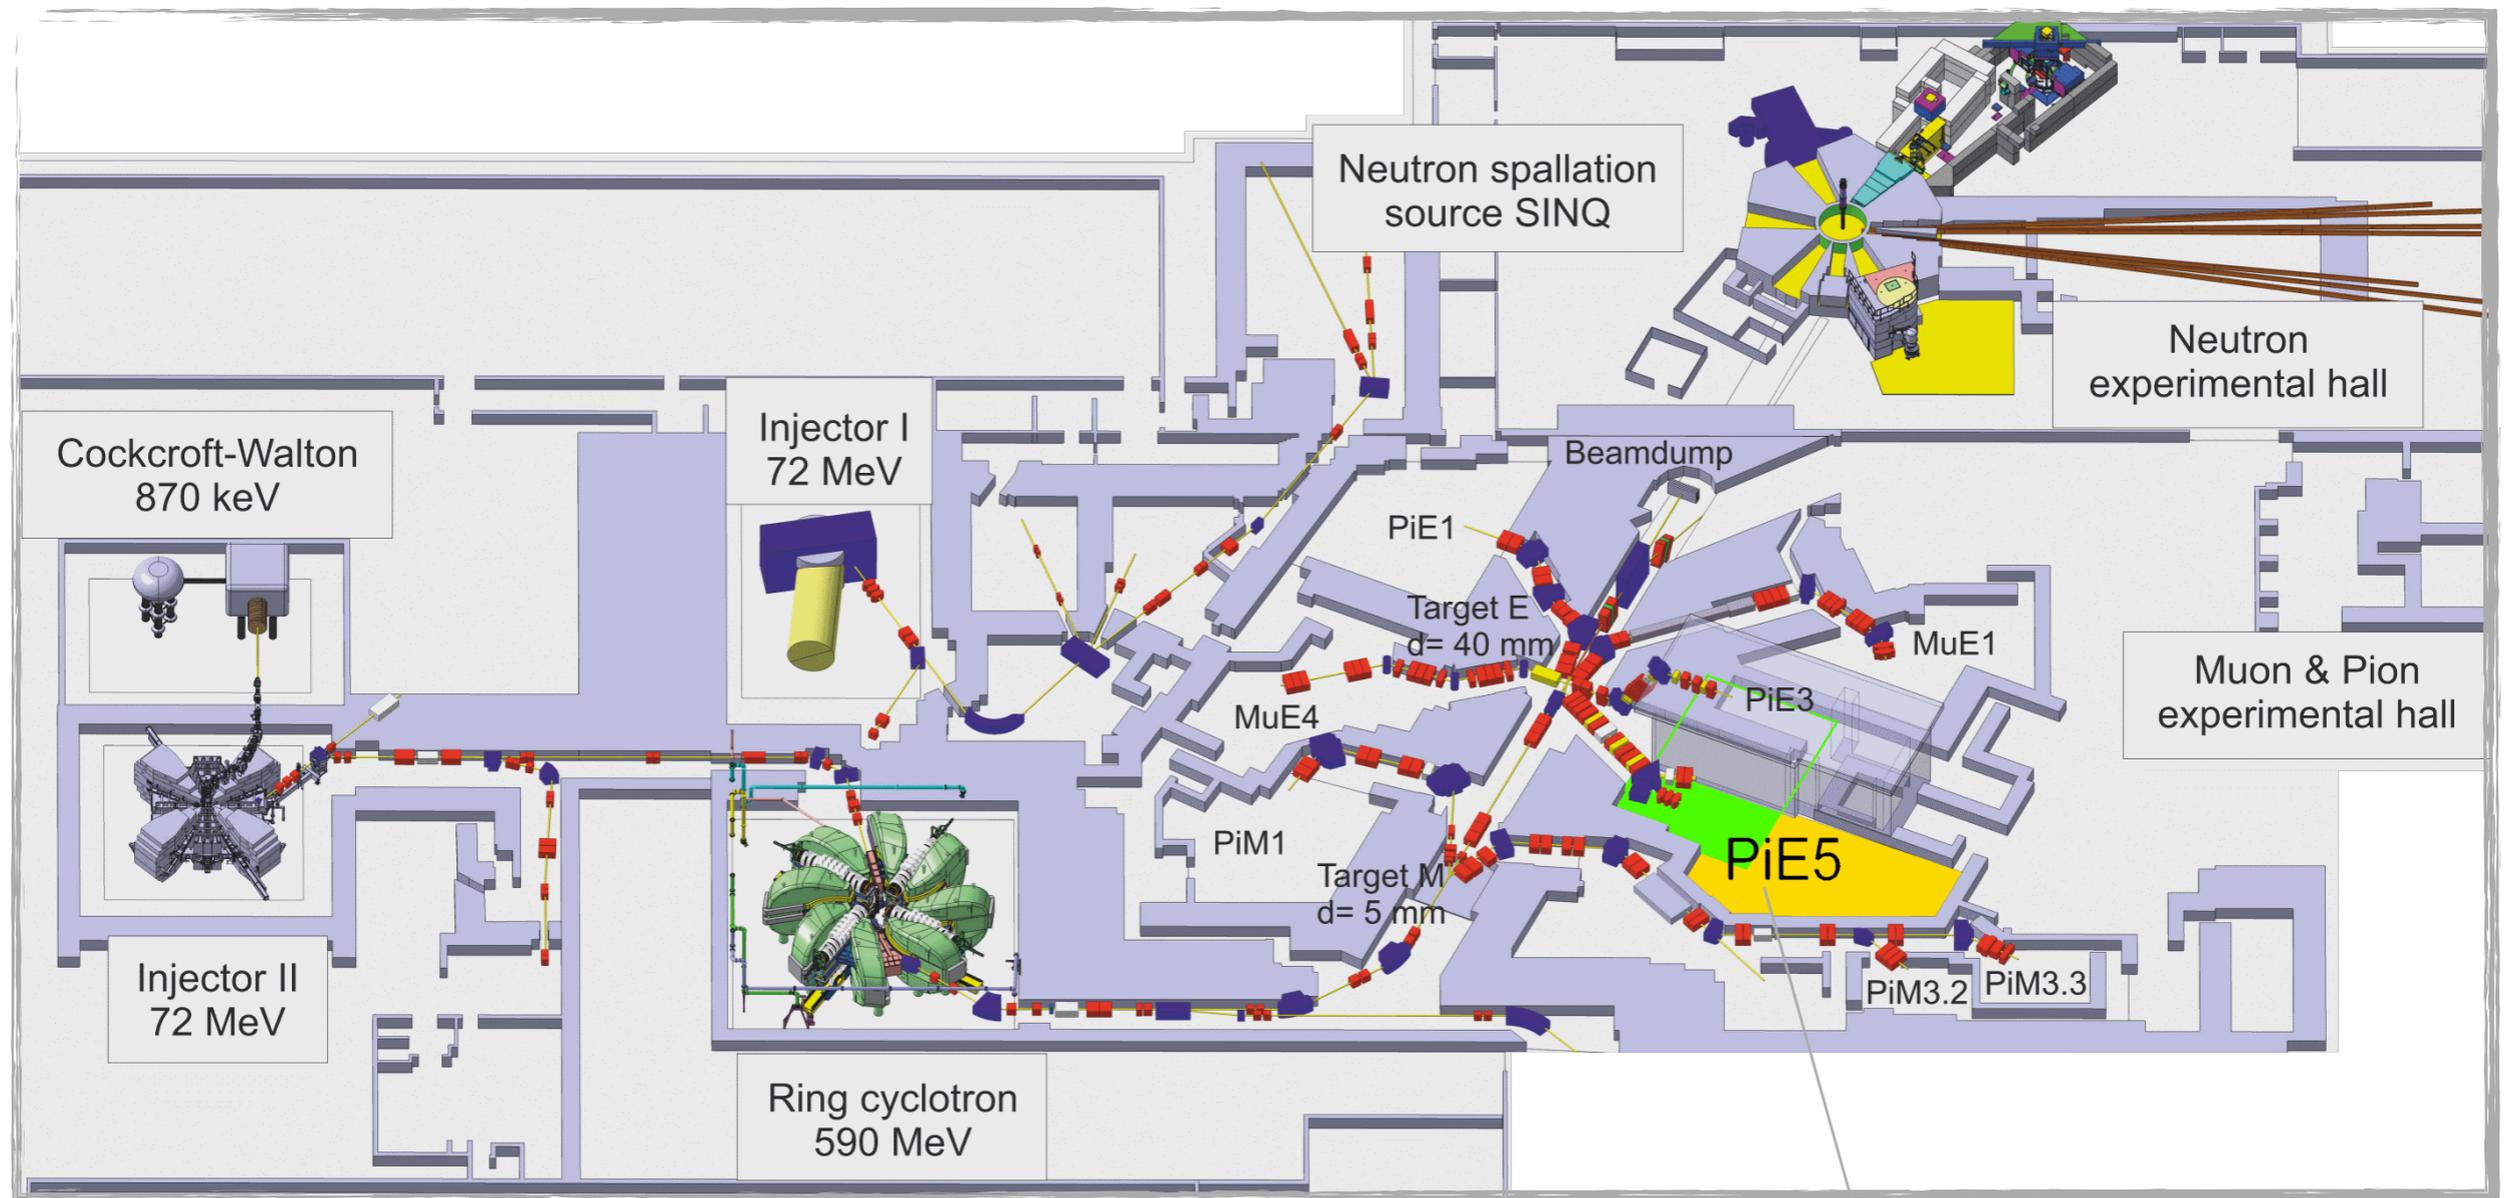


MEGII / Mu3e Experimental area


The MEGII and Mu3e beam lines

- MEGII and Mu3e (phase I) similar beam requirements:
 - **Intensity $O(10^8)$ muon/s, low momentum $p = 28$ MeV/c**
 - **Small straggling and good identification of the decay region**
- A dedicated compact muon beam line (CMBL) will serve Mu3e
- Proof-of-Principle: Delivered 8×10^7 muon/s during 2016 test beam

The Mu3e CMBL

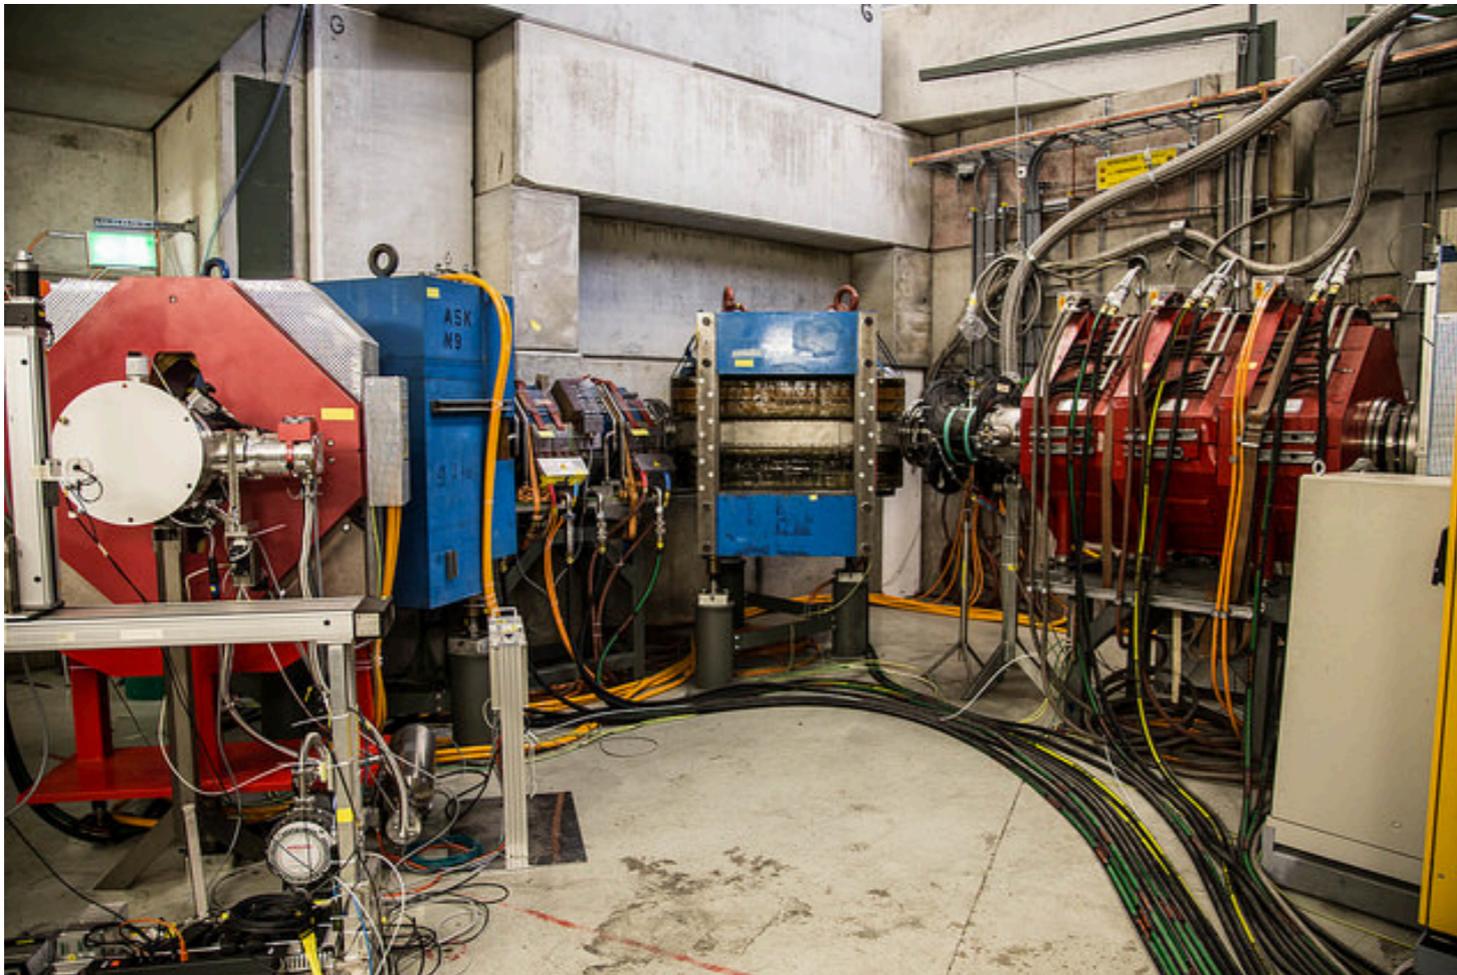

The MEGII BL

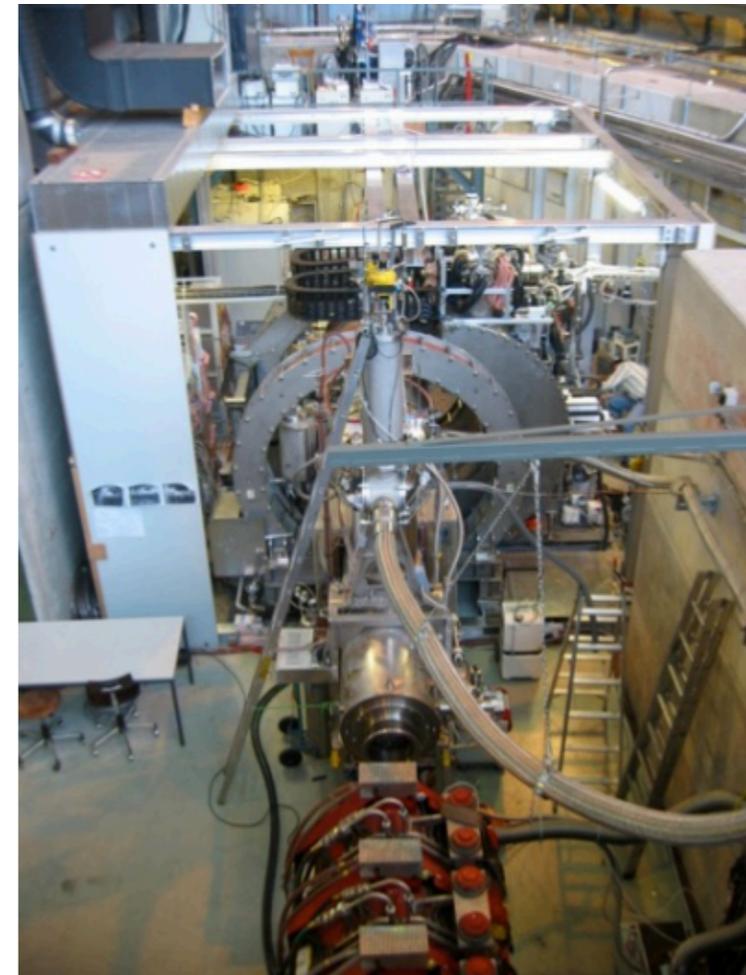


MEG: Signature, experimental setup and result

A. Baldini et al. (MEG Collaboration),
Eur. Phys. J. C73 (2013) 2365




A. Baldini et al. (MEG Collaboration),
Eur. Phys. J. C76 (2016) no. 8, 434

- The MEG experiment aims to search for $\mu^+ \rightarrow e^+ \gamma$ with a sensitivity of $\sim 10^{-13}$ (previous upper limit $BR(\mu^+ \rightarrow e^+ \gamma) \leq 1.2 \times 10^{-11}$ @90 C.L. by MEGA experiment)
- Five observables (E_γ , E_e , t_{eg} , ϑ_{eg} , ϕ_{eg}) to characterize $\mu \rightarrow e\gamma$ events

Signature

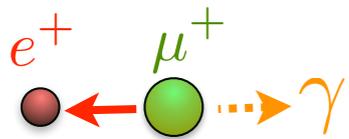

Backgrounds

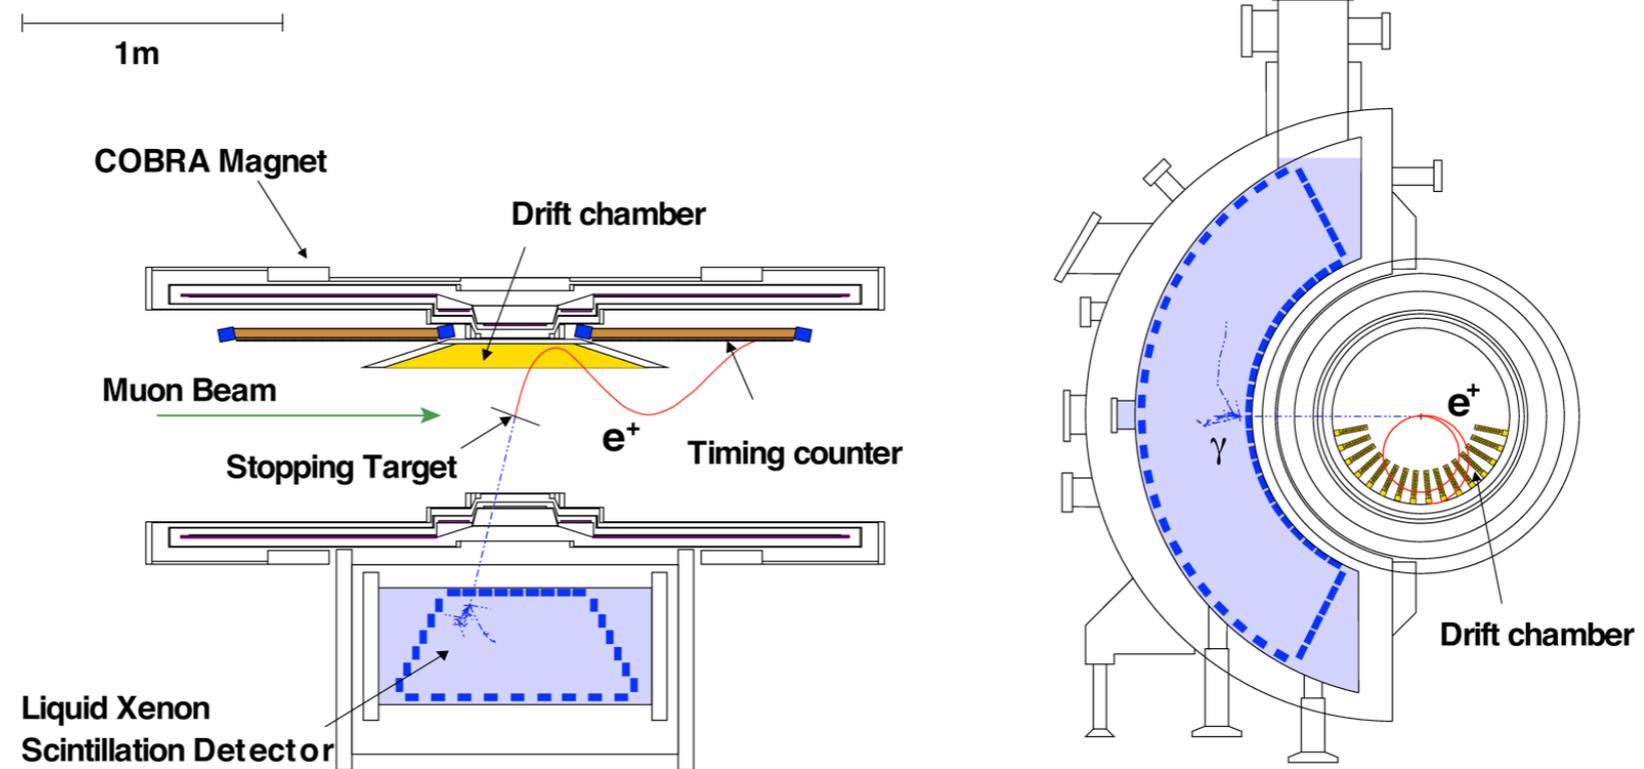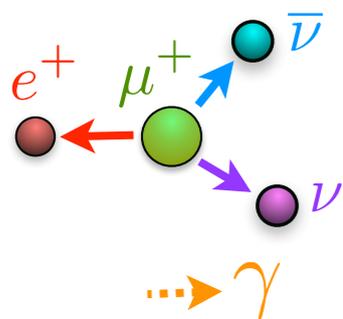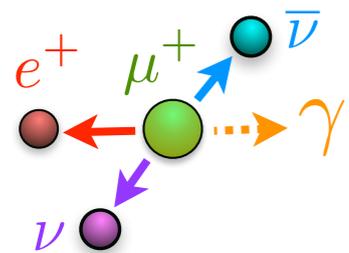

Full data sample: 2009-2013

Best fitted branching ratio at 90% C.L.:

$$B(\mu^+ \rightarrow e^+ \gamma) < 4.2 \times 10^{-13}$$

The MEGII experiment

New electronics:
Wavedream


~9000
channels
at 5GSPS

x2 Resolution
everywhere


Updated and
new Calibration
methods

Quasi mono-
chromatic
positron beam


Background rejection

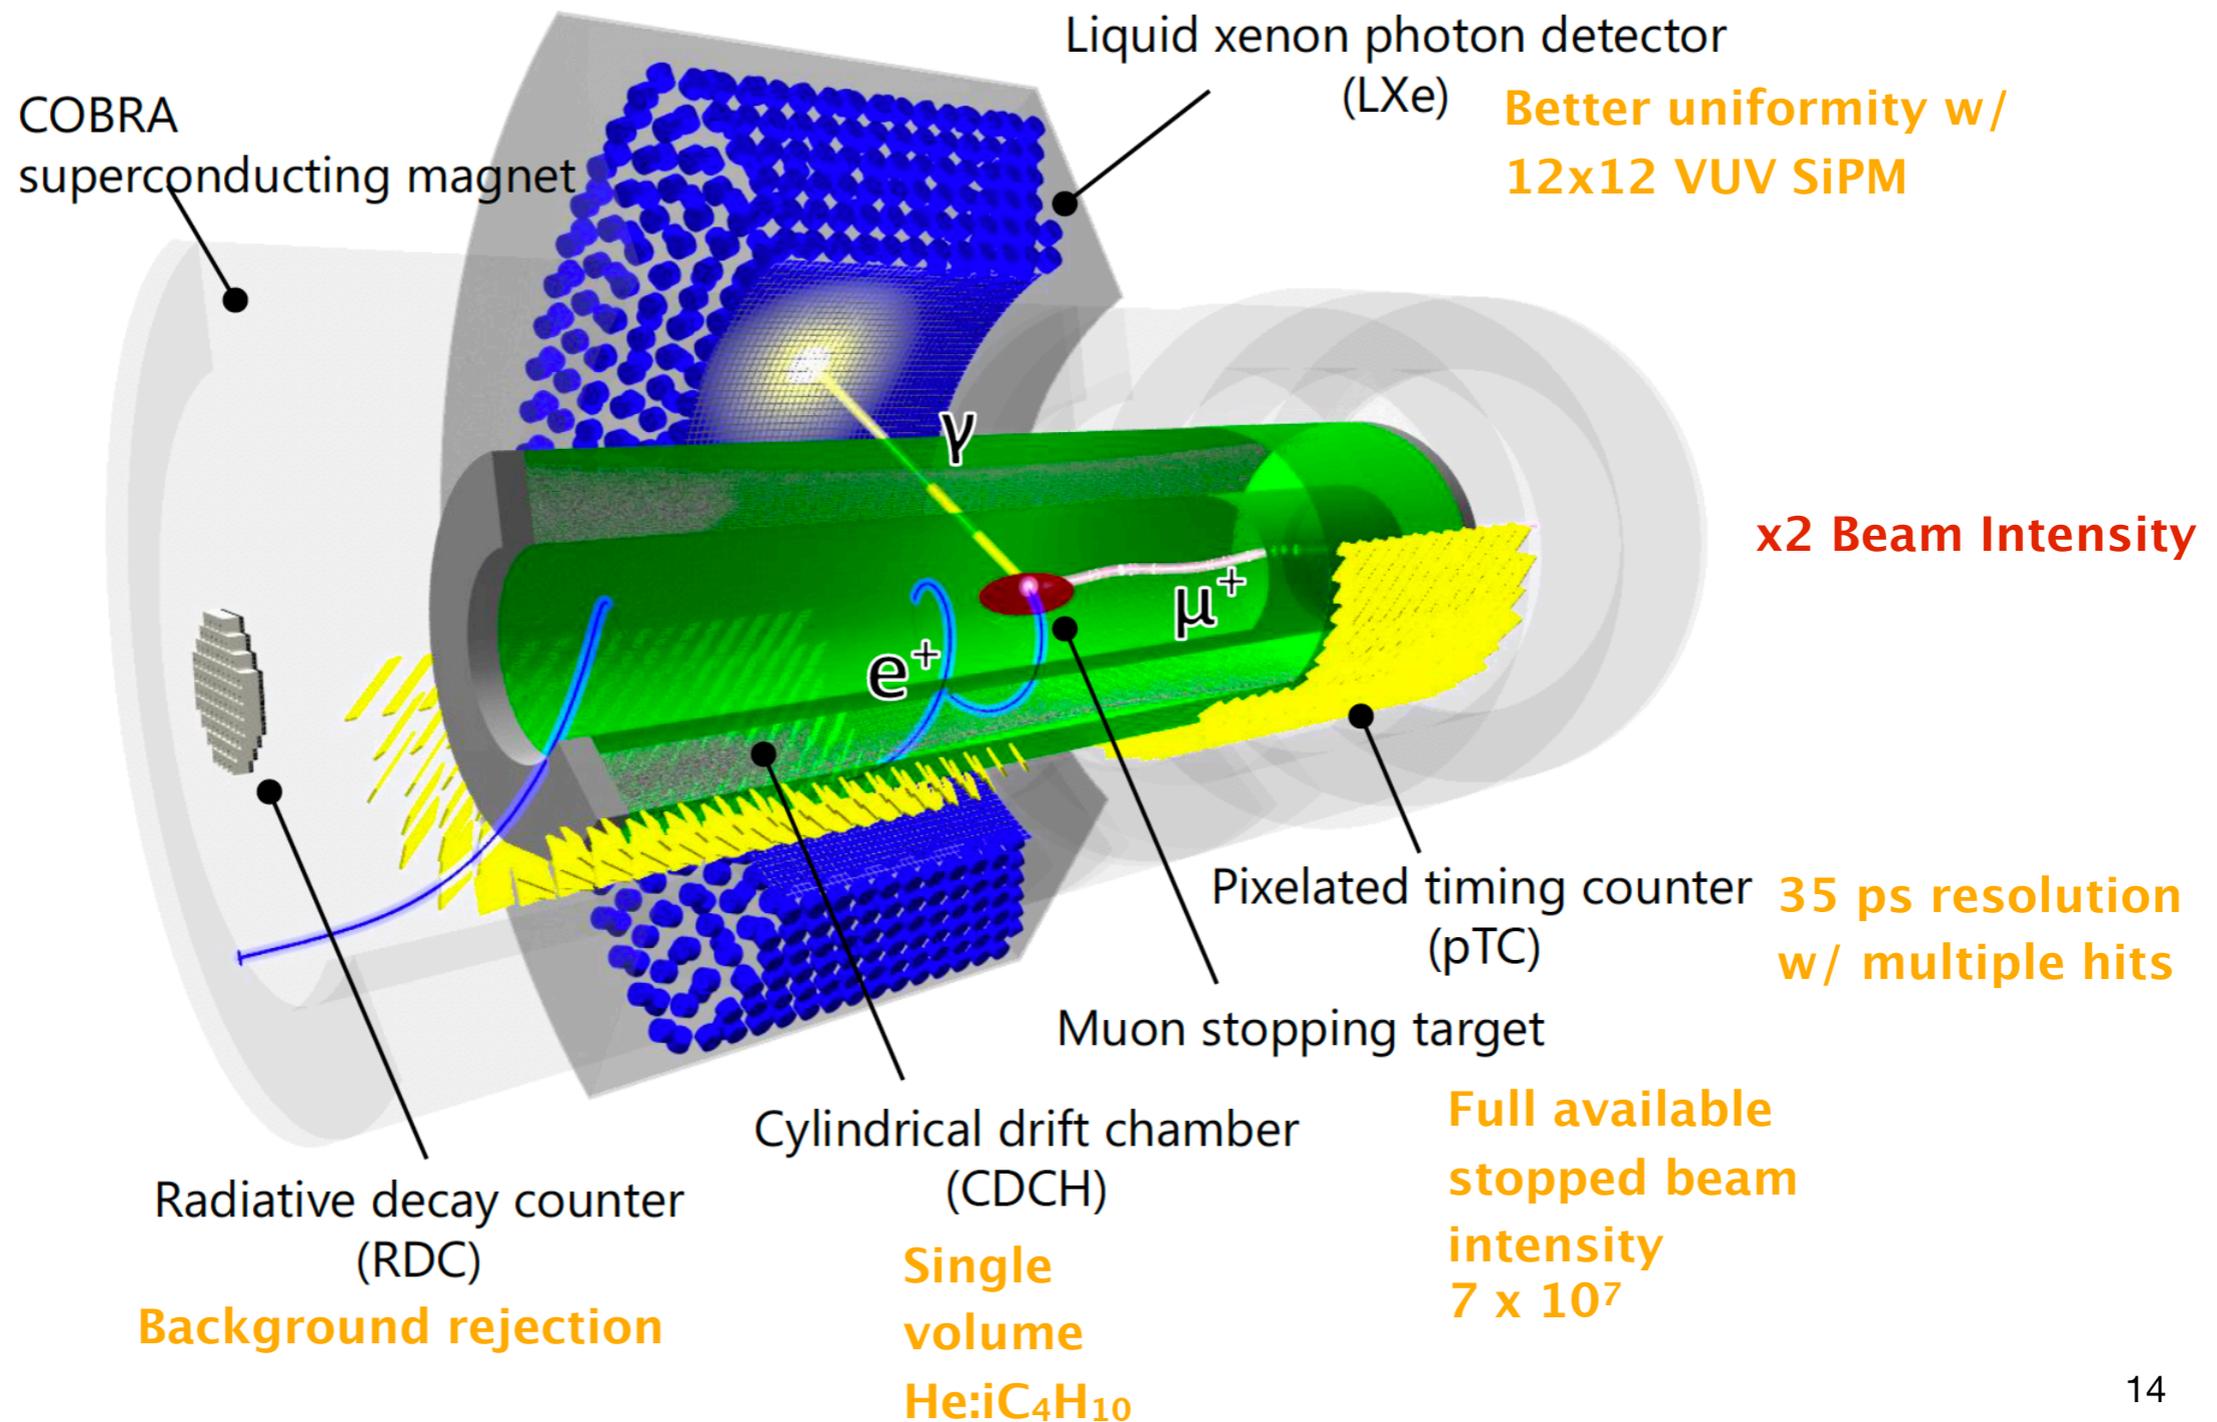

The MEG experiment vs the MEGII experiment

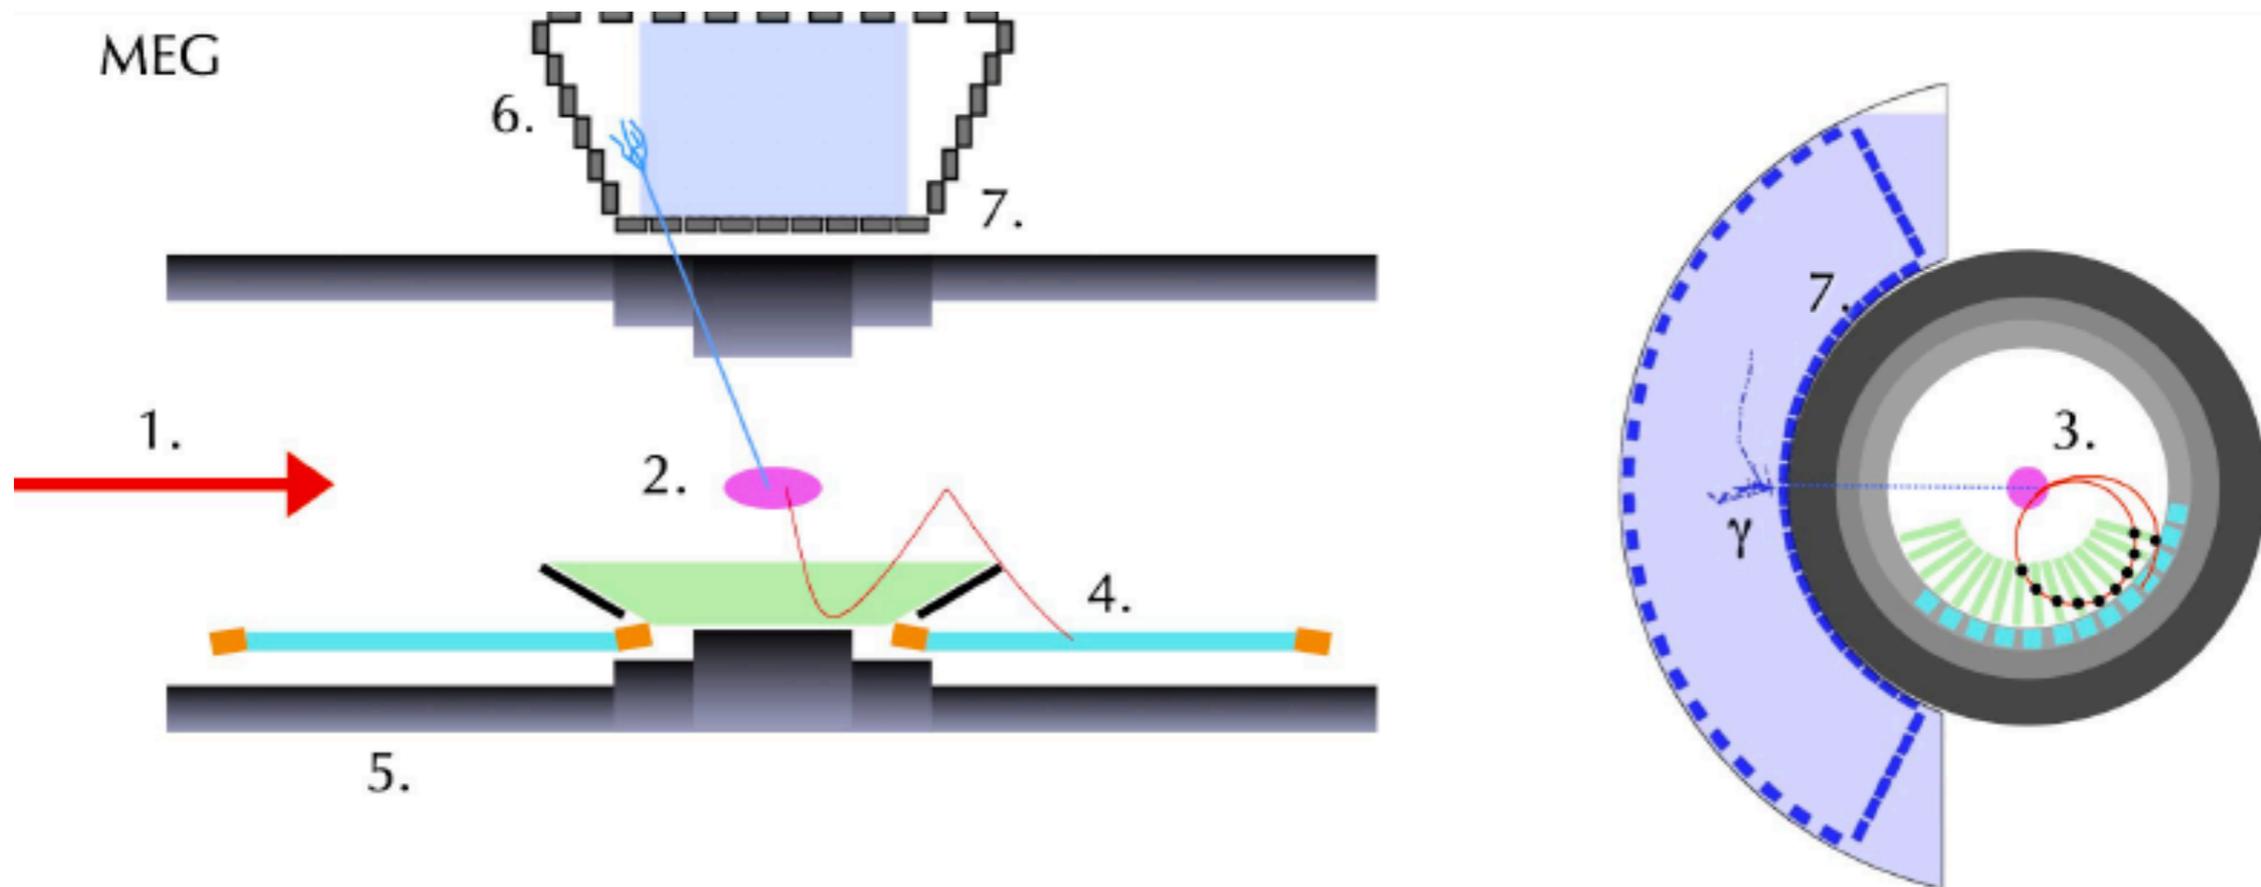


The MEG experiment vs the MEGII experiment

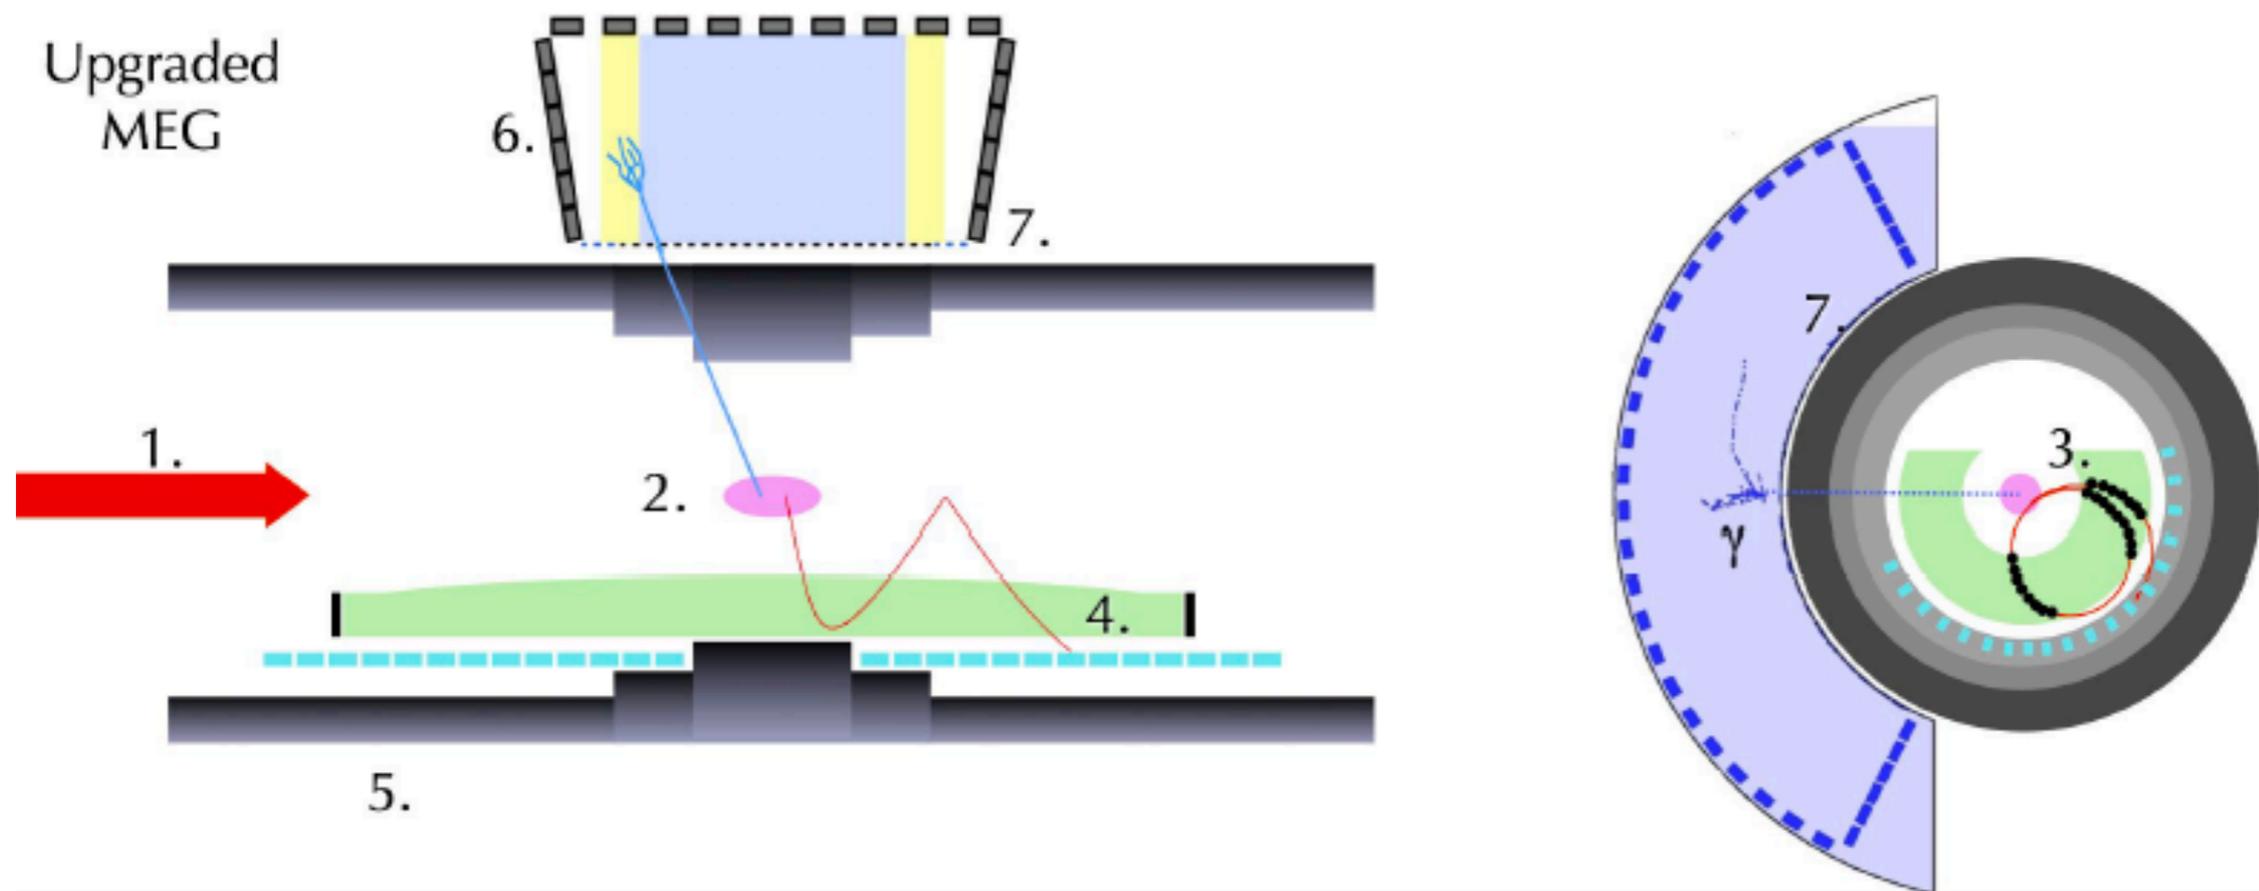

Where we will be


SES ~ 6 x 10⁻¹⁴

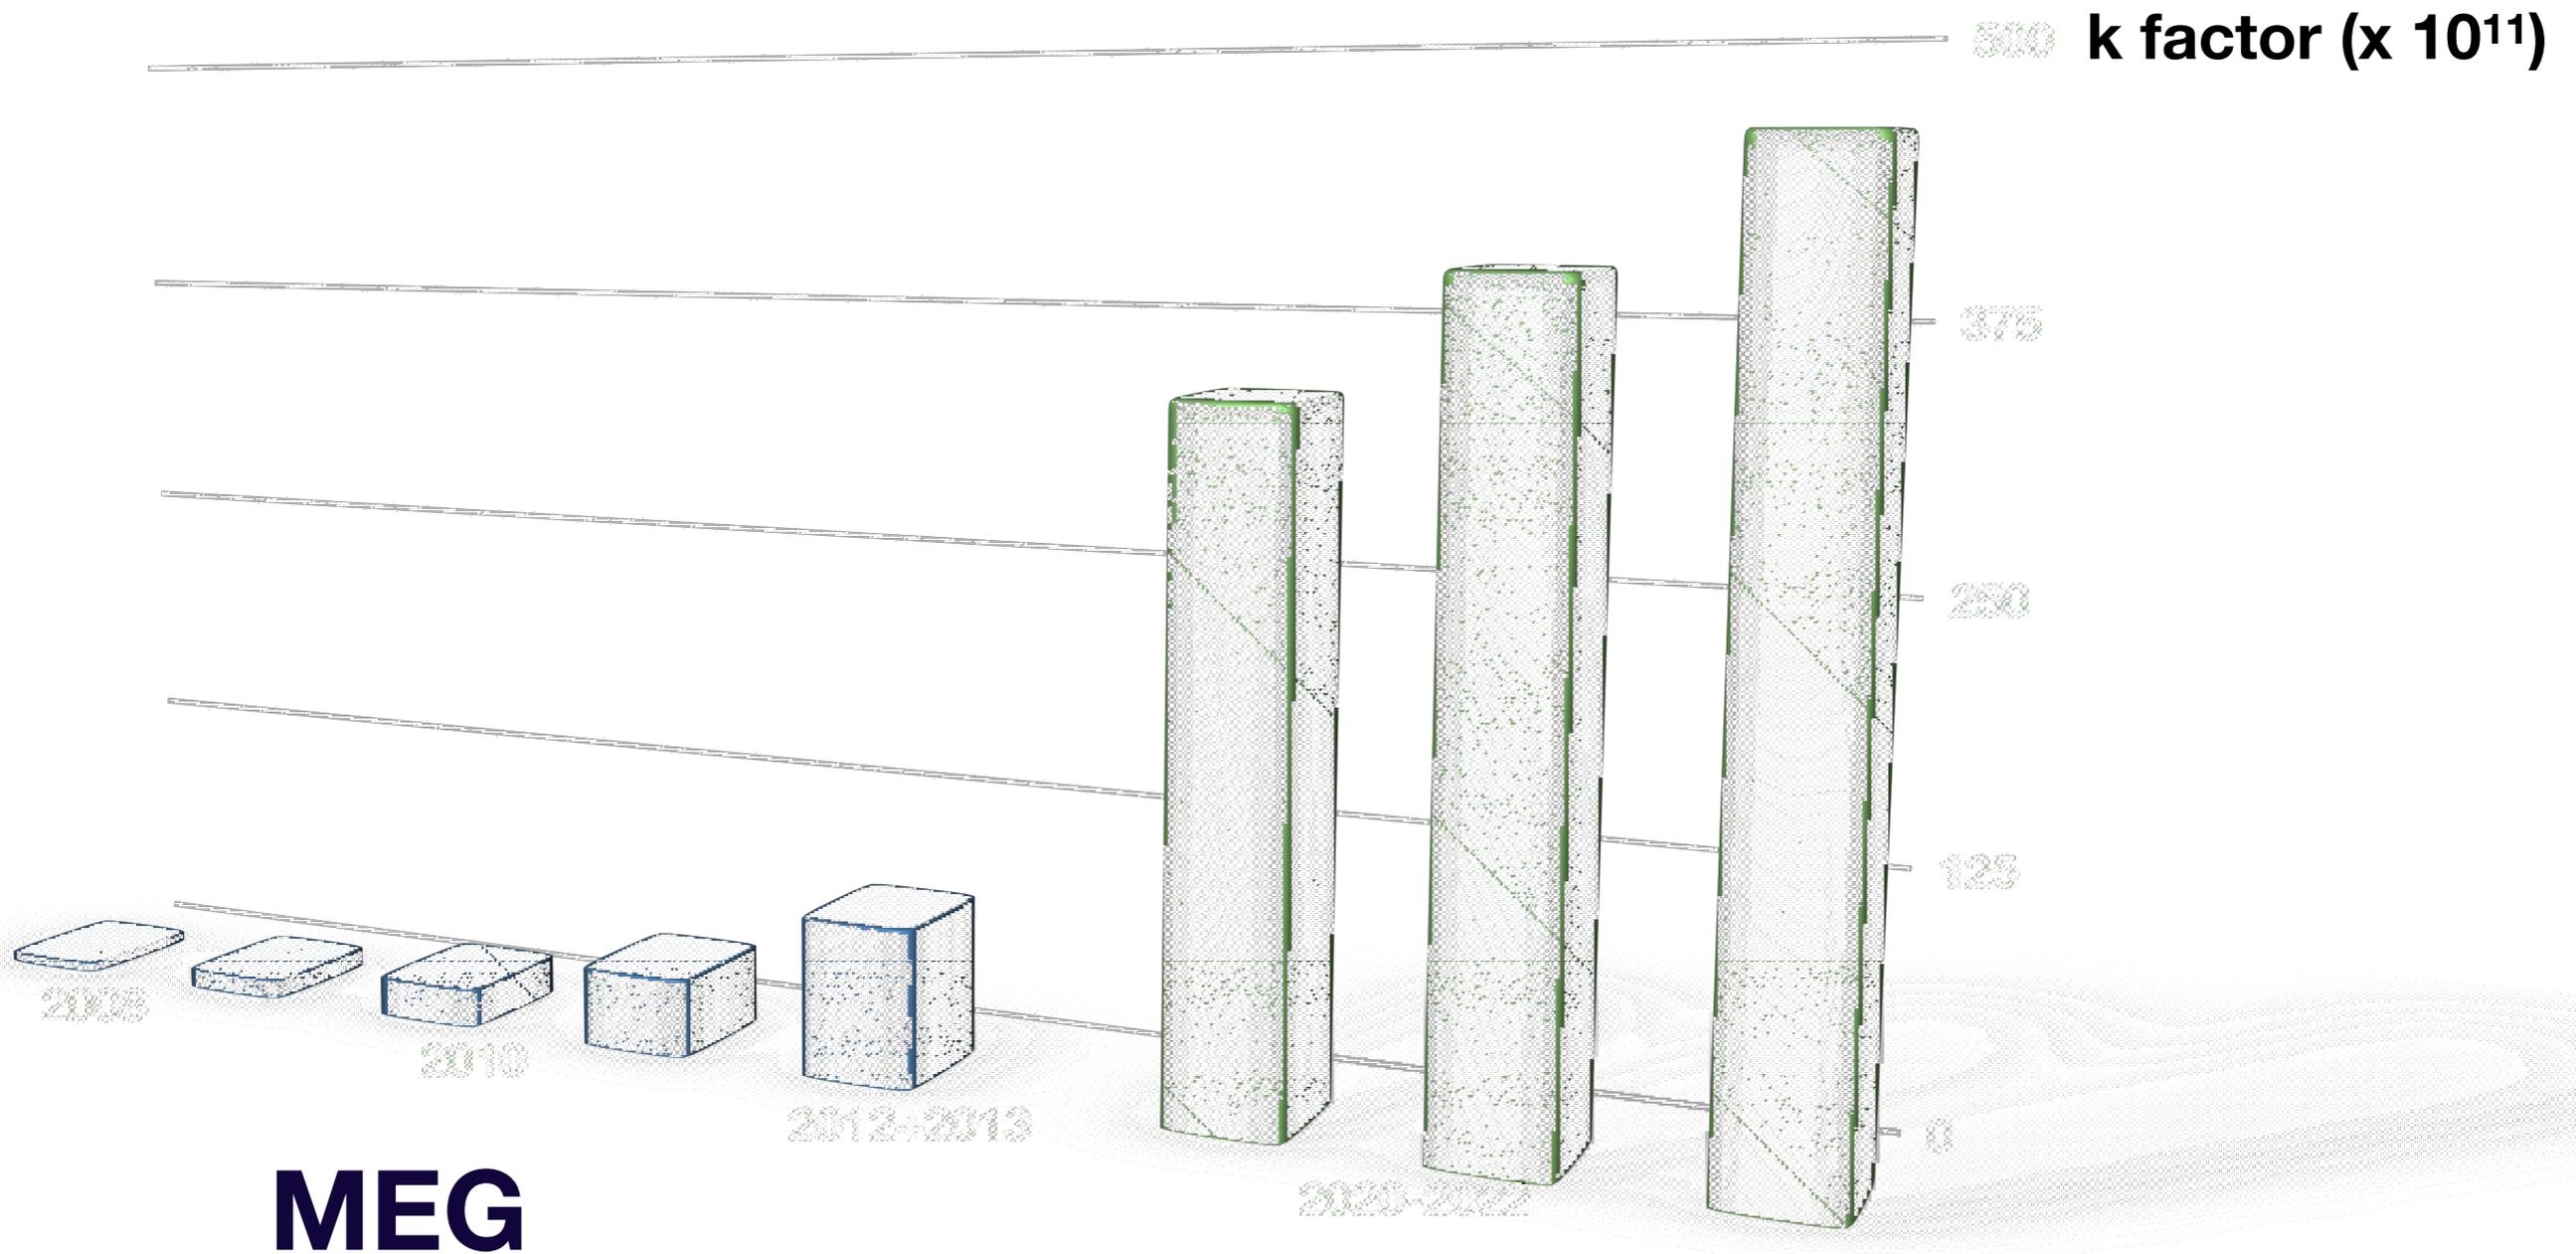



MEGII: The upgraded LXe calorimeter

- Increased uniformity/resolutions
- Increased pile-up rejection capability
- Increased acceptance and detection efficiency
- Assembly: Completed
- Detector filled with LXe
- Purification: Ongoing
- Monitoring and calibrations with sources: Started

New


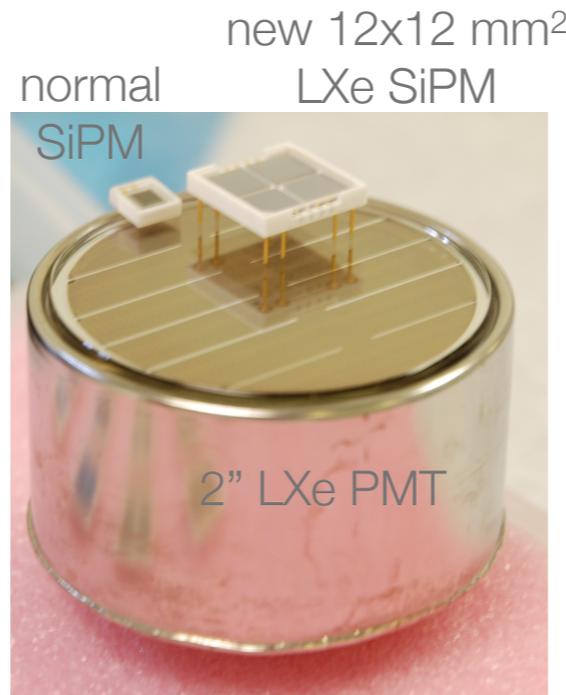


	MEG	MEGII
u [mm]	5	2.4
v [mm]	5	2.2
w [mm]	6	3.1
E [w<2cm]	2.4%	1.1%
E [w>2cm]	1.7%	1.0%
t [ps]	67	60

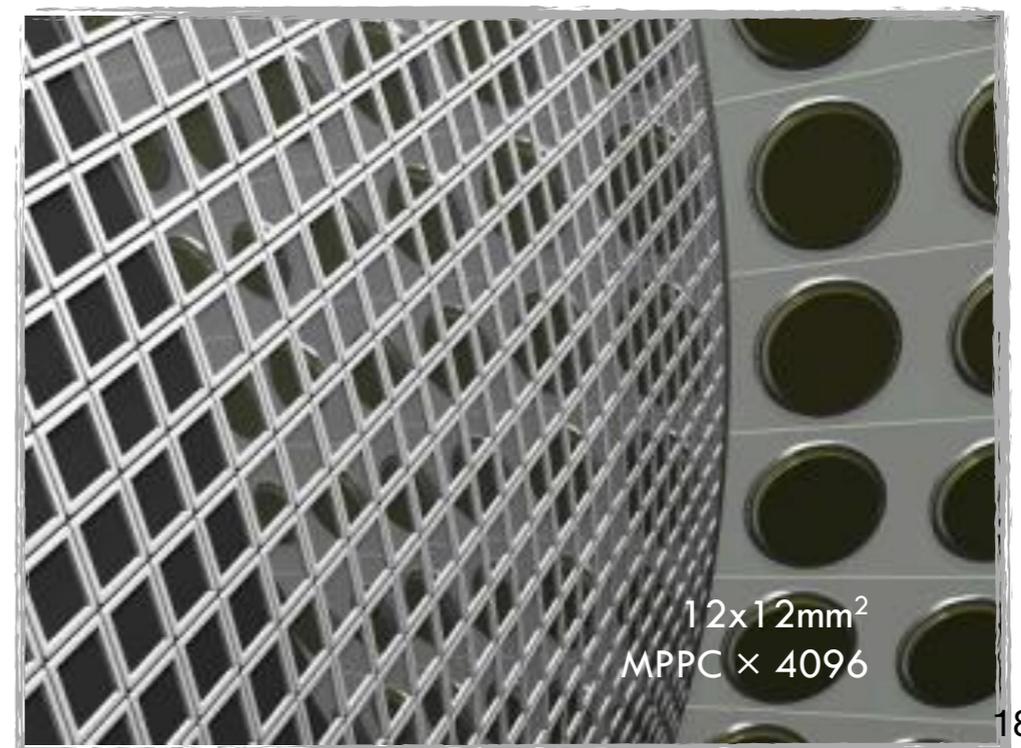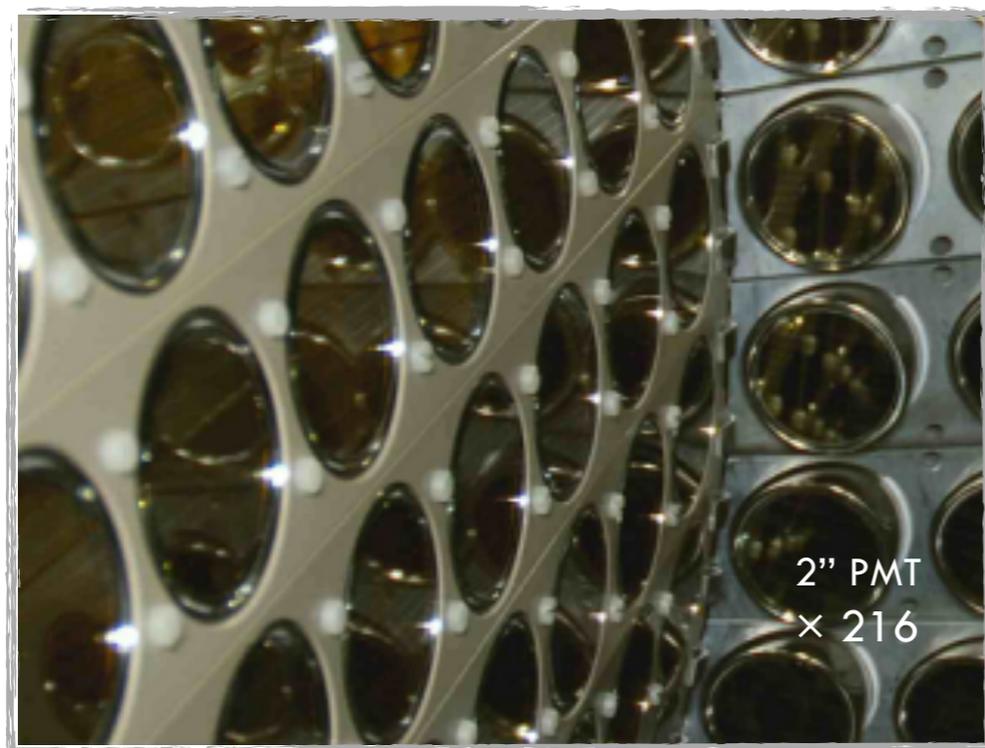

MEGII: The upgraded LXe calorimeter


- Final aim: To confirm with data that the expected detector performances will be achieved and maintained over the time
- Xe Light Yield and purity
- Photosensor behaviour (gain, PDE/ QE) at high beam intensity
- Evaluation of the gamma kinematical variables with the whole TDAQ: Energy (O(4000 channels)), Time and Positions. Low level noise crucial (i.e. coherent contribution)
- Current study: Based on a limited amount of channels

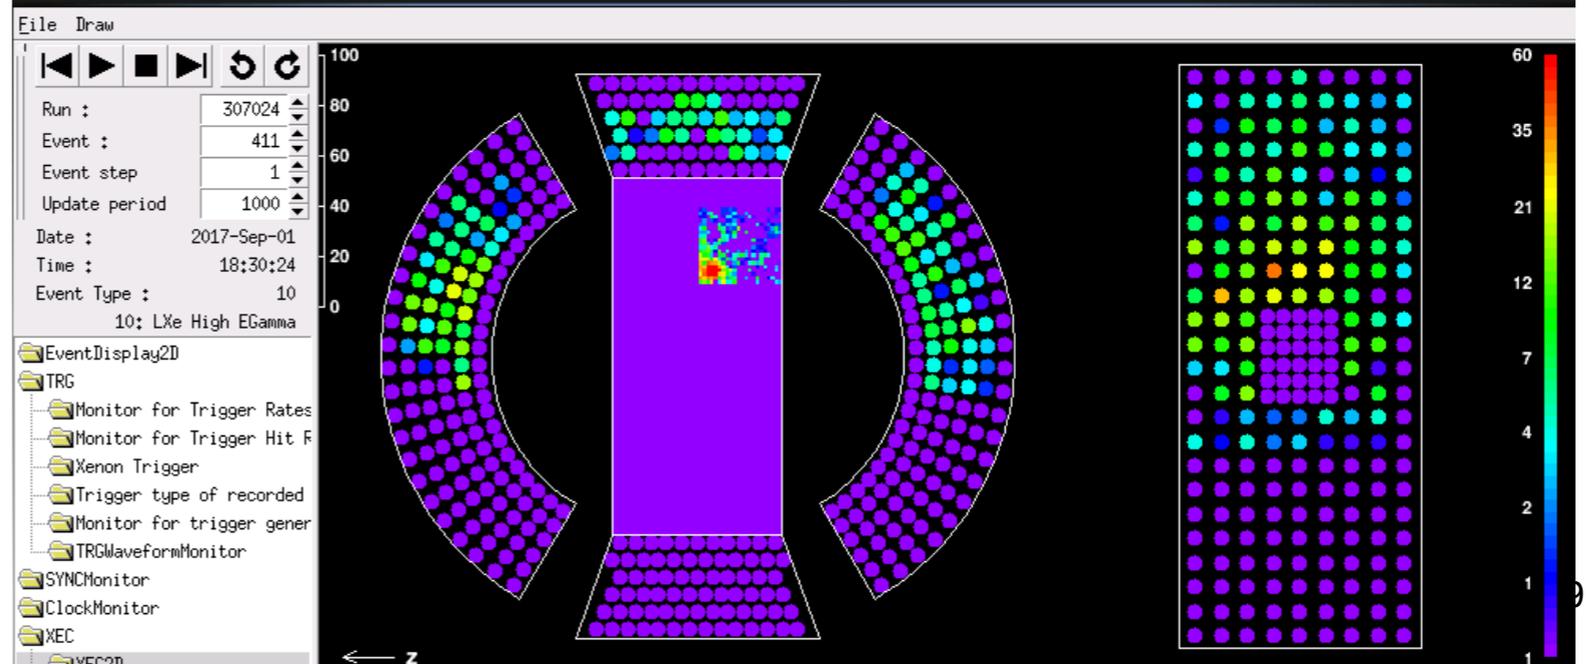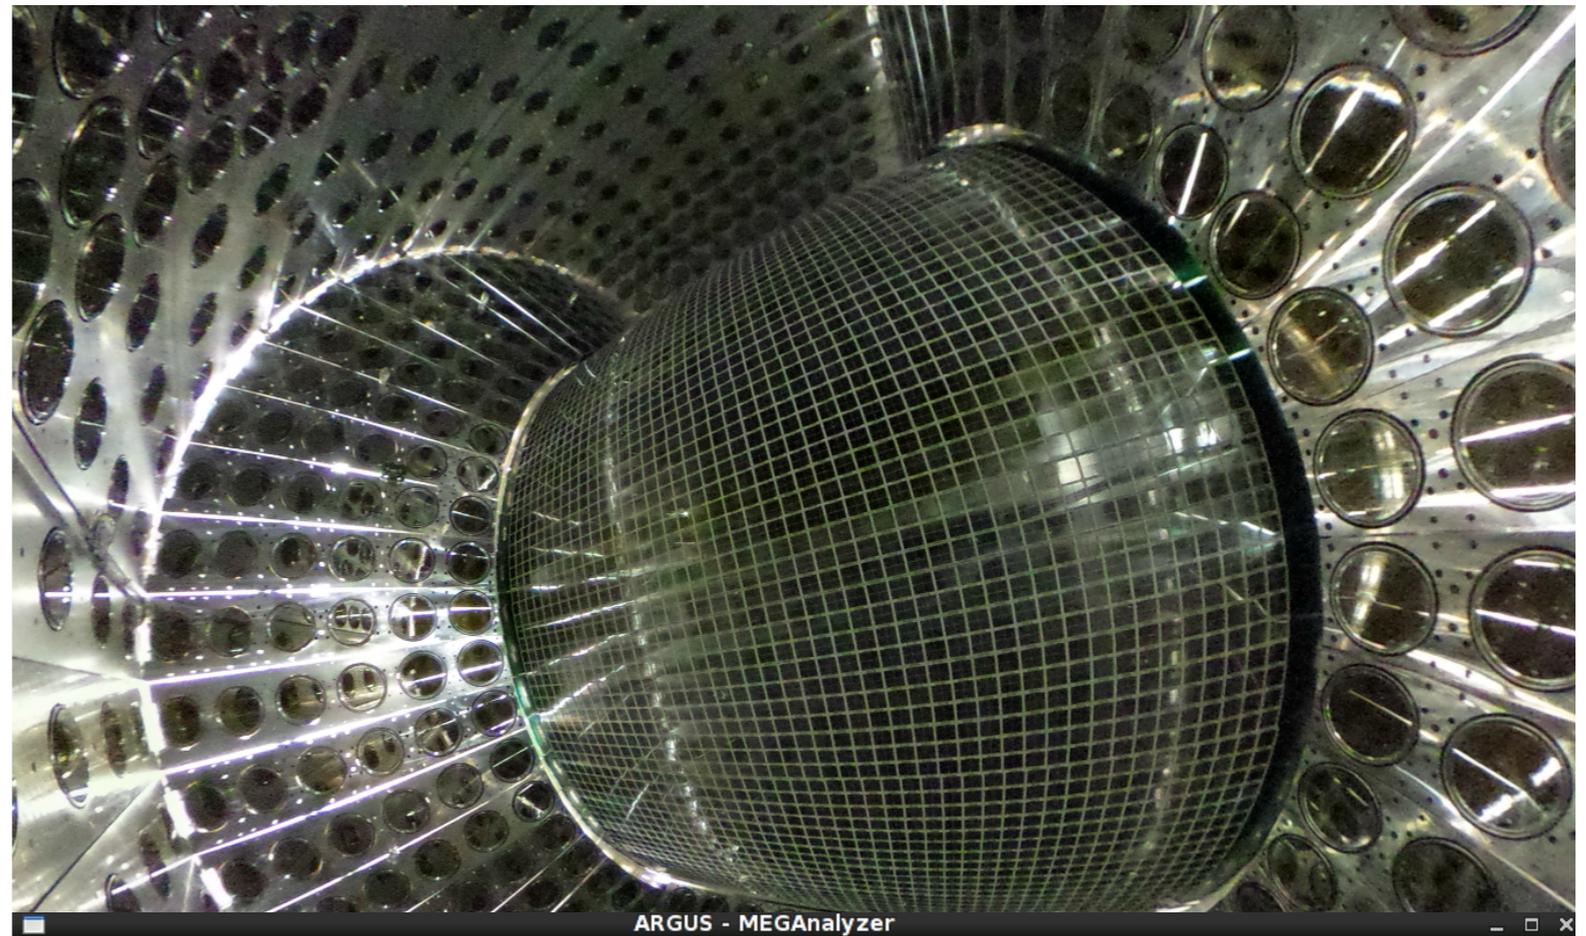



MEGII: The new single volume chamber

- Improved hit resolution: $\sigma_r \sim < 120 \text{ um}$ (210 um)
- High granularity/Increased number of hits per track/cluster timing technique
- Less material (helium: isobutane = 90:10, $1.6 \times 10^{-3} X_0$)
- High transparency towards the TC
- Assembly: Completed!

	MEG	MEGII
p [keV]	306	100
θ [mrad]	9.4	6.3
ϕ [mrad]	8.7	5.0
ϵ [%]*	40	70

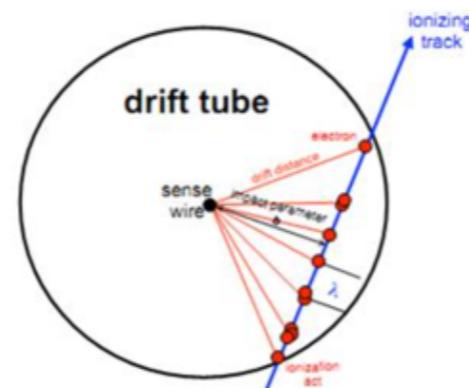

(*) It includes also the matching with the Timing Counter

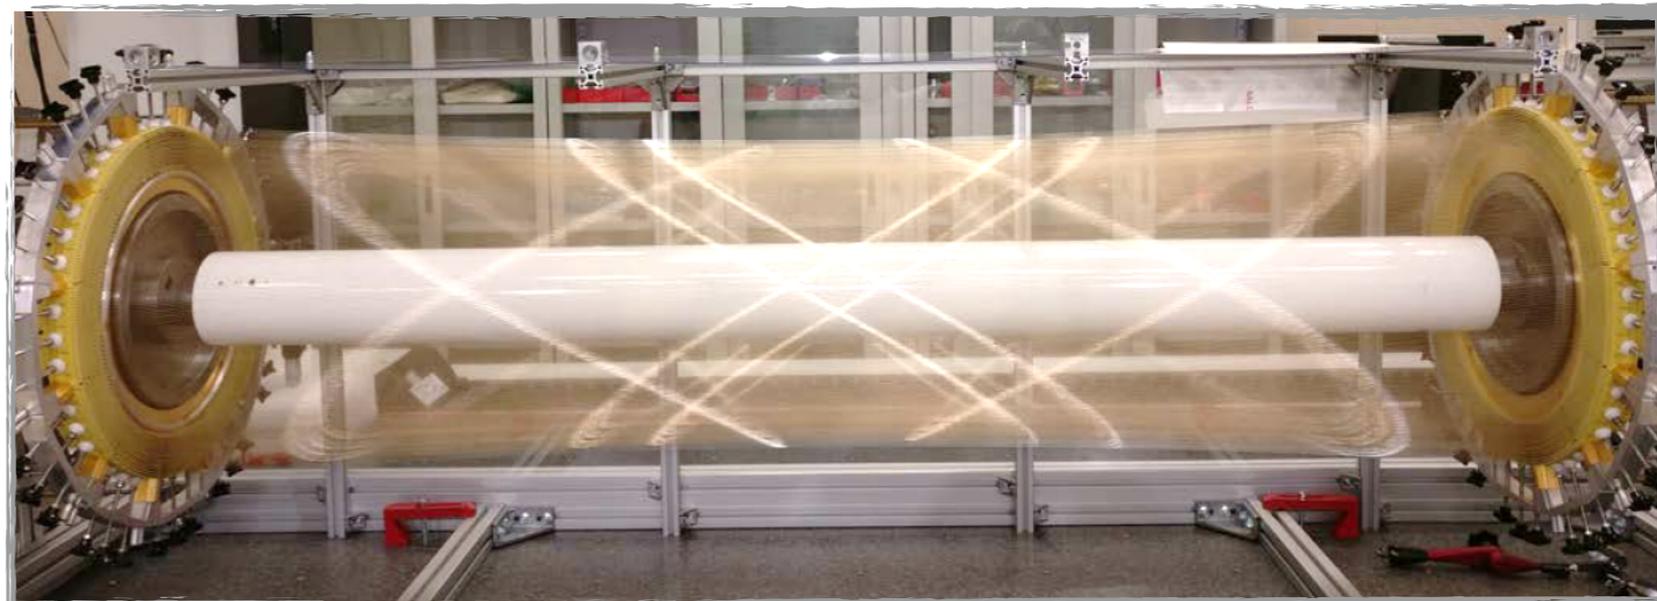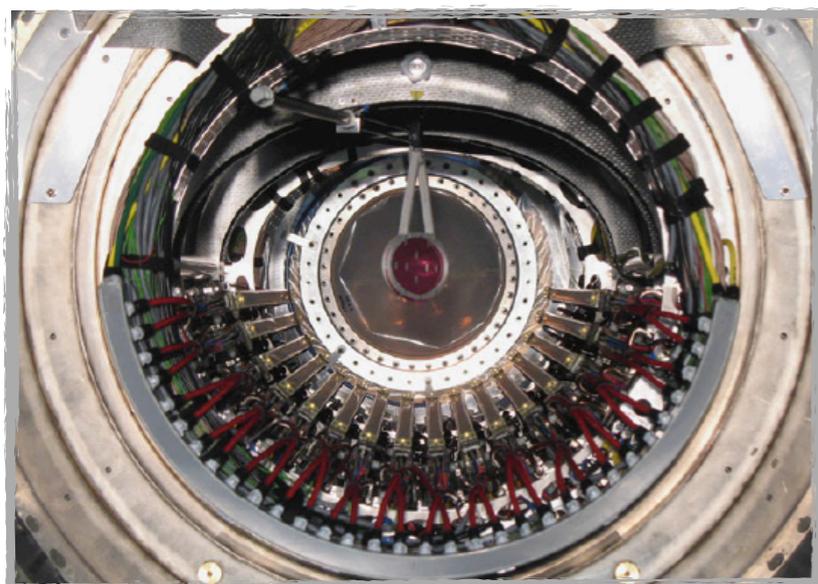


MEGII: The new single volume chamber

CDCH working point search

- During 2018 run we collected important data with CDCH integrated into the MEG II experimental apparatus for the first time
 - We experienced **electrostatic instabilities @ +3.8 mm** (2018 run configuration) of wires elongation
- We decided to reopen CDCH to perform several HV tests @ different lengths/wires elongation with the aim to find the final stable working point configuration
 1. @ +4.8 mm (+1 mm)
 2. @ +5.6 mm (+1.8 mm)
- We set the new CDCH lengths together with the PSI survey group
 - $\approx 20 \mu\text{m}$ accuracy


- 216 FE cards mounted on the US side for the HV test
- Each HV channel can drive 1 layer in 1 sector: 2 FE cards = 16 cells

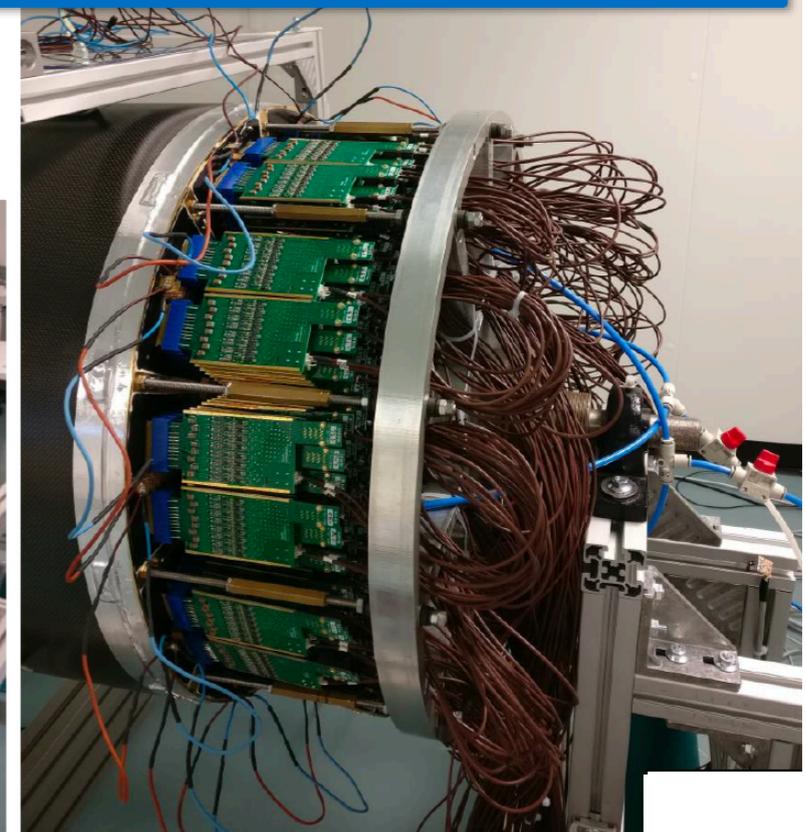

- CDCH temporarily sealed with CF + Al tape
- Nitrogen flushing

MEGII: The new single volume chamber

Ready for the RUN2019 !

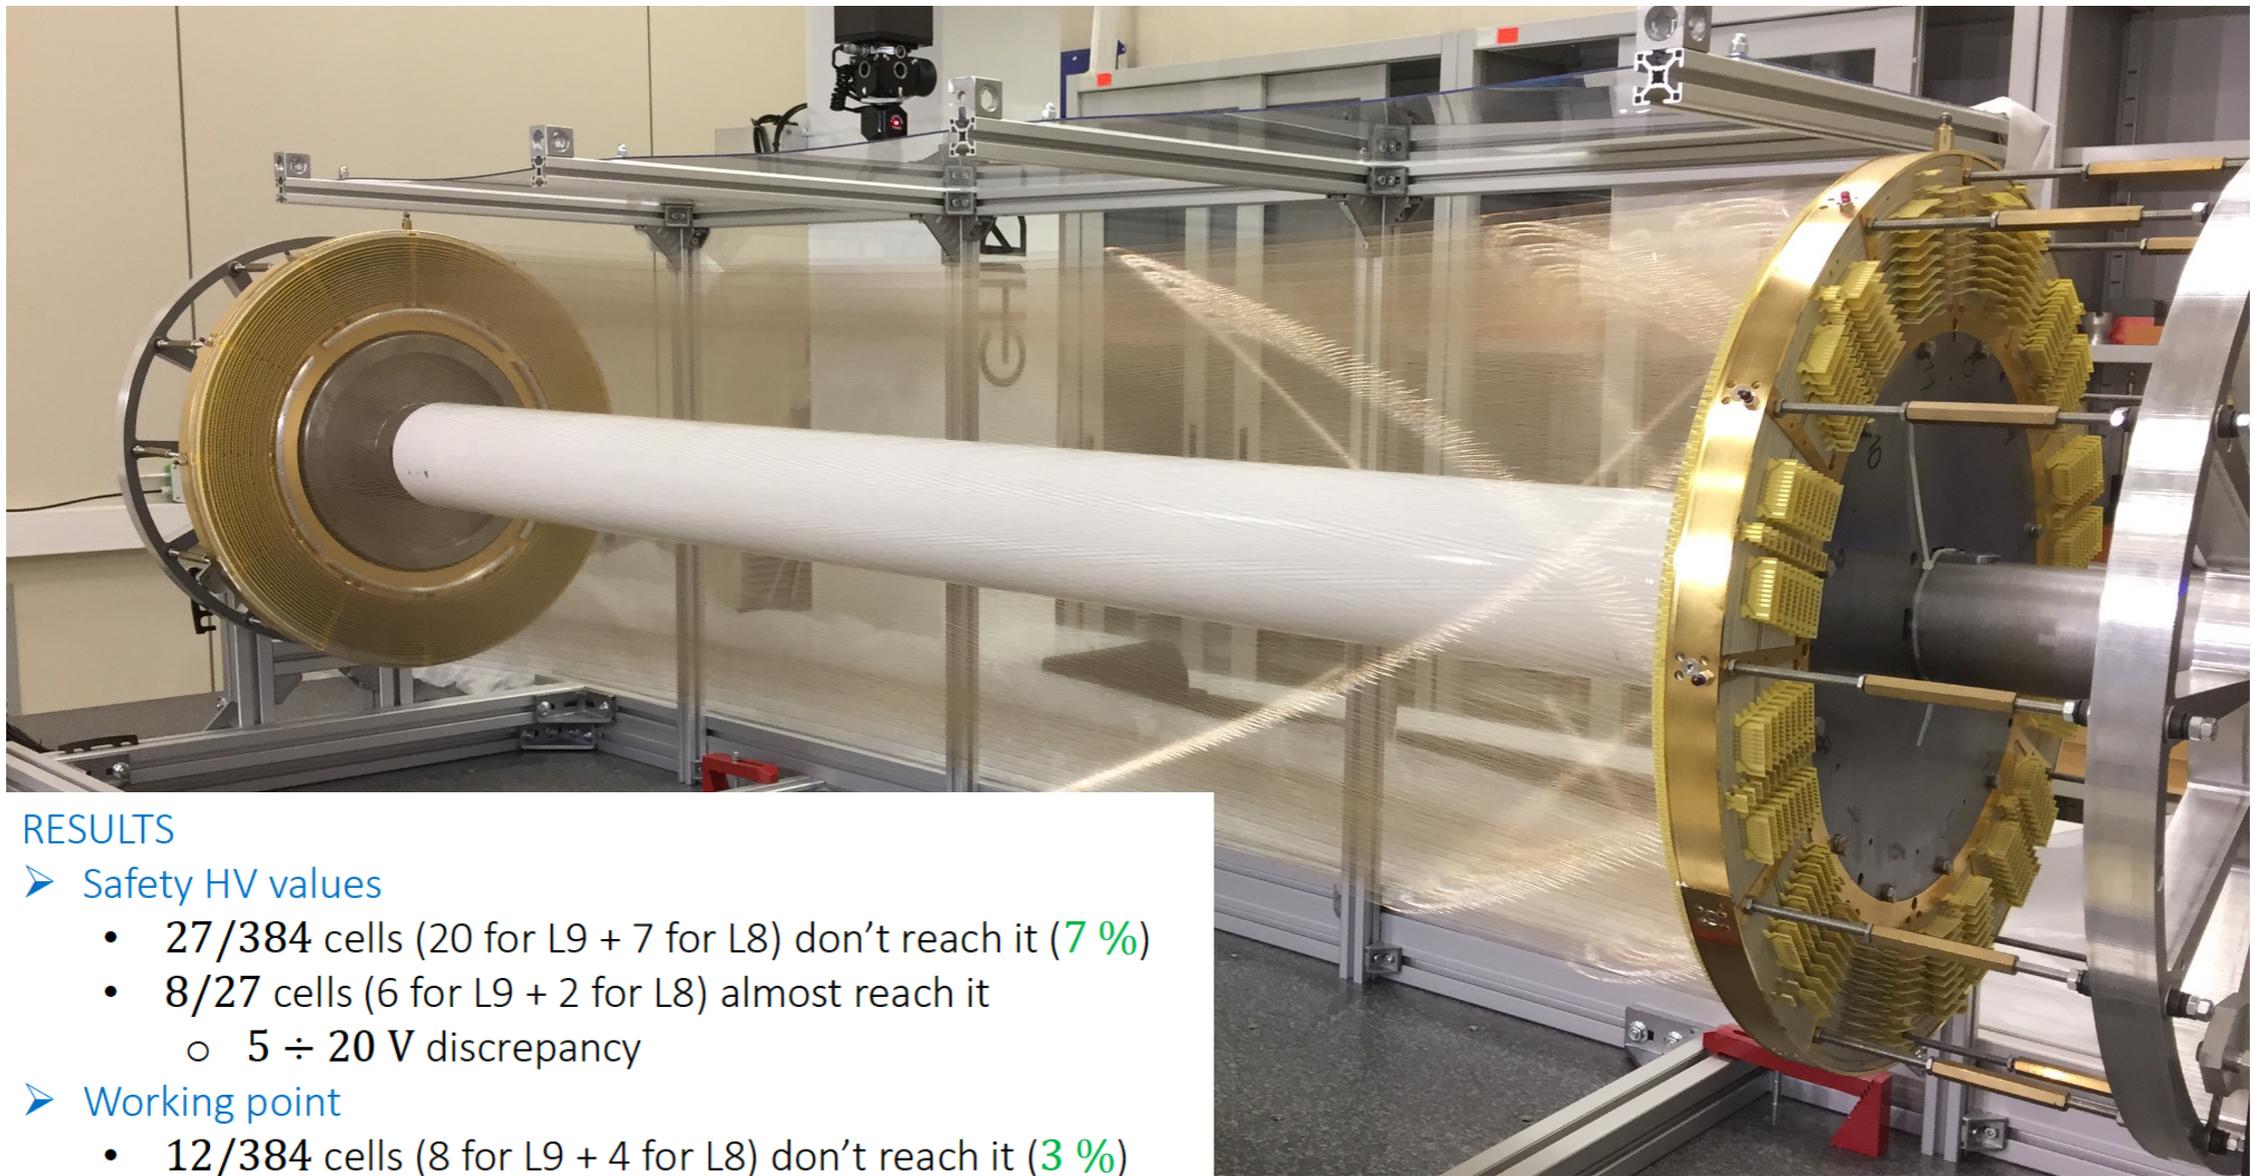

RESULTS

➤ Safety HV values

- 27/384 cells (20 for L9 + 7 for L8) don't reach it (7 %)
- 8/27 cells (6 for L9 + 2 for L8) almost reach it
 - 5 ÷ 20 V discrepancy



➤ Working point

- 12/384 cells (8 for L9 + 4 for L8) don't reach it (3 %)
- 11/12 cells (6 for L9 + 4 for L8) have permanent shorts

CDCH @ +5.6 mm elongation fulfils the MEGII requirements


MEGII: the pixelized Timing Counter

- Higher granularity: 2 x 256 of BC422 scintillator plates (120 x 40 (or 50) x 5 mm³) readout by AdvanSiD SiPM ASD-NUM3S-P-50-High-Gain
- Improved timing resolution: from 70 ps to 35 ps (multi-hits)
- Less multiple scattering and pile-up
- Assembly: Completed
- Expected detector performances confirmed with data

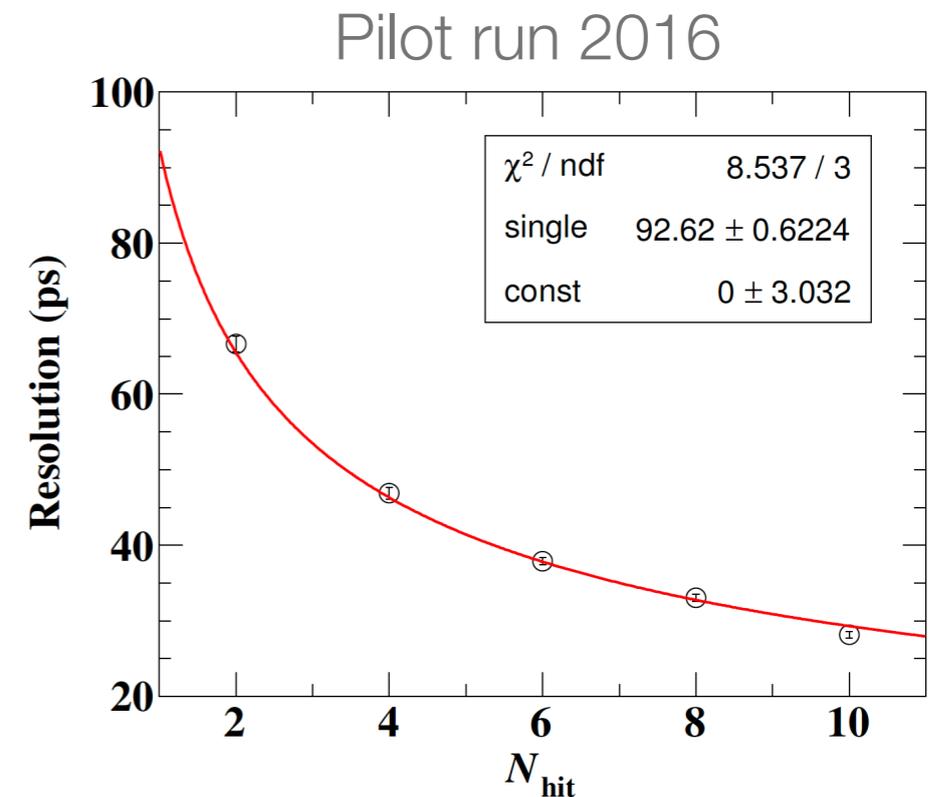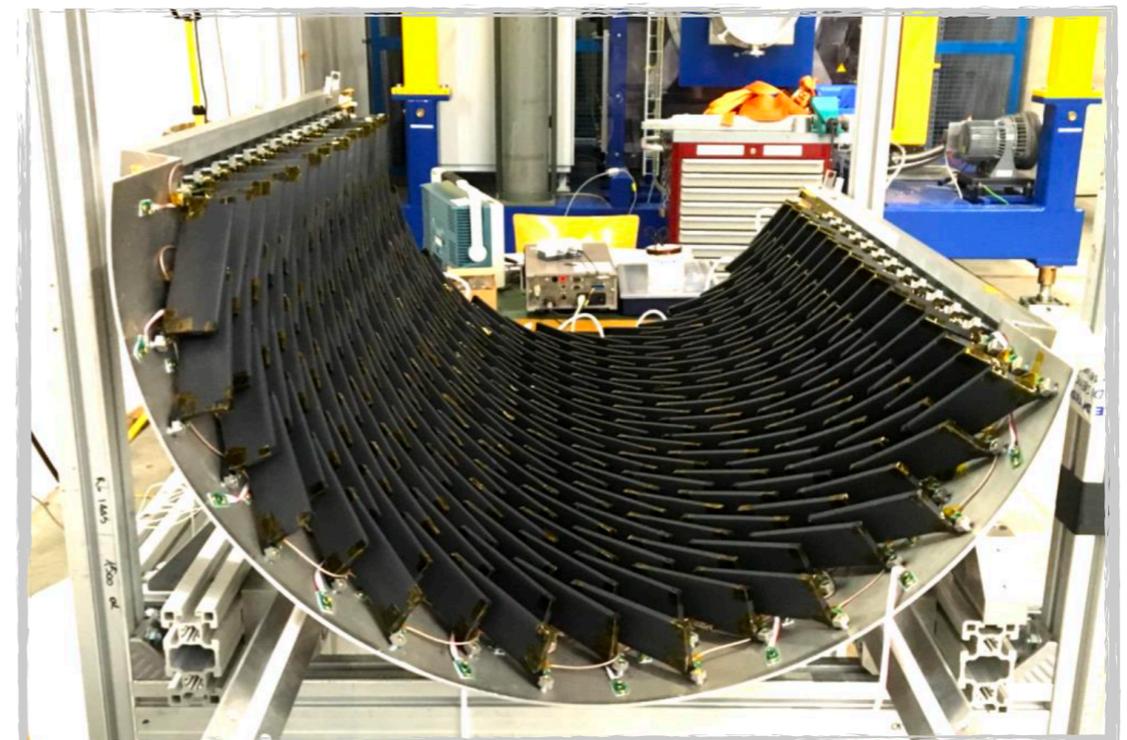

MEGII: the pixelized Timing Counter

Ready for the MEGII physics run !



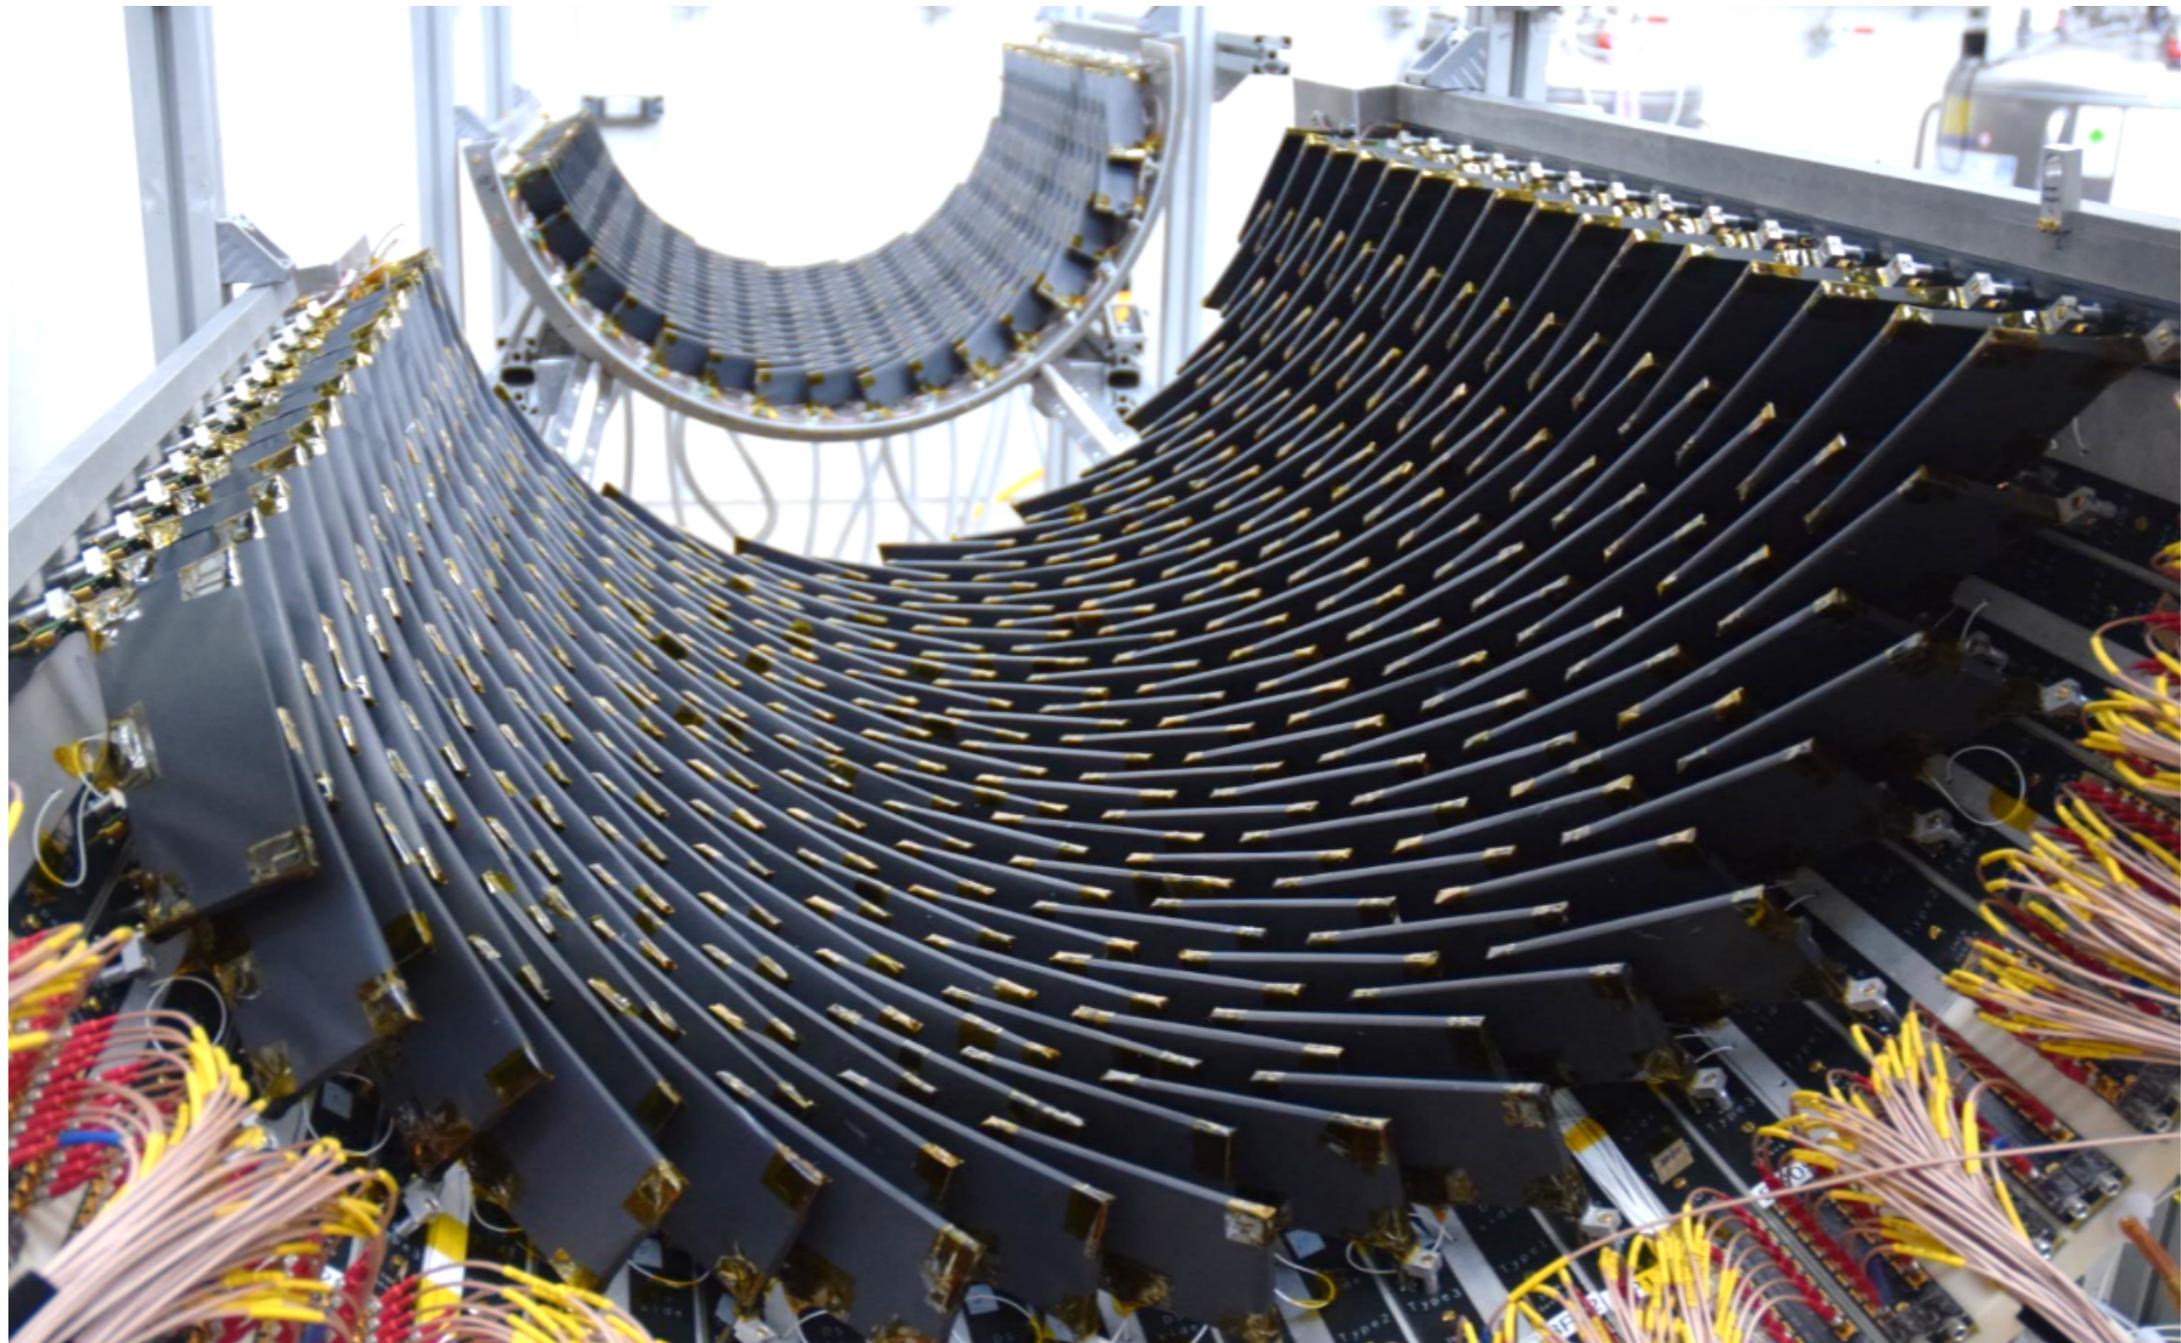


MEGII: The Radiative Decay Counter

- Added a new auxiliary detector for background rejection purpose. Impact into the experiment: Improved sensitivity by 20%
- Commissioning during the 2016 pre-engineering run
- Status: Ready



BC418
MPPC
S13360-3050PE

LYSO 2 x 2 x 2 cm³
MPPC S12572-025

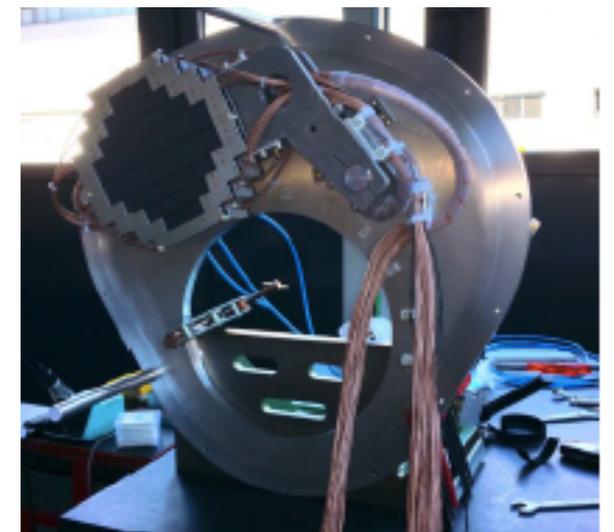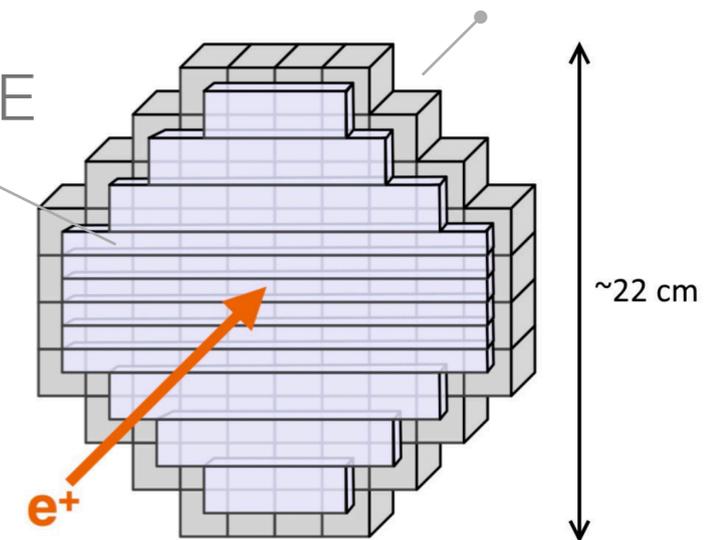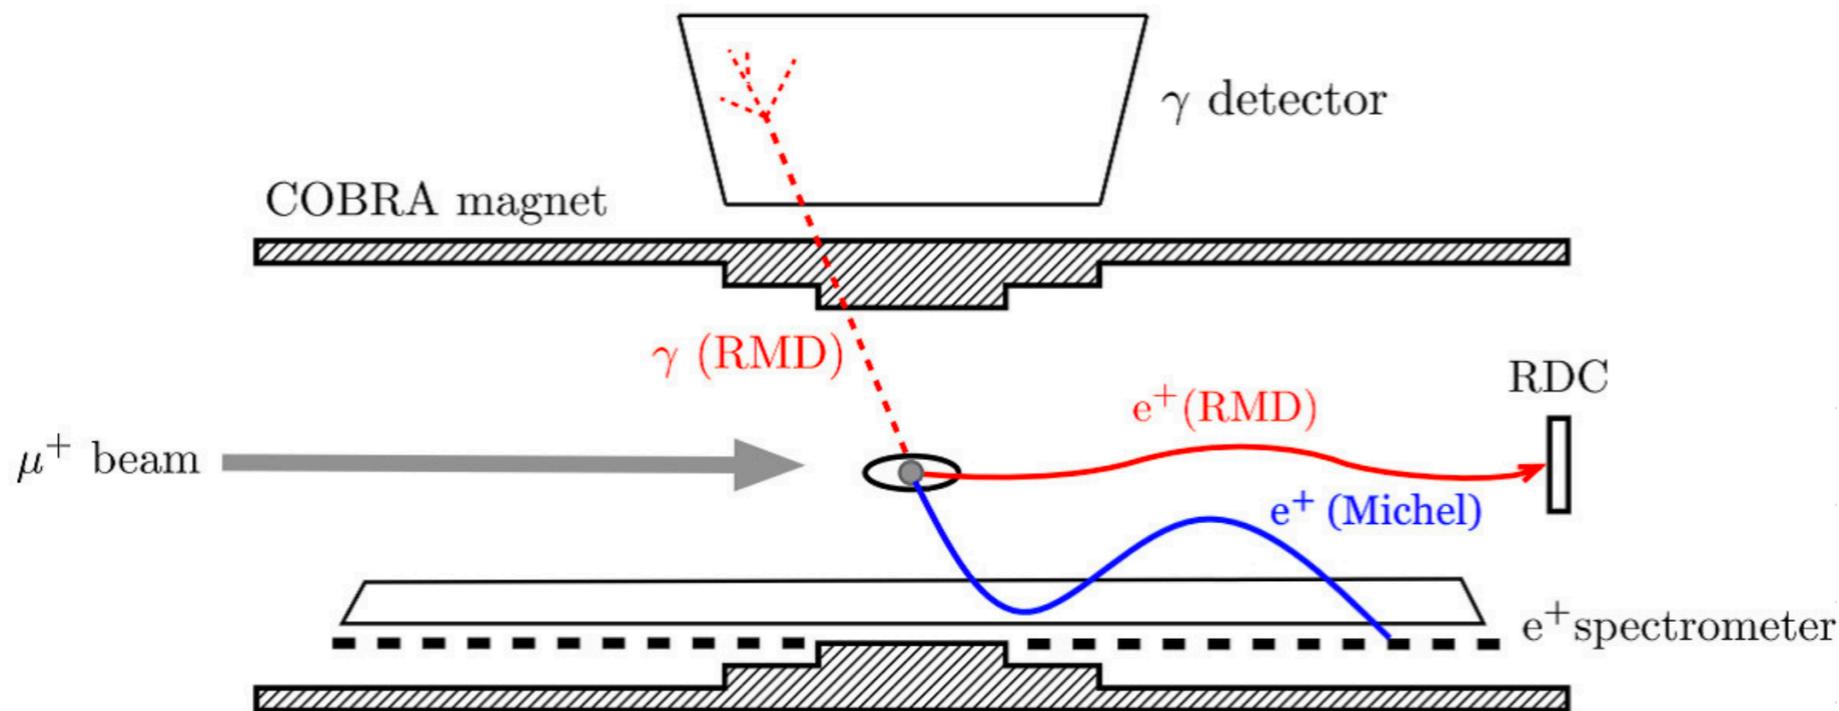


MEG: The calibration methods


- Multiple calibration and monitoring methods: detector resolution and stability are the key points in the search for rare events over the background

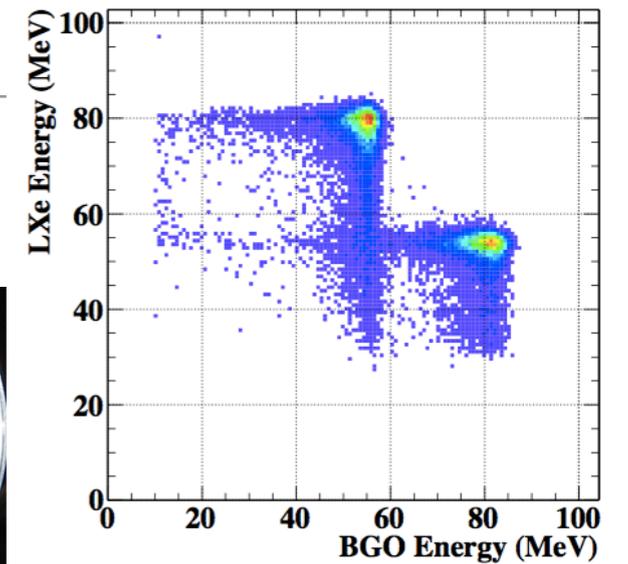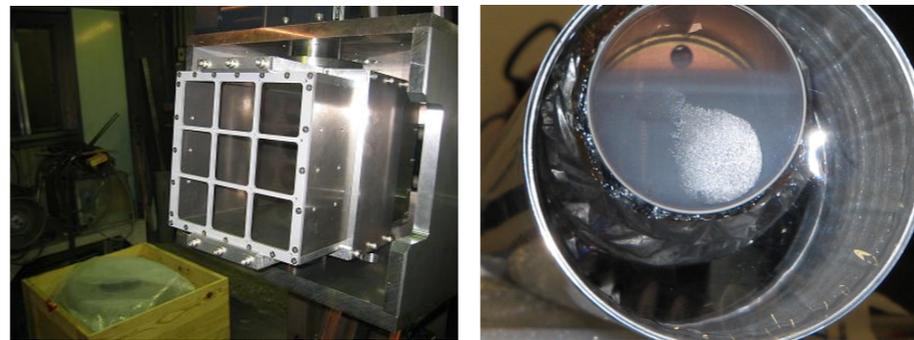

Process		Energy (MeV)	Frequency
CEX reaction	$p(\pi^-, \pi^0)n, \pi^0 \rightarrow \gamma\gamma$	55, 83	annually
C-W accelerator	${}^7\text{Li}(p, \gamma_{17.6}){}^8\text{Be}$	17.6	weekly
	${}^{11}\text{B}(p, \gamma_{11.6}){}^{12}\text{C}$	4.4&11.6	weekly
Neutron Generator	${}^{58}\text{Ni}(n, \gamma_9){}^{59}\text{Ni}$	9	daily
Mott Positrons	$p(e^+, e^+)p$	53	annually

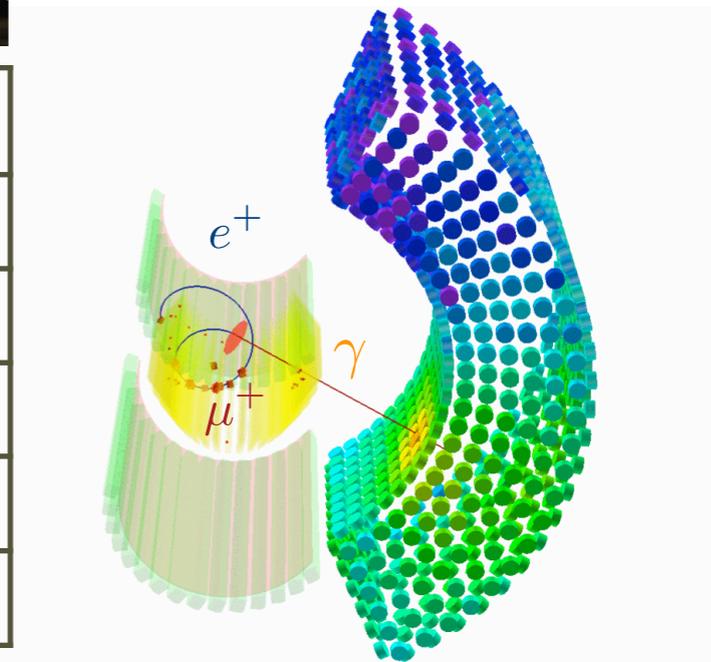



New

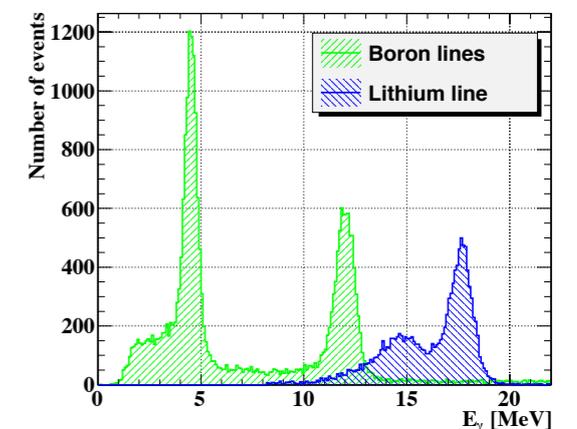


MEGII: new calibration methods and upgrades

- CEX reaction: $p(\pi^-, \pi^0)n$, $\pi^0 \rightarrow \gamma\gamma$
- 1MV Cockcroft-Walton accelerator
- Pulsed D-D Neutron generator
- NEW: Mott scattered positron beam to fully exploit the new spectrometer
- NEW: SciFi beam monitoring. Not invasive, ID particle identification, vacuum compatible, working in magnetic field, online beam monitor (beam rate and profile)
- NEW: Luminophore (CsI(Tl) on Lavsan/Mylar equivalent) to measure the beam properties at the Cobra center
- NEW: LXe X-ray survey
- NEW: Laser system for the pTC

Monochromatic e-line

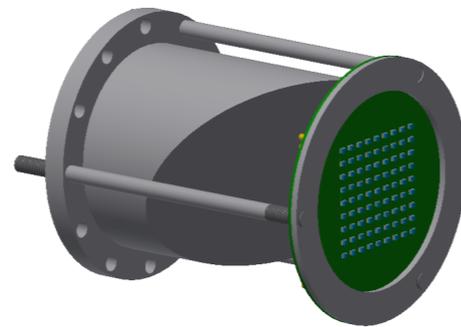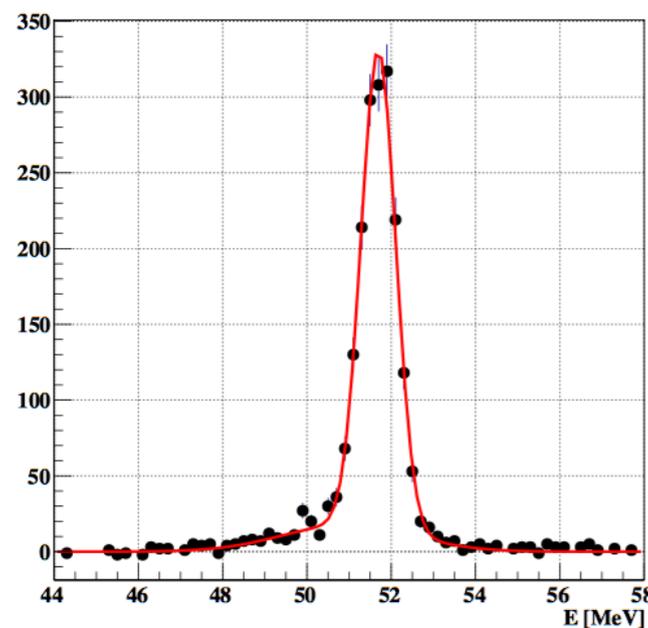


pTC's laser


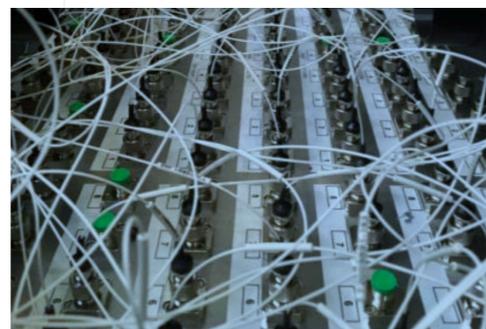


MC BCF12 250 x 250 μm^2
scintillating fibers

MatriX

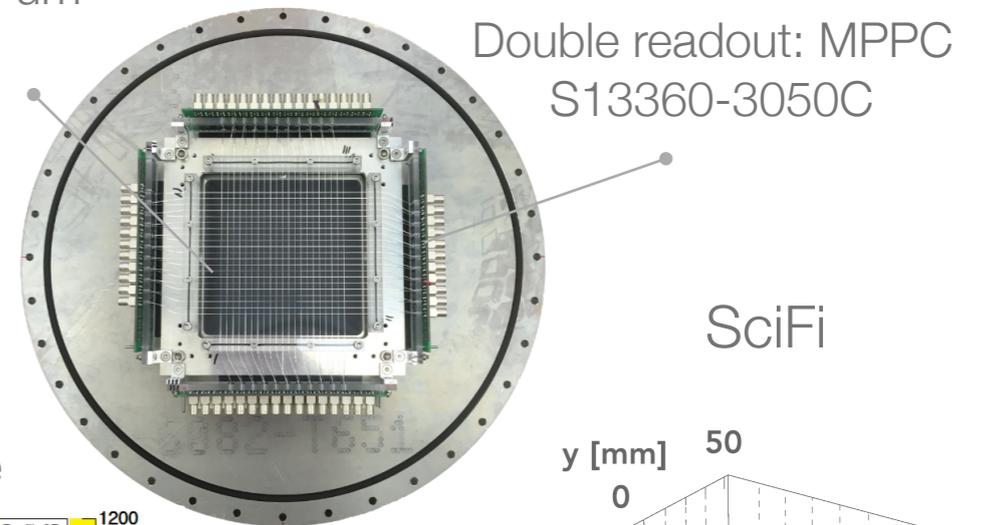


Luminophore

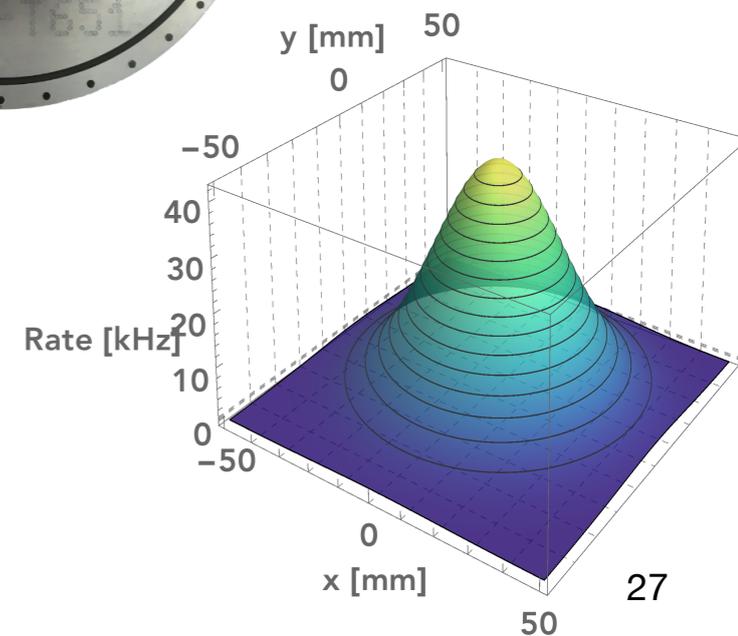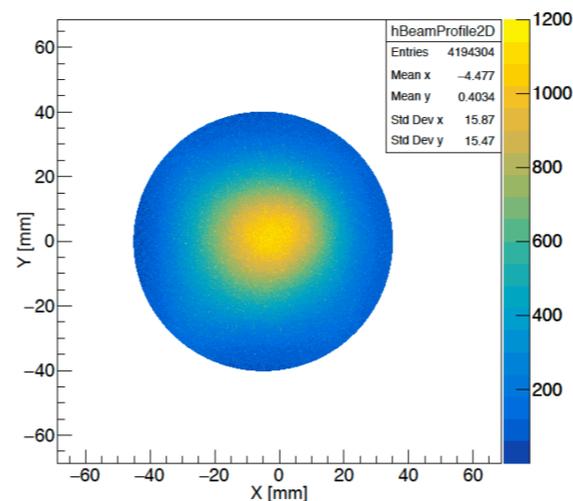

MEGII: The new electronic - DAQ and Trigger


- DAQ and Trigger
 - ~9000 channels (5 GSPS)
 - Bias voltage, preamplifiers and shaping included for SiPMs
- 256 channels (1 crate) abundant tested during the 2016 pre-engineering run; >1000 channels available for the 2017 and 2018 pre-engineering run
- Trigger electronics and several trigger algorithms included and successfully delivered for the test beams/engineering runs

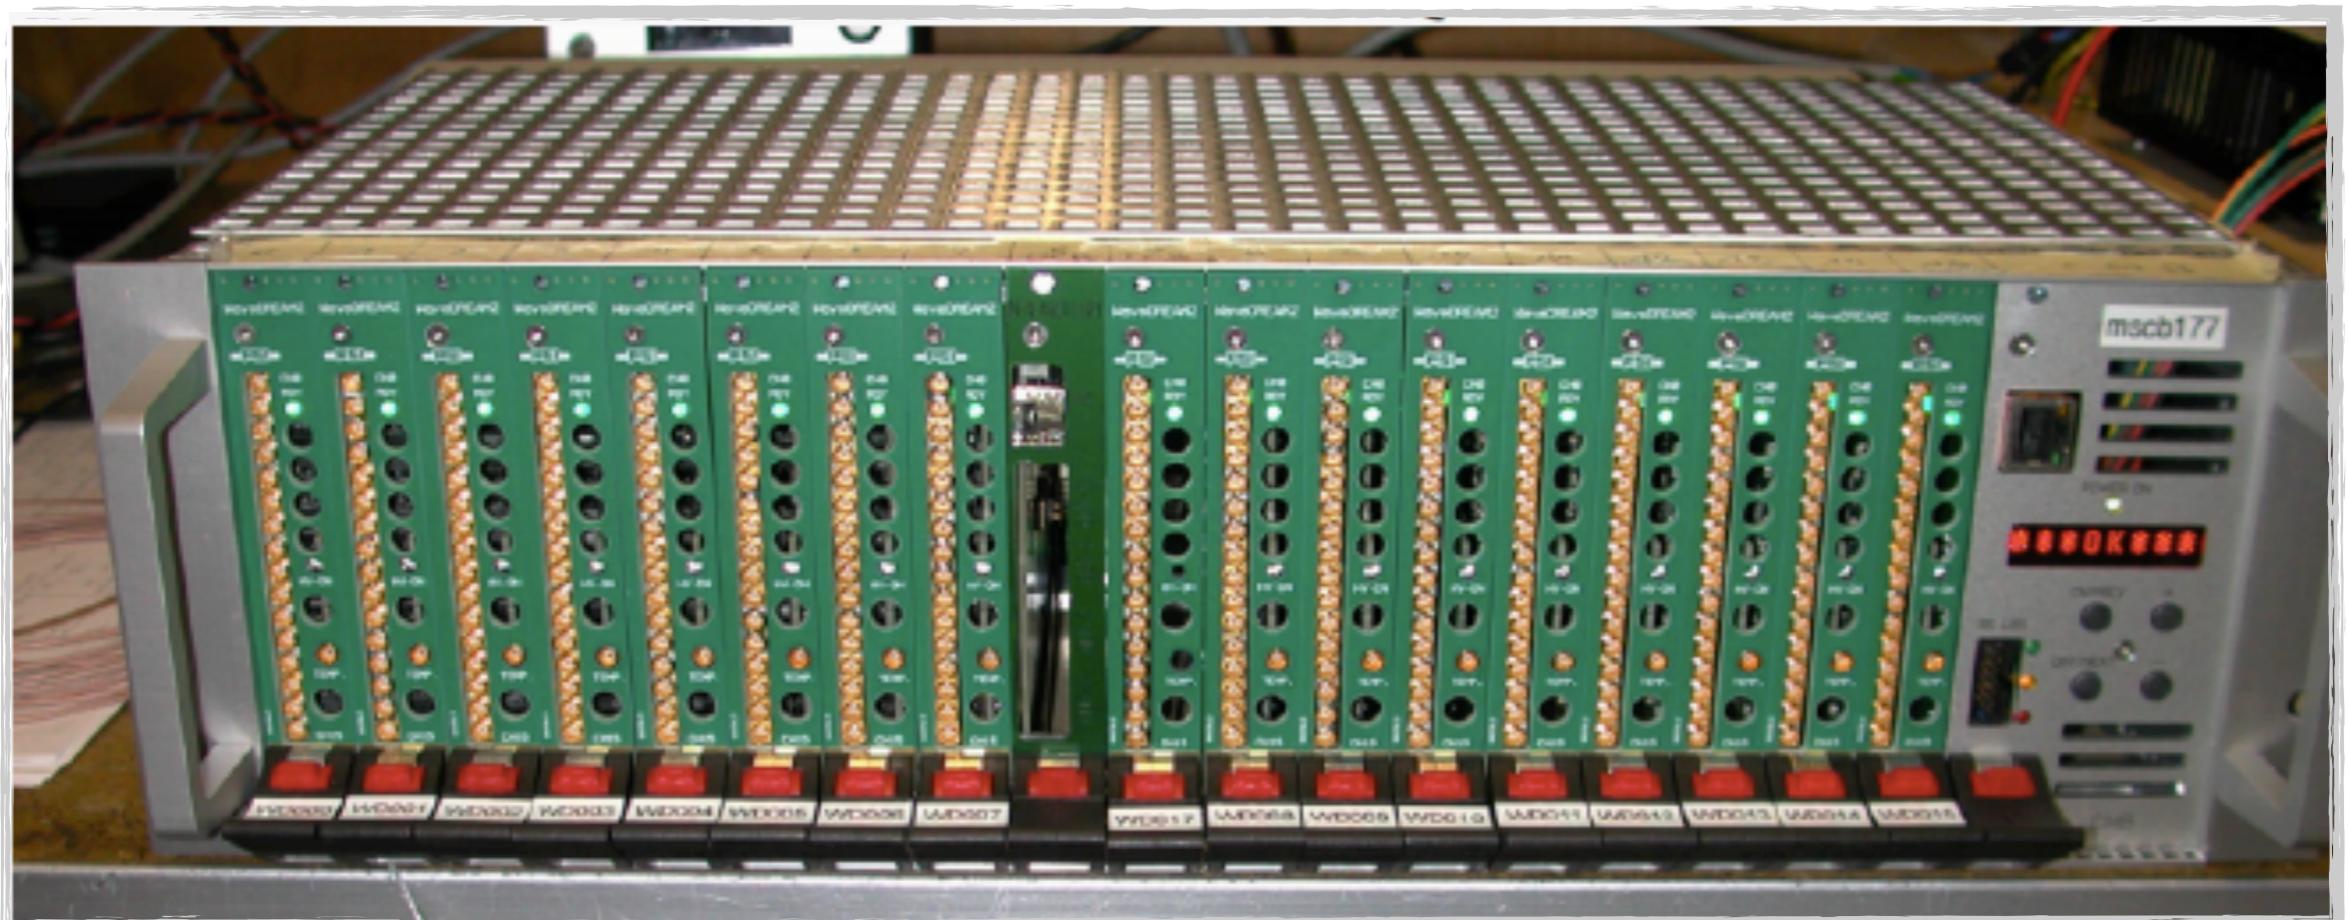

Mu3e: The $\mu^+ \rightarrow e^+ e^+ e^-$ search

- The Mu3e experiment aims to search for $\mu^+ \rightarrow e^+ e^+ e^-$ with a sensitivity of $\sim 10^{-15}$ (Phase I) up to down $\sim 10^{-16}$ (Phase II). Previous upper limit $BR(\mu^+ \rightarrow e^+ e^+ e^-) \leq 1 \times 10^{-12}$ @90 C.L. by **SINDRUM** experiment)
- Observables (E_e , t_e , **vertex**) to characterize $\mu \rightarrow eee$ events

Signature

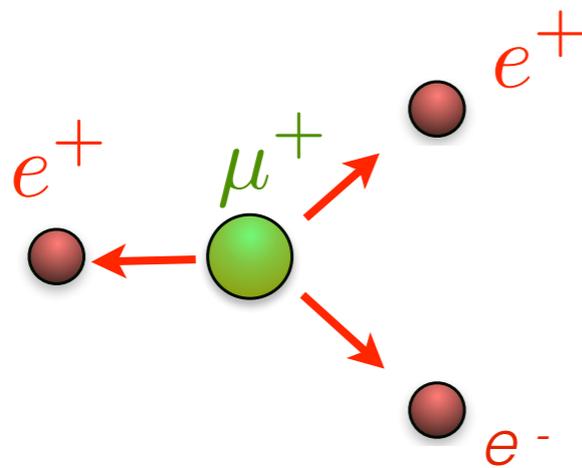


$$\Delta t_{eee} = 0$$

$$\Sigma \vec{p}_e = 0$$

$$\Sigma E_e = m_\mu$$

Background

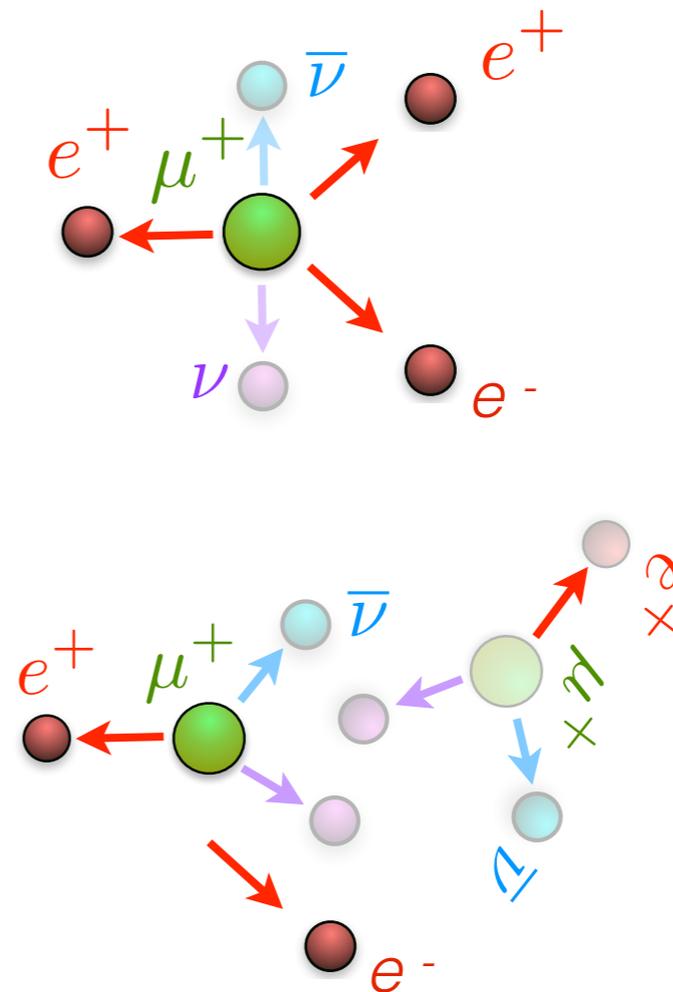

Mu3e: Requirements


Signal

1. $\mu \rightarrow eee$
 - Rare decay search: Intense muon beam $O(10^8 \text{ muon/s})$ for phase I
 - High occupancy: High detector granularity
 - Three charged particles in the final state: allowing for high detector performances vs the case of having neutral particle

Background

1. $\mu \rightarrow eee\nu\nu$
 - Missing energy: Excellent momentum resolution
2. $\mu \rightarrow e\nu\nu, \mu \rightarrow e\nu\nu, e^+e^-$
 - Coincidence and vertex: High timing and position resolutions


The Mu3e experiment: Schematic 3D

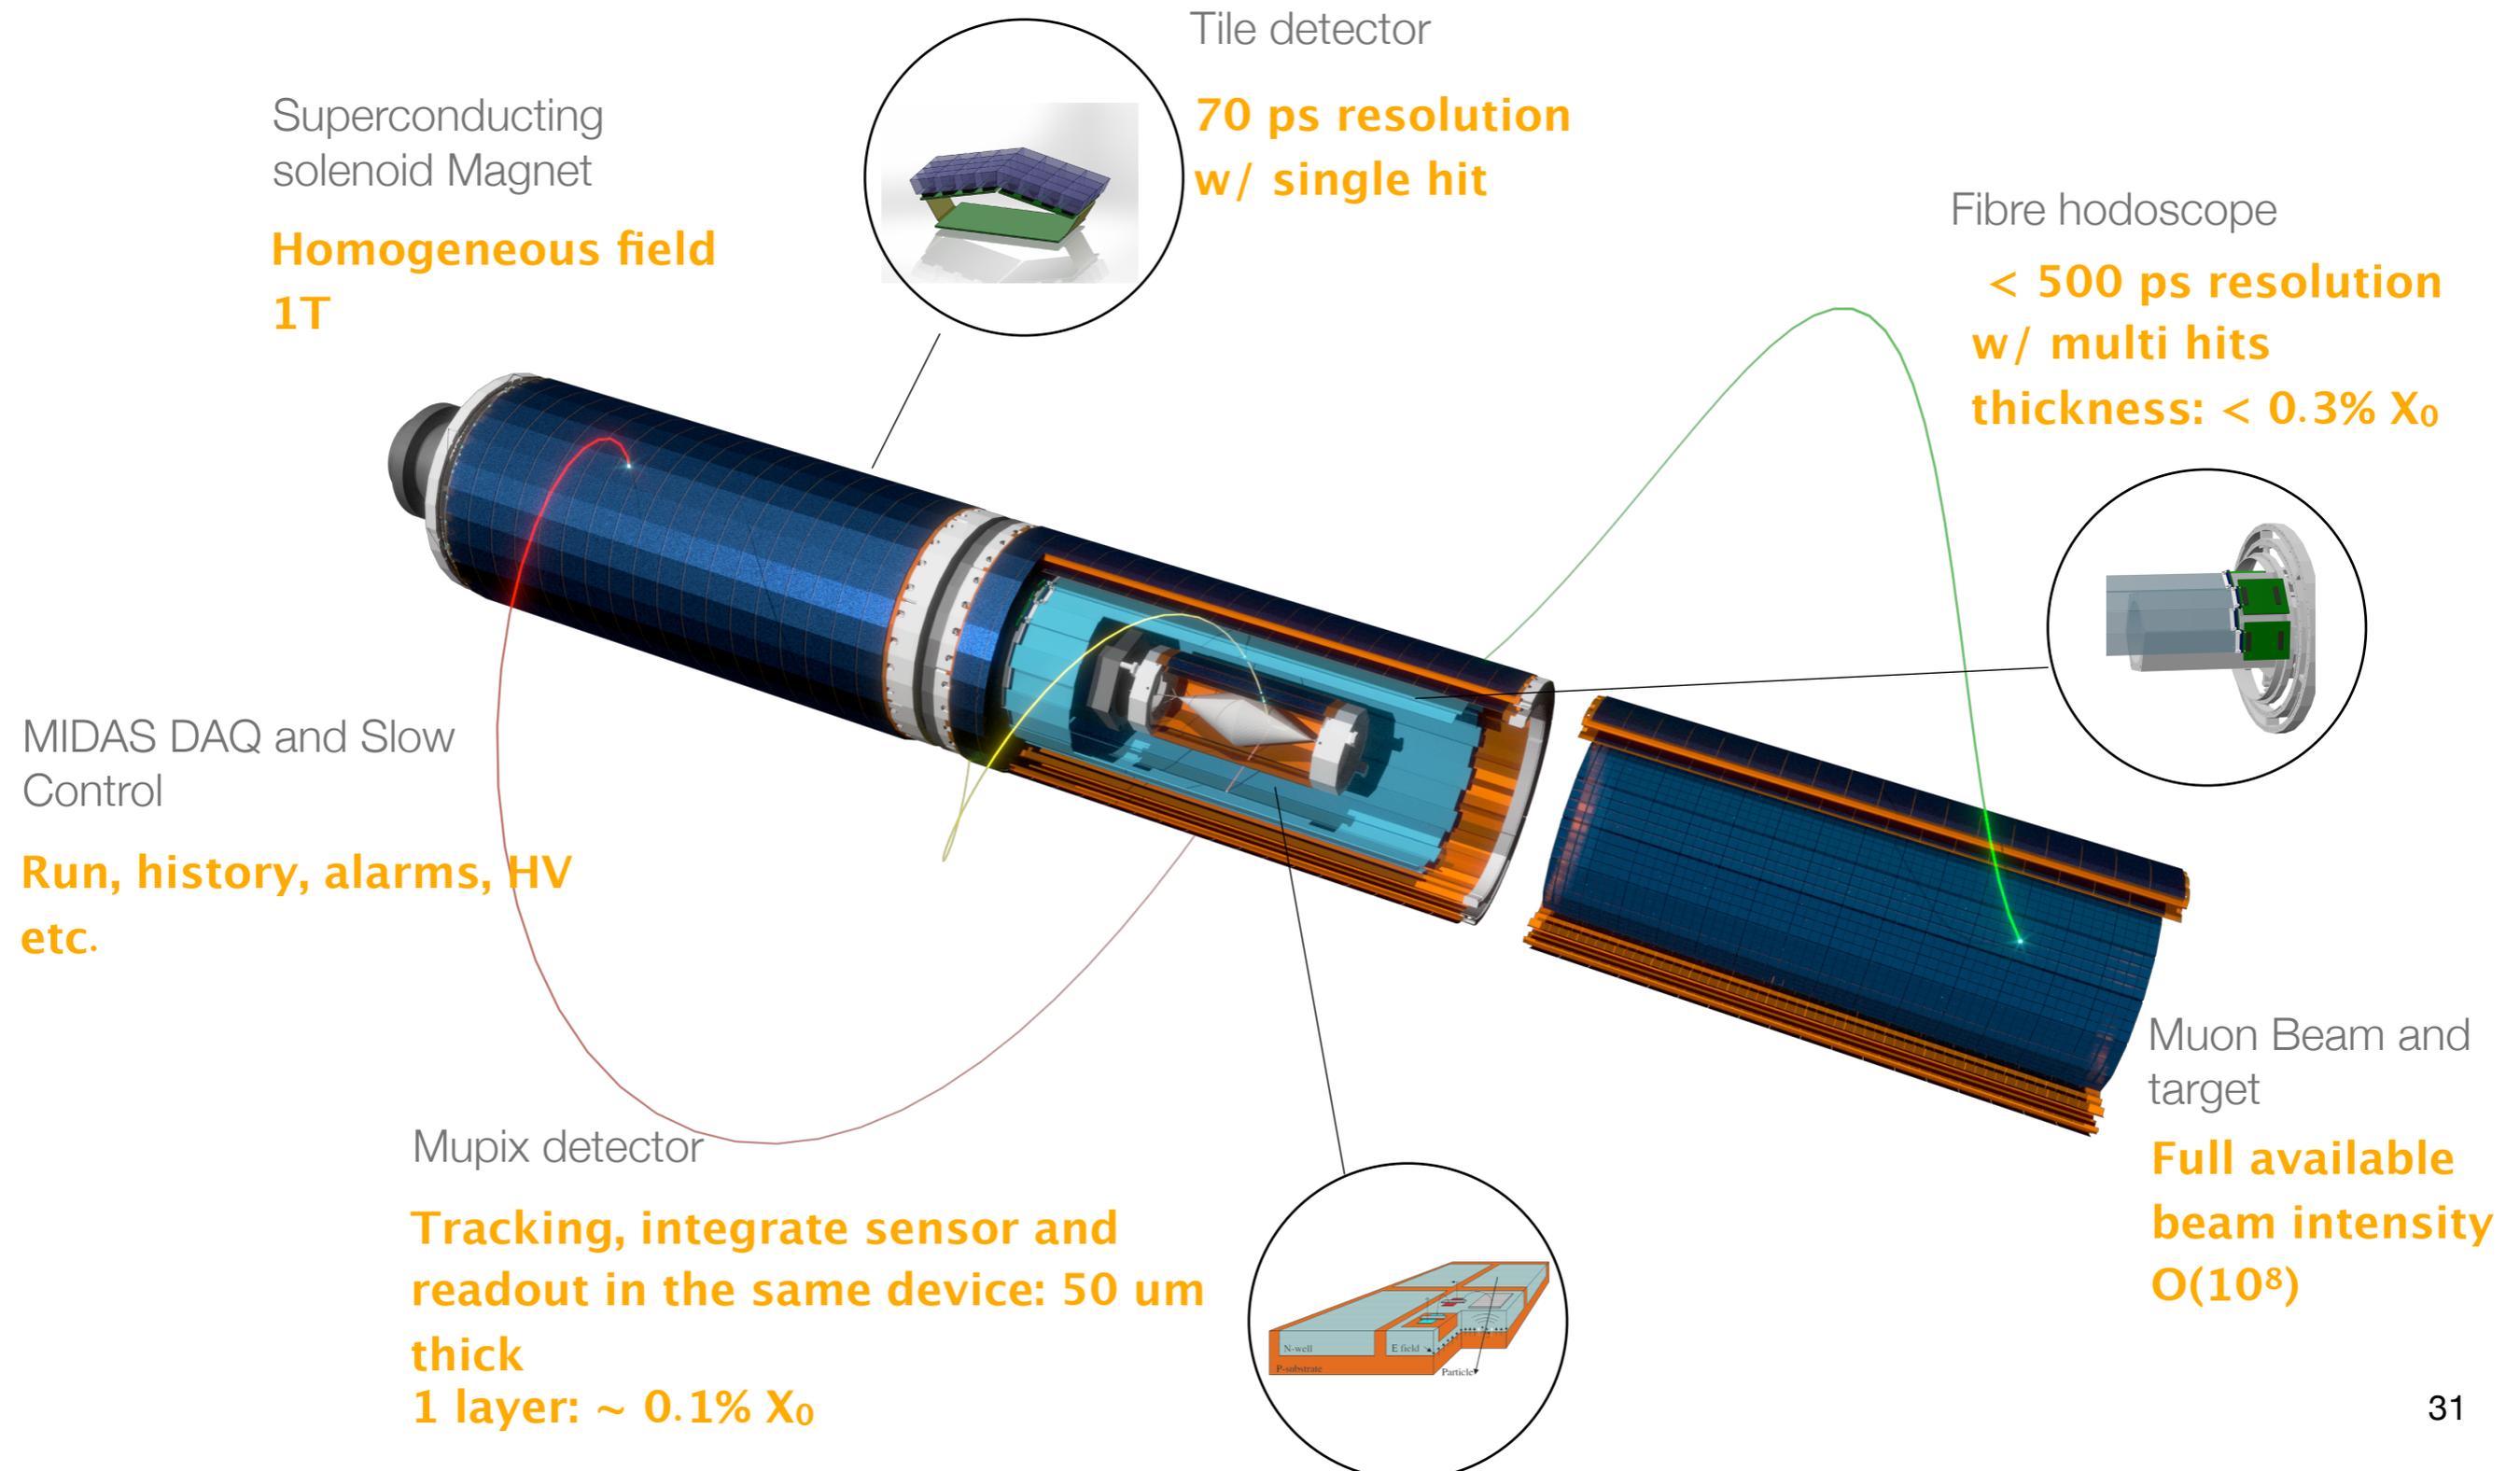

The Mu3e experiment: R&D completed. Prototyping phase

Superconducting solenoid Magnet

**Homogeneous field
1T**


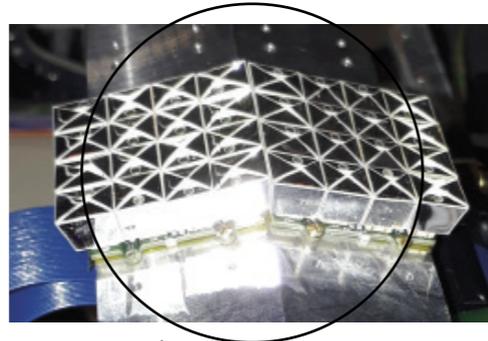


Tile detector

**70 ps resolution
w/ single hit**

Fibre hodoscope

**< 500 ps resolution
w/ multi hits
thickness: < 0.3% X_0**

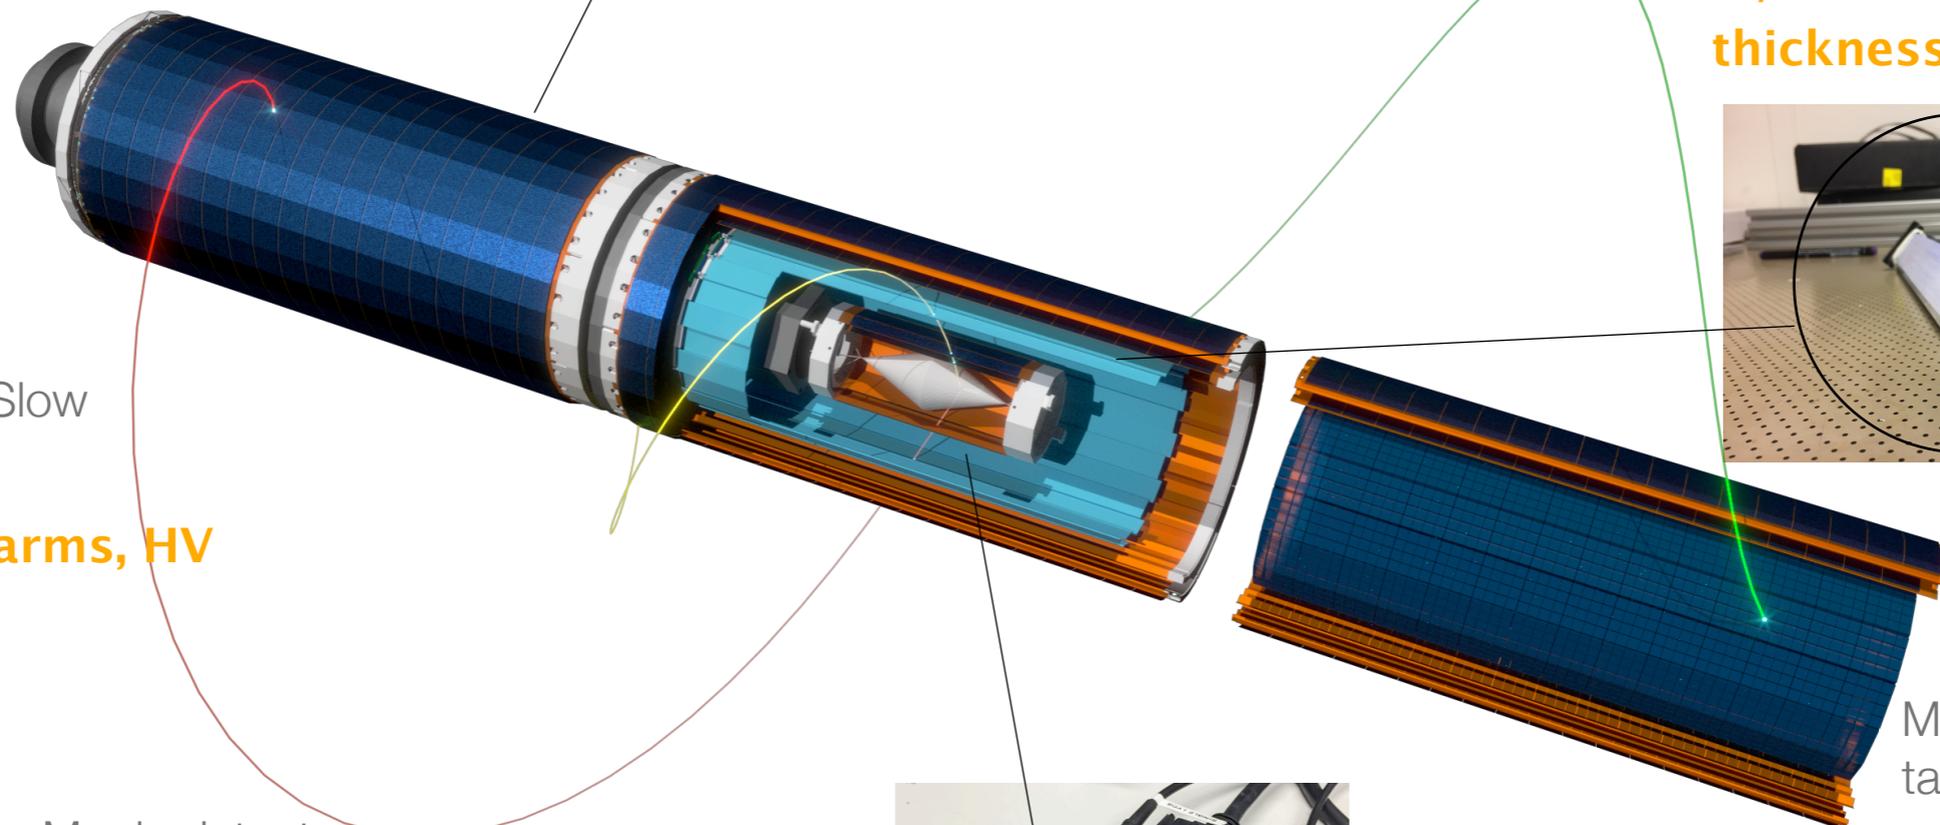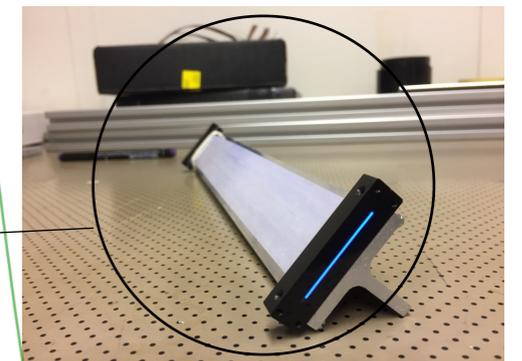


MIDAS DAQ and Slow Control

**Run, history, alarms, HV
etc.**

Mupix detector


**Tracking, integrate sensor and
readout in the same device: 50 μm
thick
1 layer: $\sim 0.1\% X_0$**

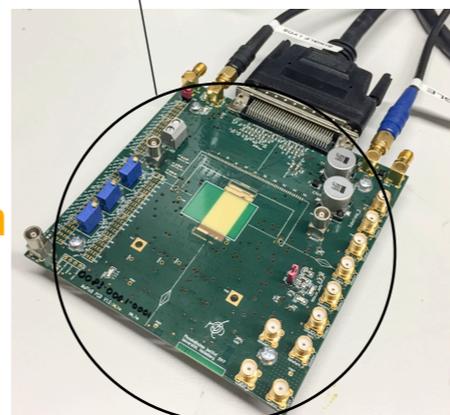

Muon Beam and target

**Full available
beam intensity
 $O(10^8)$**


The MEGII and Mu3e experimental area: Pictures

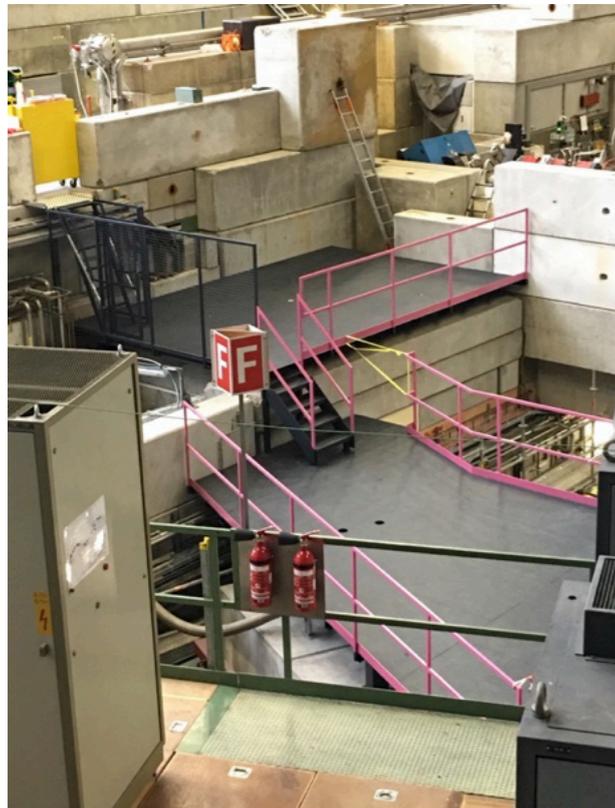

Mu3e extra platforms

New

Overview piE5 area

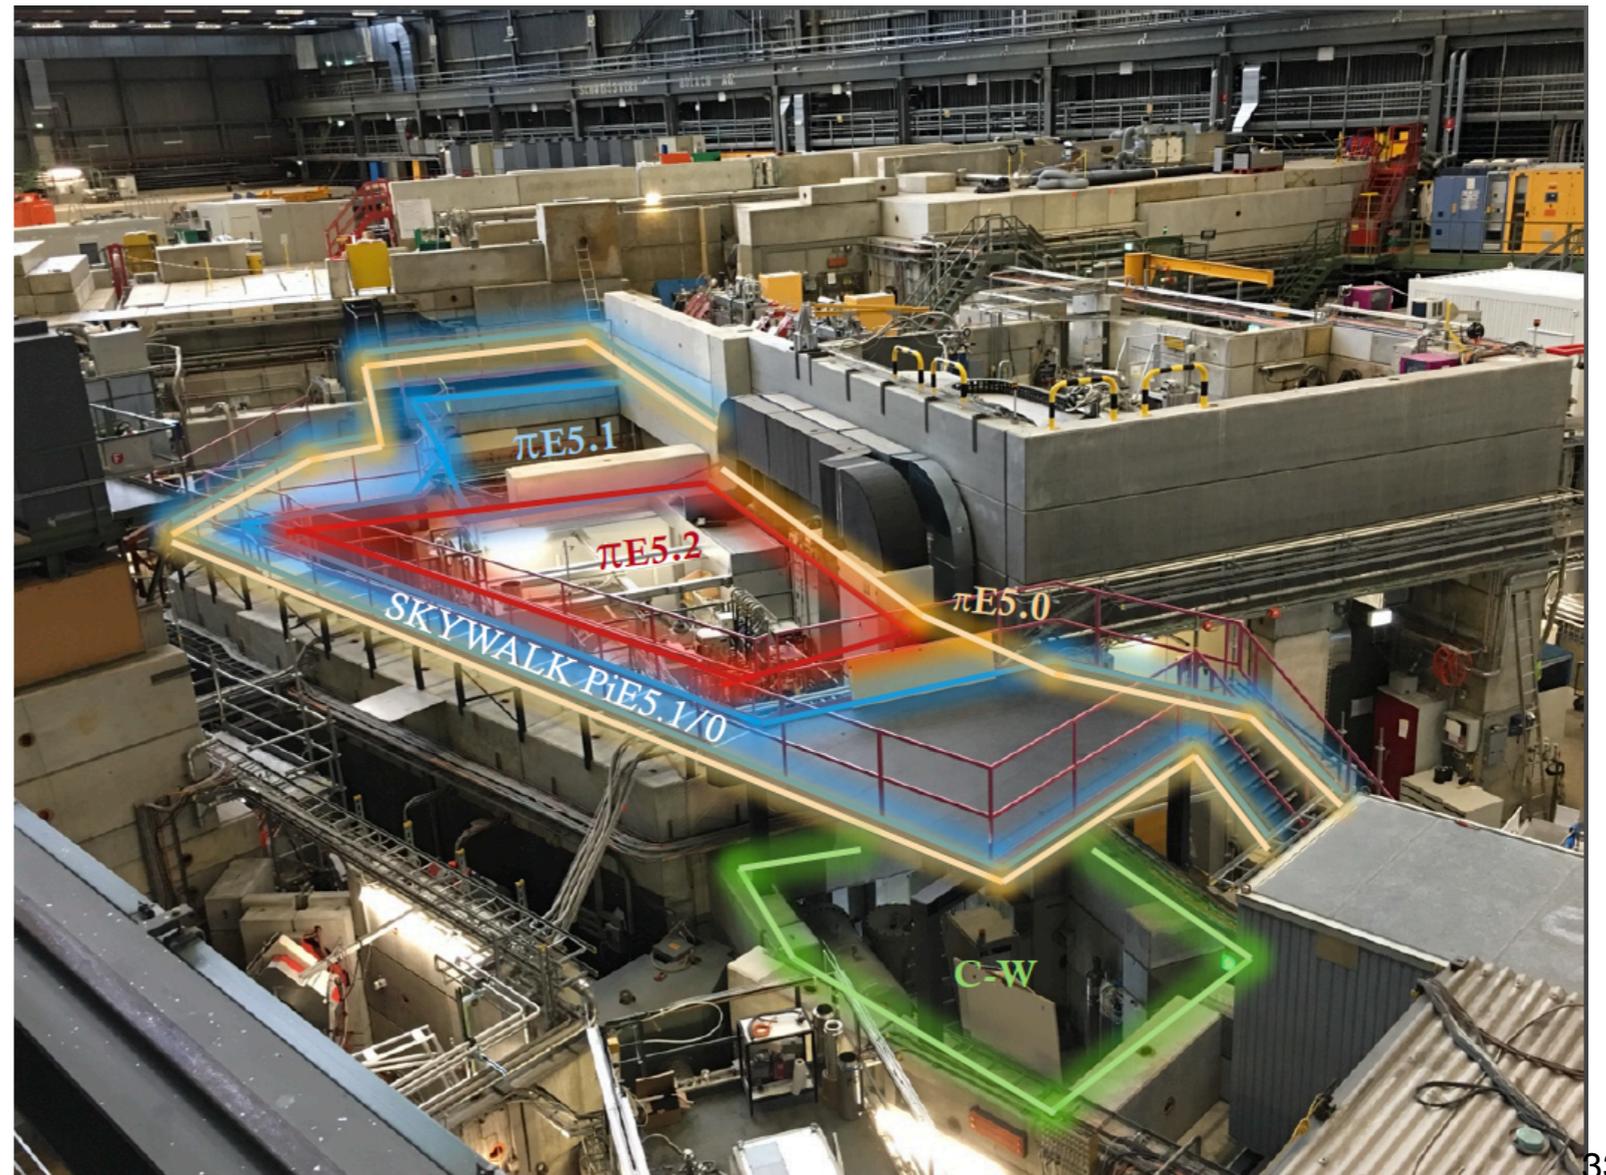

New




Mu3e control room

The MEGII and Mu3e beam lines


- MEGII and Mu3e (phase I) similar beam requirements:
 - **Intensity $O(10^8)$ muon/s, low momentum $p = 28$ MeV/c**
 - **Small straggling and good identification of the decay region**
- A dedicated compact muon beam line (CMBL) will serve Mu3e
- Proof-of-Principle: Delivered 8×10^7 muon/s during 2016 test beam

The Mu3e CMBL

New

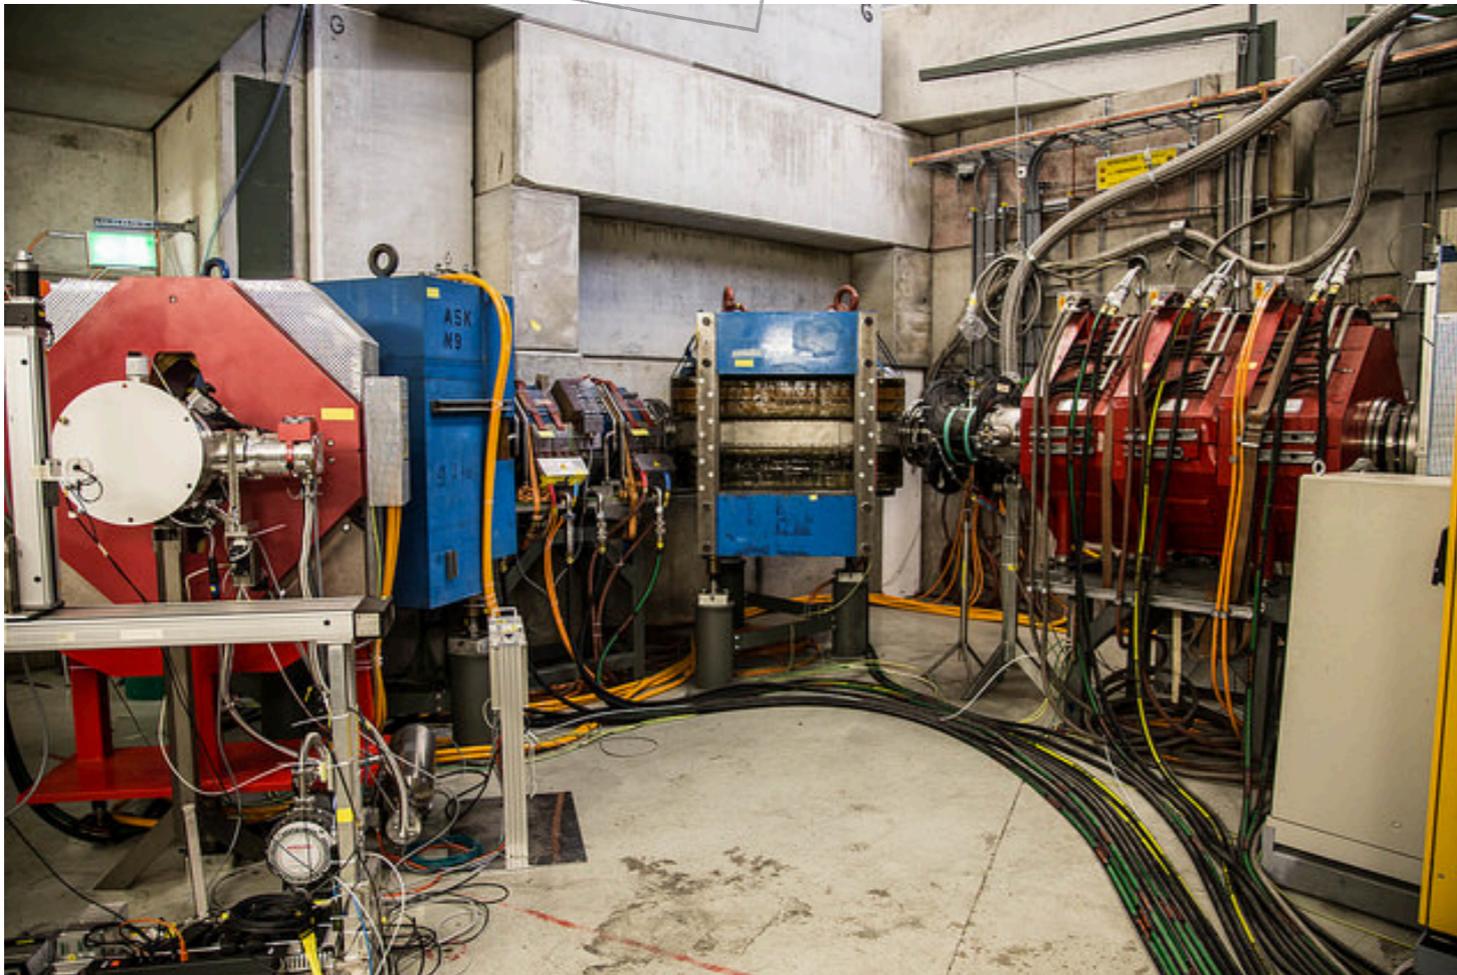

The MEGII BL

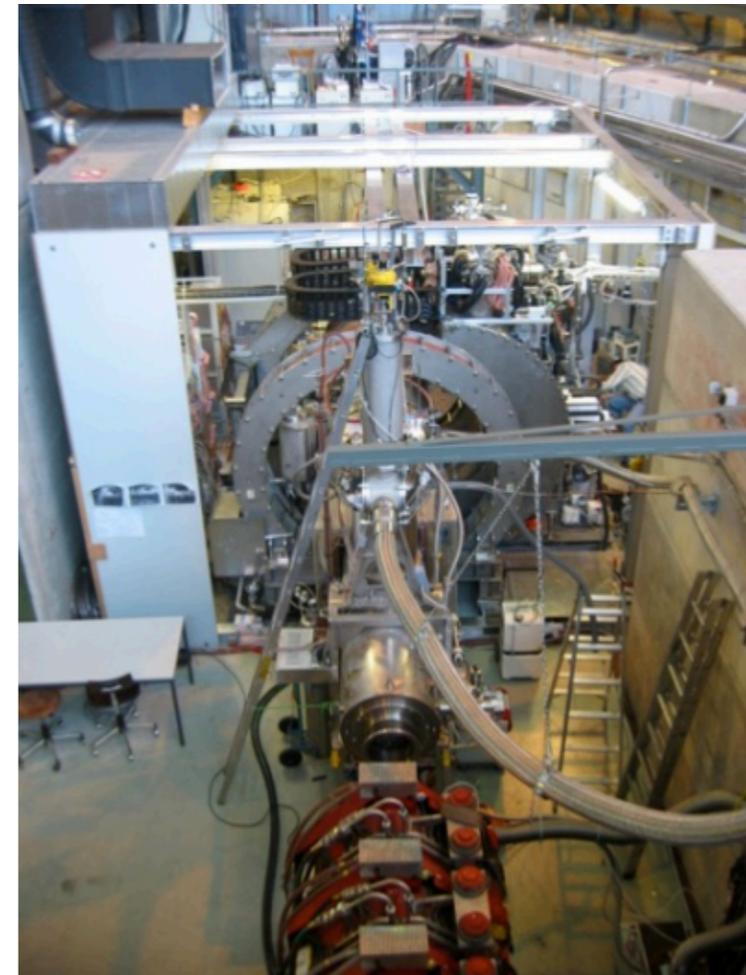


Target and magnet: Status

- Target: Mylar double hollow cone (L = 100 mm, R = 19 mm), Stopping efficiency: ~ 83%, Vertex separation ability (tracking) < 200 μm
- Magnet from Cryogenic. Delivering Time at PSI: This year
- Field Intensity: 1T; Field description: $\text{dB}/\text{B} \leq 10^{-4}$; Field stability: $\text{dB}/\text{B}(100 \text{ d}) \leq 10^{-4}$
- Dimensions: L < 3.2 m, W < 2.0 m, H < 3.5 m

New

BField Simulation

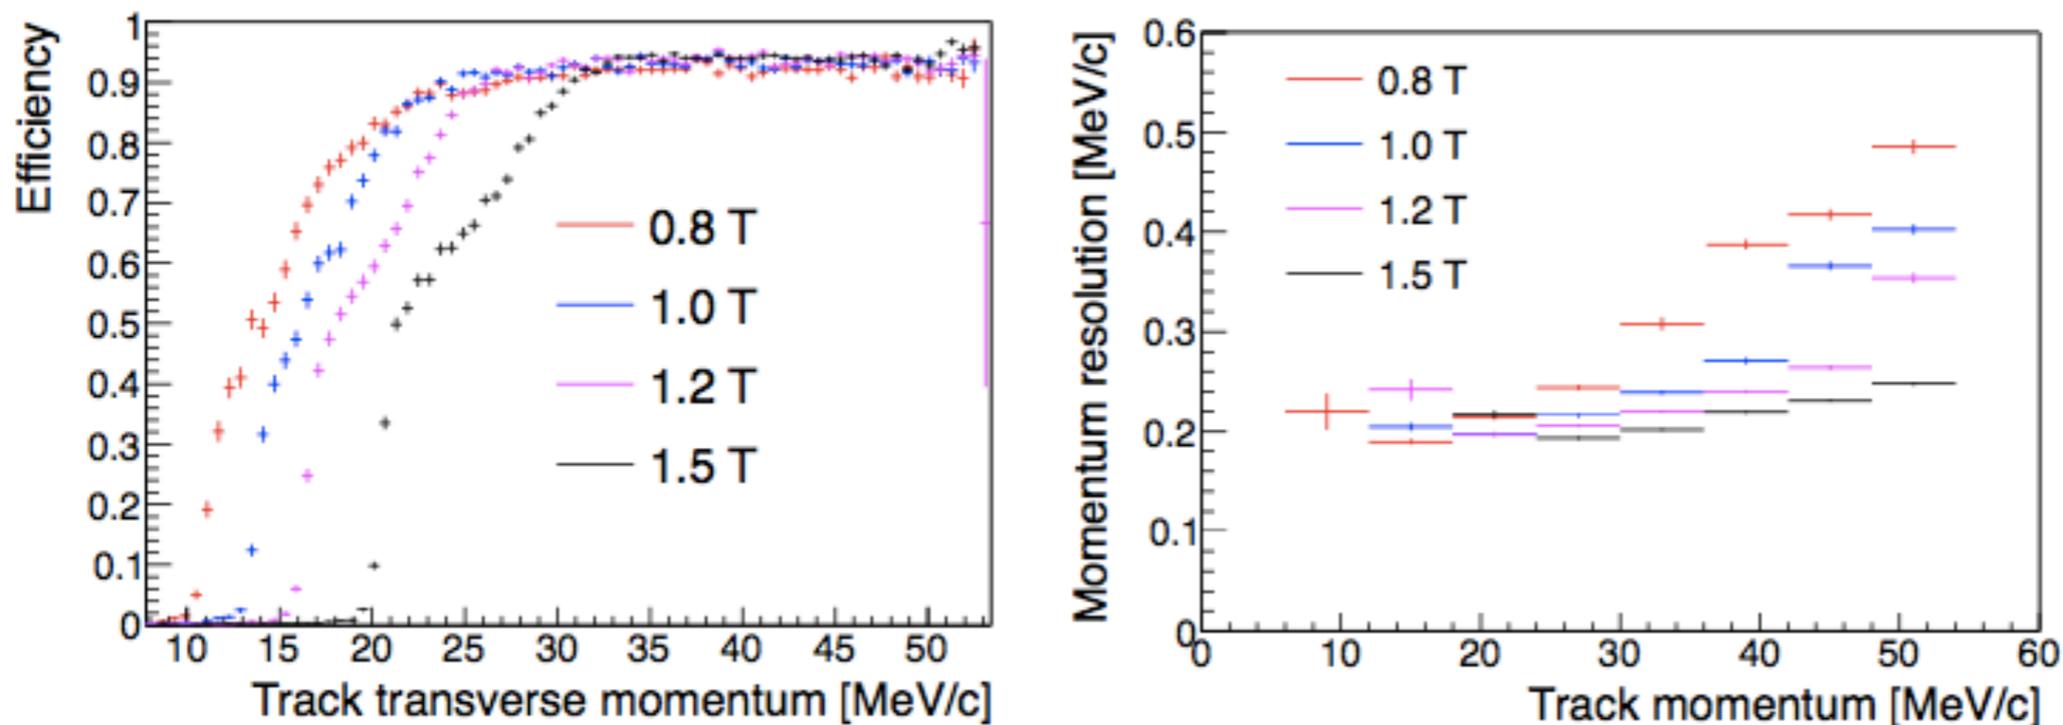


Target prototype



The pixel tracker: Overview


- Central tracker: Four layers; Re-curl tracker: Two layers
- Minimum material budget: Tracking in the scattering dominated regime
- Momentum resolution: $< 0.5 \text{ MeV}/c$ over a large phase space; Geometrical acceptance: $\sim 70\%$; X/X_0 per layer: $\sim 0.011\%$

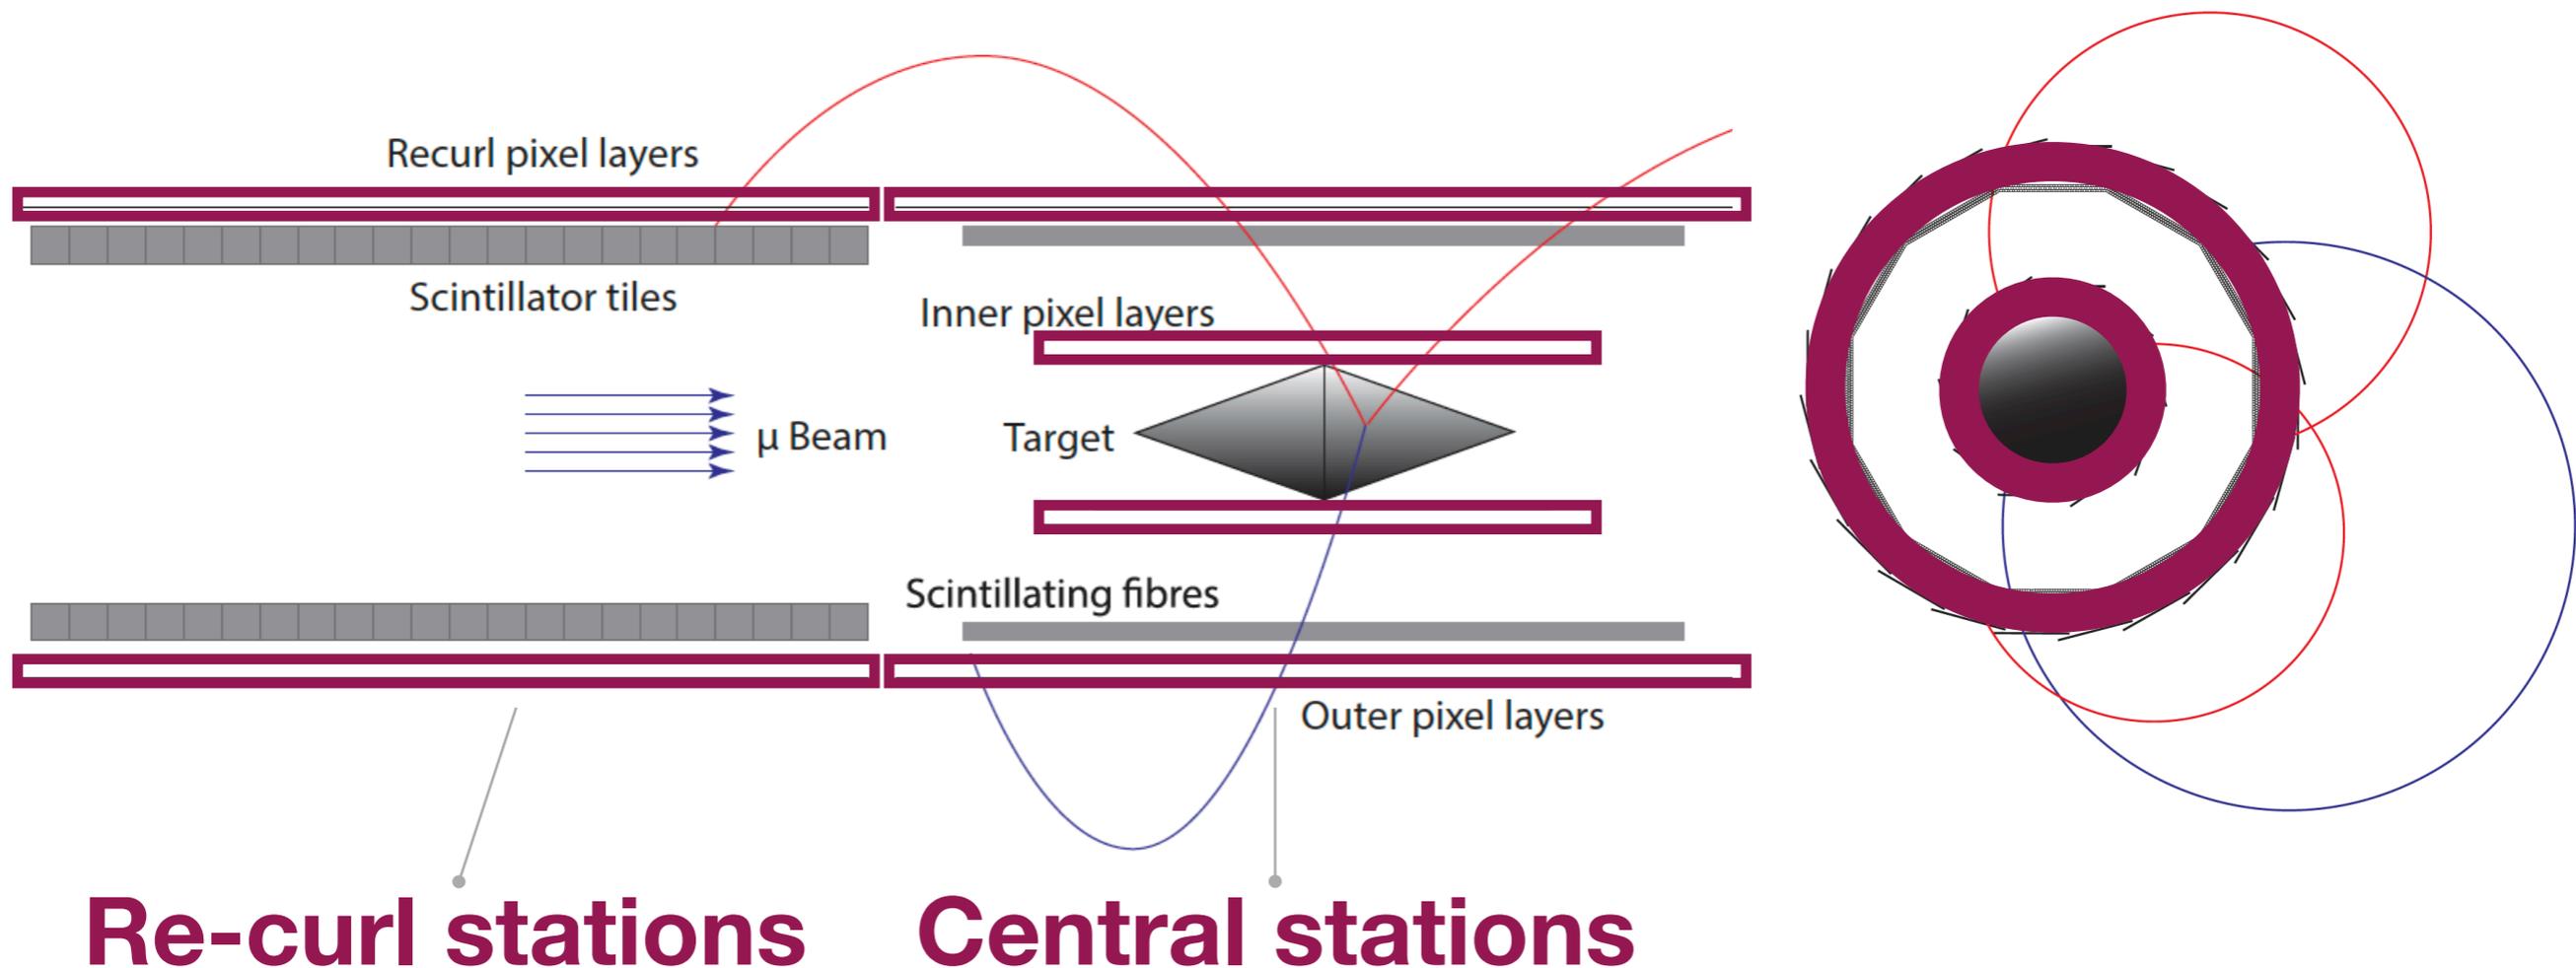

The pixel tracker: The MuPix prototypes


Ivan Peric, Nucl.Instrum.Meth. A582 (2007) 876-885

- Based on HV- MAP: Pixel dimension: $80 \times 80 \mu\text{m}^2$, Thickness: $50 \mu\text{m}$, Time resolution: $< 20 \text{ ns}$, Active area chip: $20 \times 20 \text{ mm}^2$, Efficiency: $> 99 \%$, Power consumption : $< 350 \text{ mW/cm}^2$
- MuPix 7: The first small-scale prototype which includes all Mu3e functionalities

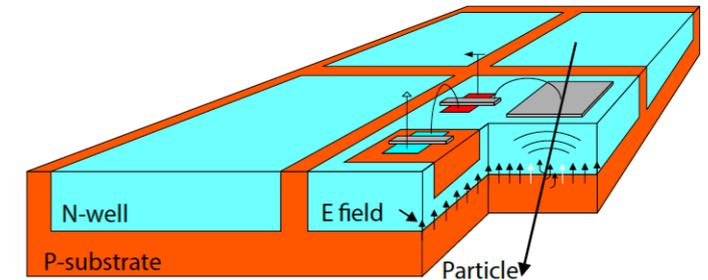


Prototype	Active Area [mm ²]
MuPix1	1.77
MuPix2	1.77
MuPix3	9.42
MuPix4	9.42
MuPix6	10.55
MuPix7	10.55

MuPix7

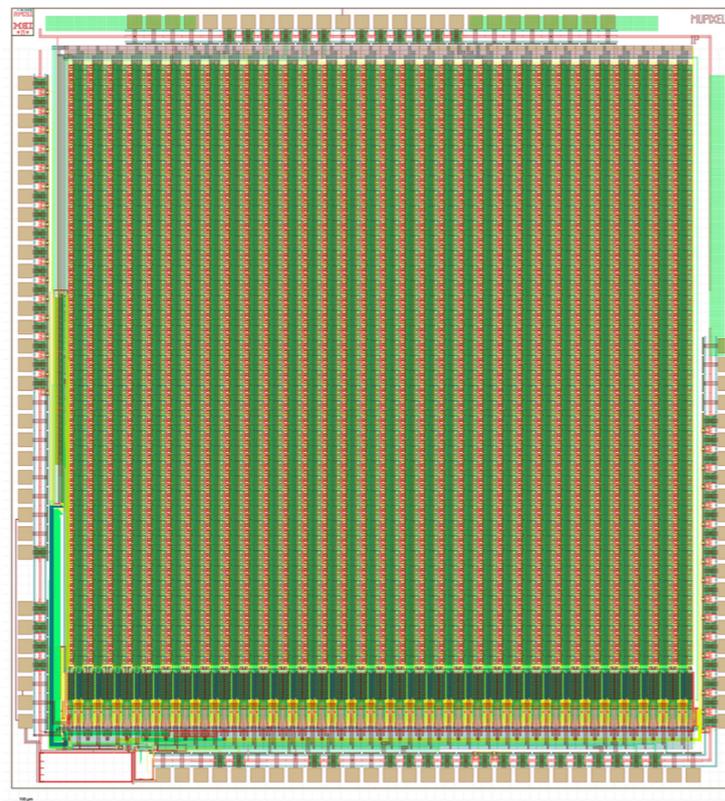



Extensively tested along beams

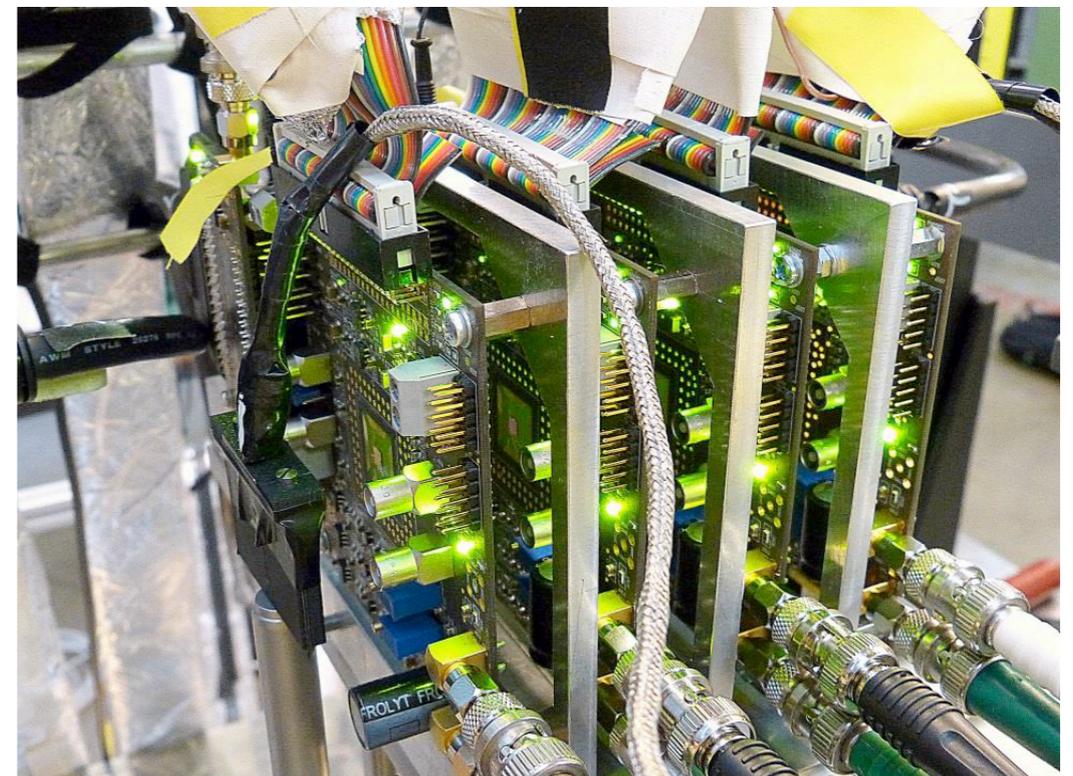

The pixel tracker: Current and future plan

- After an extensive test beam campaign, achieved milestones
 - A fully functional HV-MAPS chip, 3x3 mm². Operation at high rates: 300 kHz at PSI; up to 1 MHz at SPS
 - Crosstalk on setup under control, on chip seen. Mitigation plan exists (MuPix8), Routinely operated systems of up to 8 chips in test beams reliably
 - Data processing of one telescope at full rate on GPU demonstrated
- Next steps
 - MuPix 8, the first large area prototype: from O(10) mm² to 160 mm² : Ready and extensively tested!
 - MuPix 9, small test chip for: Slow Control, voltage regulators and other test circuits. This year test beam campaign
 - MuPix 10, the final version for Mu3e: 380 mm²

New


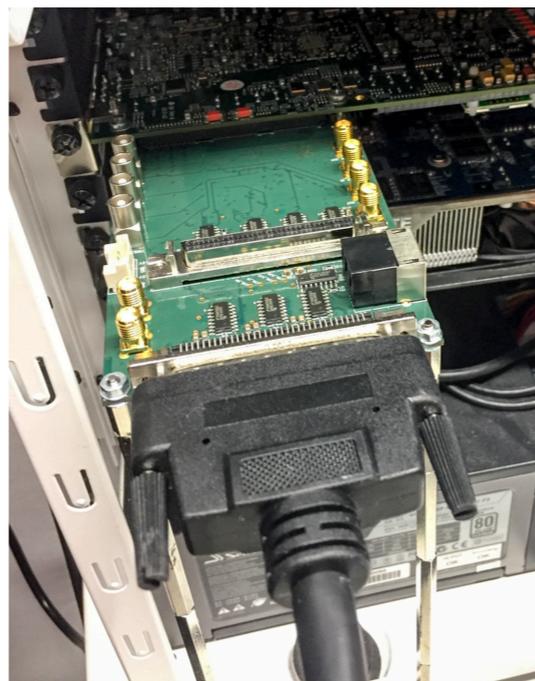
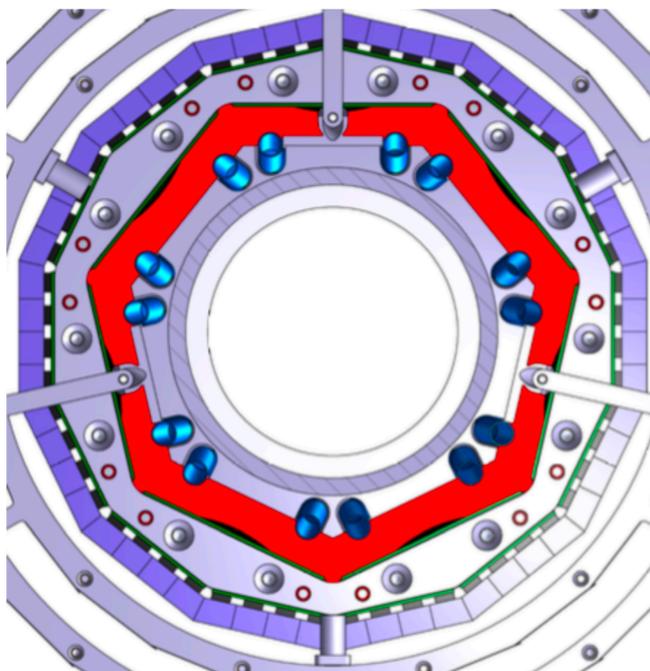


MuPix8

New


MuPix 8: First Results

- Extensive beam test performed during 2018
- Some preliminary results

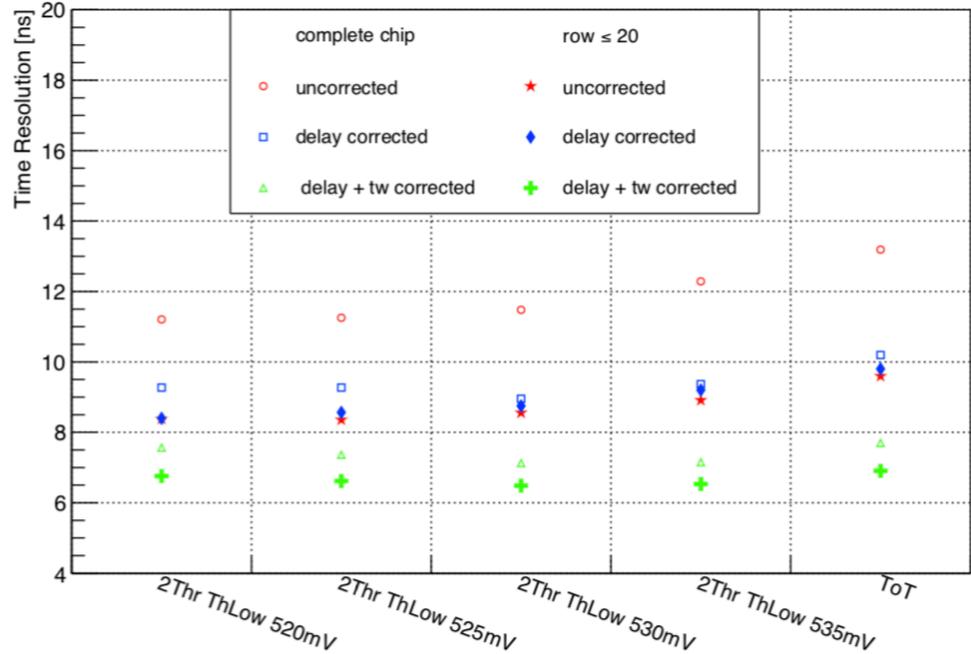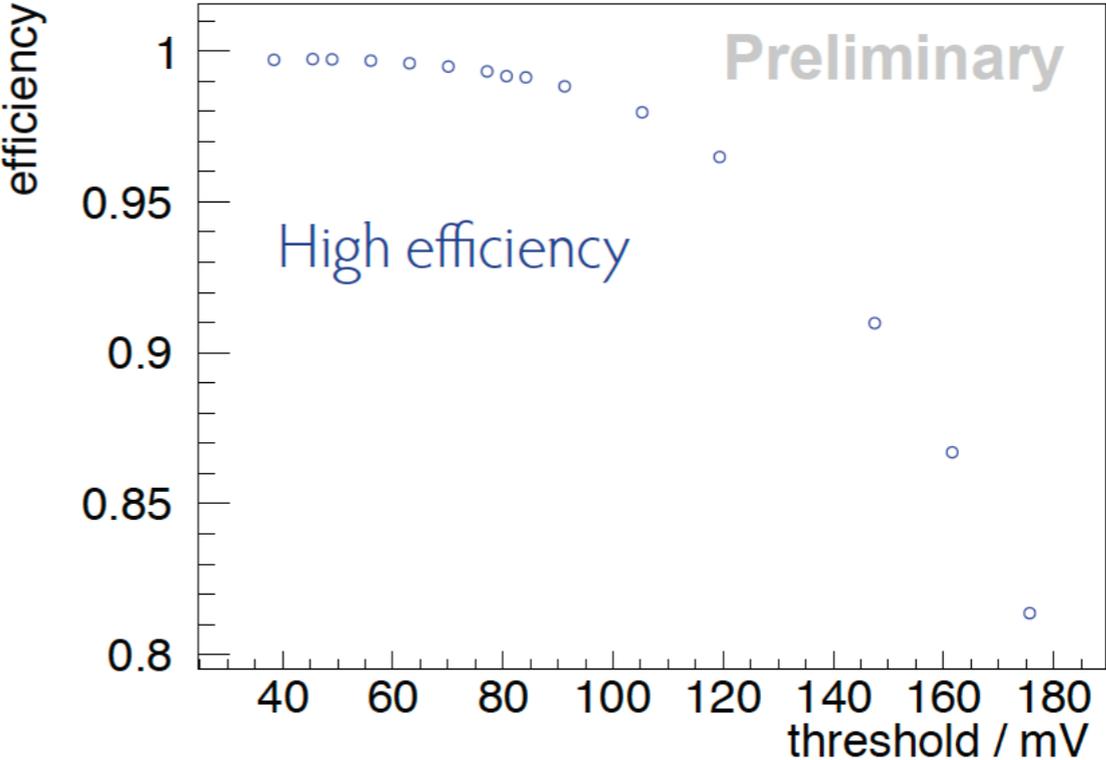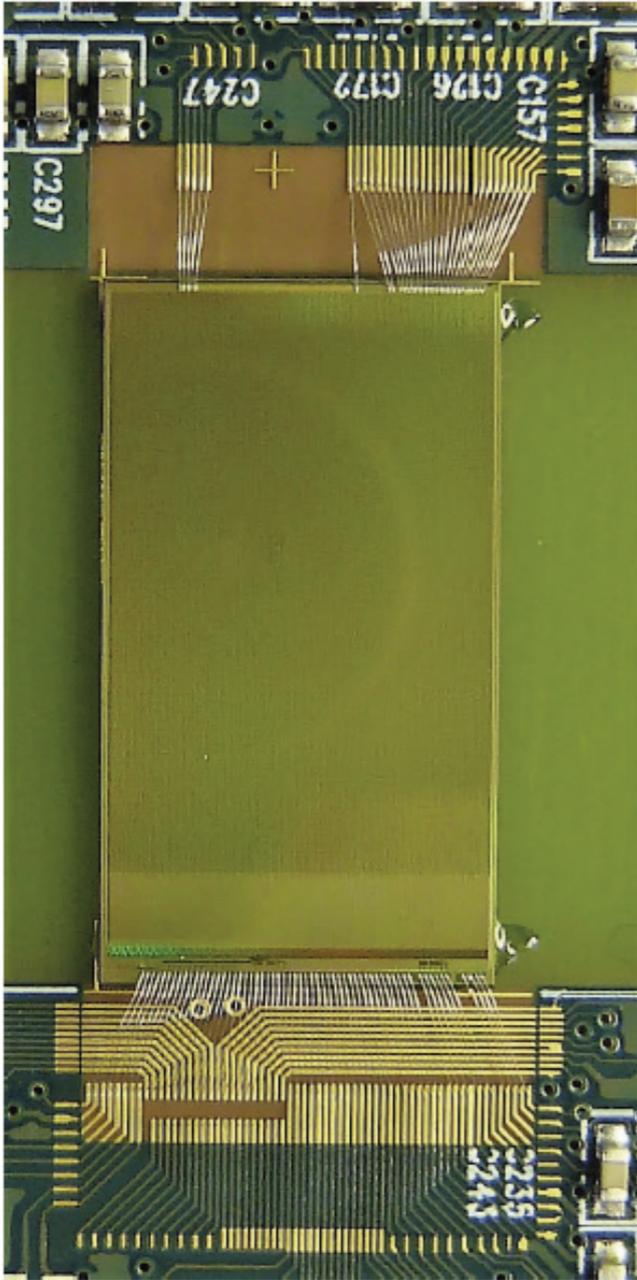


The timing detectors: Fibers and tiles

- Precise timing measurement: Critical to reduce the accidental BGs
 - Scintillating fibers (SciFi) $O(1 \text{ ns})$, full detection efficiency ($>99\%$)
 - Scintillating tiles $O(100 \text{ ps})$, full detection efficiency ($>99\%$)

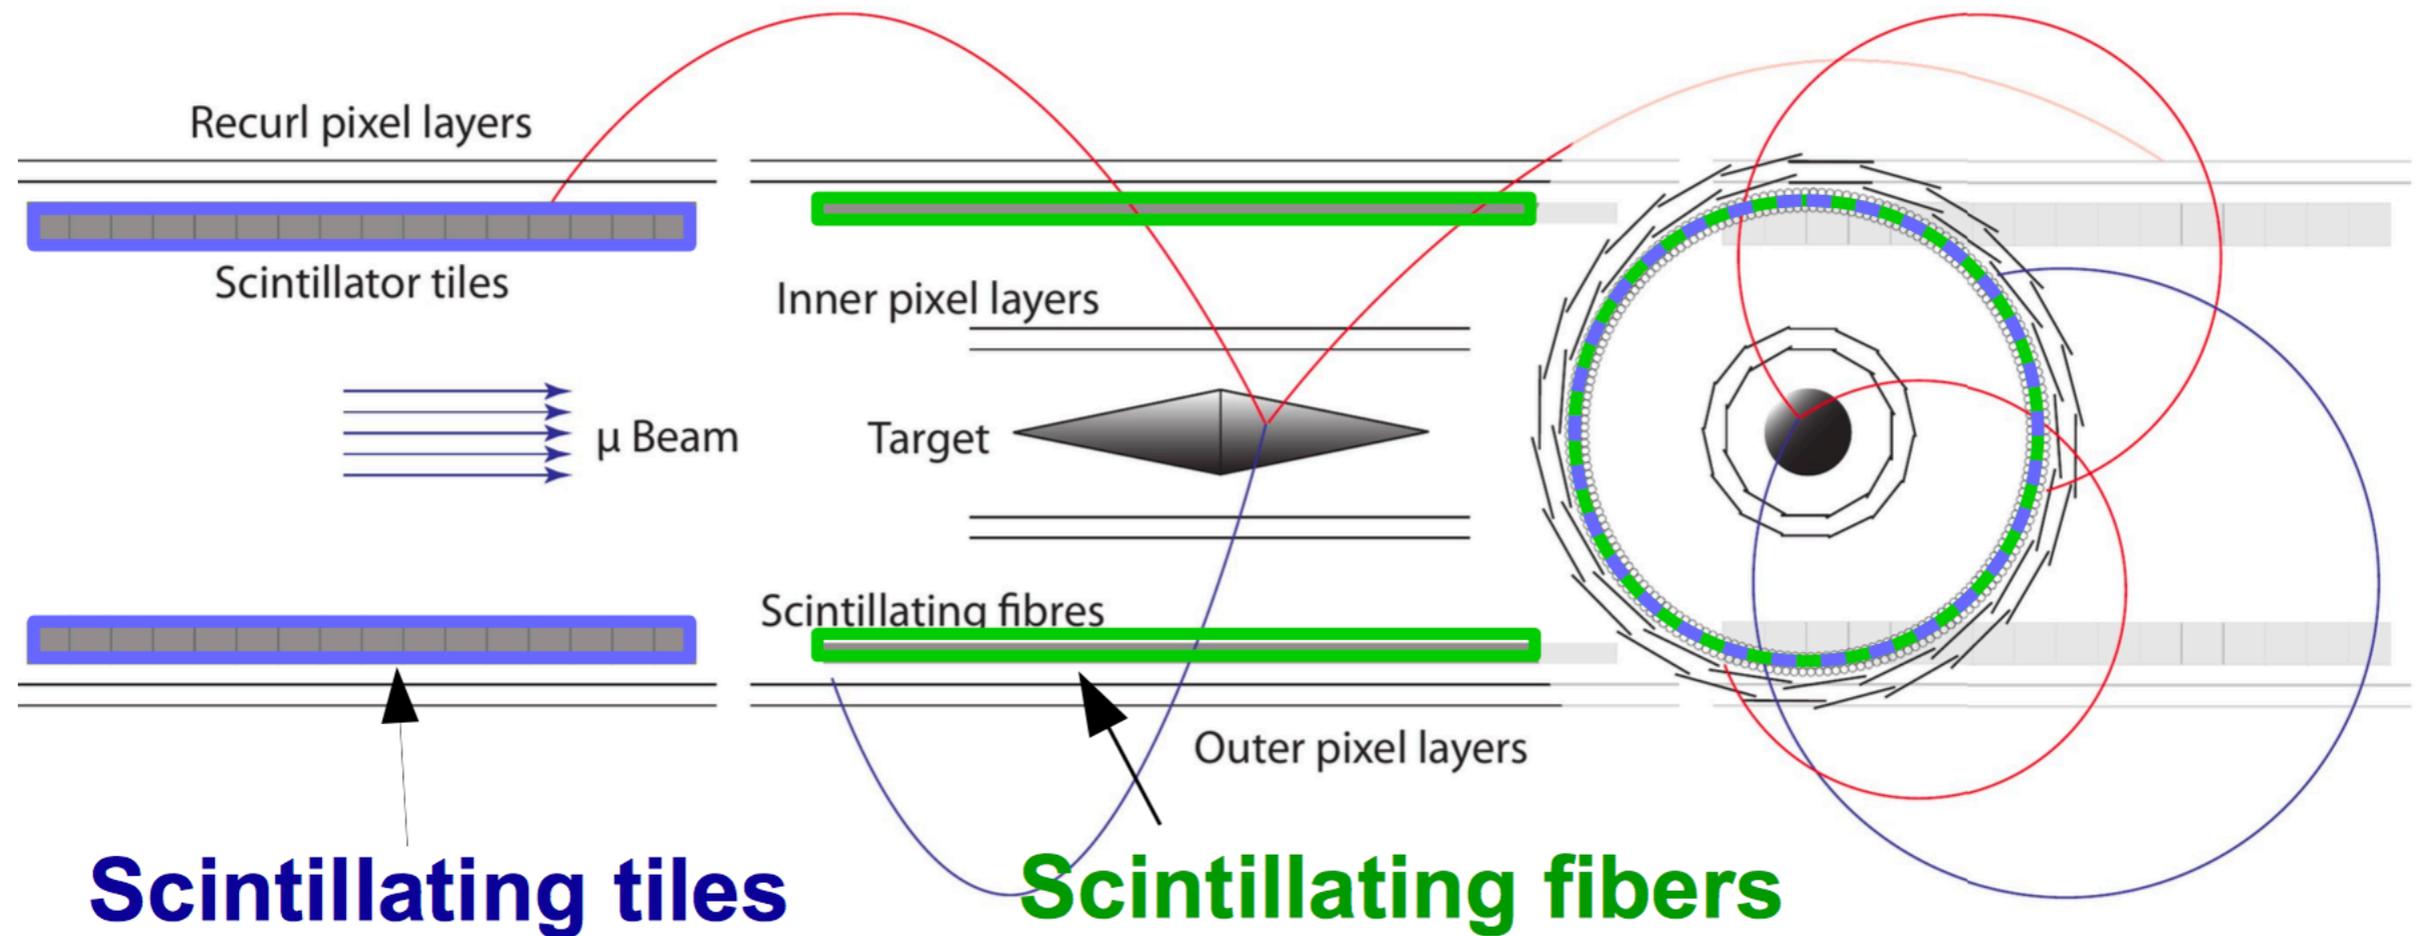


The timing detectors: Fibers and tiles

- Precise timing measurement: Critical to reduce the accidental BGs
 - Scintillating fibers (SciFi) $O(1 \text{ ns})$, full detection efficiency ($>99\%$)
 - Scintillating tiles $O(100 \text{ ps})$, full detection efficiency ($>99\%$)

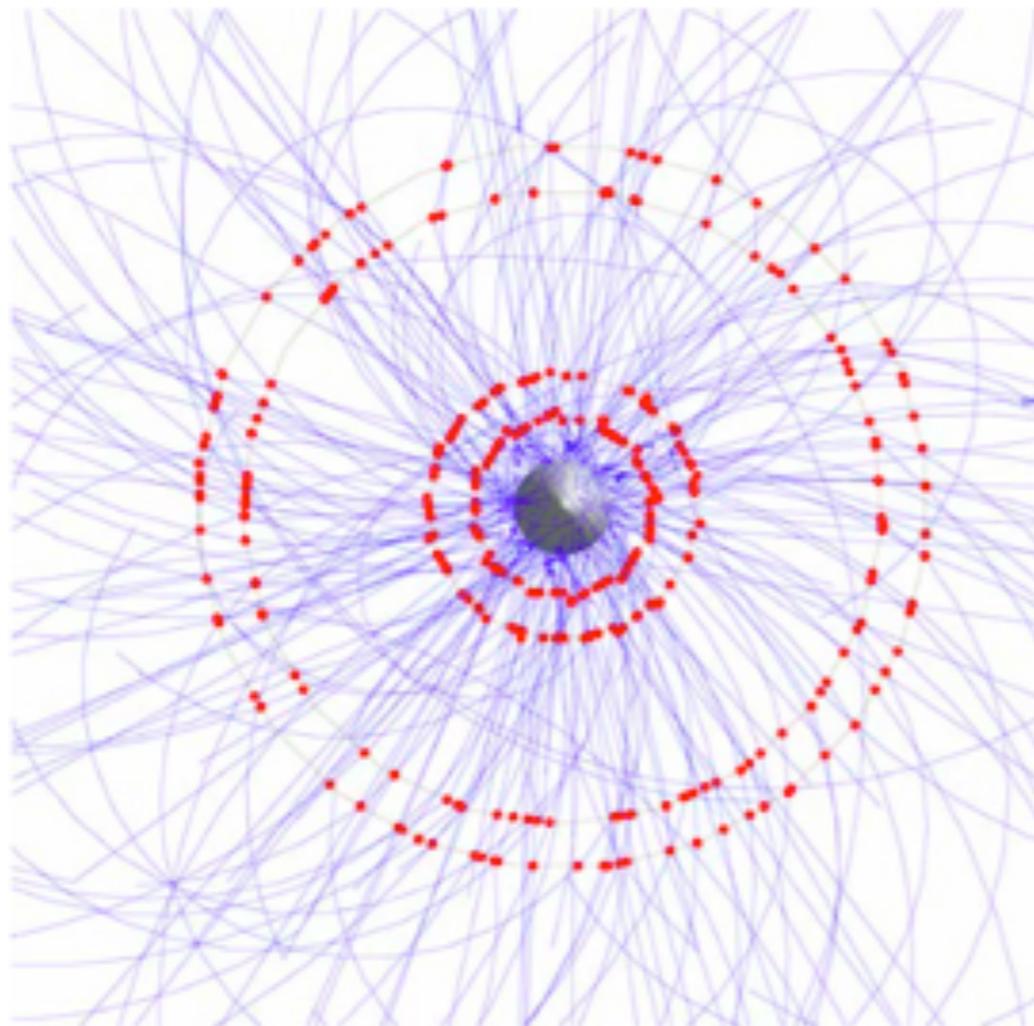


Pixels: $O(50 \text{ ns})$

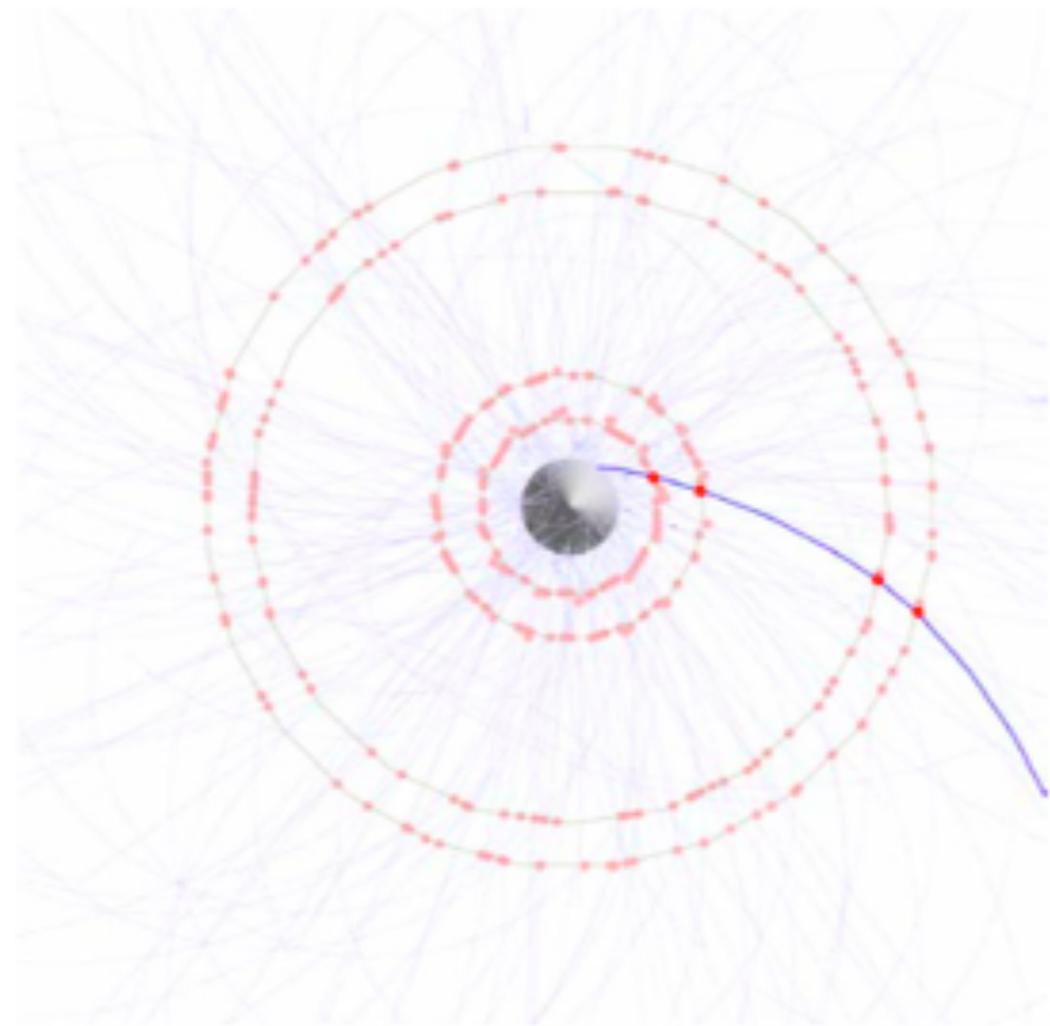


Scintillating fibres $O(1 \text{ ns})$;
Scintillating tiles $O(100 \text{ ps})$

The timing detectors: Impact

- Precise timing measurement: Critical to reduce the accidental BGs
 - Scintillating fibers (SciFi) O(1 ns), full detection efficiency (>99%)
 - Scintillating tiles O(100 ps), full detection efficiency (>99%)

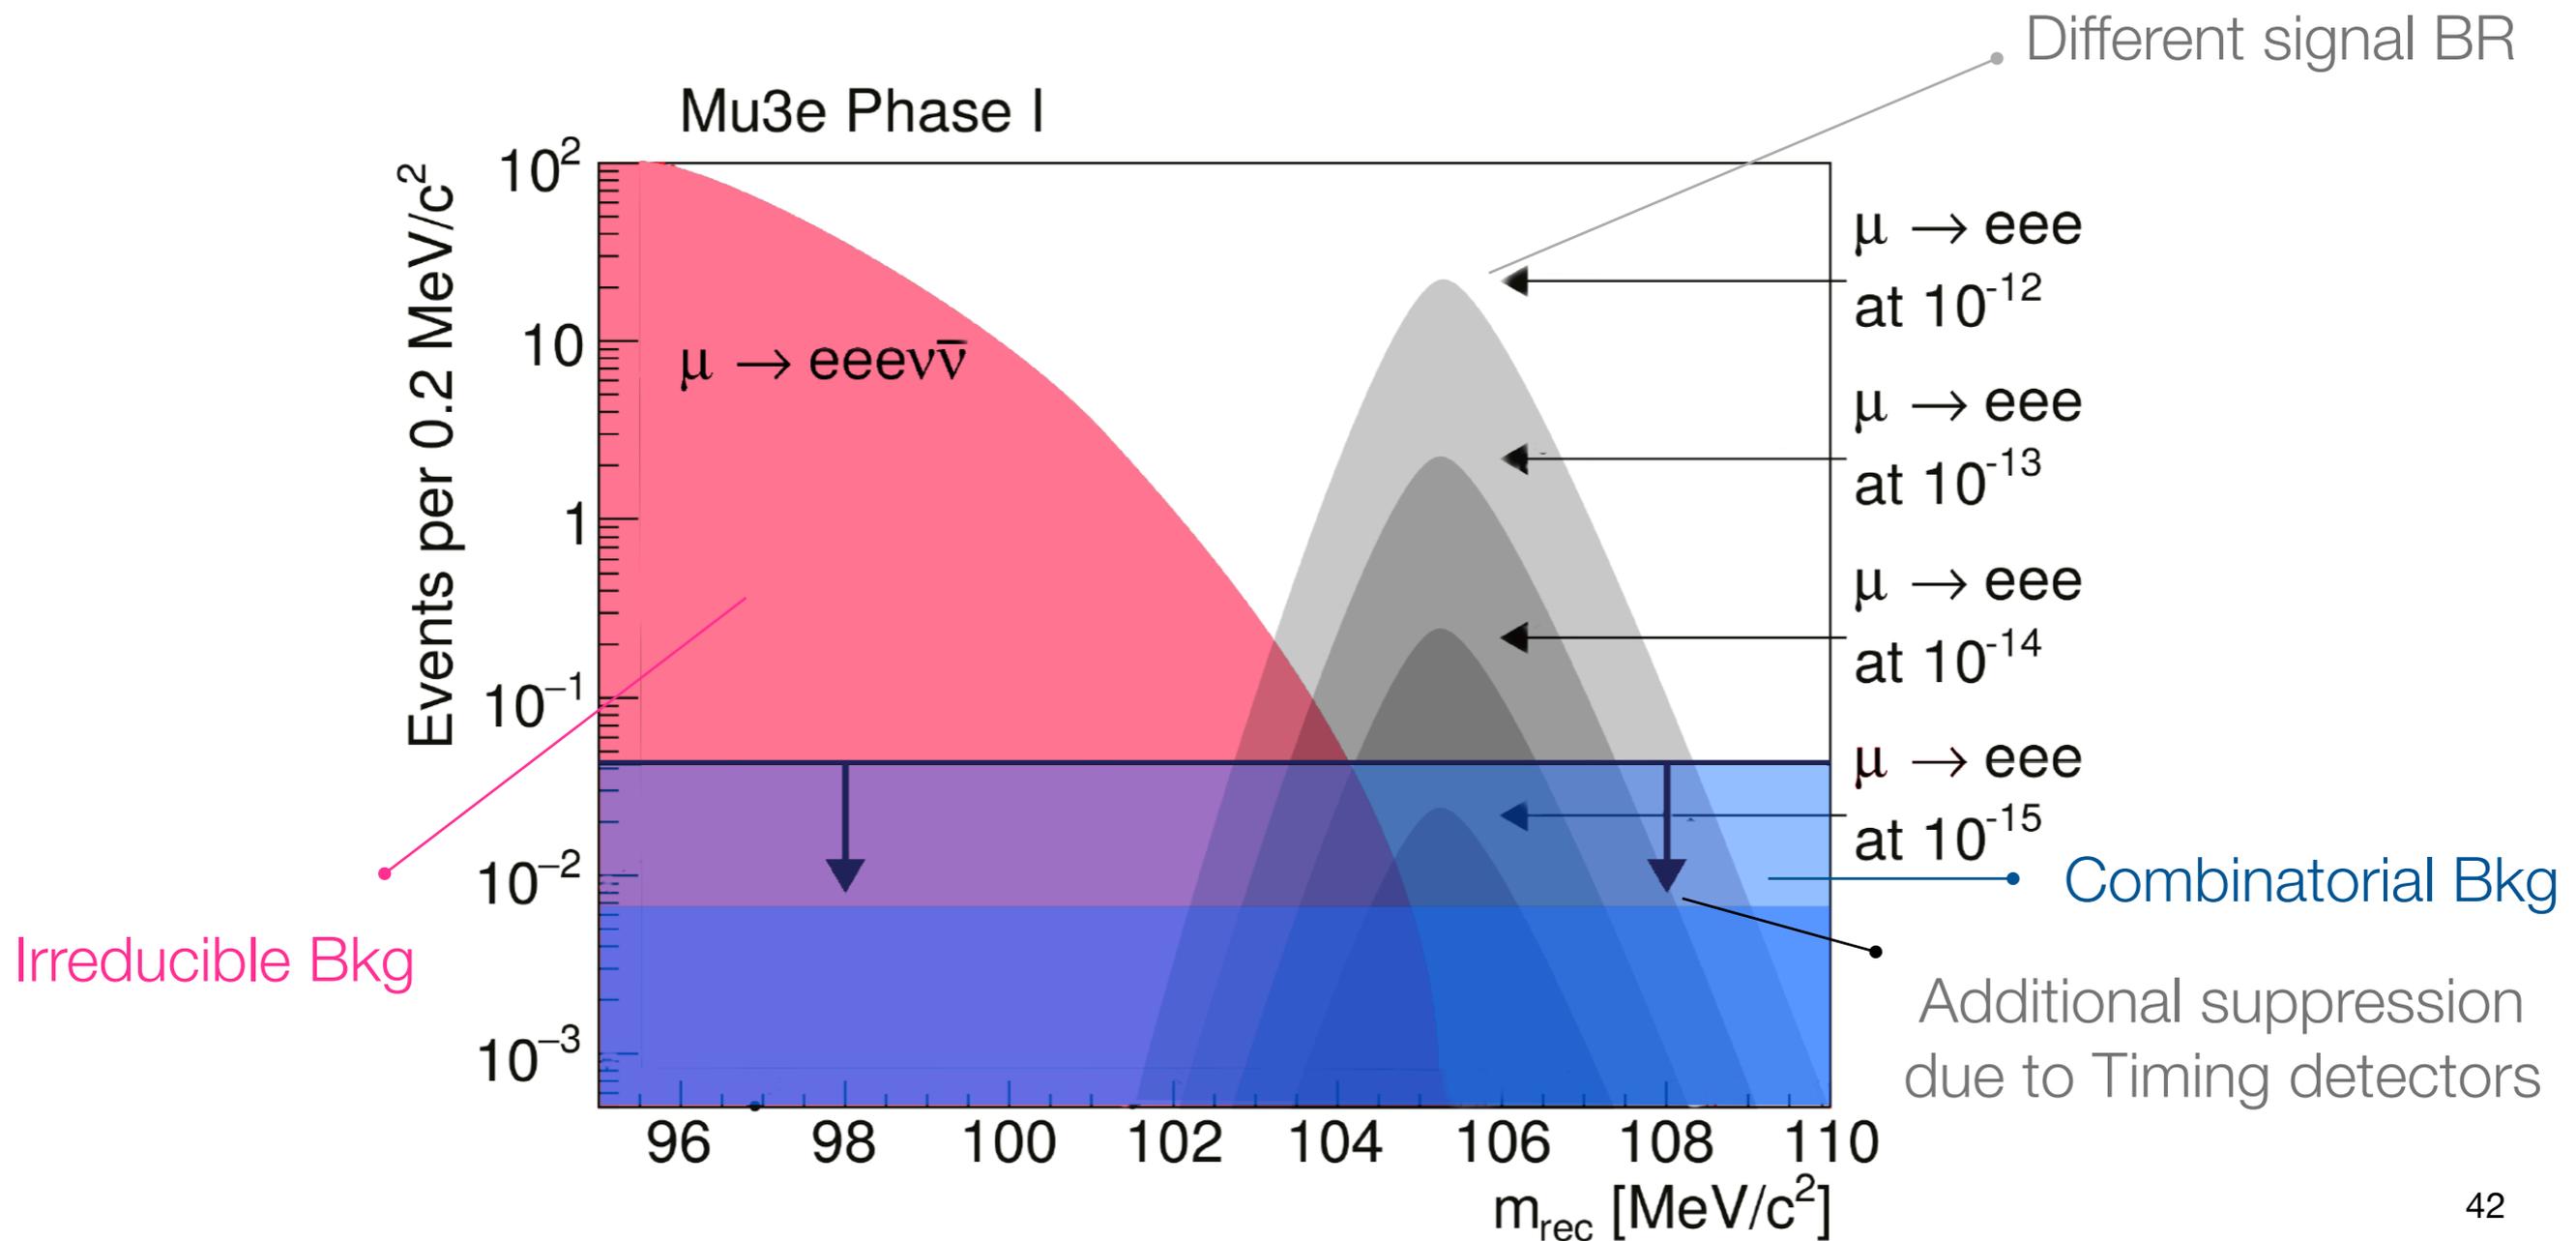

The Fiber detector (SciFi): Overview

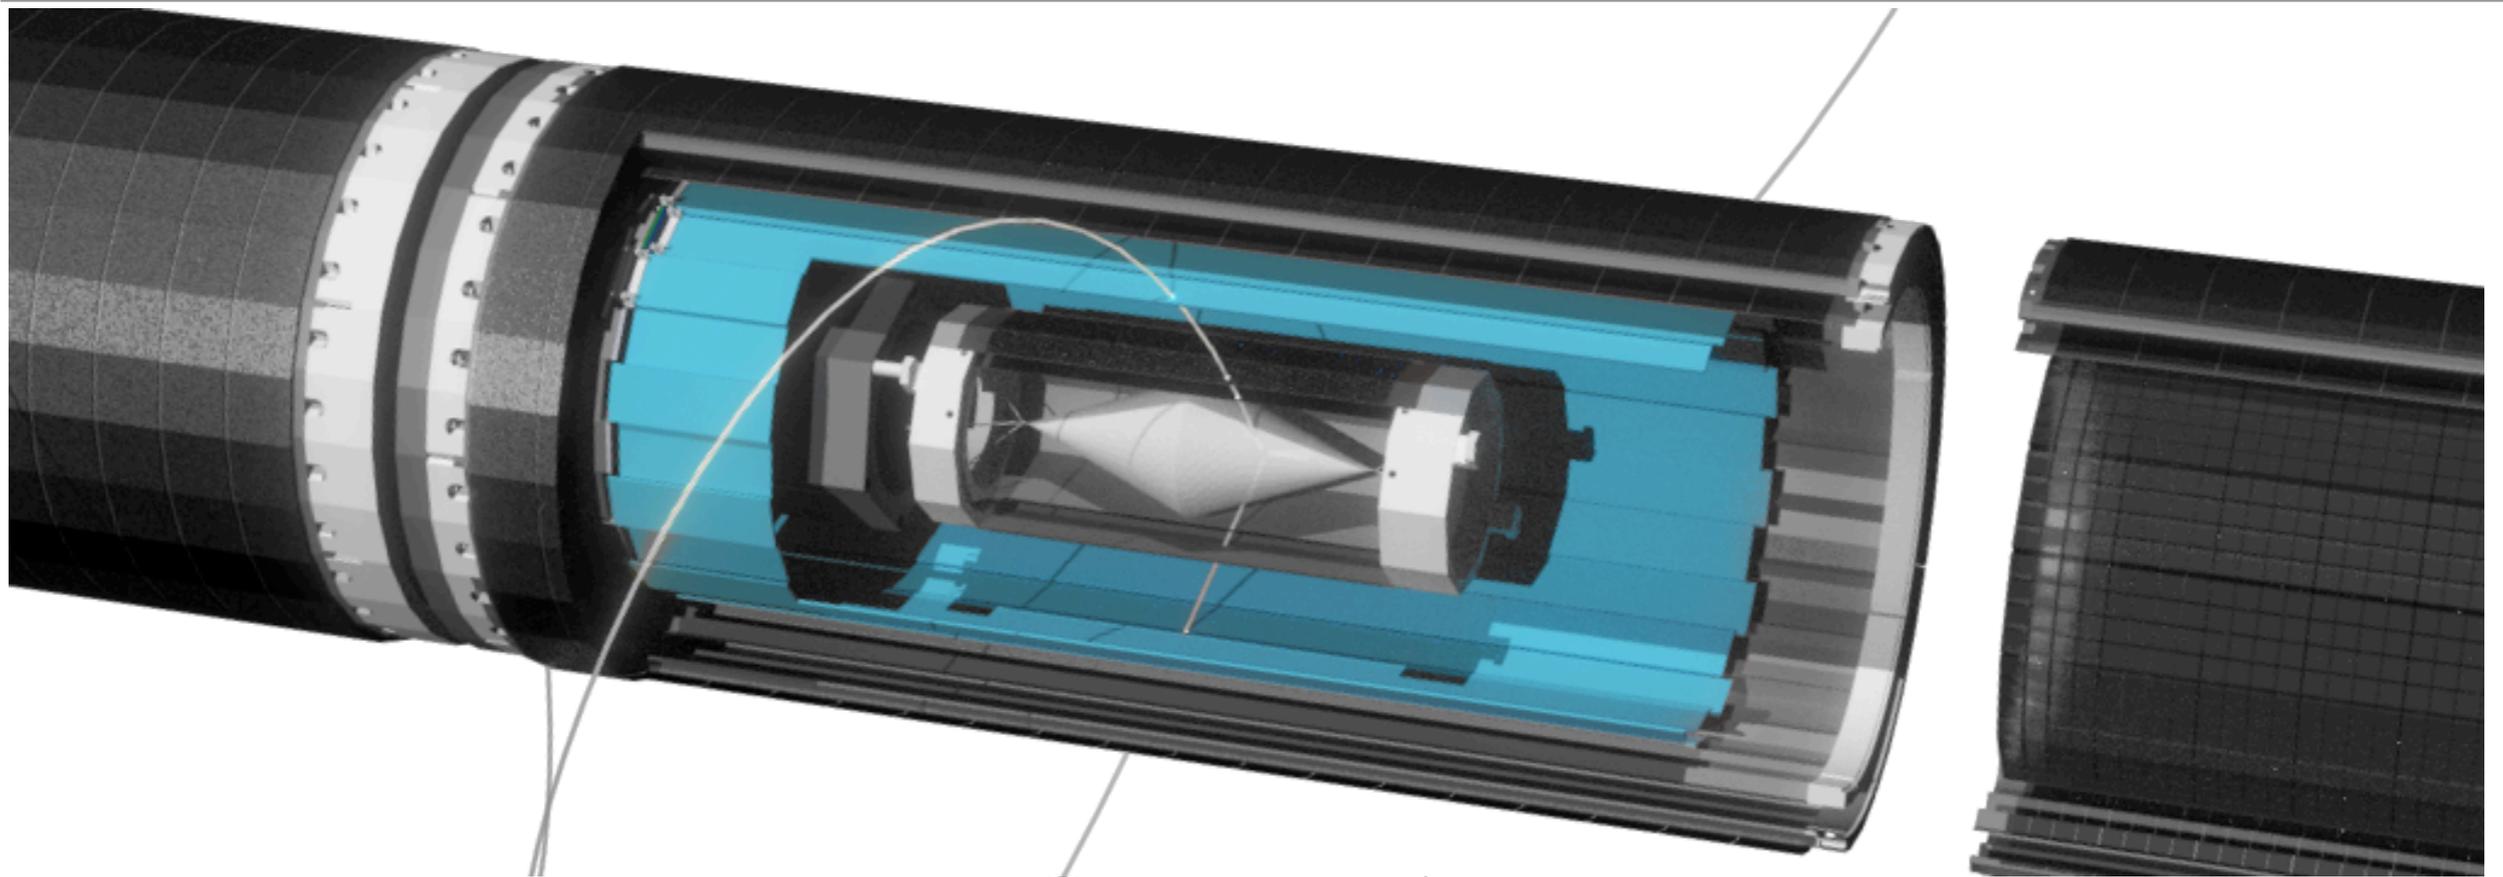

Parts


- cylindrical at ~ 6 cm (radius);
- length of 28-30 cm;
- 3 layers of round or square
- multi-clad $250 \mu\text{m}$ fibres
- fibres grouped onto SiPM array
- MuSTiC readout

Constraints



- high detection efficiency $\varepsilon > 95\%$
- time resolution $\sigma < 1$ ns
- $< 900 \mu\text{m}$ total thickness
- $< 0.4 \% X_0$
- rate up to 250 KHz/fibre
- very tight space for cables, electronics and cooling

SciFi prototypes: Results

- Studied a variety of fibres (SCSF 78 MJ, clear; SCSF 78 MJ, with 20% TiO₂; NOL 11, clear; NOL 11, with 20% TiO₂; SCSF 81 MJ, with 20% TiO₂; BCF12 clear; BCF12, with 100 nm Al deposit)
- Confirmed full detection efficiency (> 96 % @ 0.5 thr in Nphe) and timing performances for multi-layer configurations (square and round fibres) with several prototypes: individual and array readout with standalone and prototyping (STiC) DAQ

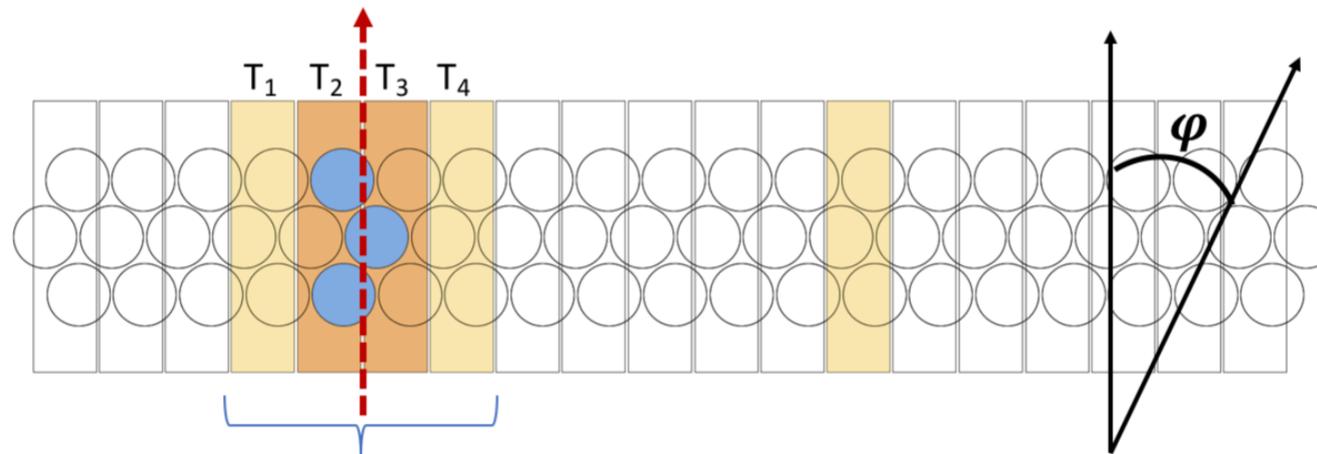


New

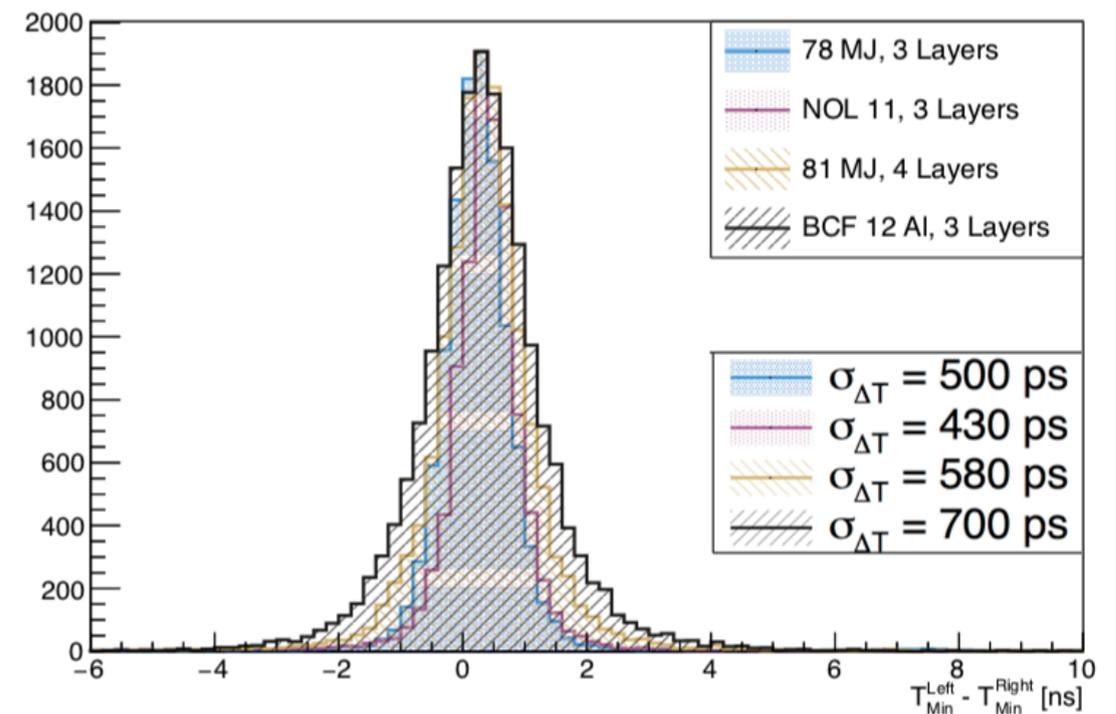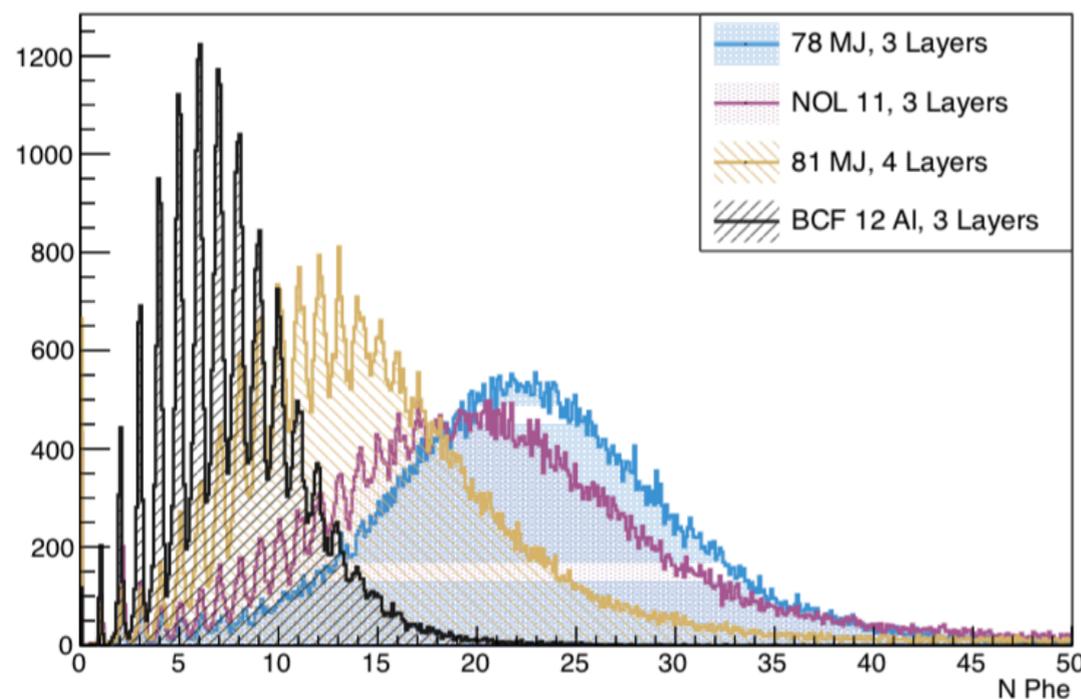


SciFi prototypes: Results


- Studied a variety of fibres (SCSF 78 MJ, clear; SCSF 78 MJ, with 20% TiO₂; NOL 11, clear; NOL 11, with 20% TiO₂; SCSF 81 MJ, with 20% TiO₂; BCF12 clear; BCF12, with 100 nm Al deposit)
- Confirmed full detection efficiency (> 96 % @ 0.5 thr in Nphe) and timing performances for multi-layer configurations (square and round fibres) with several prototypes: individual and array readout with standalone and prototyping (STiC) DAQ

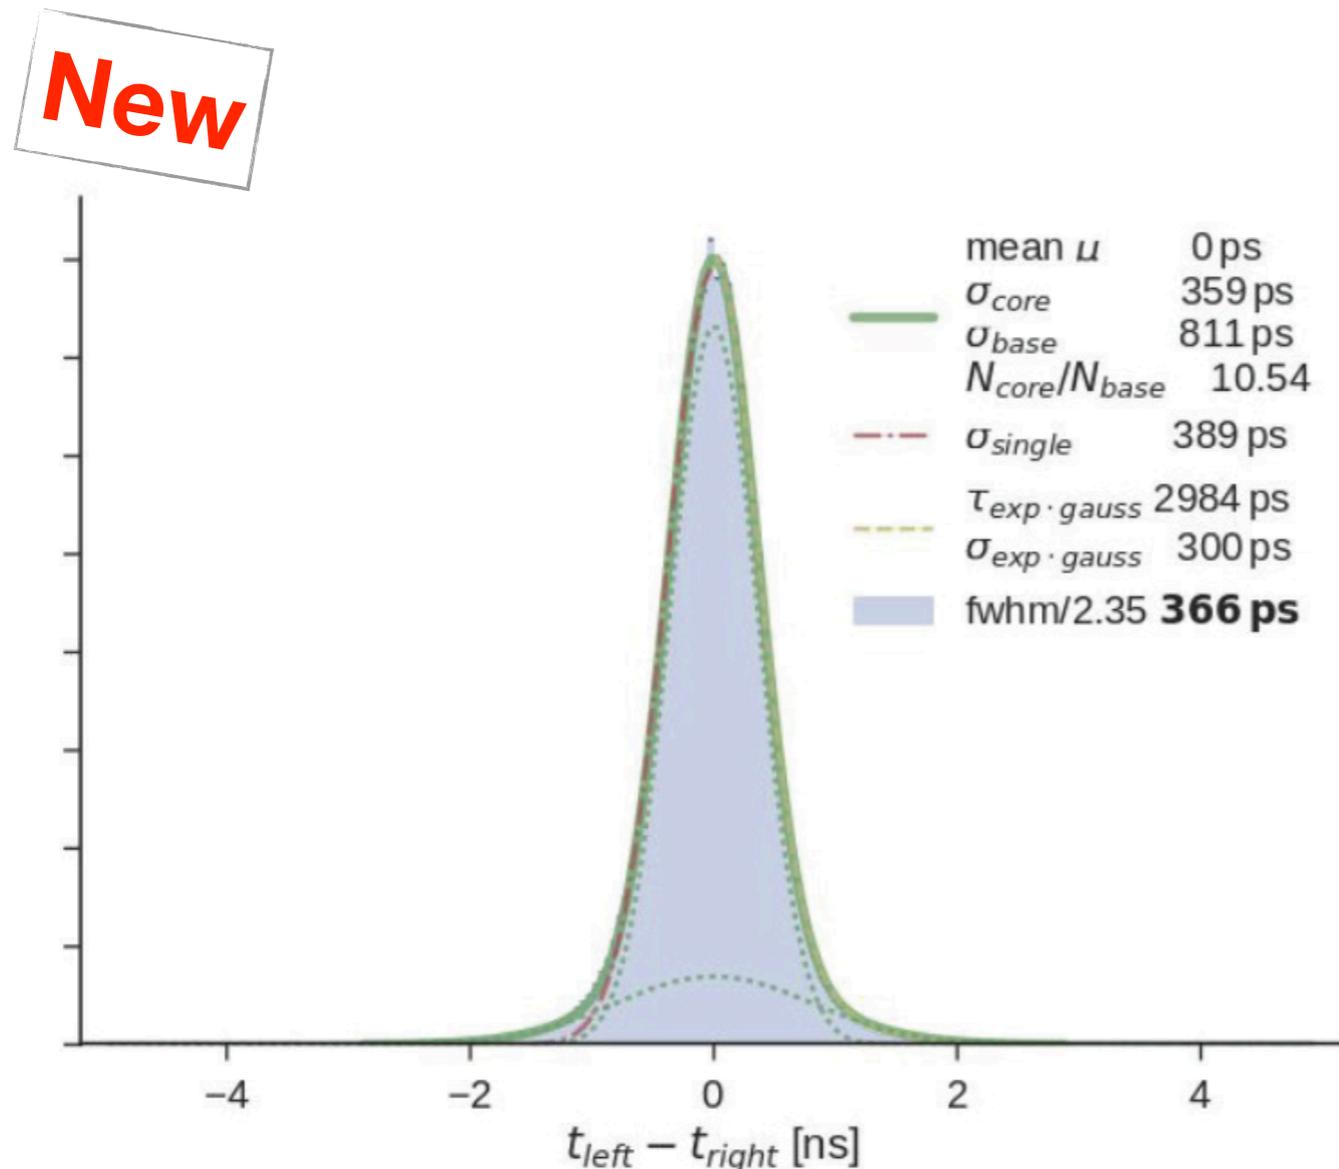

SiPM Array: Hamamatsu S13552-HQR

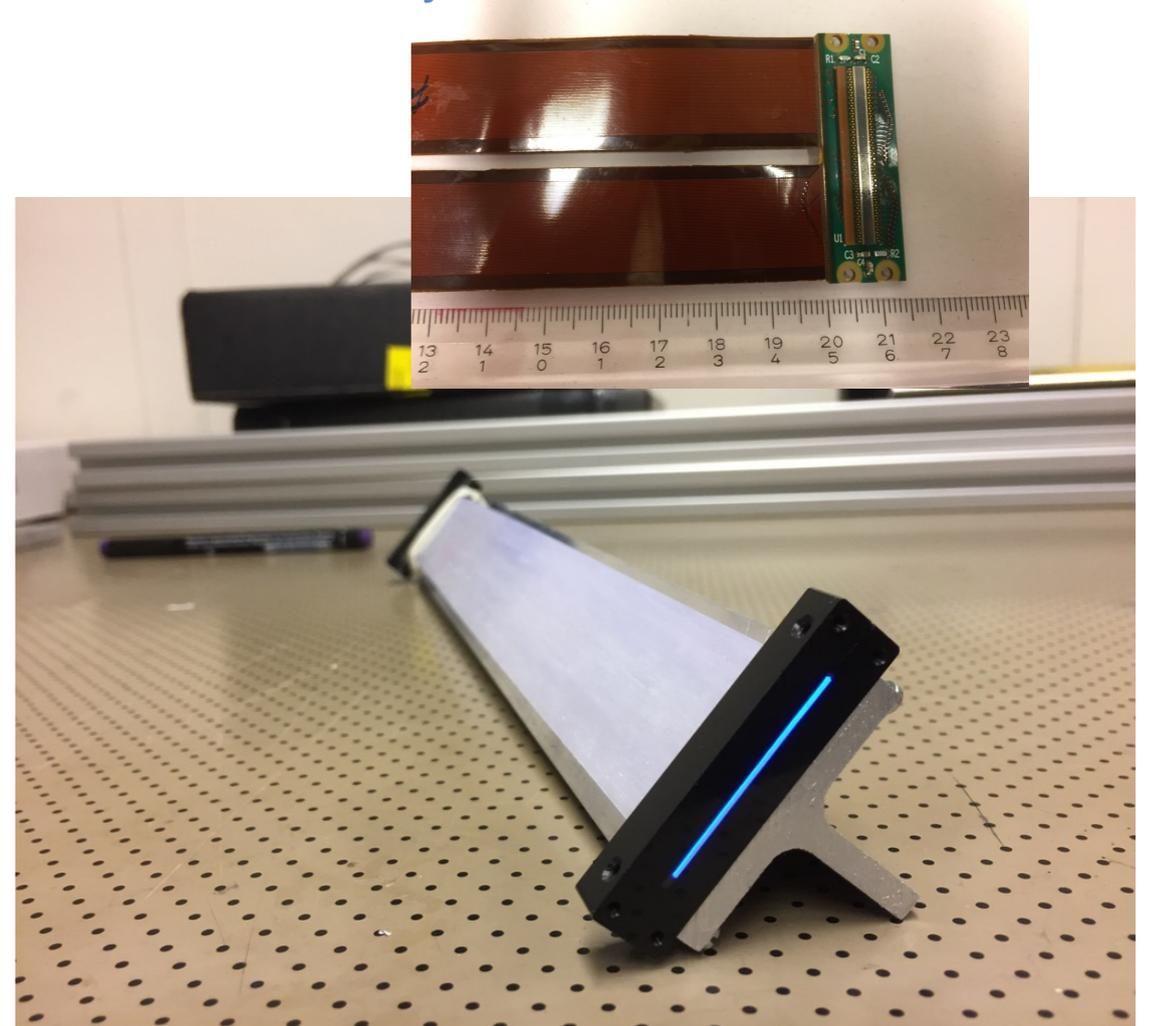

The Tile detector: Overview

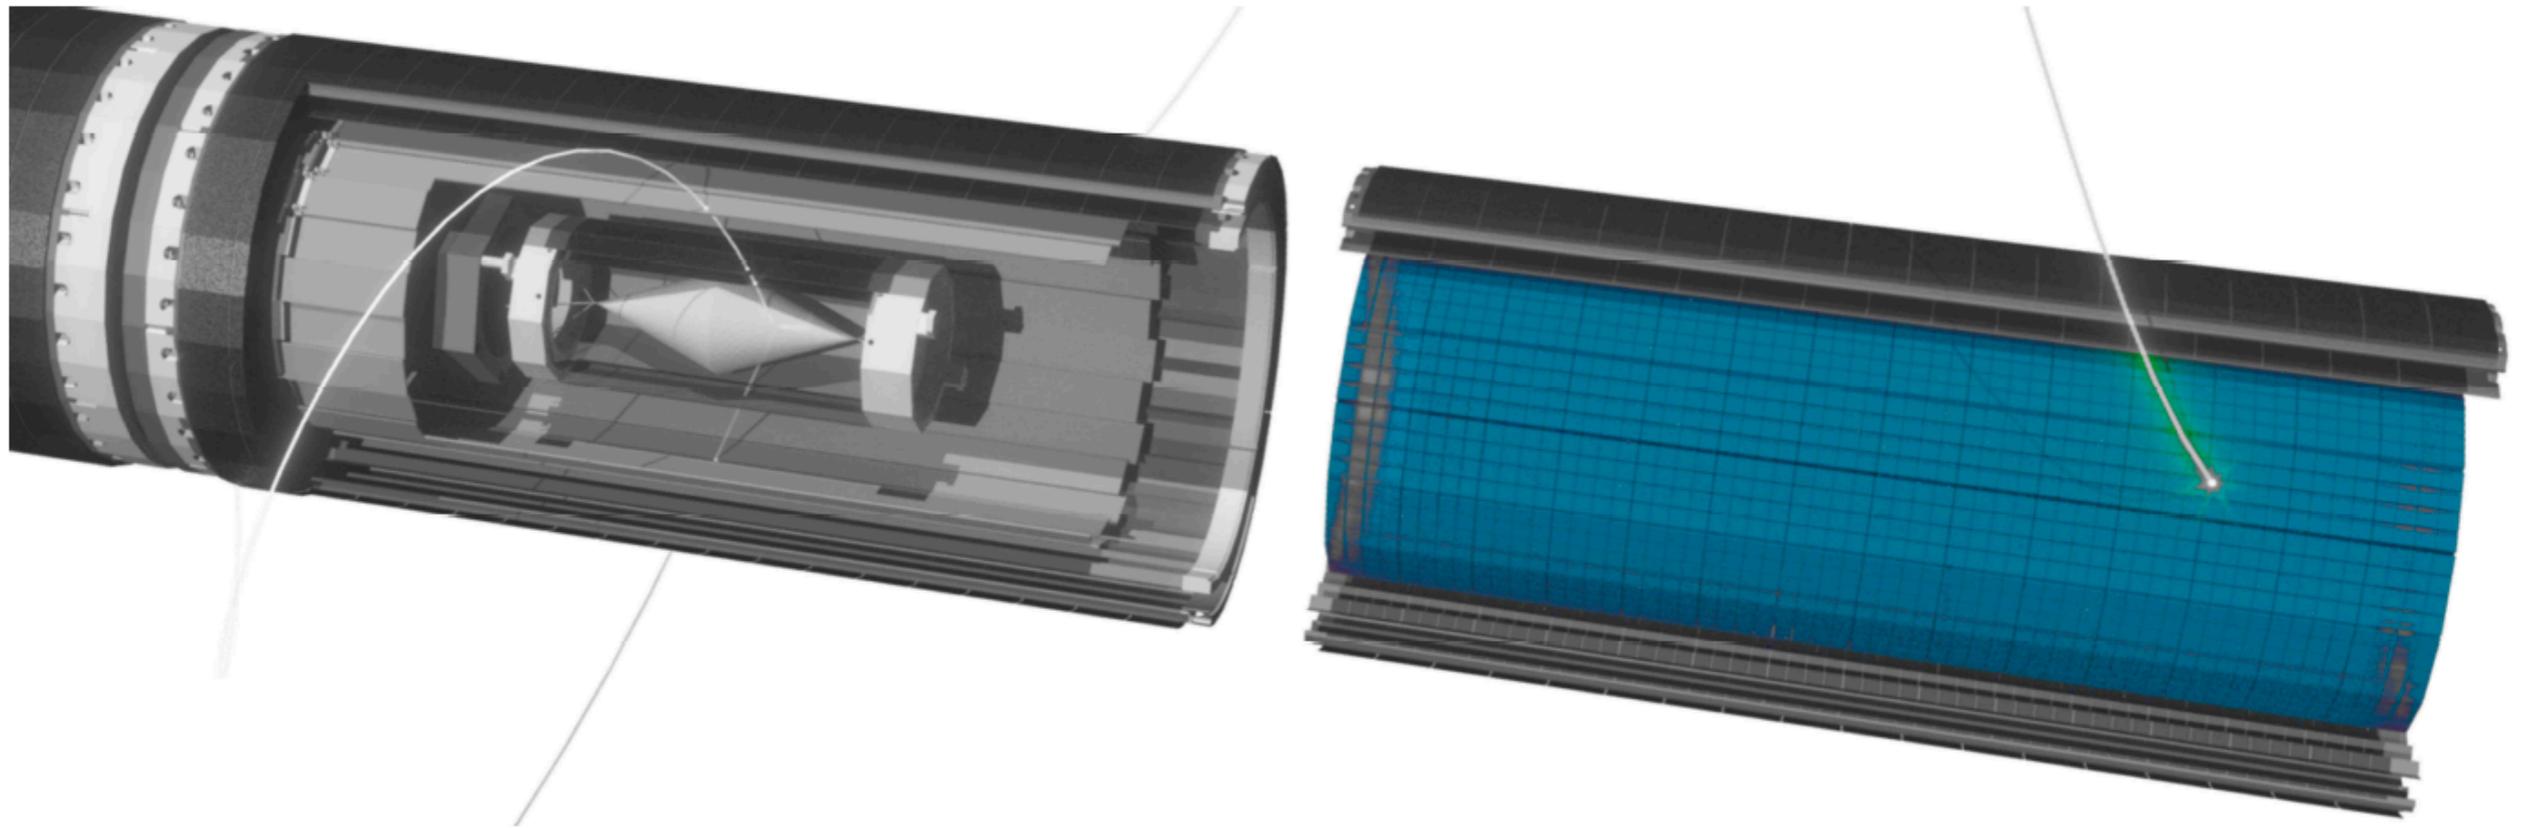



Parts

- cylindrical at ~ 6 cm (radius)
- length of 36.4 cm
- 56 x 56 tiles of 6.5 x 6.5 x 5 mm³
- 3 x 3 mm² single SiPM per tile
- Mixed mode ASIC: MuTRiG

Requirements

- high detection efficiency $\varepsilon > 95\%$
- time resolution $\sigma < 100$ ps
- rate up to 50 KHz per tile/channel

The Tile detector: Overview

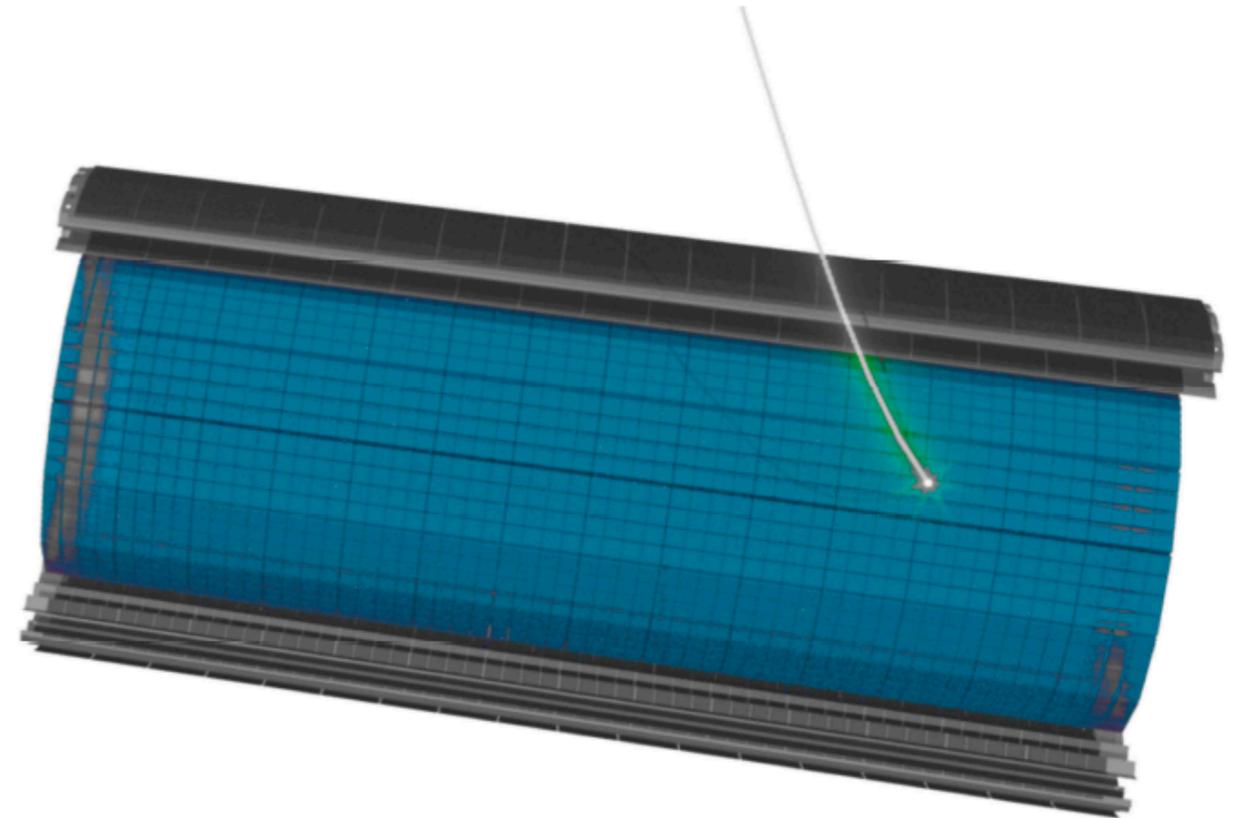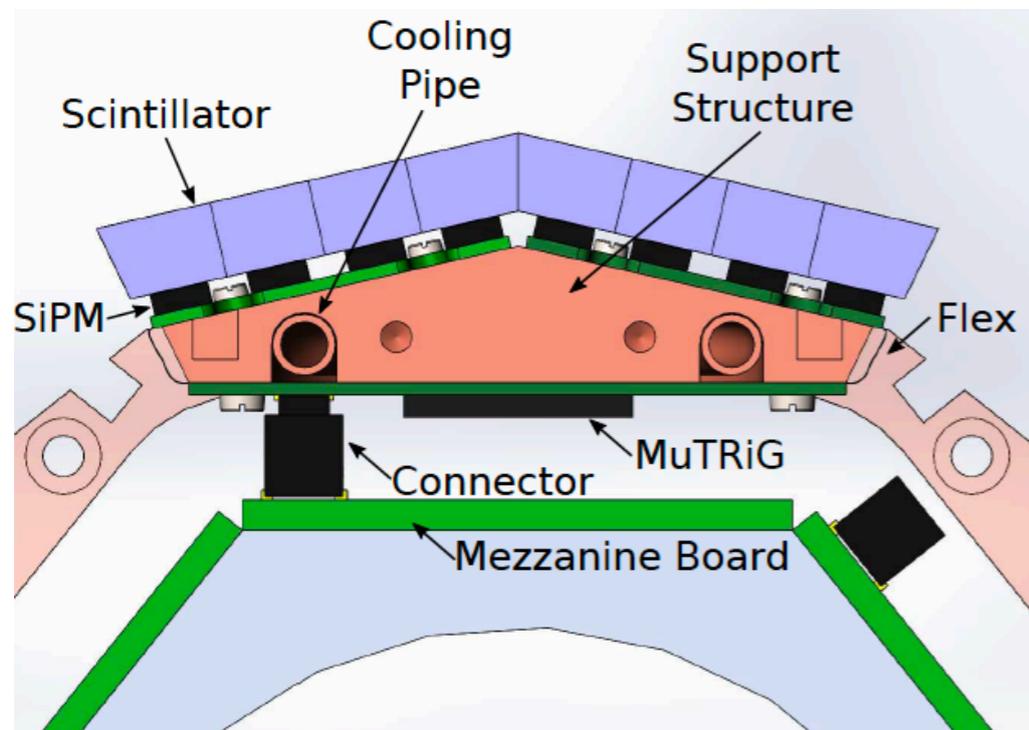

Parts




- cylindrical at ~ 6 cm (radius)
- length of 36.4 cm
- 56 x 56 tiles of $6.5 \times 6.5 \times 5$ mm³
- 3 x 3 mm² single SiPM per tile
- Mixed mode ASIC: MuTRiG

Requirements

- high detection efficiency $\varepsilon > 95\%$
- time resolution $\sigma < 100$ ps
- rate up to 50 KHz per tile/channel

Tile Prototype: Results



- Mu3e requirements fulfilled: Full detection efficiency ($> 99\%$) and timing resolution $\mathcal{O}(60)$ ps
- 4 x 4 channel BC408
- $7.5 \times 8.5 \times 5.0$ mm³
- Hamamatsu S10362-33-050C (3×3 mm²)
- readout with STiC2

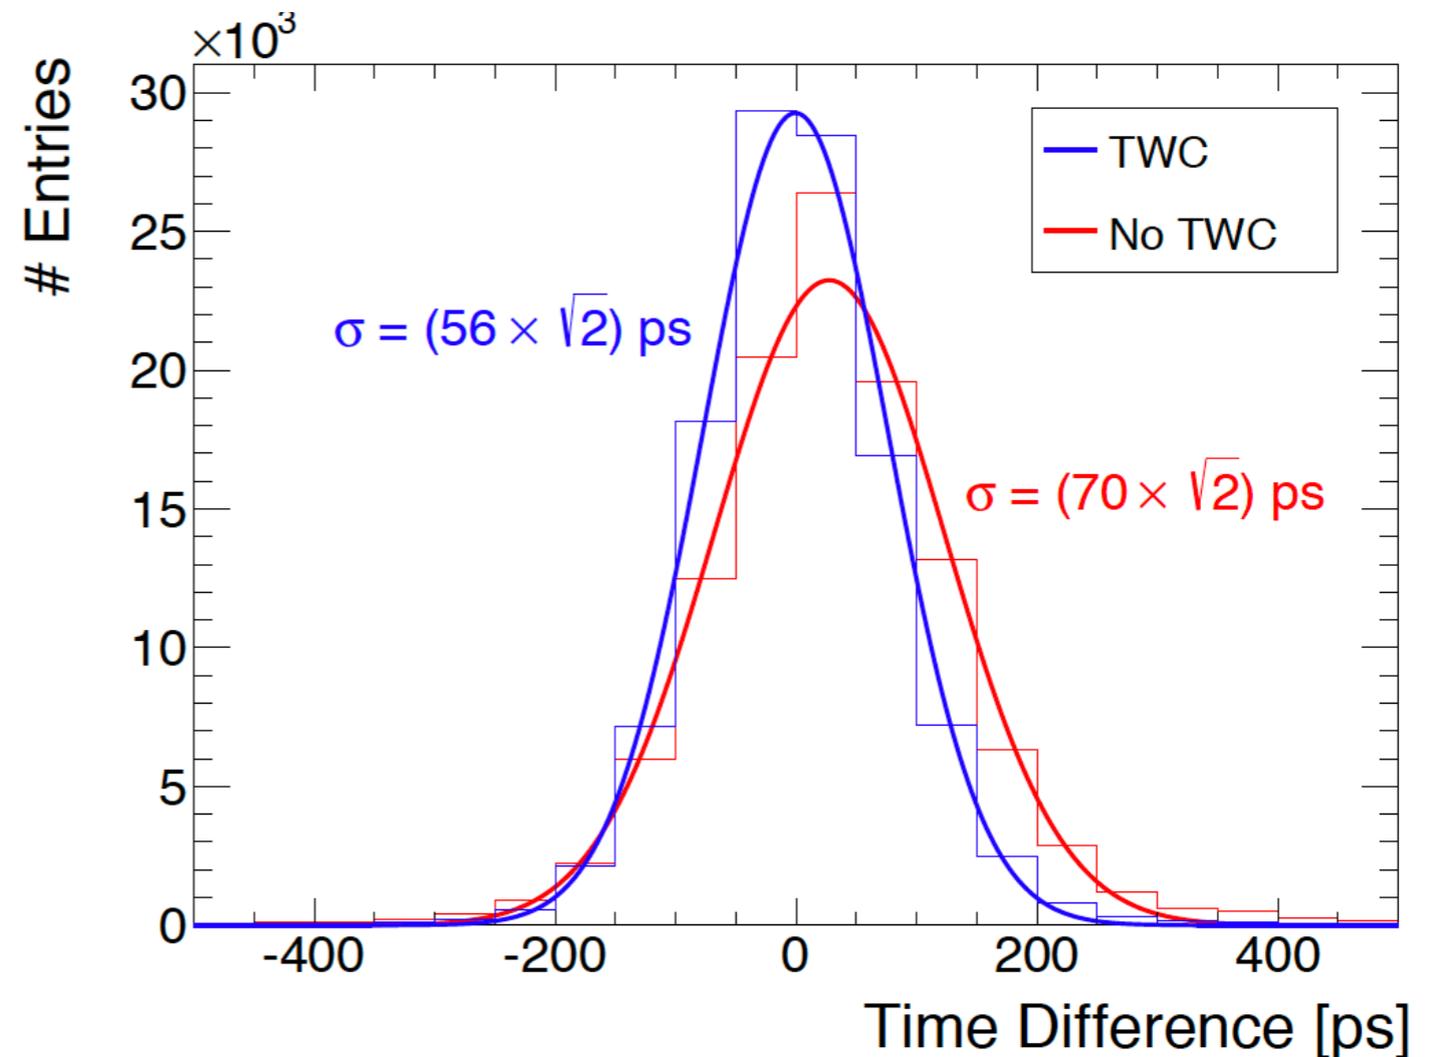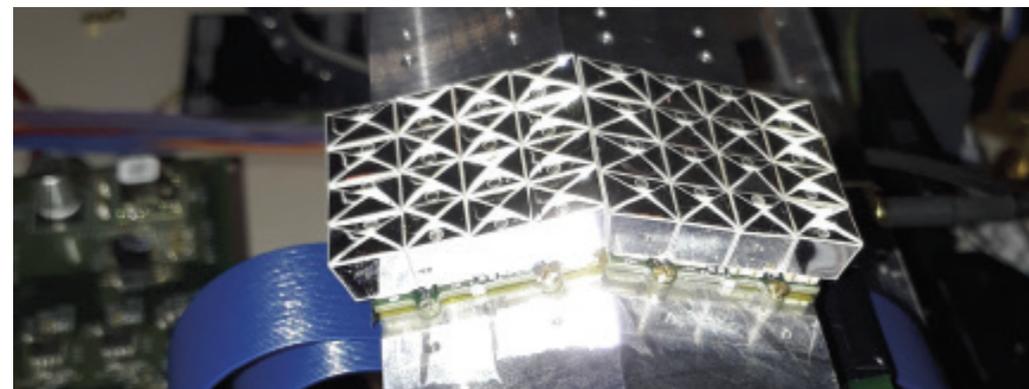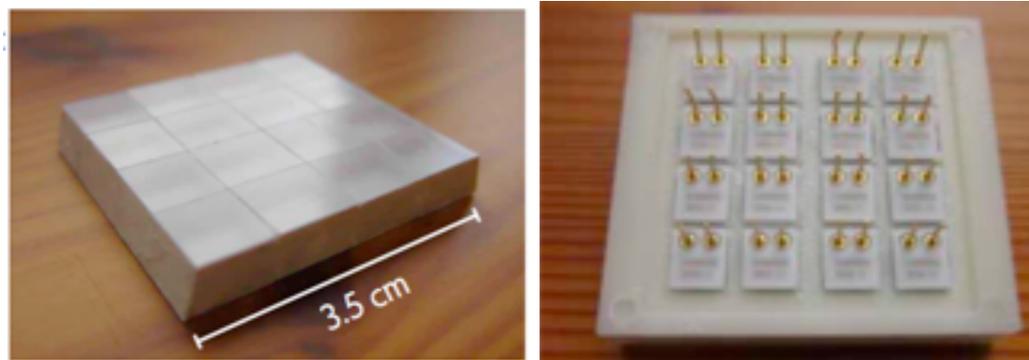

MuTRiG

- Mixed mode, ~ 50 ps timestamps, high impedance, optional differential
- Commissioning started!

New

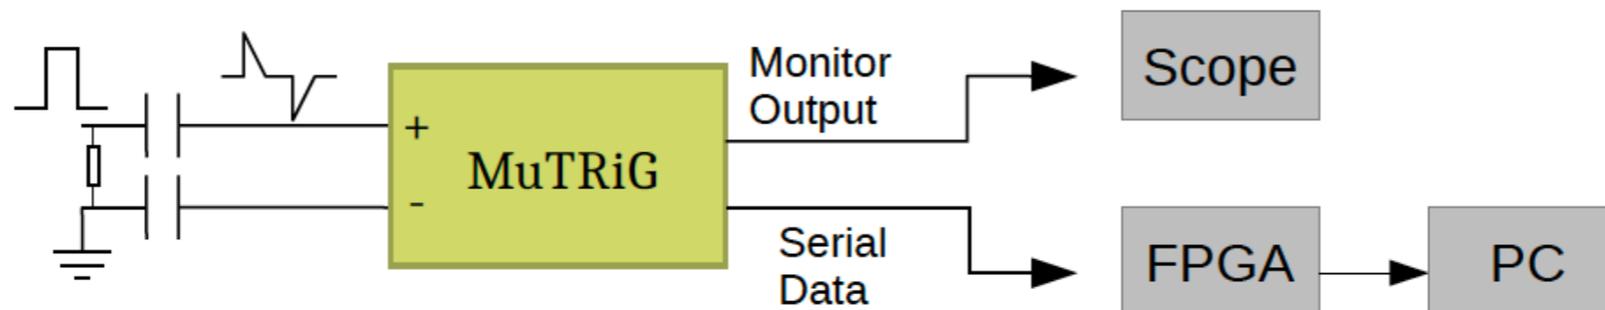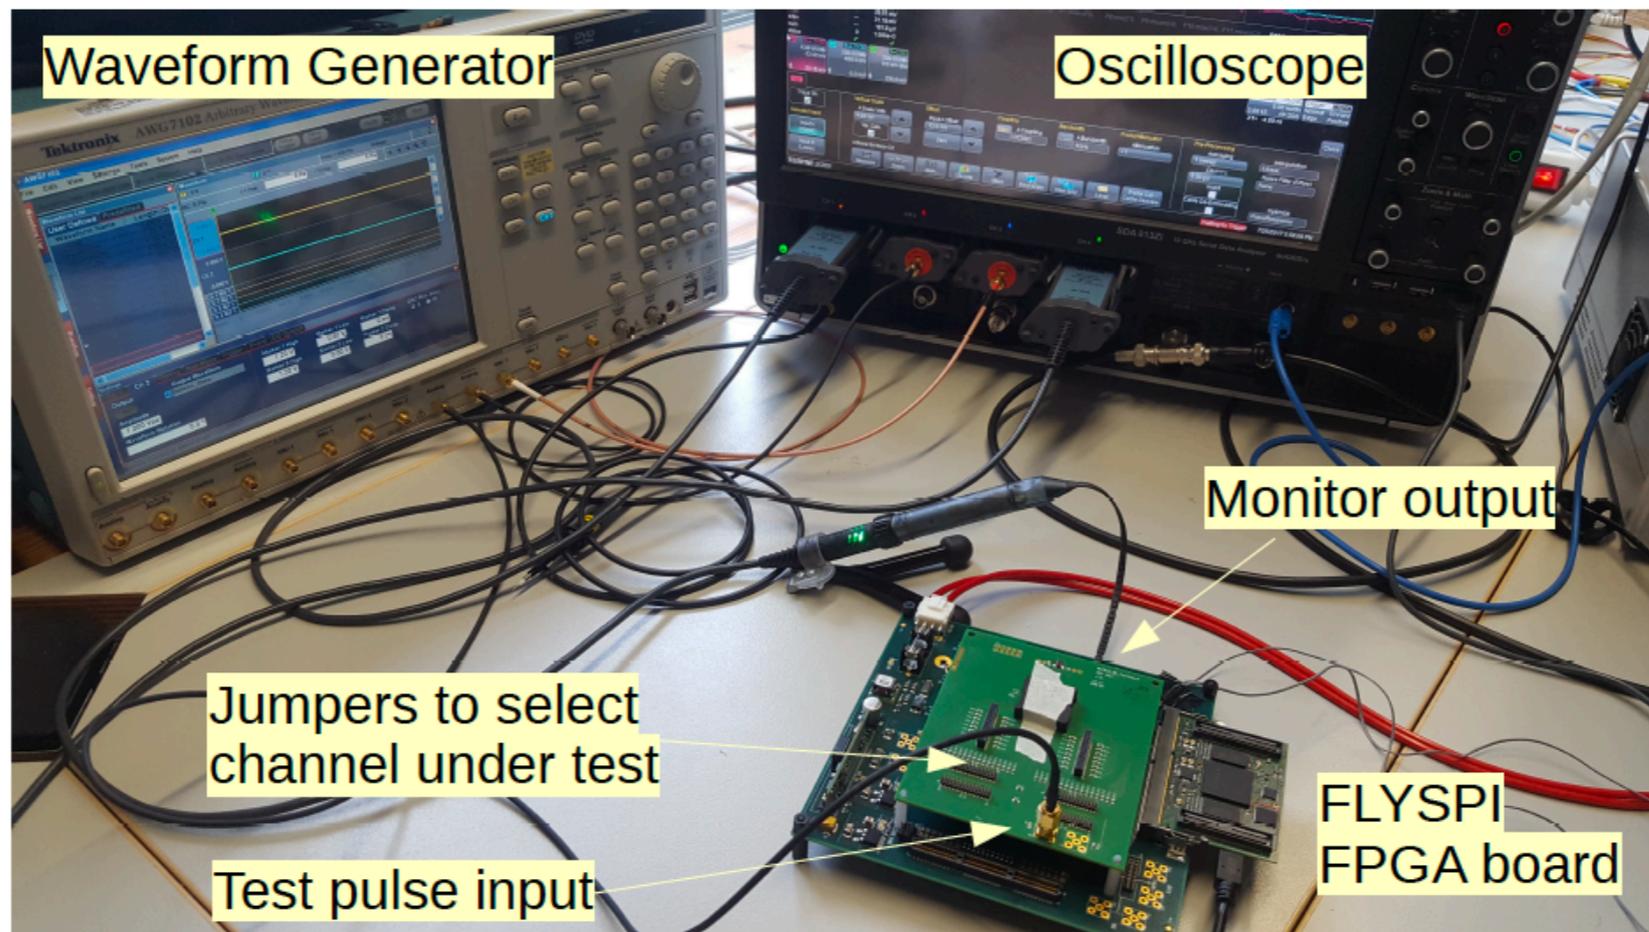

The High intensity Muon Beam (HiMB) project at PSI


- Aim: $O(10^{10})$ muon/s; Surface (positive) muon beam ($p = 28 \text{ MeV}/c$); **DC** beam
- Strategy:
 - Target optimization
 - Beam line optimization
- Time schedule: **O(2025)**

The High intensity Muon Beam (HiMB) project at PSI

- Back to standard target to exploit possible improvements towards high intensity beams:
- **Target geometry and alternate materials**
 - Search for high pion yield materials -> higher muon yield



relative μ^+ yield $\propto \pi^+$ stop density $\cdot \mu^+$ Range \cdot length

$$\begin{aligned} &\propto n \cdot \sigma_{\pi^+} \cdot SP_{\pi^+} \cdot \frac{1}{SP_{\mu^+}} \cdot \frac{\rho_c (6/12)_c}{\rho_x (Z/A)_x} \\ &\propto Z^{1/3} \cdot Z \cdot \frac{1}{Z} \cdot \frac{1}{Z} \\ &\propto \frac{1}{Z^{2/3}} \end{aligned}$$

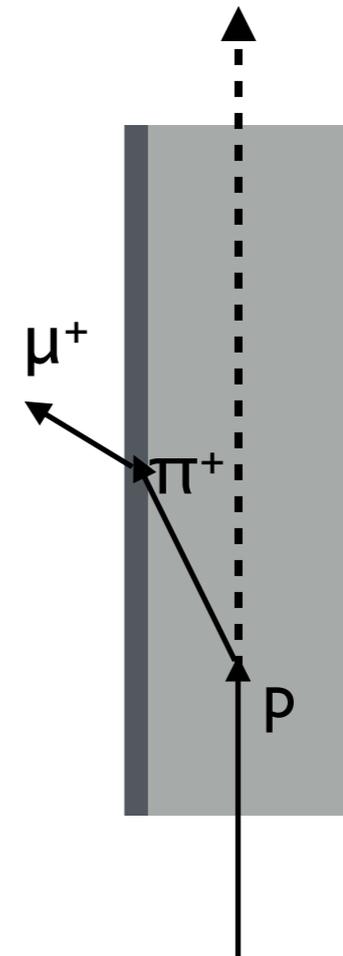

The High intensity Muon Beam (HiMB) project at PSI


- Back to standard target to exploit possible improvements towards high intensity beams:
 - **Target geometry and alternate materials**
 - Search for high pion yield materials -> higher muon yield

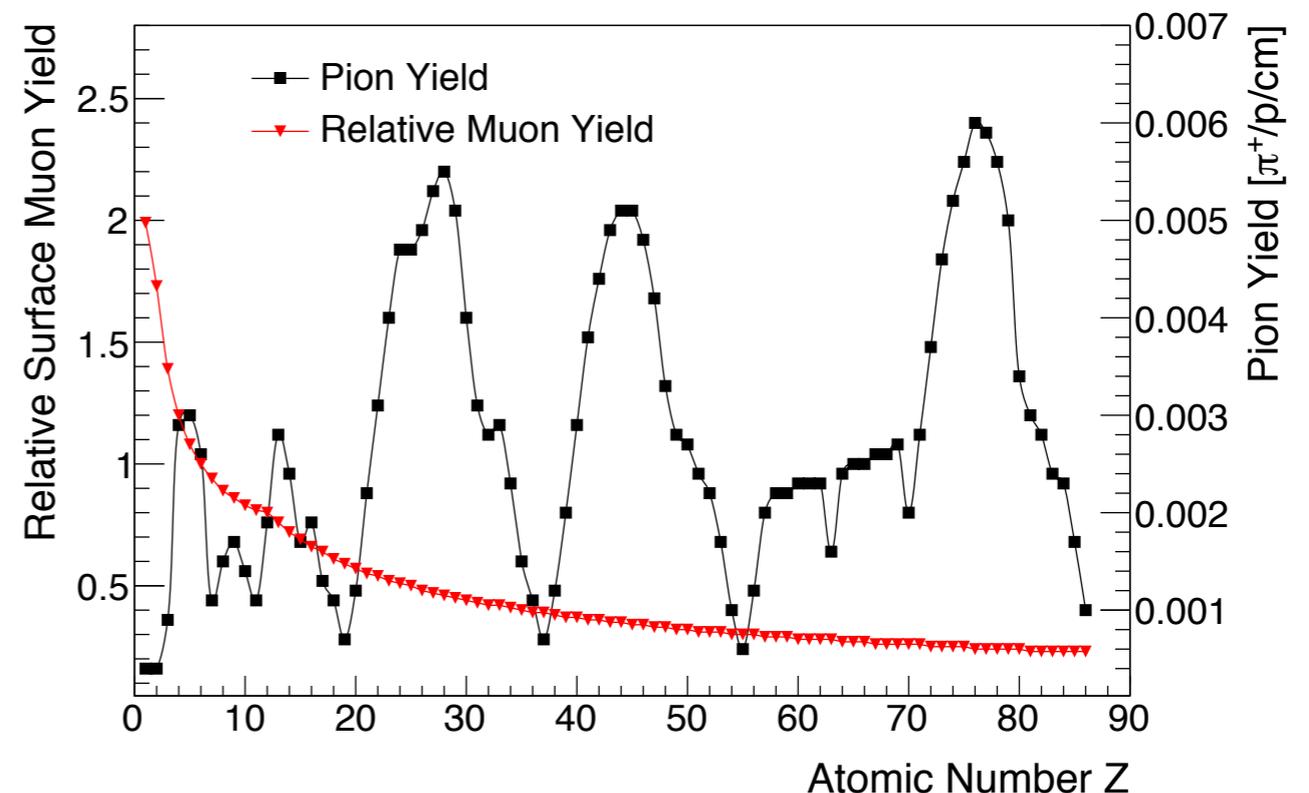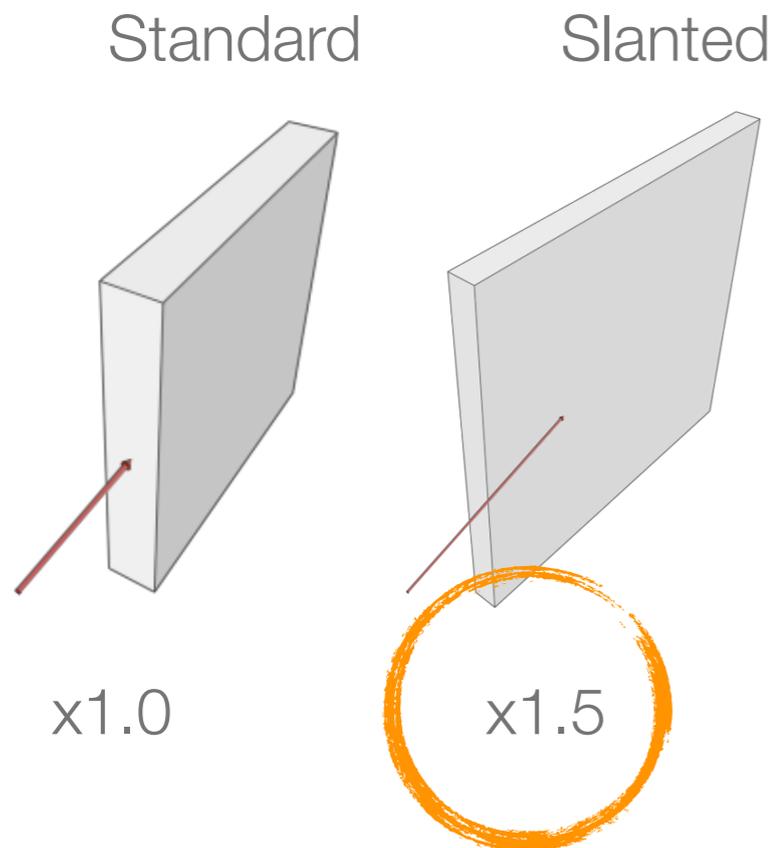

- **50%** of muon beam intensity gain, would correspond to effectively raising the proton beam power at PSI by **650 kW**, equivalent to a beam power of almost **2 MW** without the additional complications such as increased energy and radiation deposition into the target and its surroundings


The High intensity Muon Beam (HiMB) project at PSI

- Aim: $O(10^{10})$ muon/s; Surface (positive) muon beam ($p = 28 \text{ MeV}/c$); **DC** beam
- Time schedule: **O(2025)**
- Put into perspective the beam line optimisation the equivalent beam power would be of the order of **several tens of MW**

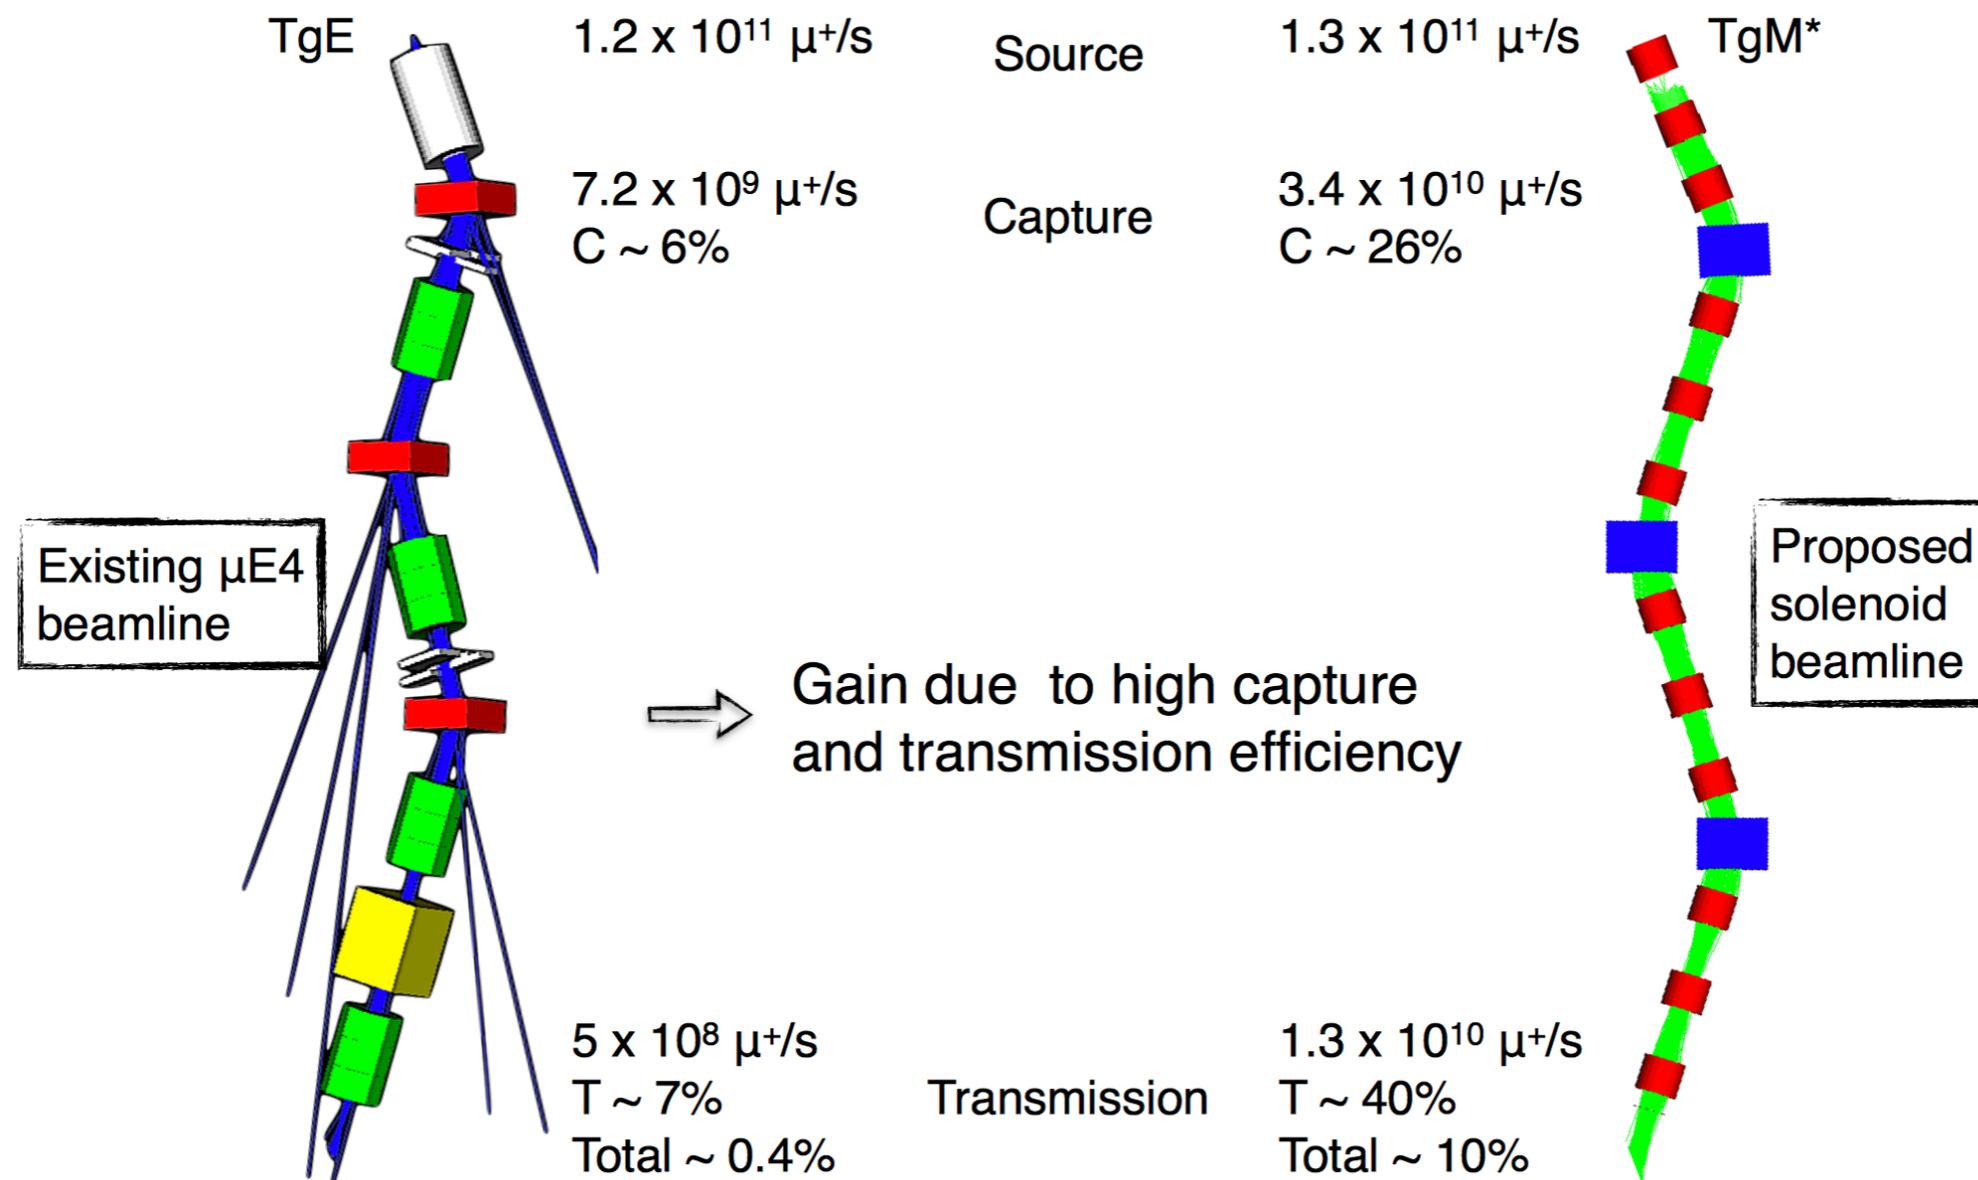

Slanted target: Prototype test this year


- Expect 30-60 % enhancement
- Measurements foreseen in three directions in 2019

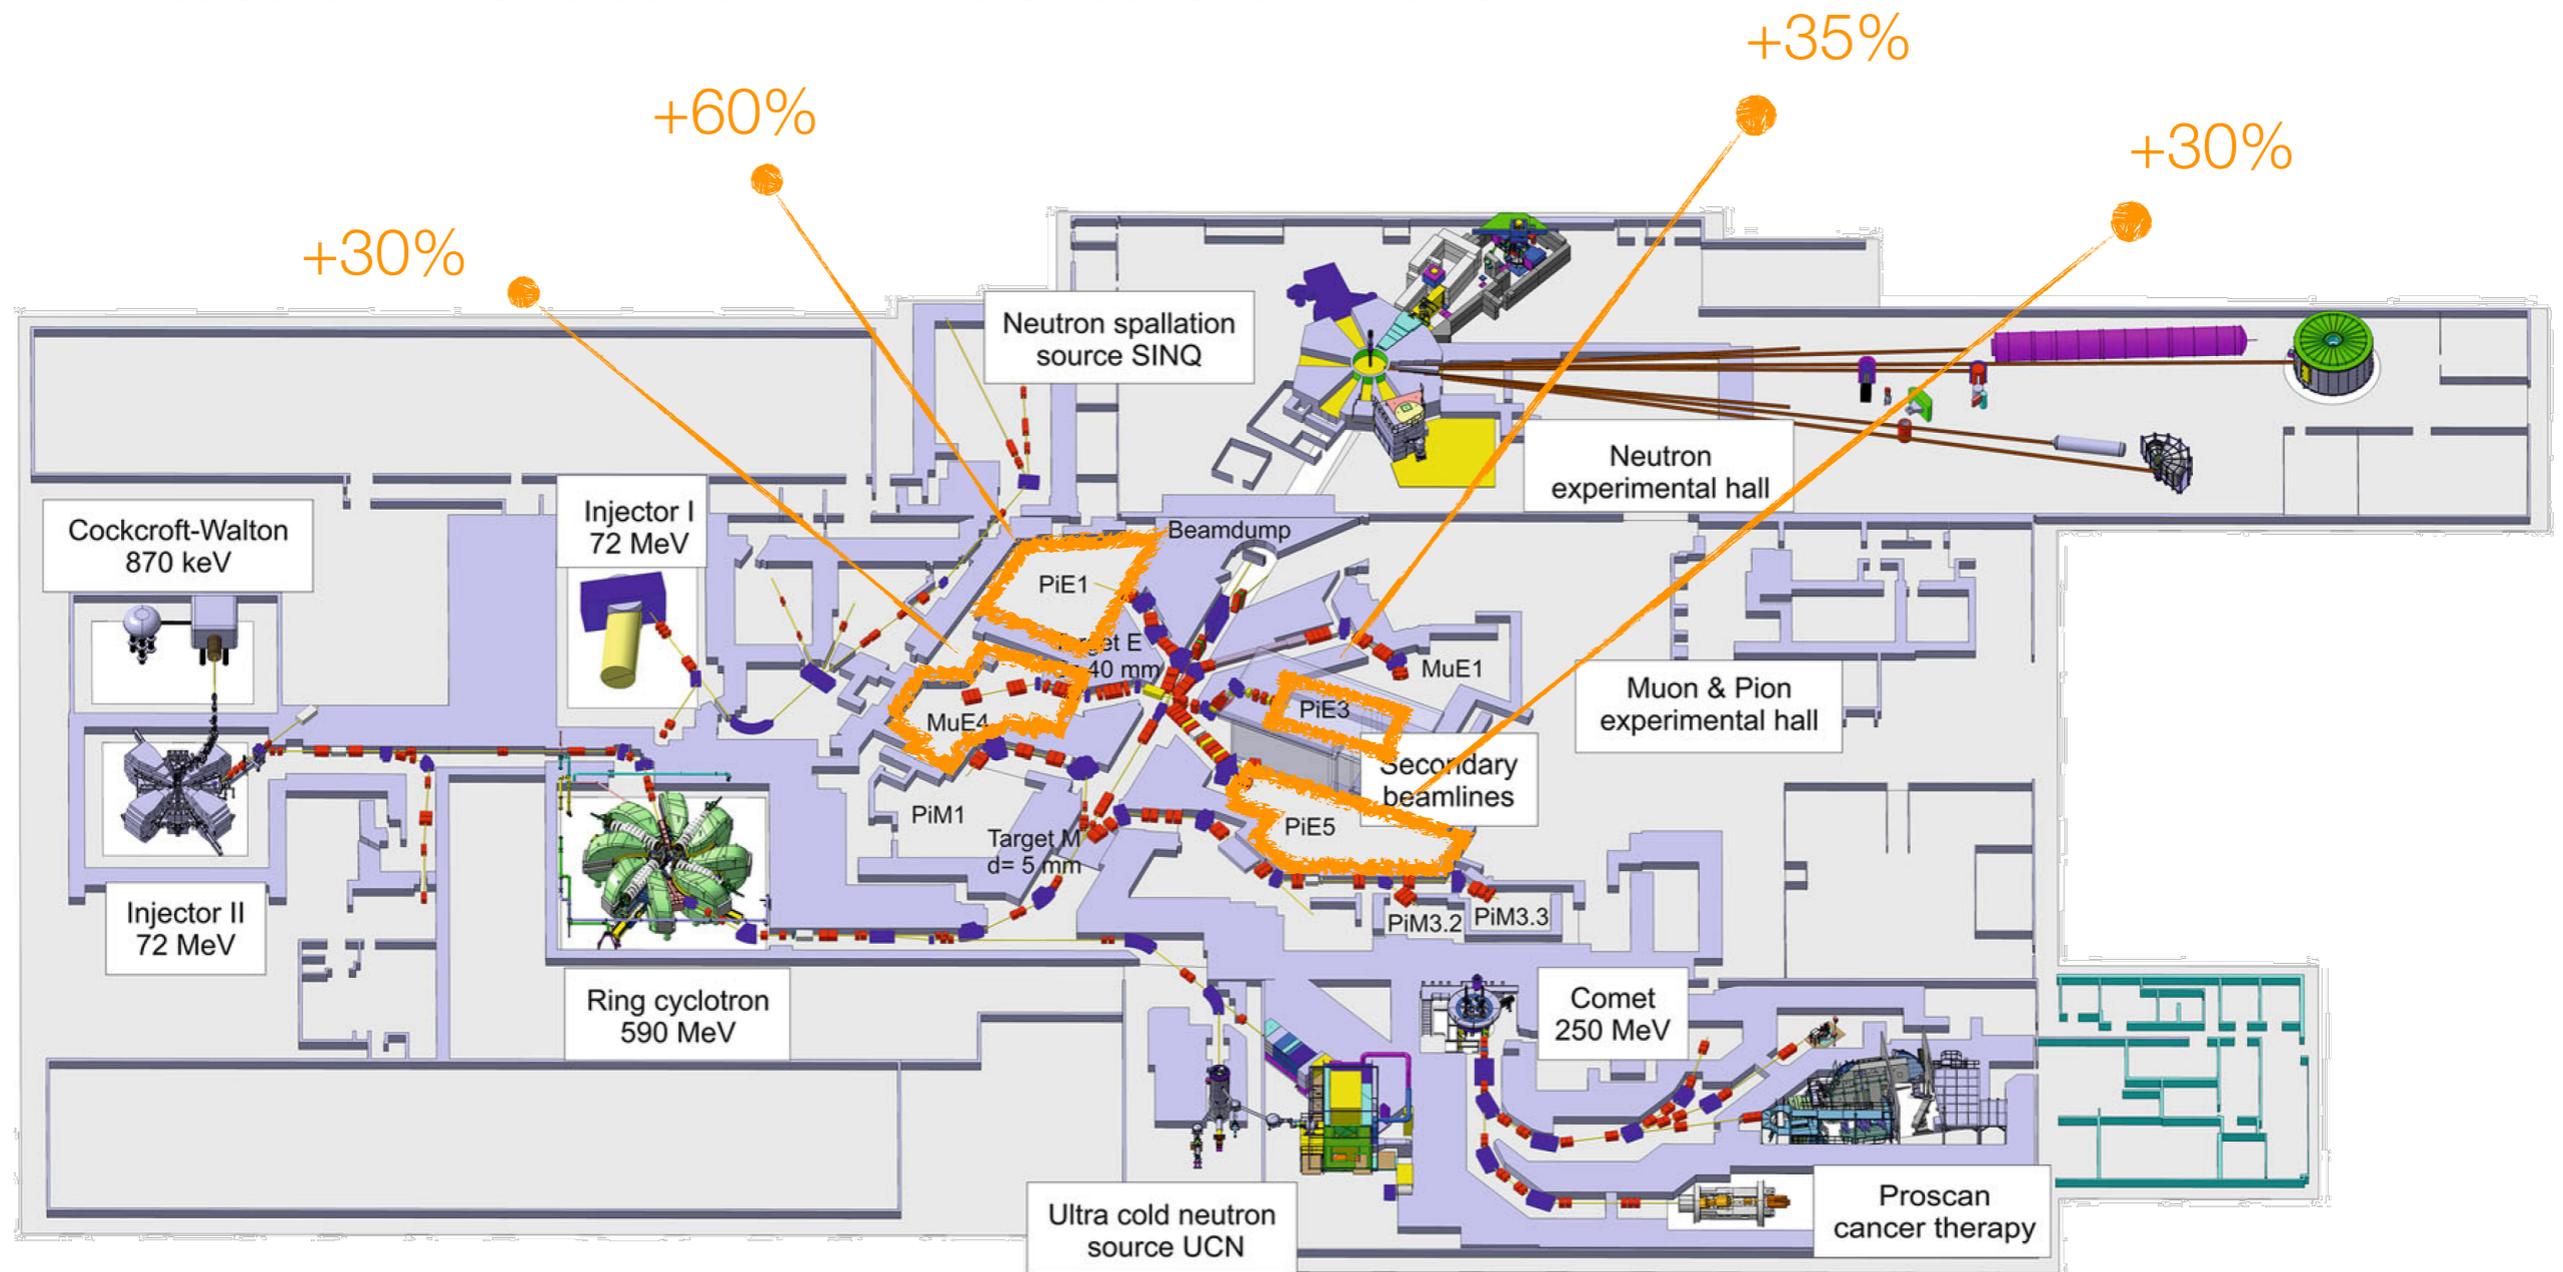

DC and Pulsed muon beams - present and future


Laboratory	Beam Line	DC rate (μ/sec)	Pulsed rate (μ/sec)
PSI (CH) (590 MeV, 1.3 MW)	$\mu E4, \pi E5$ HiMB at EH	$2 \div 4 \times 10^8 (\mu^+)$ $\mathcal{O}(10^{10}) (\mu^+)$ (>2018)	
J-PARC (Japan) (3 GeV, 210 kW) (8 GeV, 56 kW)	MUSE D-Line MUSE U-Line COMET		$3 \times 10^7 (\mu^+)$ $6.4 \times 10^7 (\mu^+)$ $1 \times 10^{11} (\mu^-)$ (2020)
FNAL (USA) (8 GeV, 25 kW)	Mu2e		$5 \times 10^{10} (\mu^-)$ (2020)
TRIUMF (Canada) (500 MeV, 75 kW)	M13, M15, M20	$1.8 \div 2 \times 10^6 (\mu^+)$	
RAL-ISIS (UK) (800 MeV, 160 kW)	EC/RIKEN-RAL		$7 \times 10^4 (\mu^-)$ $6 \times 10^5 (\mu^+)$
KEK (Tsukuba, Japan) (500 MeV, 25 kW)	Dai Omega		$4 \times 10^5 (\mu^+)$ (2020)
RCNP (Osaka, Japan) (400 MeV, 400 W)	MuSIC	$10^4 (\mu^-) \div 10^5 (\mu^+)$ $10^7 (\mu^-) \div 10^8 (\mu^+)$ (>2018)	
JINR (Dubna, Russia) (660 MeV, 1.6 kW)	Phasotron	$10^5 (\mu^+)$	
RISP (Korea) (600 MeV, 0.6 MW)	RAON	$2 \times 10^8 (\mu^+)$ (>2020)	
CSNS (China) (1.6 GeV, 4 kW)	HEPEA	$1 \times 10^8 (\mu^+)$ (>2020)	

DC and Pulsed muon beams - present and future

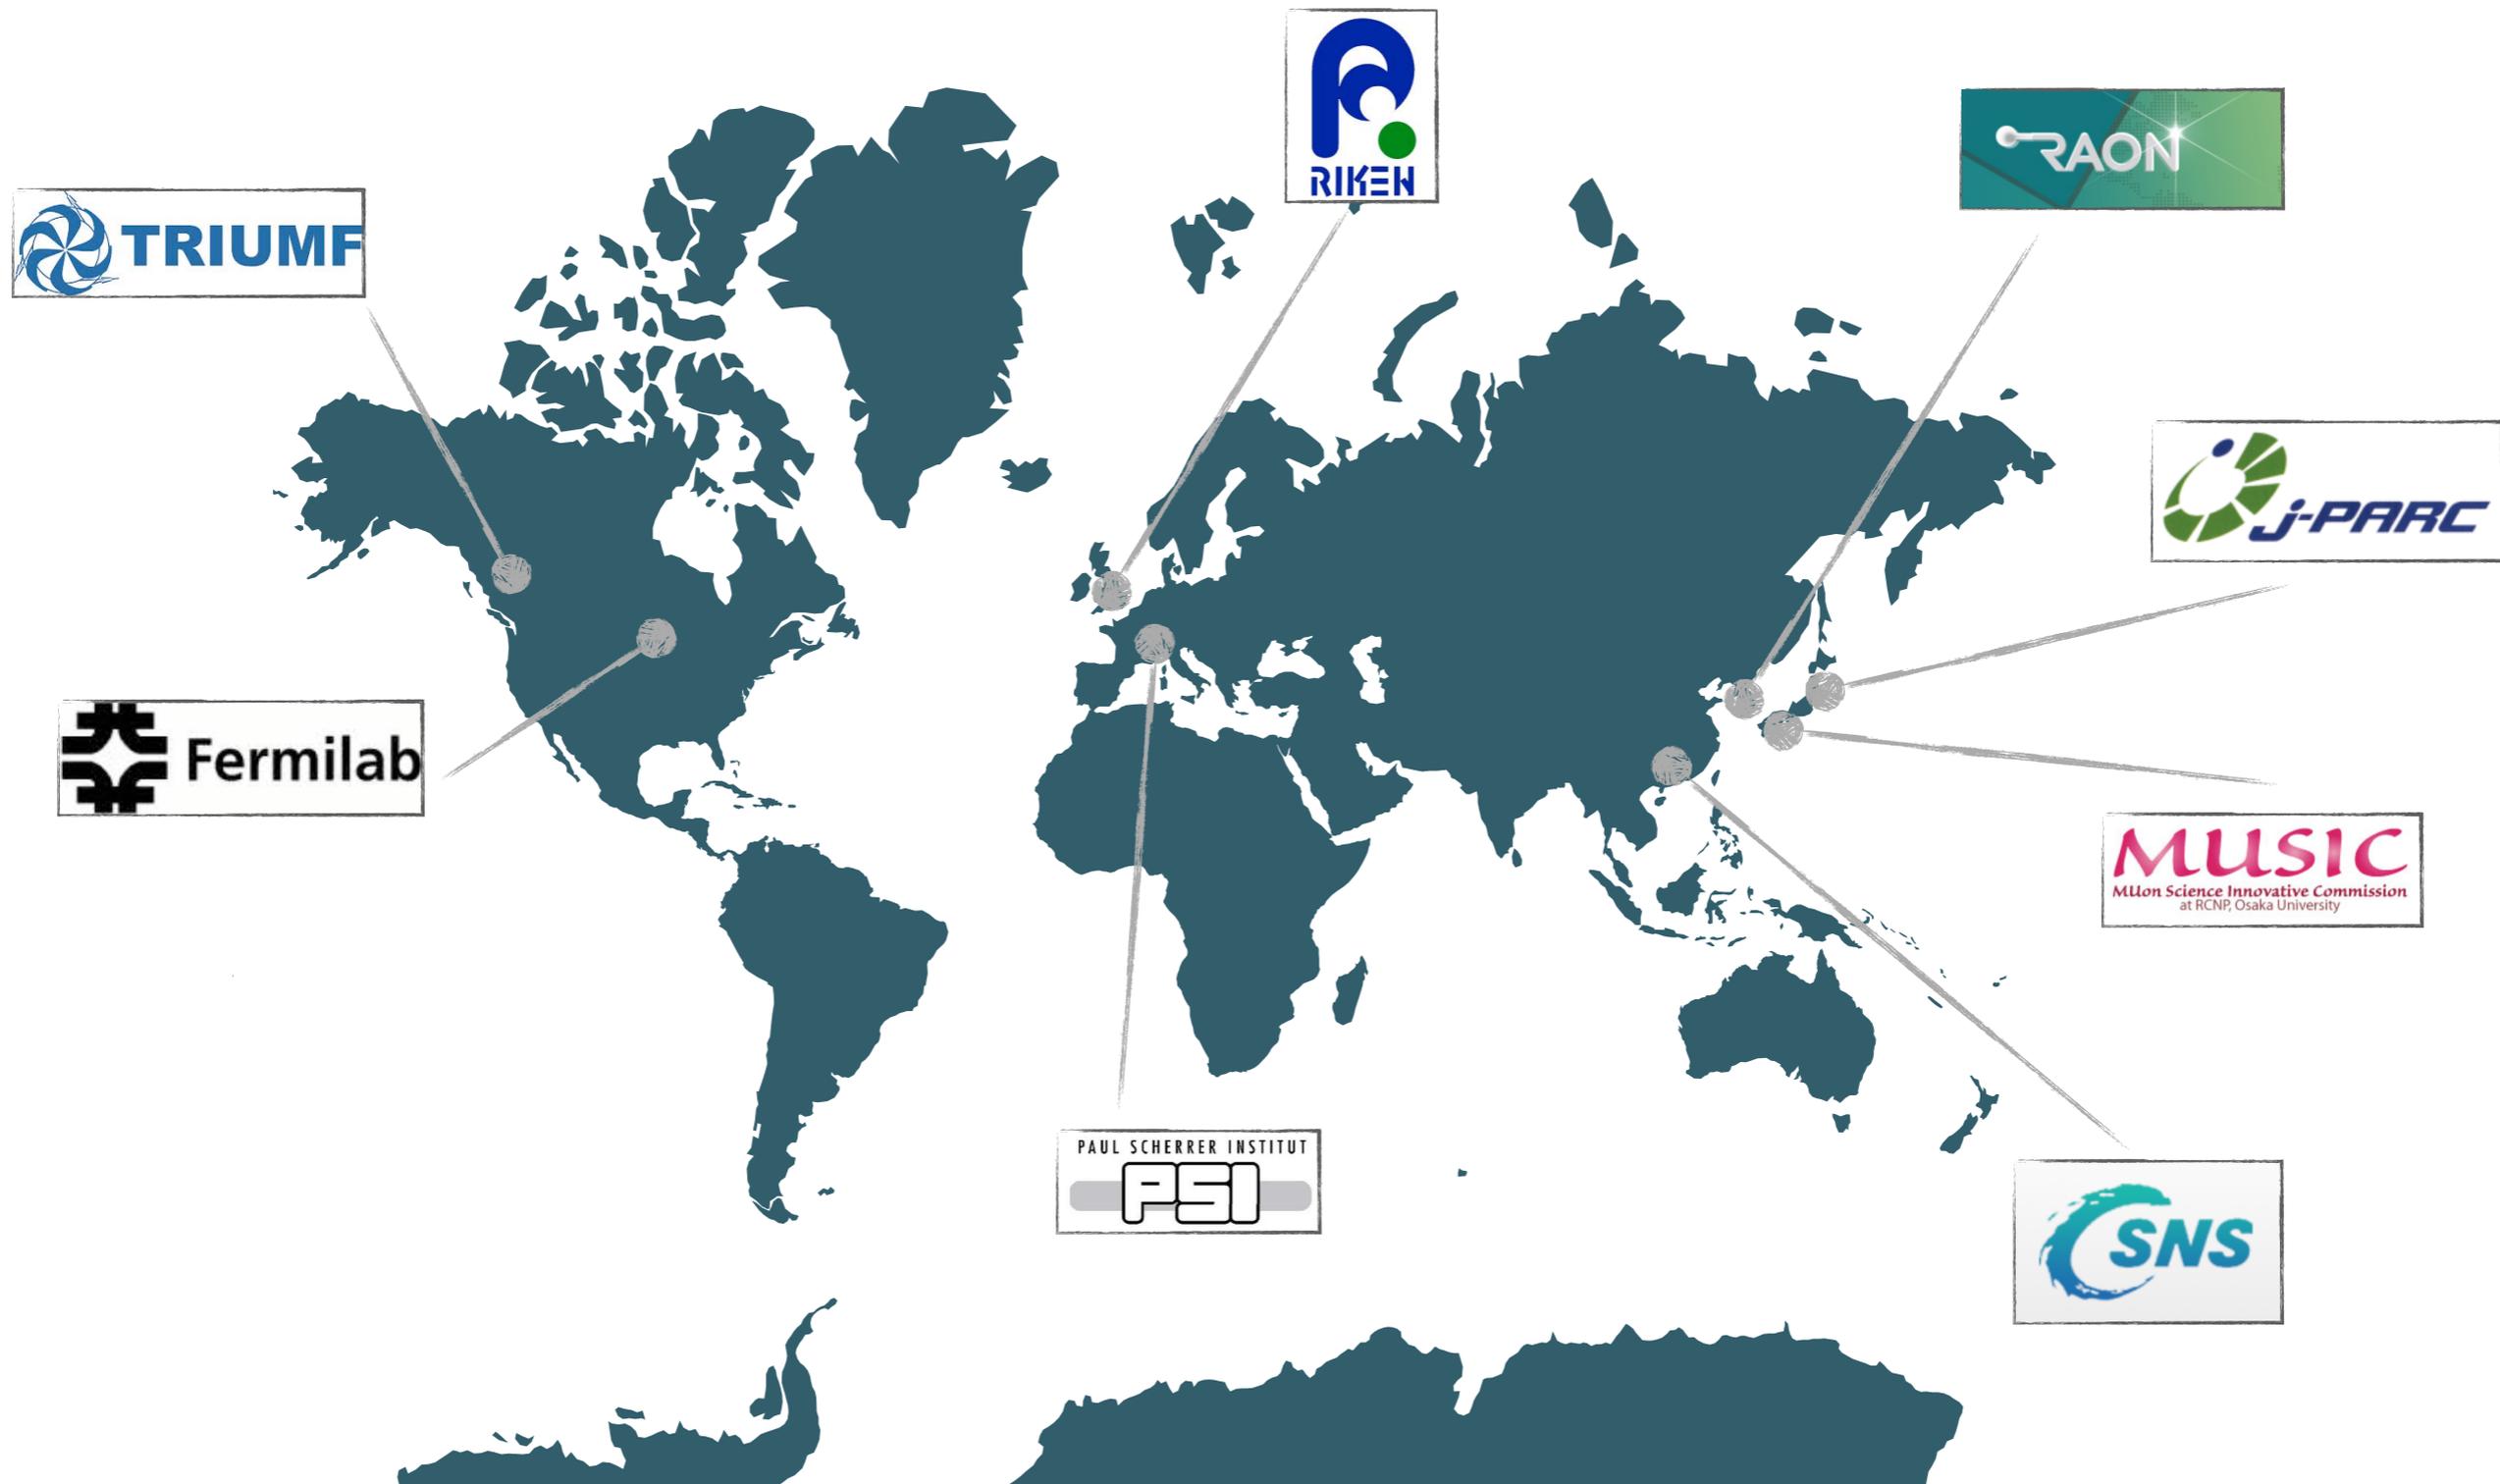

Outlooks

- Astonishing sensitivities in muon cLFV channels are foreseen for the incoming future
- **cLFV remains one of the most exciting place where to search for new physics**
- Submitted inputs to the European Strategy Committee

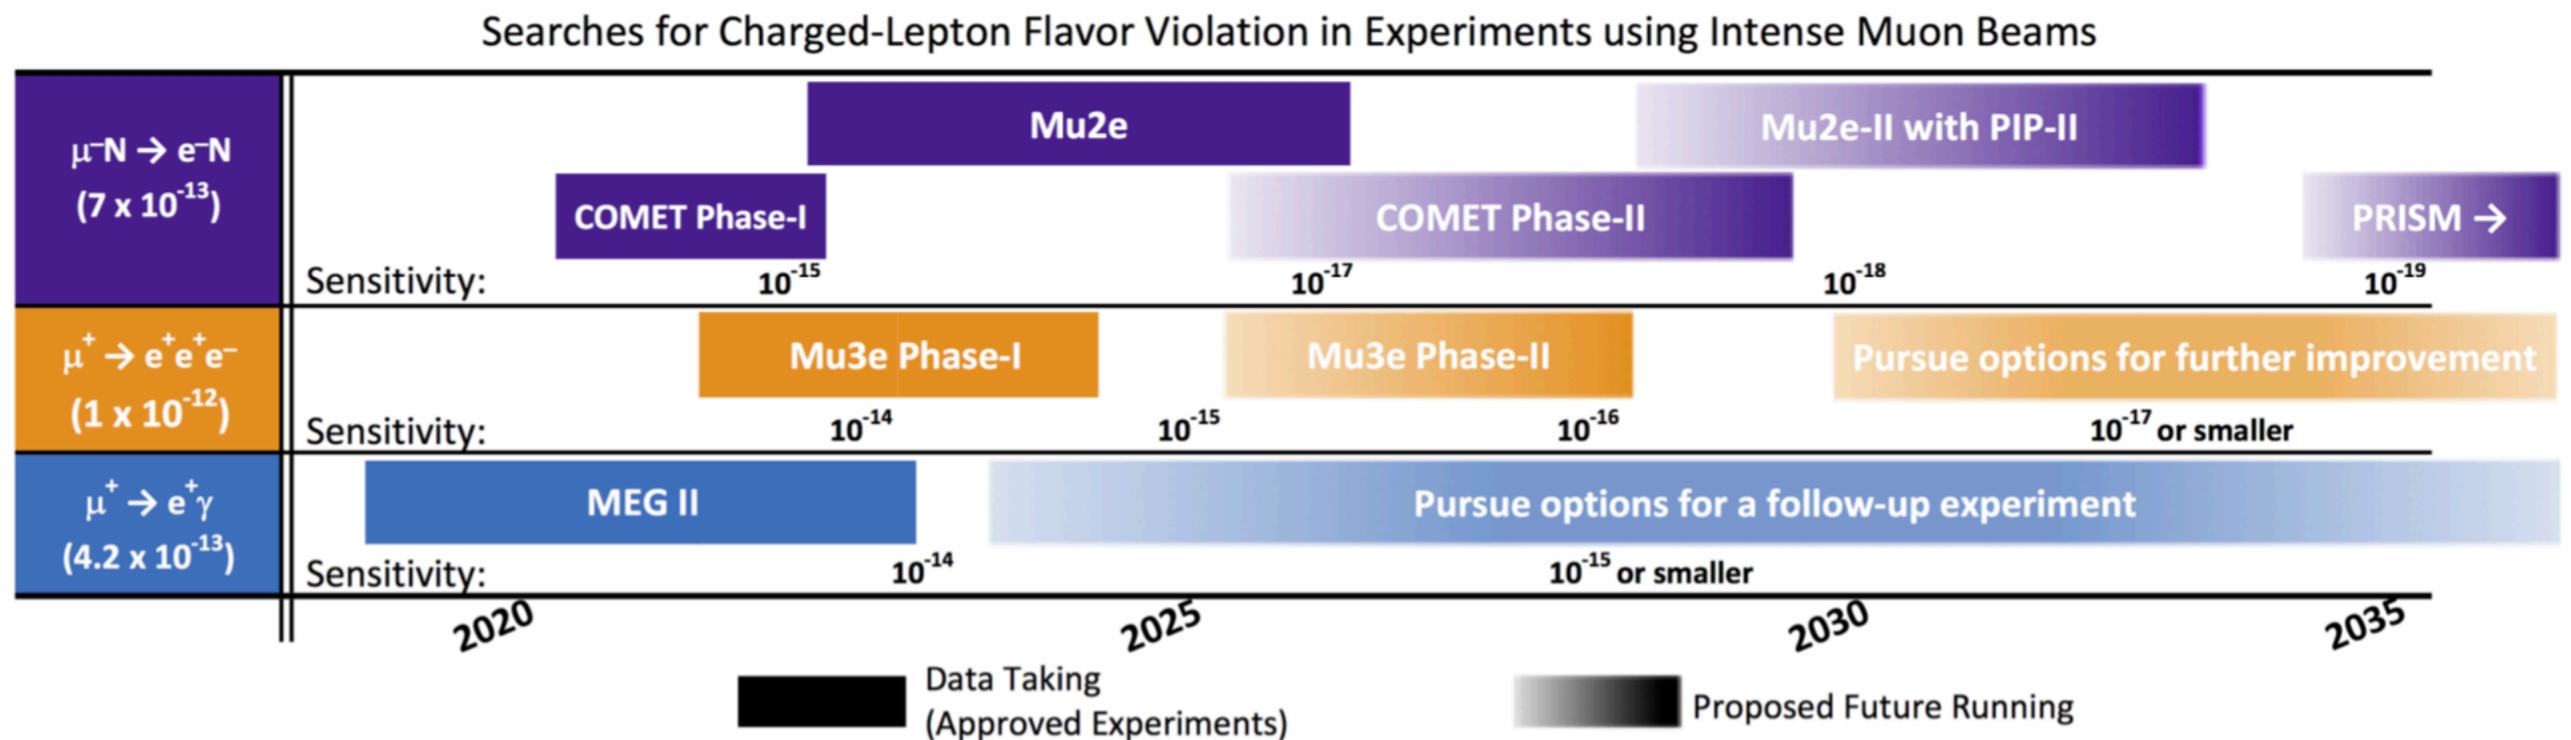

Thanks for your attention!

Back-up

MEGII: The new single volume chamber

RESULTS


➤ Safety HV values

- 27/384 cells (20 for L9 + 7 for L8) don't reach it (7 %)
- 8/27 cells (6 for L9 + 2 for L8) almost reach it
 - 5 ÷ 20 V discrepancy

➤ Working point

- 12/384 cells (8 for L9 + 4 for L8) don't reach it (3 %)
- 11/12 cells (6 for L9 + 4 for L8) have permanent shorts

HV test cell-by-cell L9+L8 @+1.8 mm (US endplate)

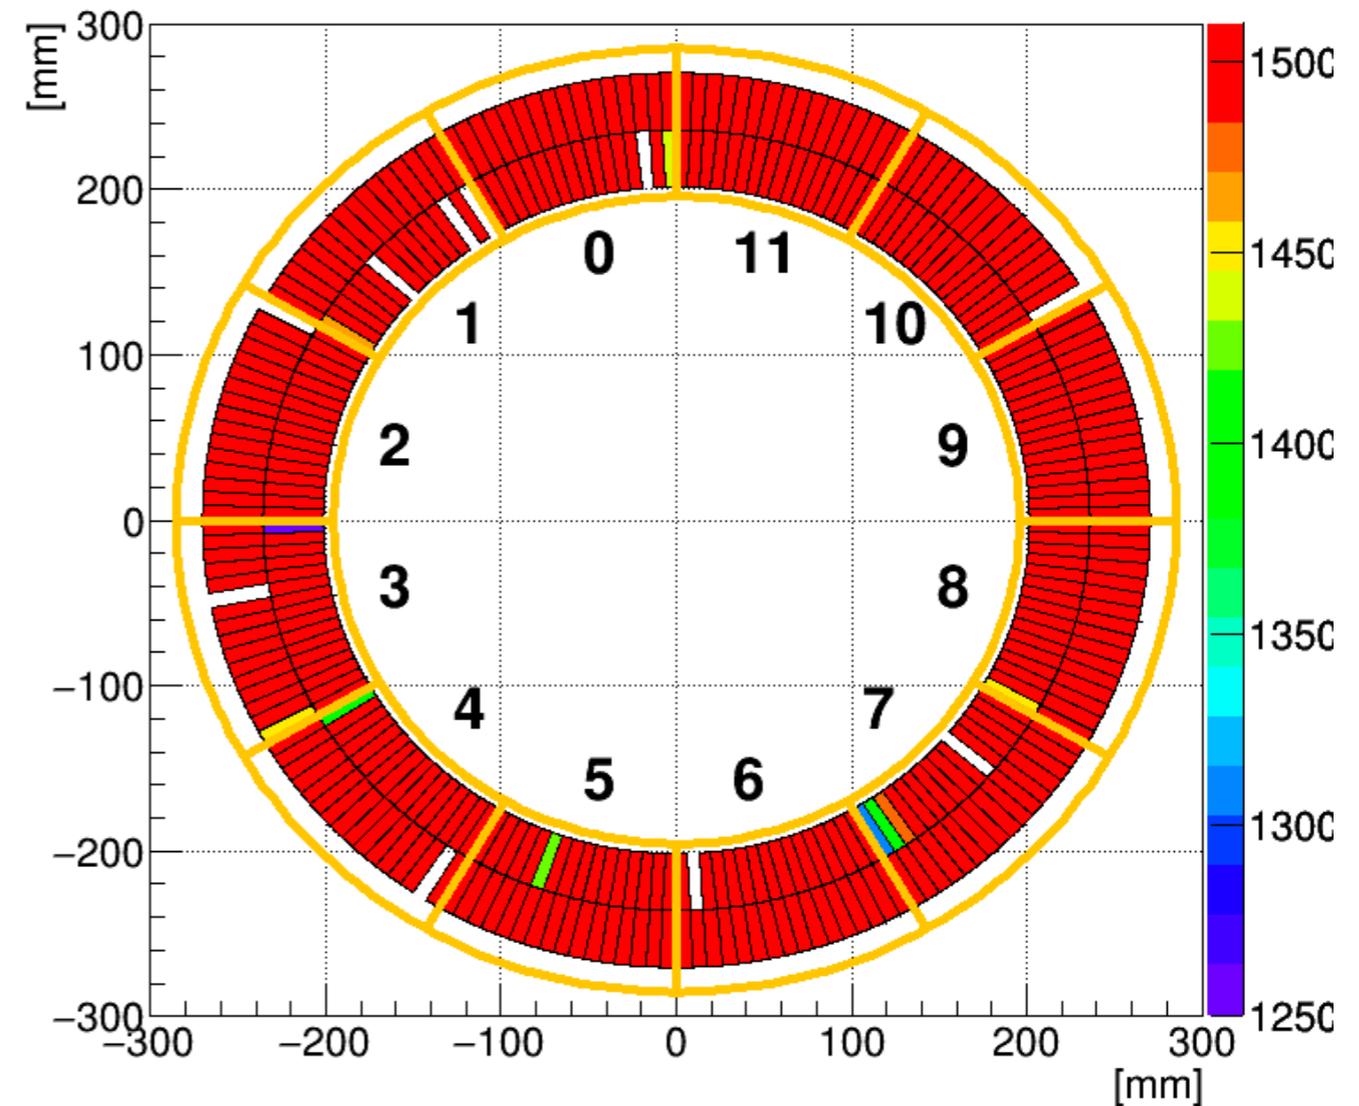


CDCH @ +5.6 mm elongation fulfils the MEGII requirements

MuSIC at Research Center for Nuclear Physics (RCNP), Osaka University


- Aim: $O(10^8)$ muon/s; Surface (positive) muon beam ($p = 28 \text{ MeV}/c$); **DC** beam

Conventional muon beamline

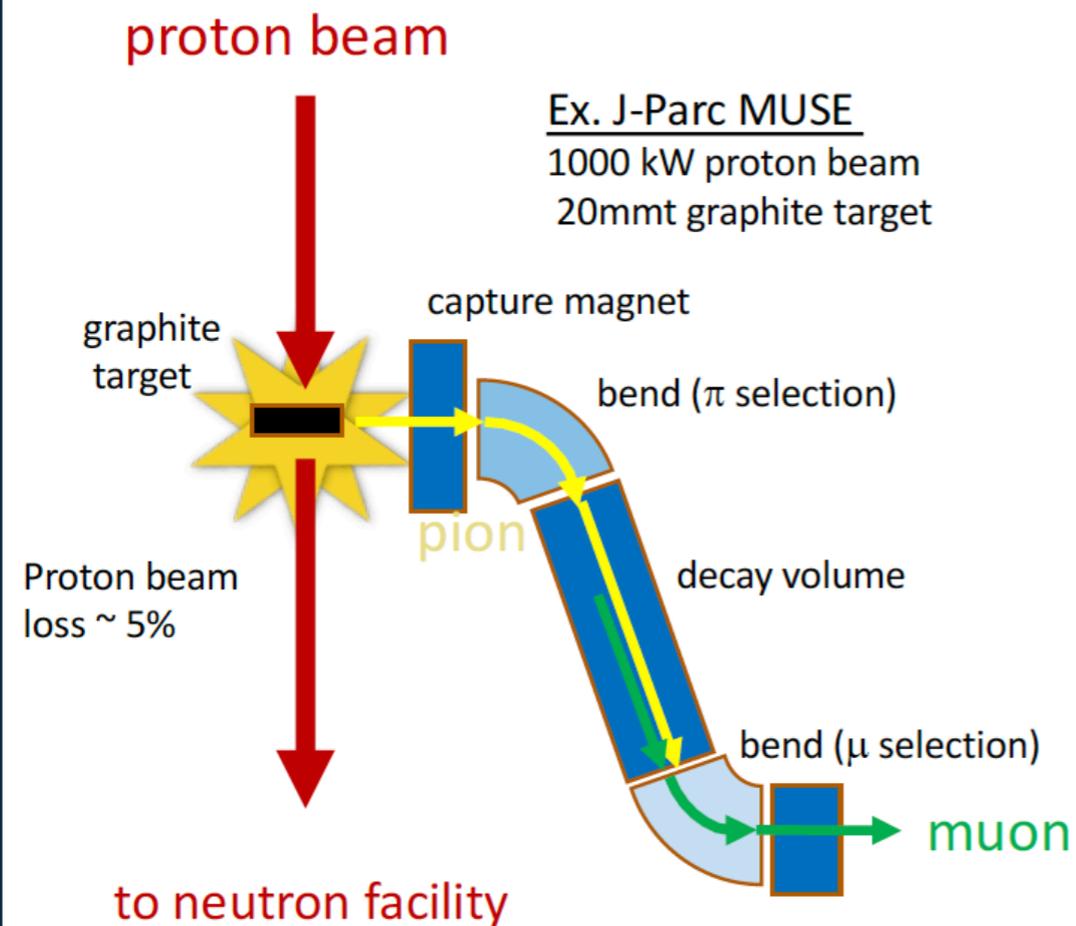

- Thin target ($\sim 20\text{mmt}$)
- Small solid angle
- Separate pion and muon momentum selection (obtain highly polarized muon beam)

MuSIC beamline

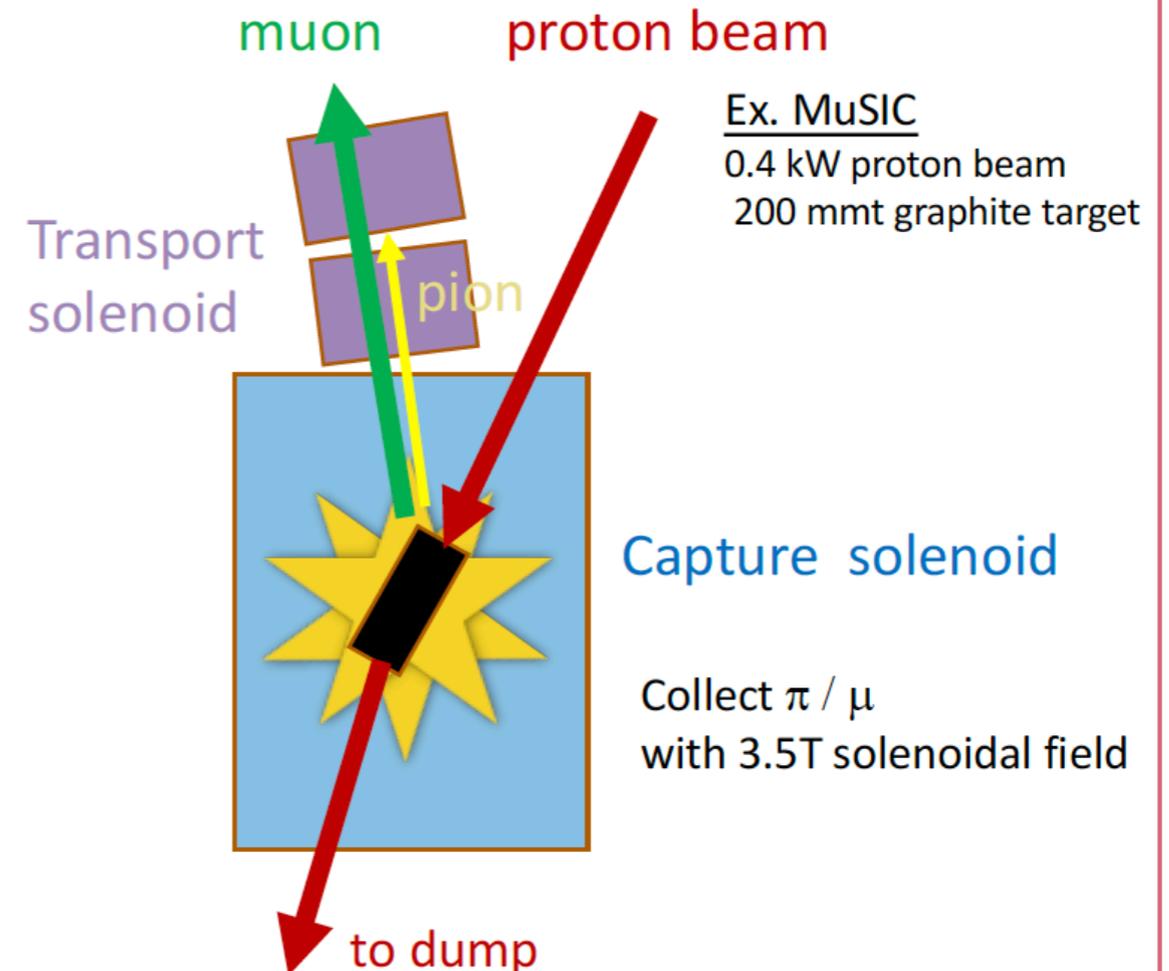

- Thick target (200mmt)
- Large solid angle, good collection efficiency
- No muon spin selection (no selection of pion / muon momentum)

cLFV search landscape

● Muons

~ 250

- MEG, PSI
- MEGII, PSI
- Mu3e, PSI
- DeeMee, J-PARC
- MuSiC, Osaka
- Mu2e, FNAL
- COMET, J-PARC
- PROJECT X, FNAL
- PRIME, J-PARC

Rough estimate of numbers of researchers, in total ~ 850 (with some overlap)



● Kaons

~ 100

- NA48, CERN
- NA62, CERN
- KOTO, J-PARC

● Taus

~ 250

- BABAR, PEP-II
- BELLE/BELLE II, KEKB/SuperKEKB

● cLFV @ LHC

~ 250

- ATLAS, CERN
- CMS, CERN
- LHCb, CERN

● J/ψ @ BEPCII

~ 100

- BESIII, Beijing


cLFV best upper limits

Process	Upper limit	Reference	Comment
$\mu^+ \rightarrow e^+ \gamma$	4.2×10^{-13}	arXiv:1605.05081	MEG
$\mu^+ \rightarrow e^+ e^+ e^-$	1.0×10^{-12}	Nucl. Phys. B299 (1988) 1	SINDRUM
$\mu^- N \rightarrow e^- N$	7.0×10^{-13}	Eur. Phys. J. C 47 (2006) 337	SINDRUM II
$\tau \rightarrow e \gamma$	3.3×10^{-8}	PRL 104 (2010) 021802	Babar
$\tau \rightarrow \mu \gamma$	4.4×10^{-8}	PRL 104 (2010) 021802	Babar
$\tau^- \rightarrow e^- e^+ e^-$	2.7×10^{-8}	Phys. Lett. B 687 (2010) 139	Belle
$\tau^- \rightarrow \mu^- \mu^+ \mu^-$	2.1×10^{-8}	Phys. Lett. B 687 (2010) 139	Belle
$\tau^- \rightarrow \mu^+ e^- e^-$	1.5×10^{-8}	Phys. Lett. B 687 (2010) 139	Belle
$Z \rightarrow \mu e$	7.5×10^{-7}	Phys. Rev. D 90 (2014) 072010	Atlas
$Z \rightarrow \mu e$	7.3×10^{-7}	CMS PAS EXO-13-005	CMS
$H \rightarrow \tau \mu$	1.85×10^{-2}	JHEP 11 (2015) 211	Atlas (*)
$H \rightarrow \tau \mu$	1.51×10^{-2}	Phys. Lett. B 749 (2015) 337	CMS
$K_L \rightarrow \mu e$	4.7×10^{-12}	PRL 81 (1998) 5734	BNL

* $B(H \rightarrow \mu e) < O(10^{-8})$ from $\mu \rightarrow e \gamma$ ⁶³

The role of the low energy precision physics

- The Standard Model of particle physics: A great triumph of the modern physics but not the ultimate theory

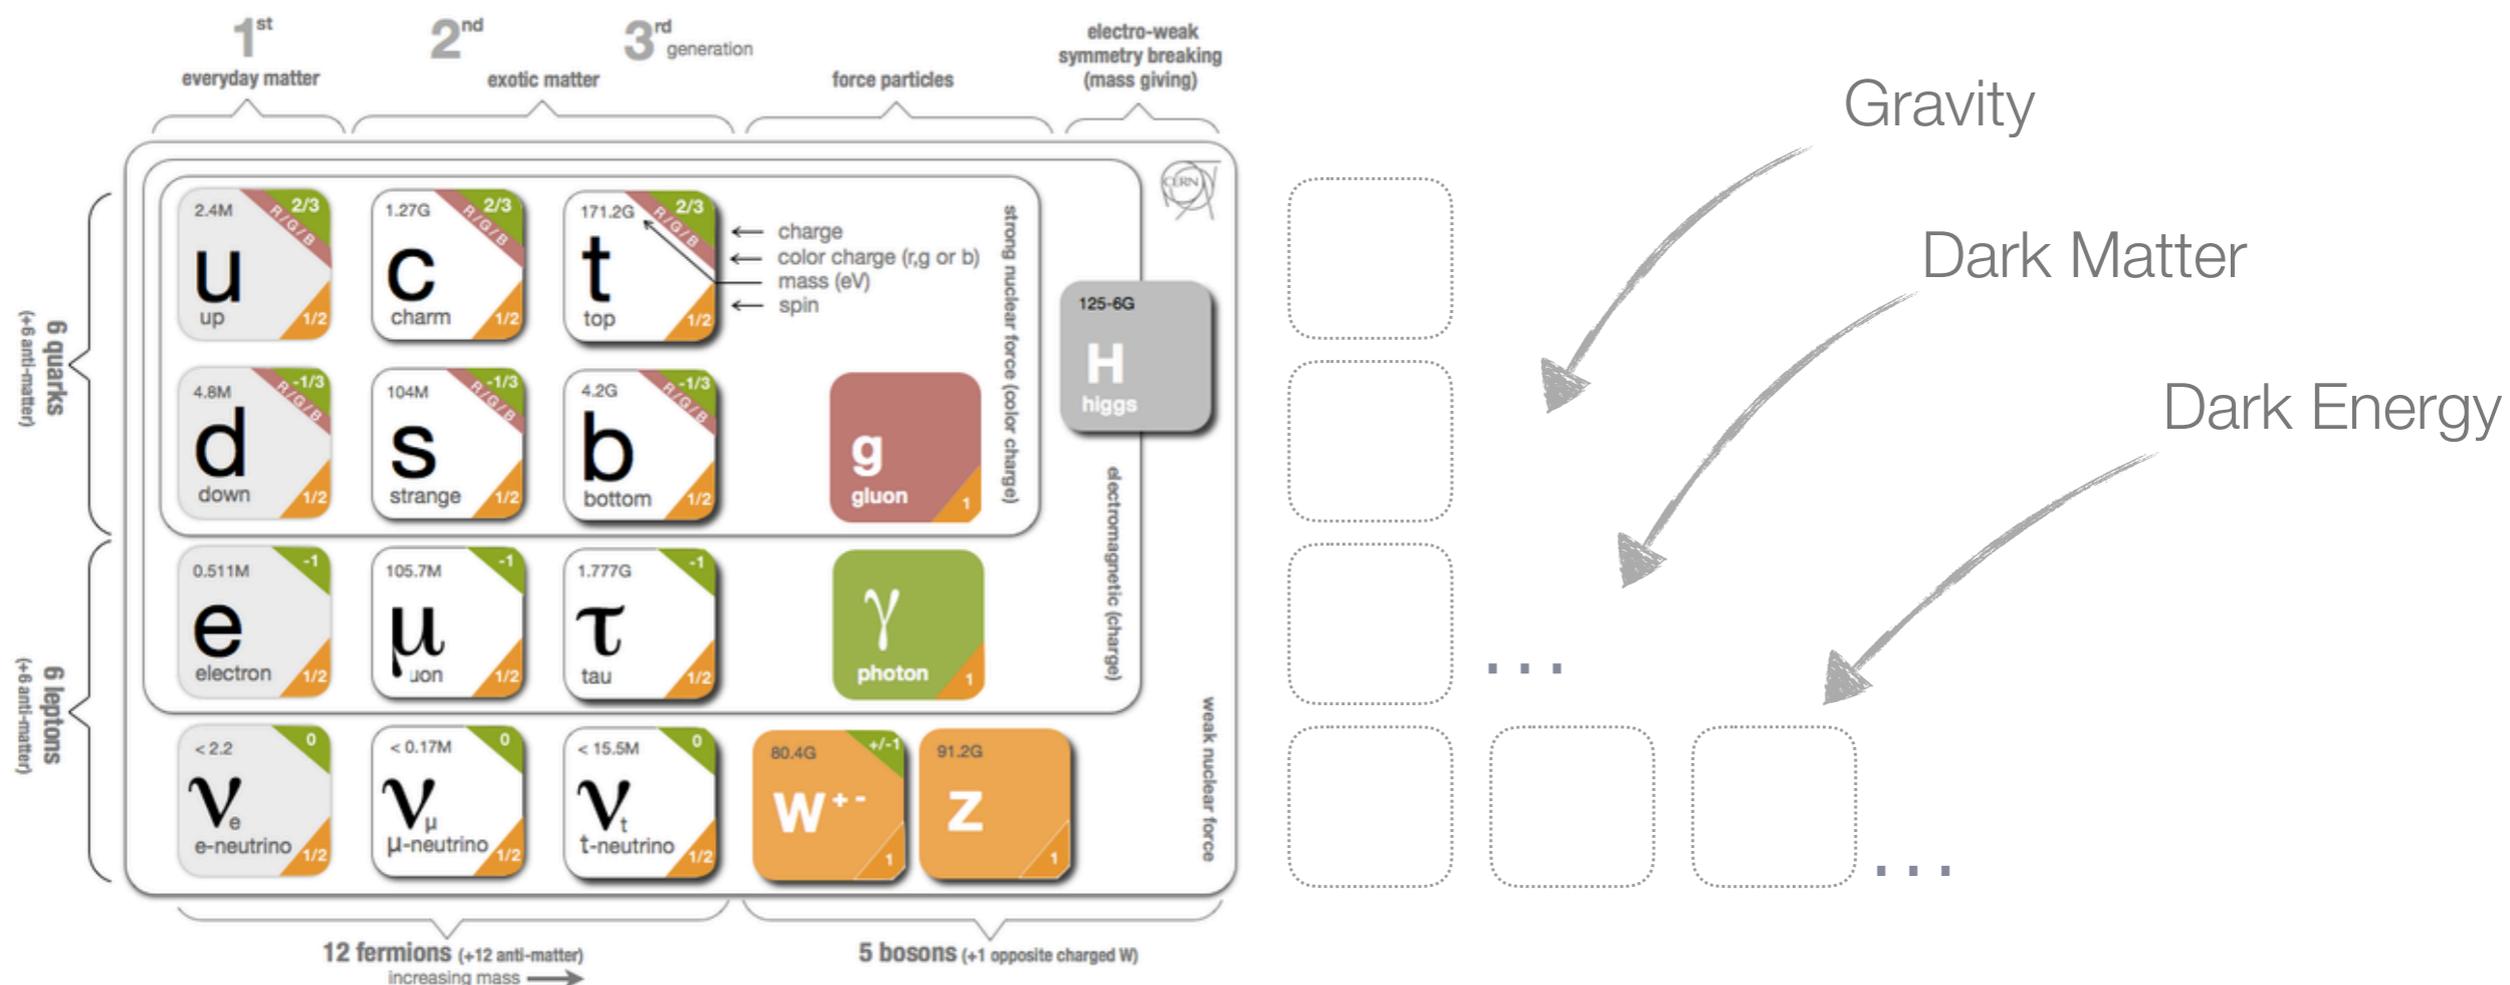

- Low energy precision physics: Rare/forbidden decay searches, symmetry tests, precision measurements very sensitive tool for unveiling new physics and probing very high energy scale


The role of the low energy precision physics

- Two main strategies to unveil new physics
 - Indirect searches
 - Precision tests

The role of the low energy precision physics


- Two main strategies to unveil new physics
 - **Indirect searches**
 - Precision tests

Charged lepton flavour violation

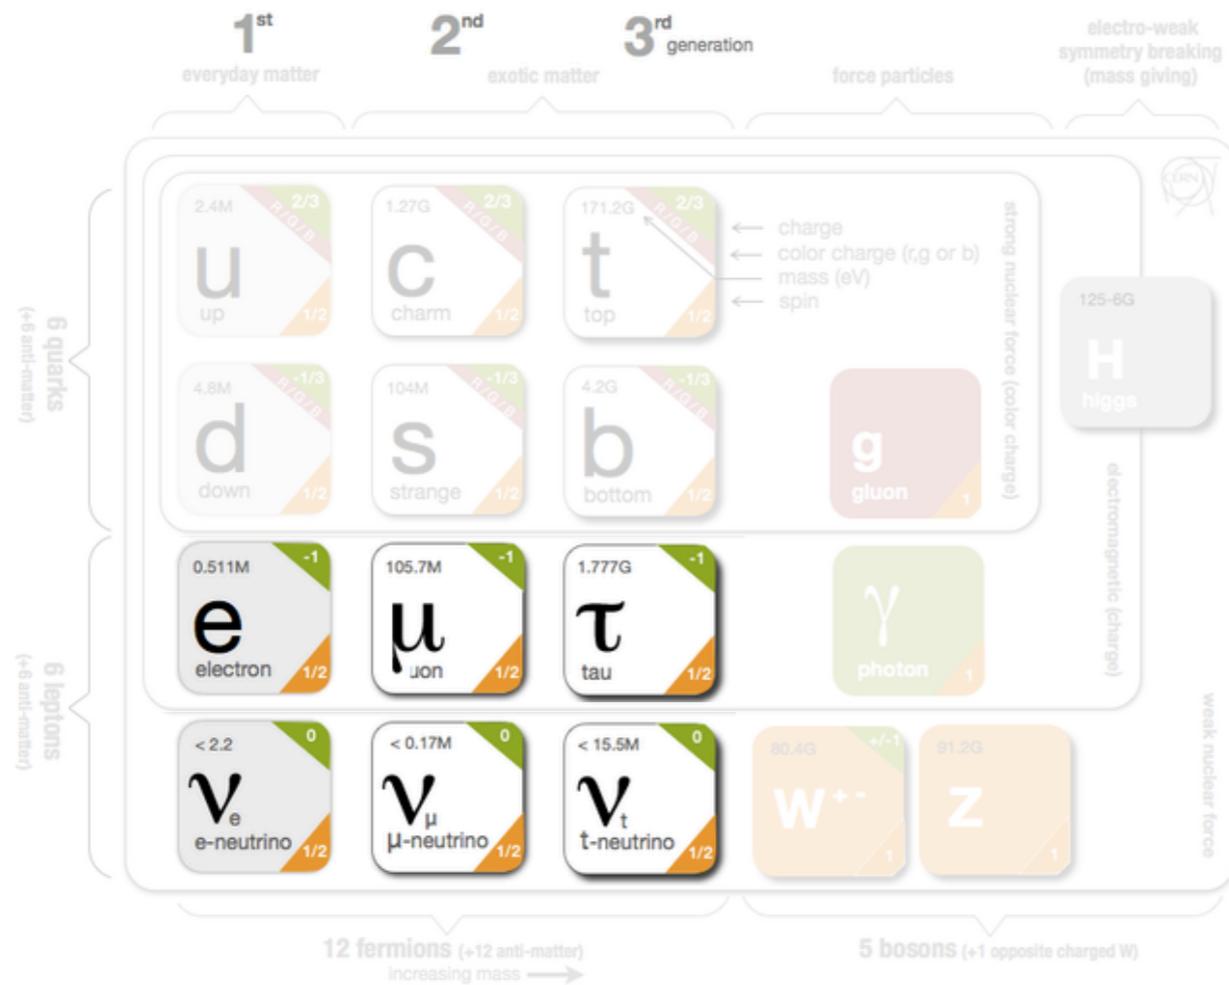

Charged lepton flavour violation


- Neutrino oscillations: Evidence of physics Behind Standard Model (BSM)
Neutral lepton flavour violation

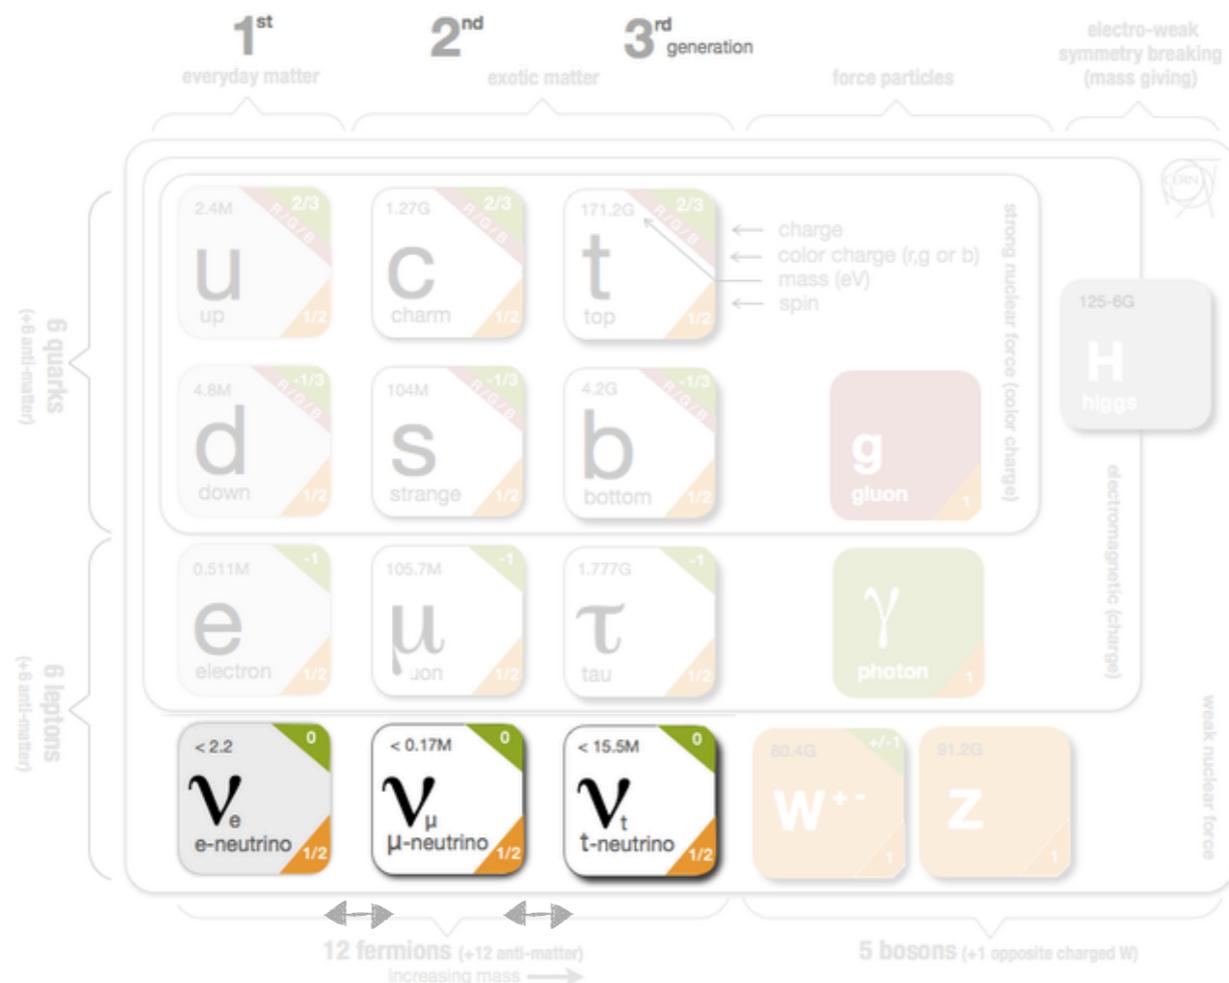

$$\Delta N_i \neq 0 \text{ with } i = 1, 2, 3$$

Charged lepton flavour violation

- Neutrino oscillations: Evidence of physics Behind Standard Model (BSM)
Neutral lepton flavour violation

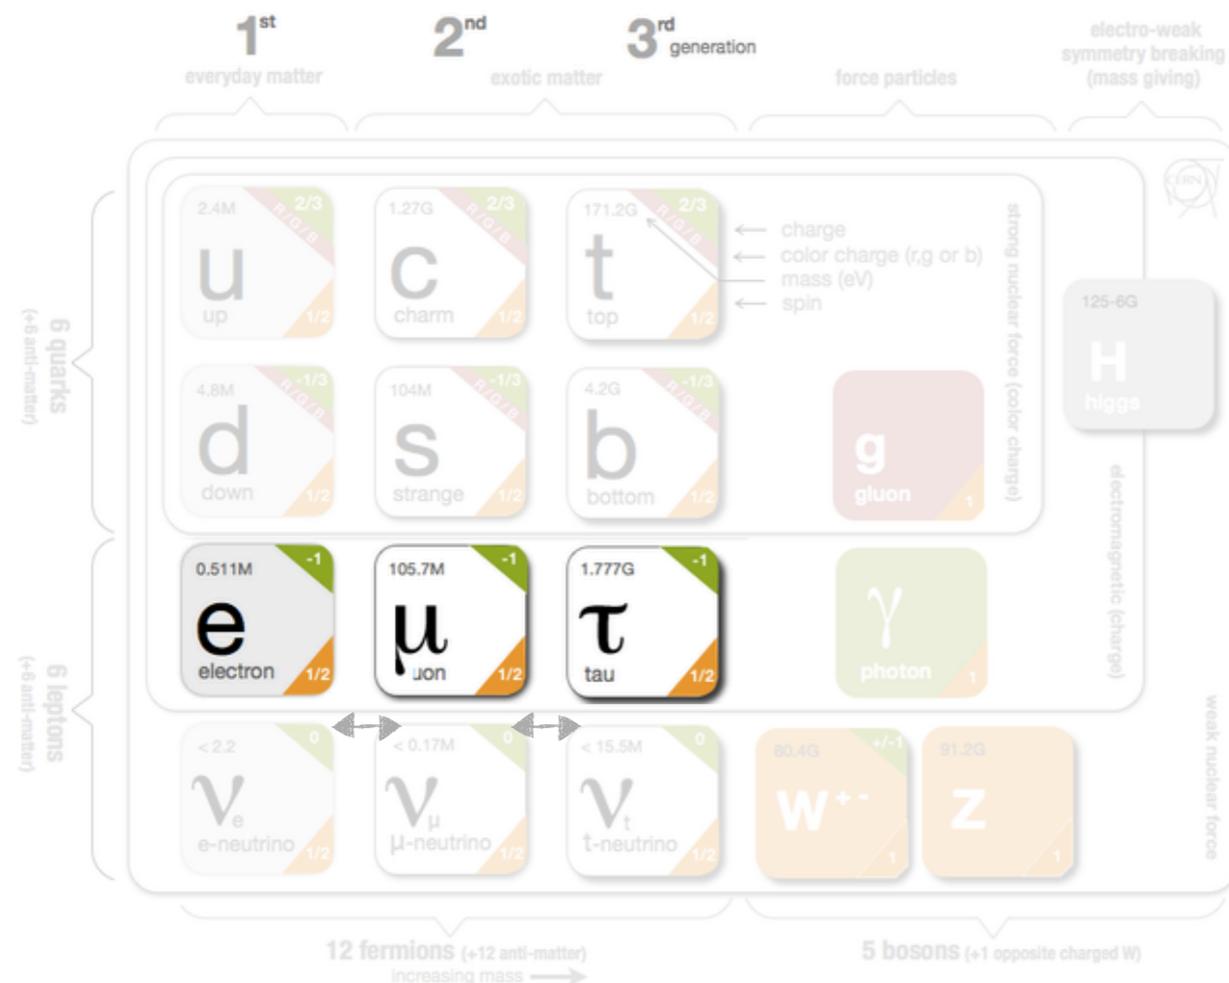

$$\Delta N_i \neq 0 \text{ with } i = 1, 2, 3$$

- Charged lepton flavour violation: NOT yet observed