

The EDM in the $g-2$ experiment

Becky Chislett
23rd October 2019



Electric Dipole Moments

Fundamental particles can have an EDM which is analogous to the MDM

$$\vec{d} = \eta \frac{Qe}{2mc} \vec{s}$$

$$\vec{\mu} = g \frac{e}{2mc} \vec{s}$$

Provides an additional source of CP violation

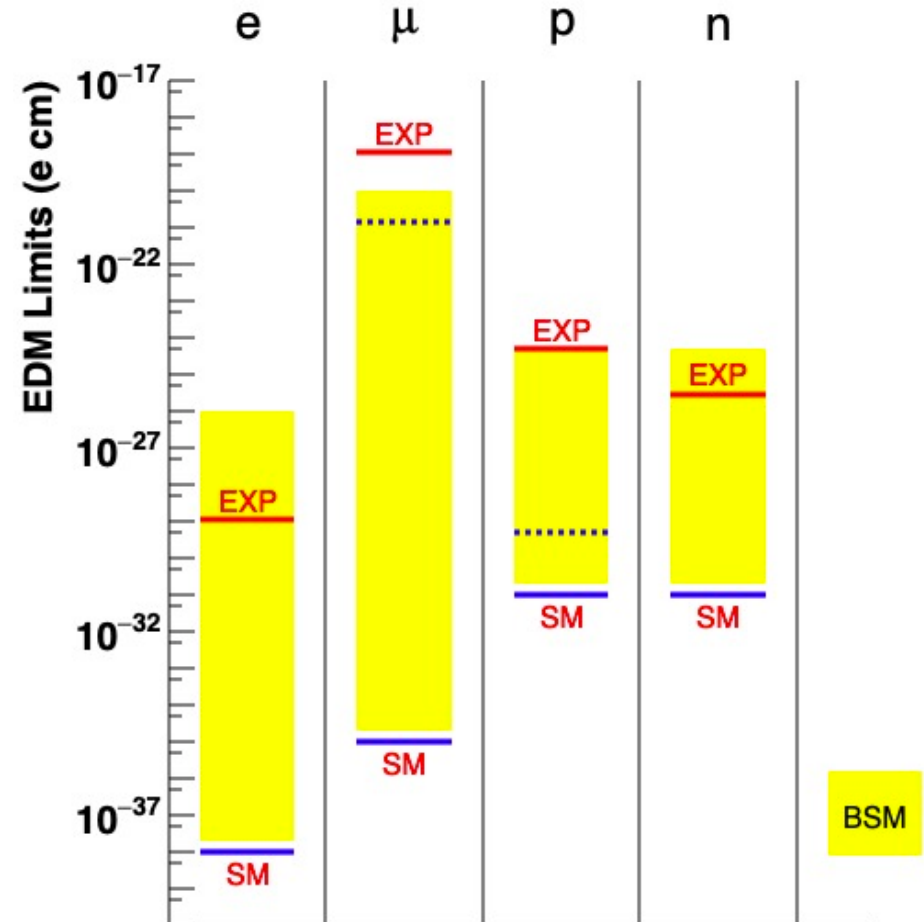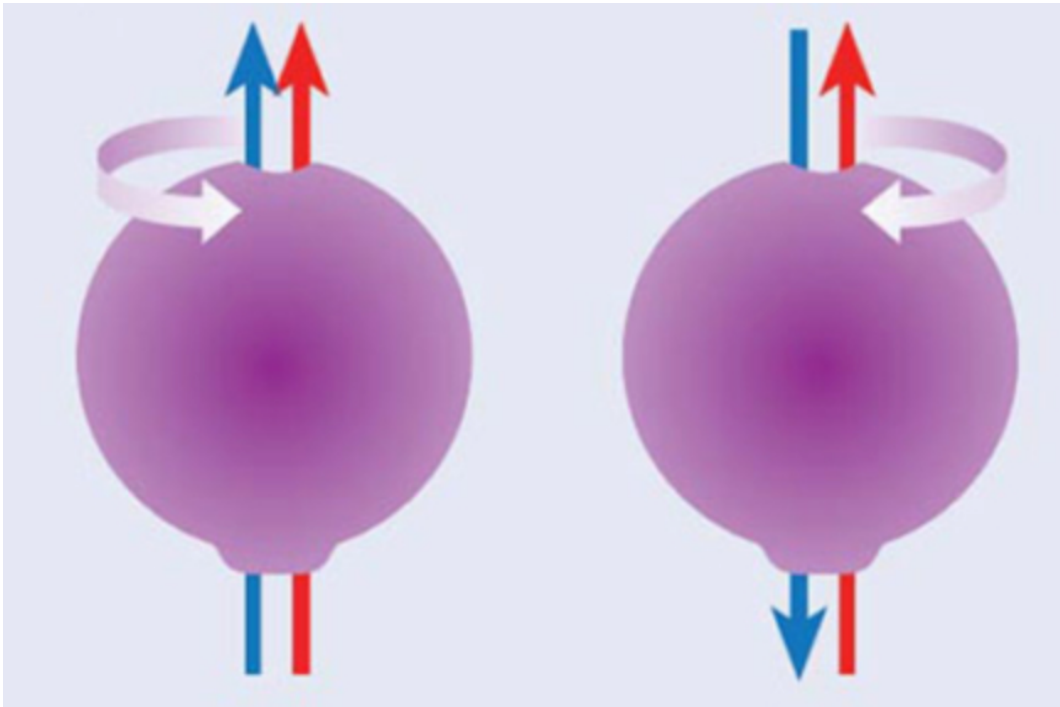

The power of EDM measurements has recently been demonstrated by the latest electron EDM measurement


The EDM in the g-2 experiment

If an EDM is present the spin equation is modified to:

$$\vec{\omega}_{a\eta} = \vec{\omega}_a + \vec{\omega}_\eta = \underbrace{-\frac{Qe}{m} a \vec{B}}_{\text{MDM}} - \eta \frac{Qe}{2m} \left[\frac{\vec{E}}{c} + \underbrace{\vec{\beta} \times \vec{B}}_{\text{Dominant term}} \right]$$

Dominant term

An EDM tilts the precession plane towards the centre of the ring

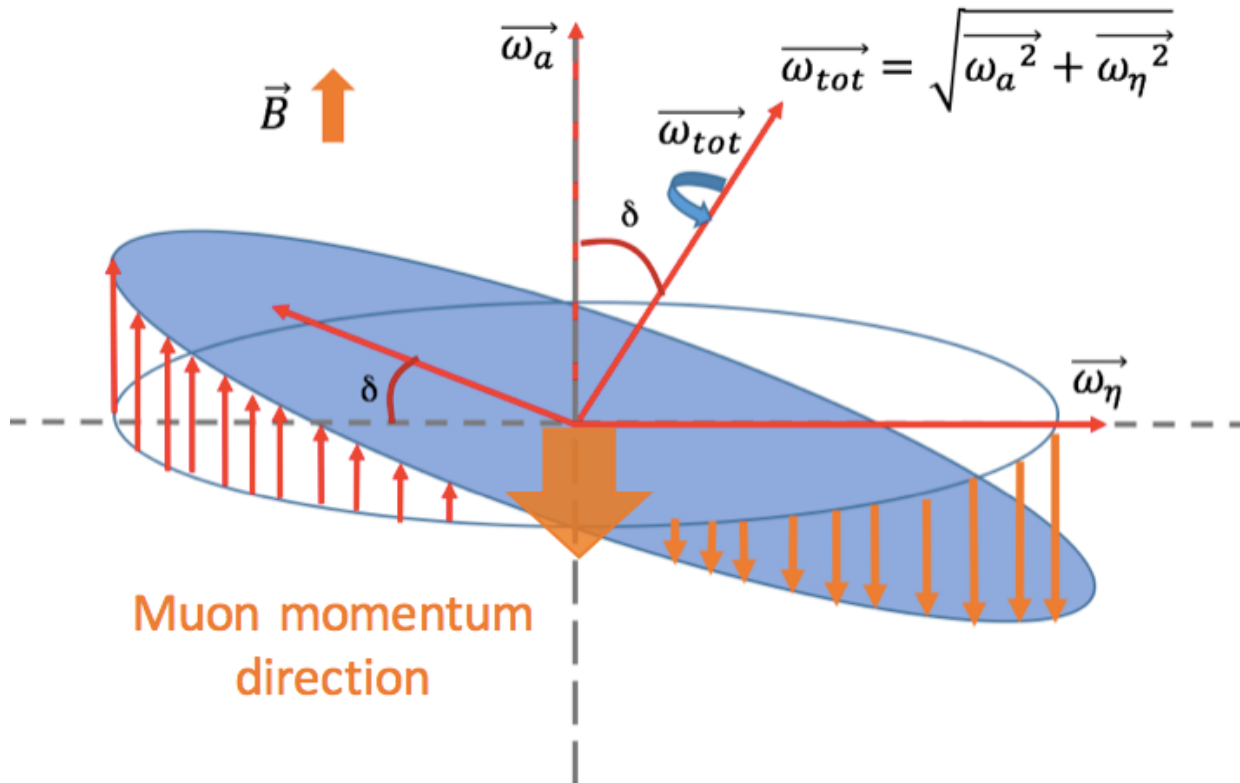

Produces a vertical oscillation 90 degrees out of phase :

$$\omega_{a\eta} = \sqrt{\omega_a^2 + \omega_\eta^2}$$



$$\delta = \tan^{-1} \left(\frac{\eta\beta}{2a} \right)$$

The vertical angle

The tilt of the precession plane is determined by the size of the EDM

$$\delta = \tan^{-1}\left(\frac{\omega_\eta}{\omega_a}\right) = \tan^{-1}\left(\frac{\eta\beta}{2a_\mu}\right)$$

However, the precession angle is reduced due to the Lorentz boost :

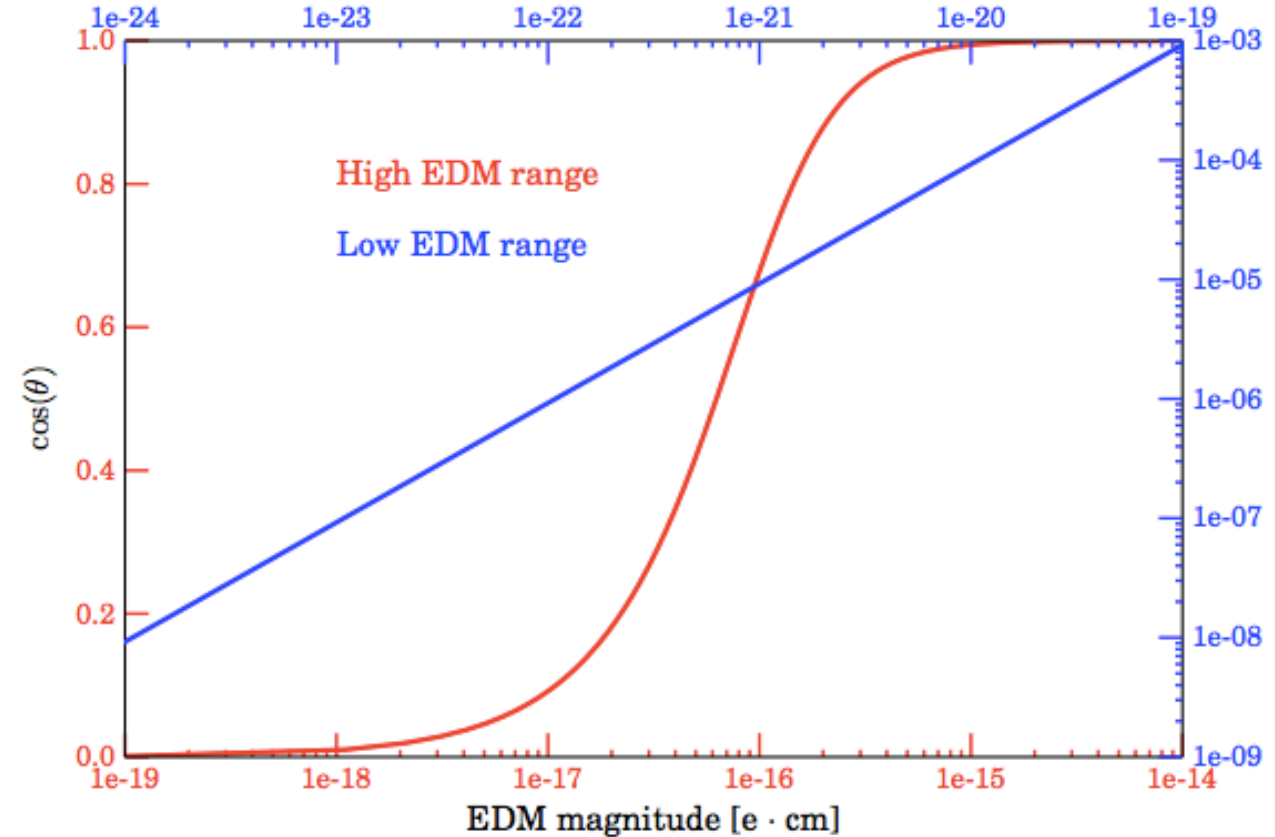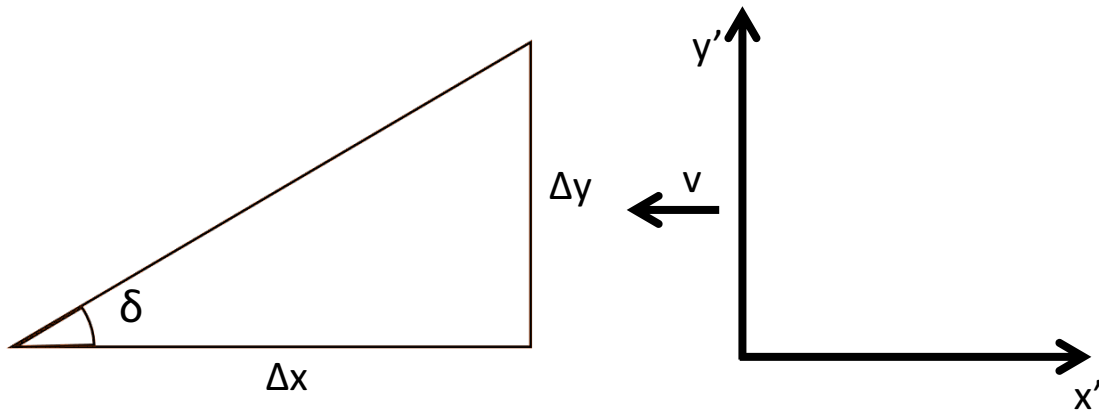

$$\delta' = \tan^{-1}\left(\frac{\tan \delta}{\gamma}\right)$$


(neglecting the vertical momentum component)

The measured angle

The measured decay asymmetry is further reduced because :

- The positrons are not always emitted along the spin direction
- Detector acceptance effects

Simulation suggests that this reduces the amplitude to 10%

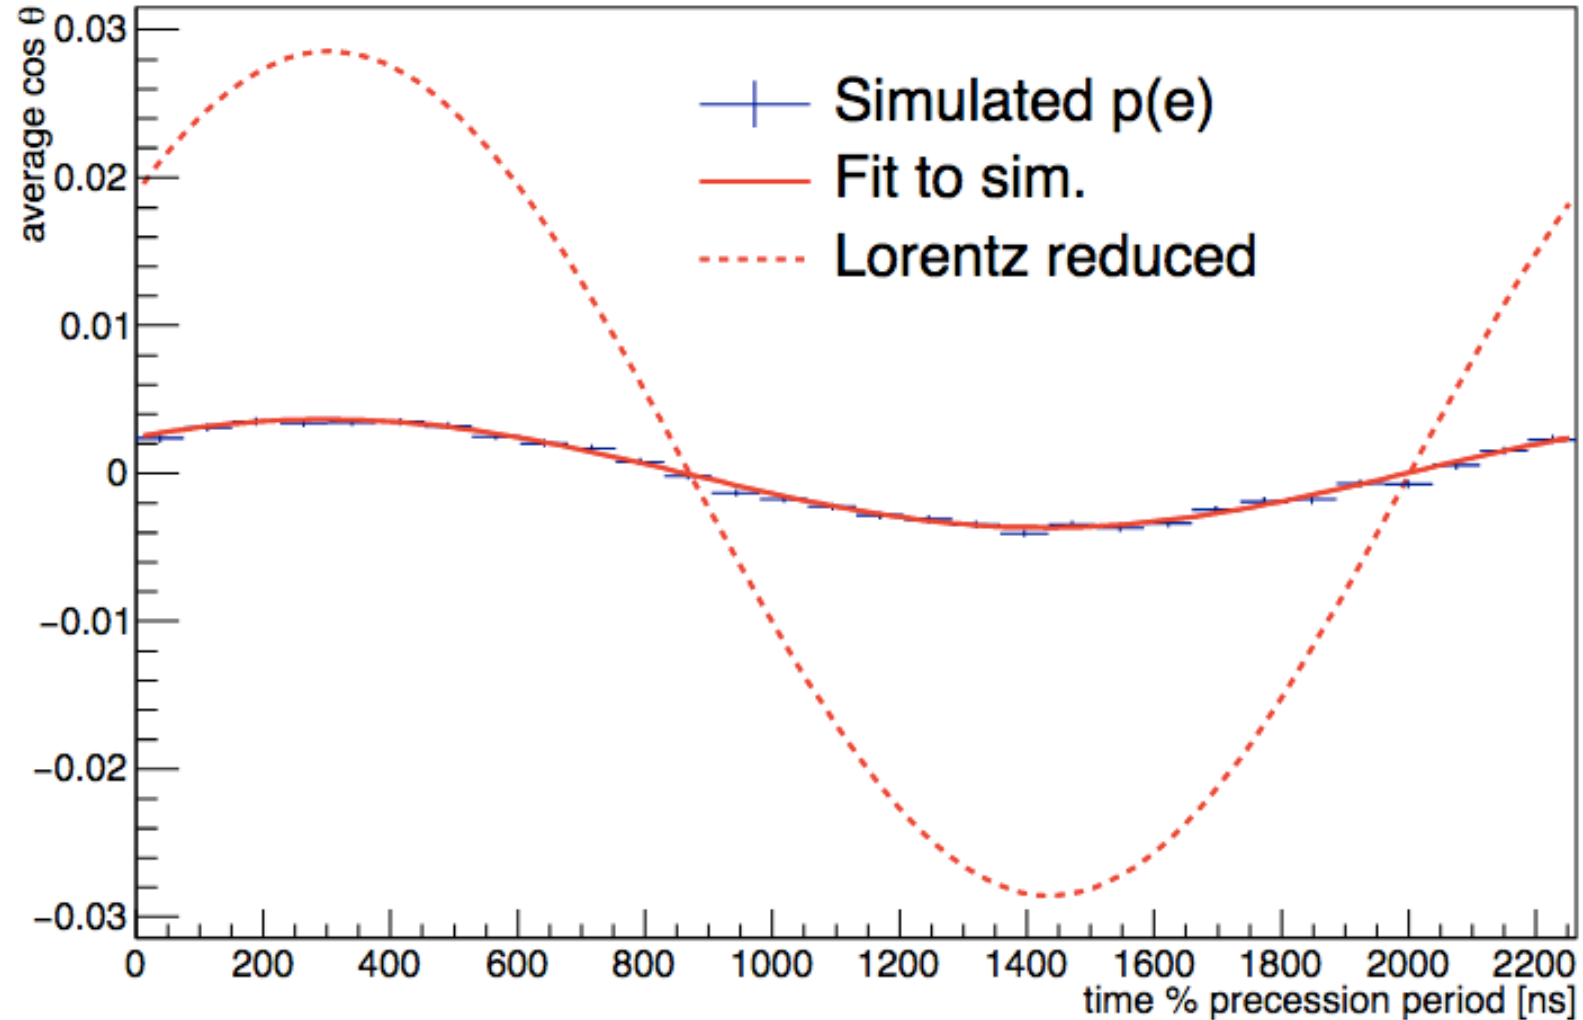

The decay asymmetry

The lower momentum positrons have a larger decay angle asymmetry

However :

- Lower energy positrons contain less information about the muon spin direction
- The statistics drop off at lower energies

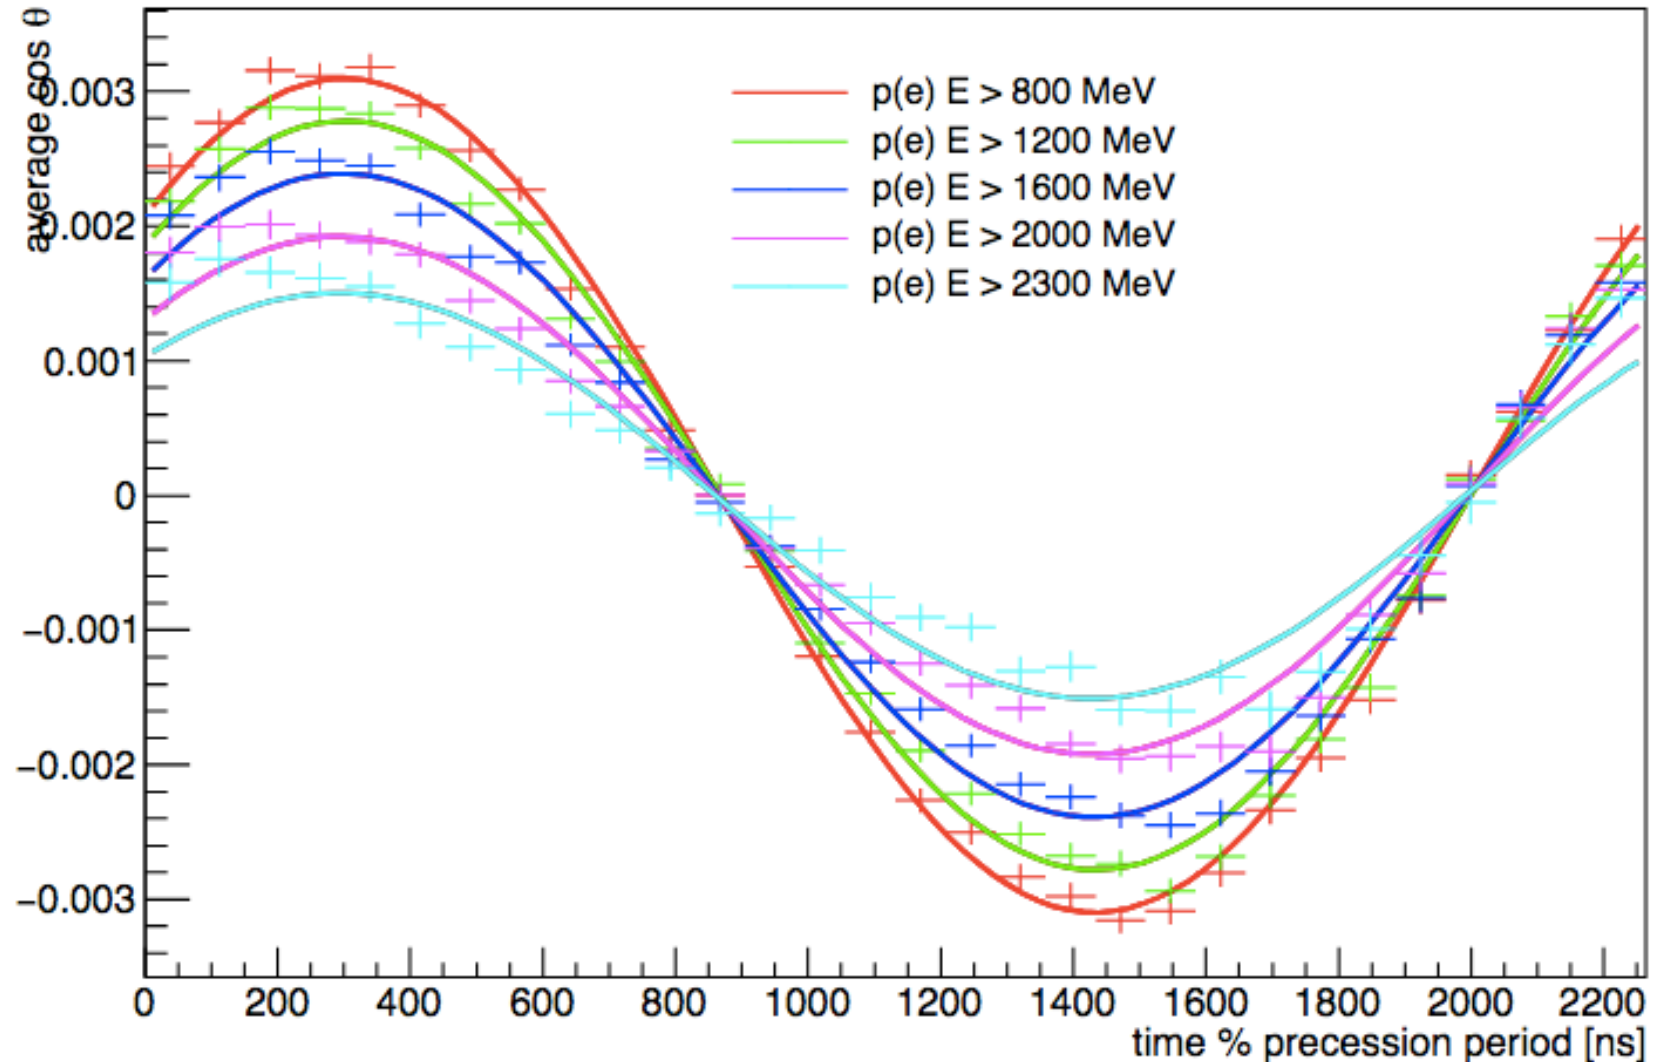



Figure of Merit

The statistical uncertainty is inversely proportional to NA^2


Number of muons

Asymmetry

G-2 asymmetry

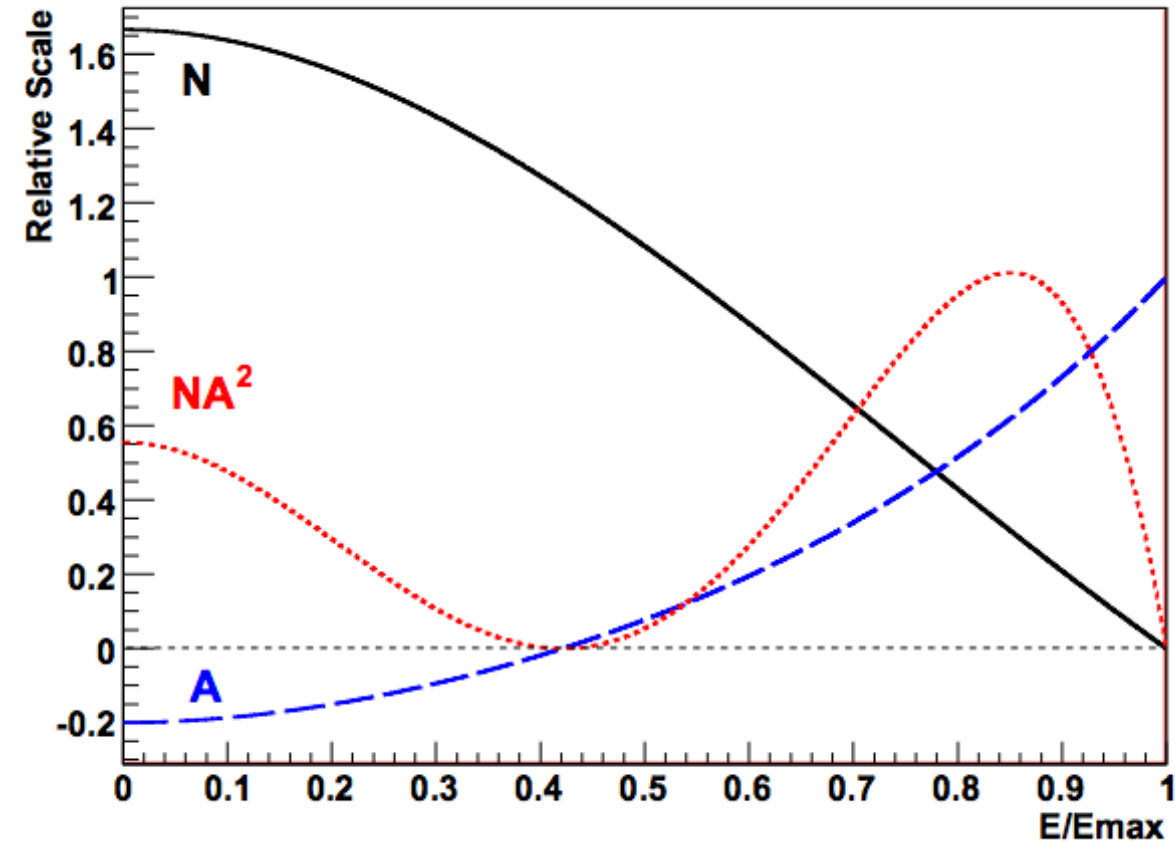

EDM asymmetry

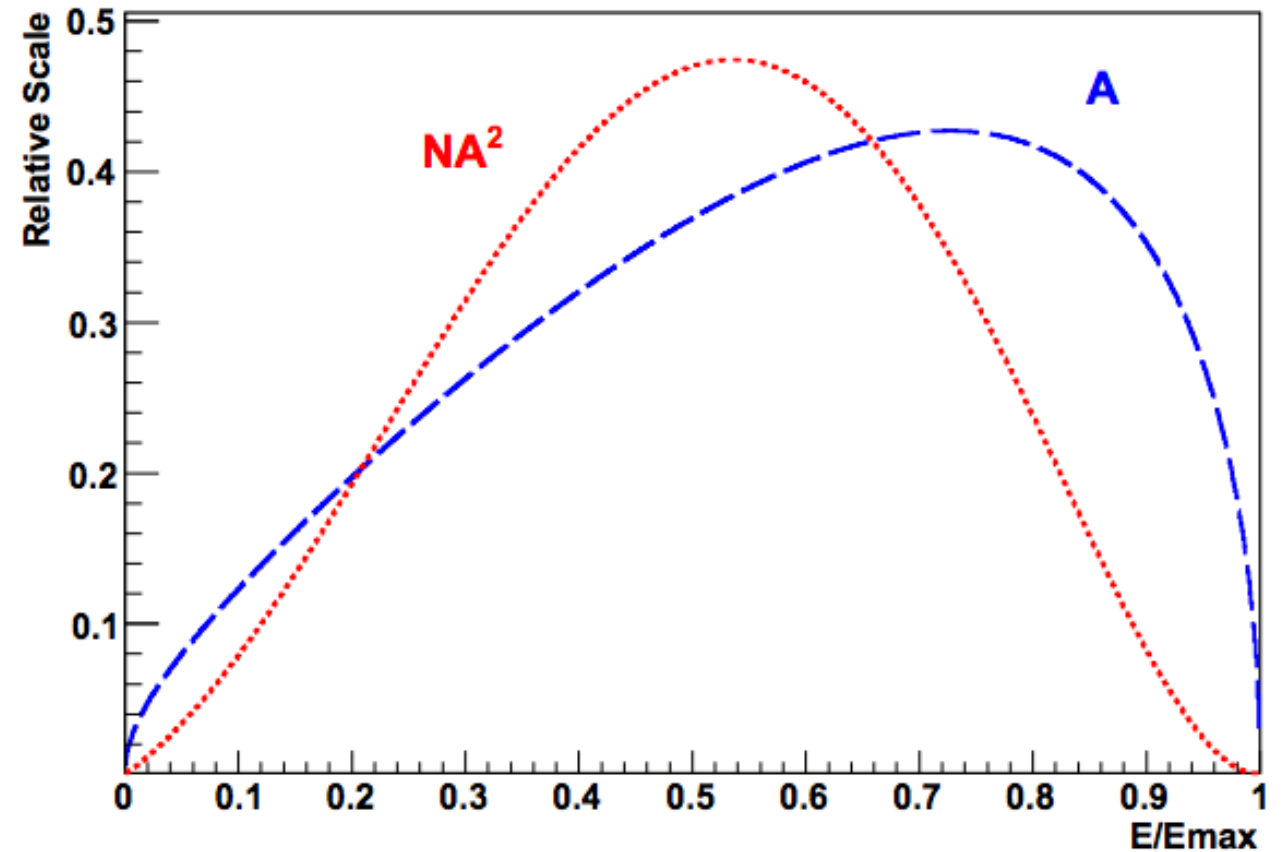

$E_{\text{max}} \sim 3.1 \text{ GeV}$


The BNL measurement

The EDM can be measured

- **Indirectly** by comparing the measured value of ω_a to the SM prediction
- **Directly** by looking for a tilt in the precession plane

For the direct method 3 techniques were used at BNL:

- **Phase as a function of vertical position**
- **Vertical position oscillation as a function of time**
- **Vertical decay angle oscillation as a function of time**

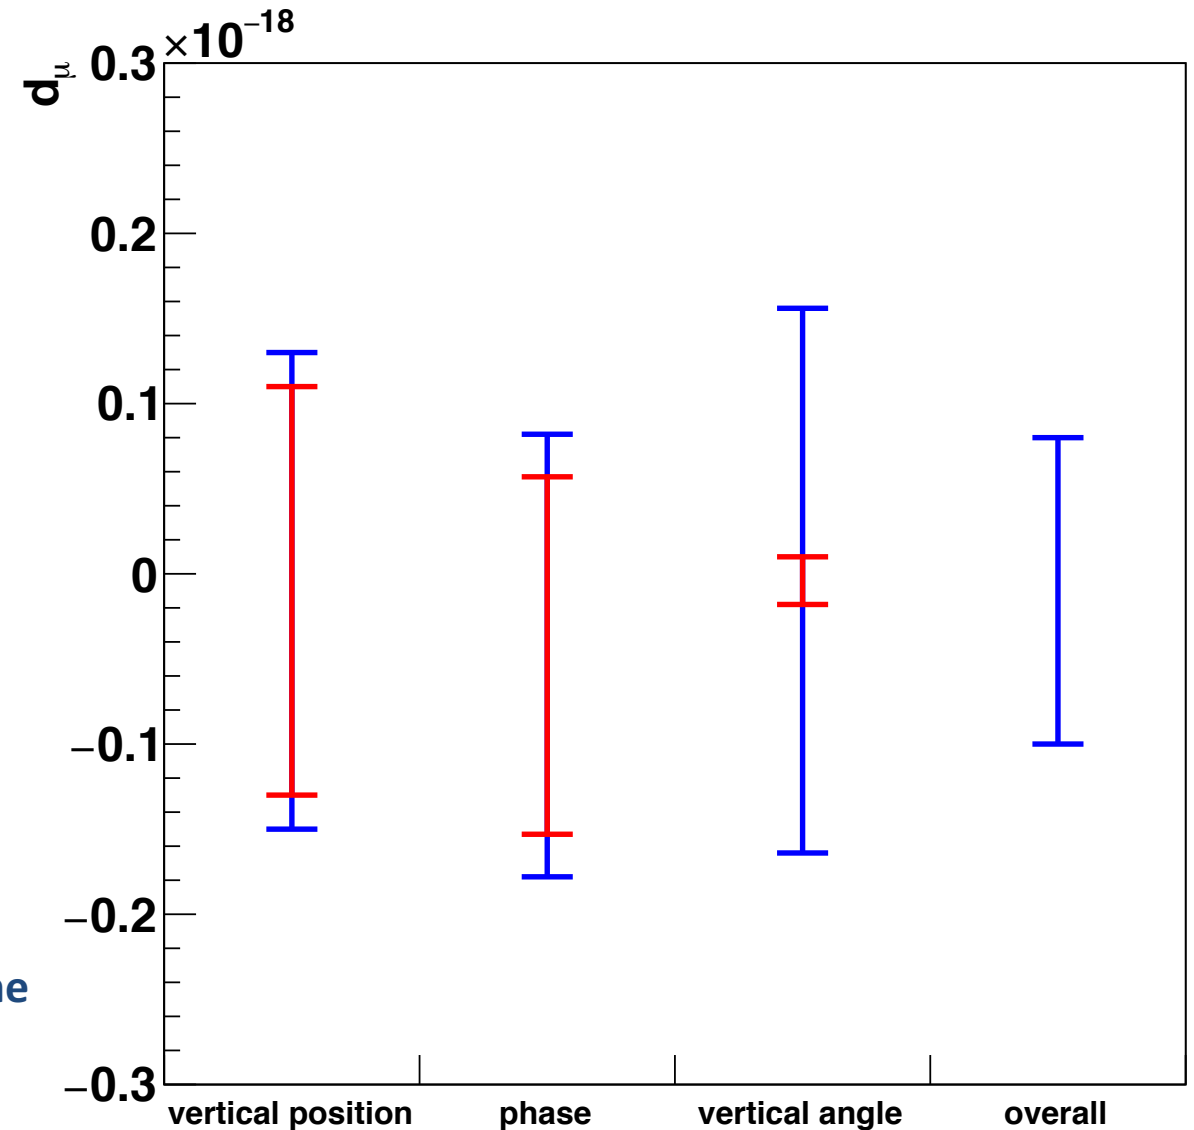

Vertical decay angle uncertainties

Look for an oscillation in the vertical decay angle of the positrons


Plot the number oscillation as a function of time modulo the precession period

Minimises period disturbances at other frequencies

Use the period calculated from the ω_a fit

Fit to calculate the phase :

$$N(t) = e^{-t/\tau_e} (N_0 + W \cos(\omega t + \Phi))$$

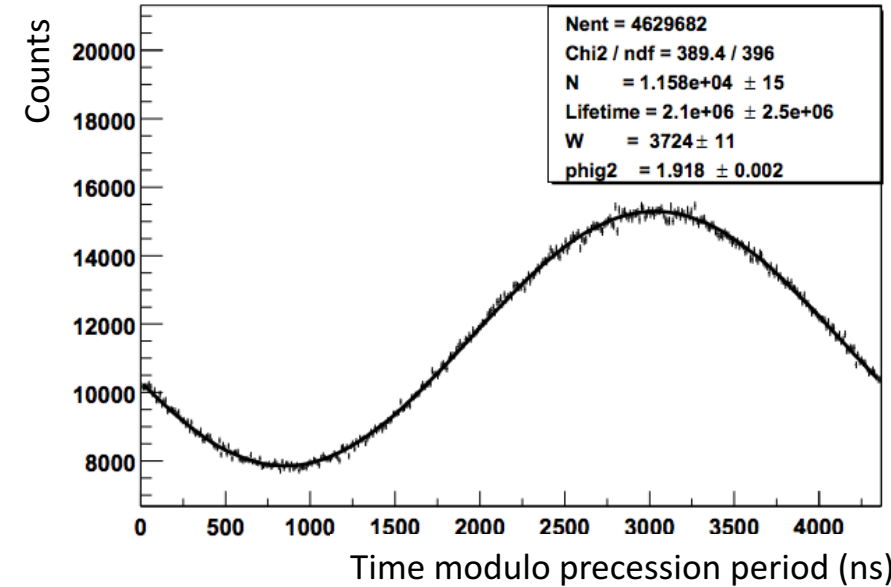


Plot the average vertical decay angle as a function of time modulo the precession period

Fit (fix phase from above):

$$\theta(t) = M + A_\mu \cos(\omega t + \Phi) + A_{EDM} \sin(\omega t + \Phi)$$

EDM oscillation comes in $\pi/2$ out of phase from the MDM

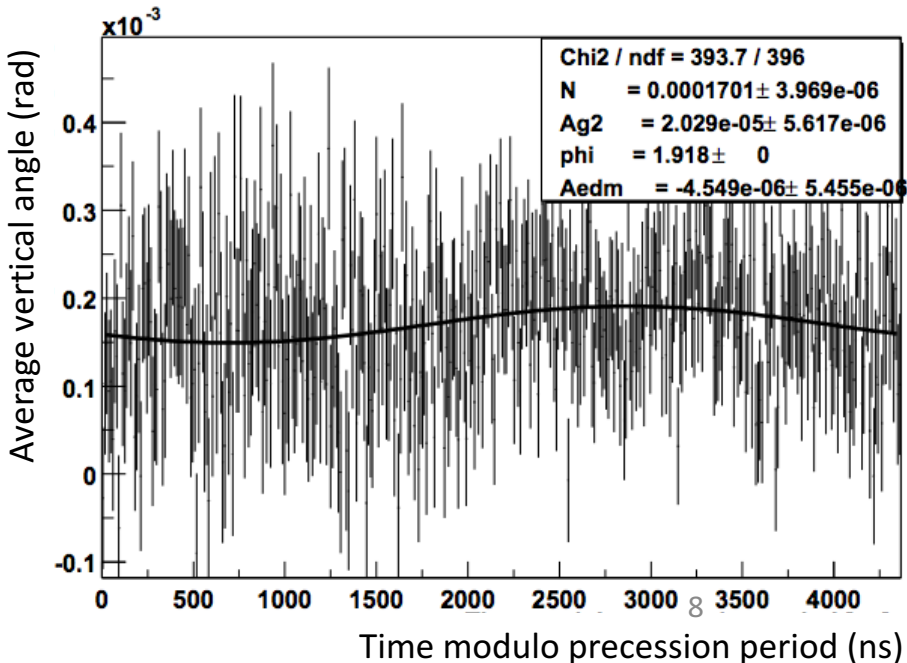

Vertical decay angle uncertainties

Main systematic uncertainties to be considered for this method:

Radial Magnetic field:

Would cause a tilt in the precession plane

Detector acceptance:

Inward going positrons travel a shorter distance than outward going positrons

—————> narrower beam spread

Horizontal CBO oscillations

Phase or period errors:

Could mix the number oscillation into the EDM phase

E821:


Oscillation amplitude : $(-0.1 \pm 4.4) \times 10^{-6}$ rad

—————> $d_\mu = (-0.04 \pm 1.6) \times 10^{-19}$ e·cm

—————> $|d_\mu| < 3.2 \times 10^{-19}$ e·cm (95% C.L)



Dominated by the statistical error

Systematic error	Vertical oscillation amplitude (μ rad lab)	Precession plane tilt (mrad)	False EDM generated 10^{-19} (e·cm)
Radial field	0.13	0.04	0.045
Acceptance coupling	0.3	0.09	0.1
Horizontal CBO	0.3	0.09	0.1
Number oscillation	0.01	0.003	0.0034
phase fit			
Precession period	0.01	0.003	0.0034
Totals	0.44	0.13	0.14

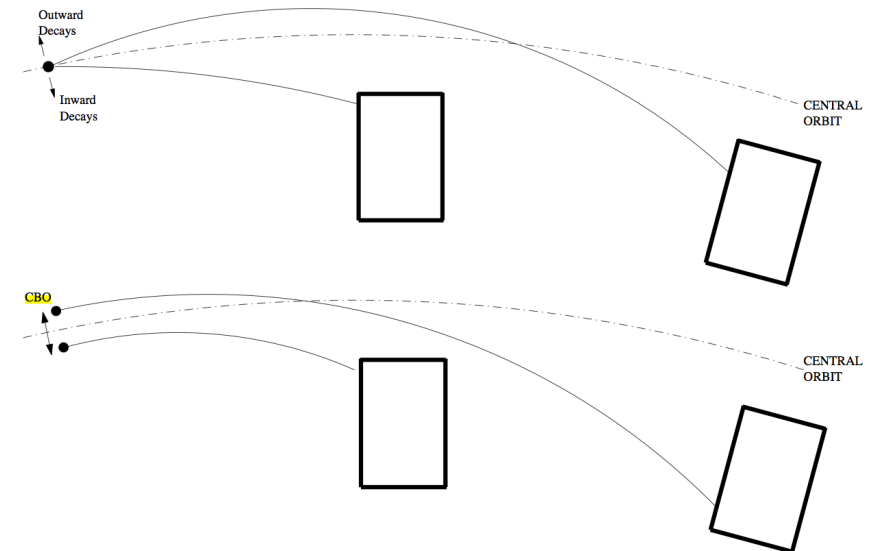

The measurement at FNAL


The tracking detectors in the experiment at FNAL should allow for a large improvement in the limit from the vertical angle EDM analysis at BNL

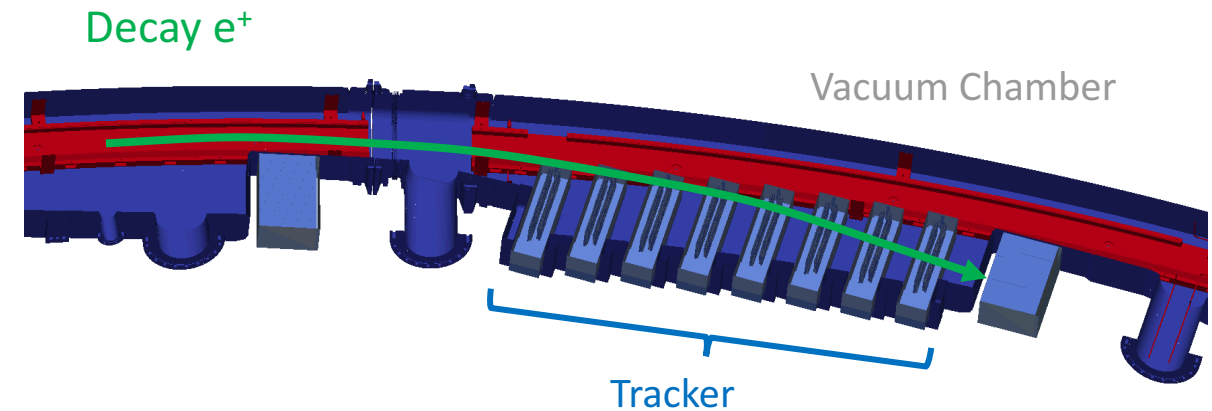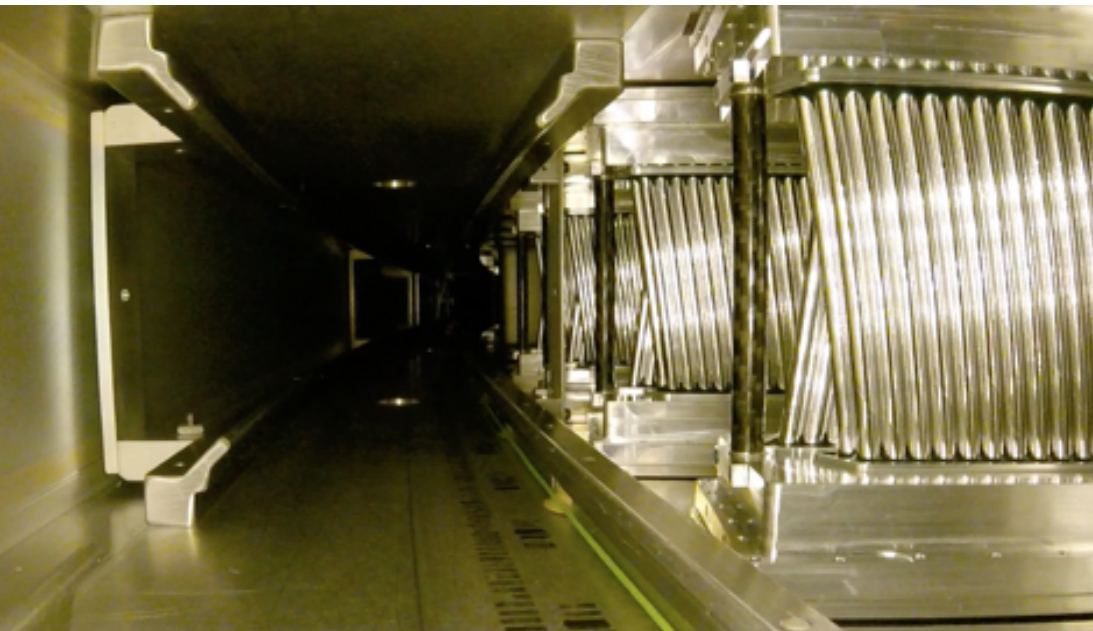

Expect $O(1000)$ times better statistics than at BNL





Reduce error by 1 order of magnitude quickly, approaching 2 orders of magnitude by the end

But need careful control of the systematic errors

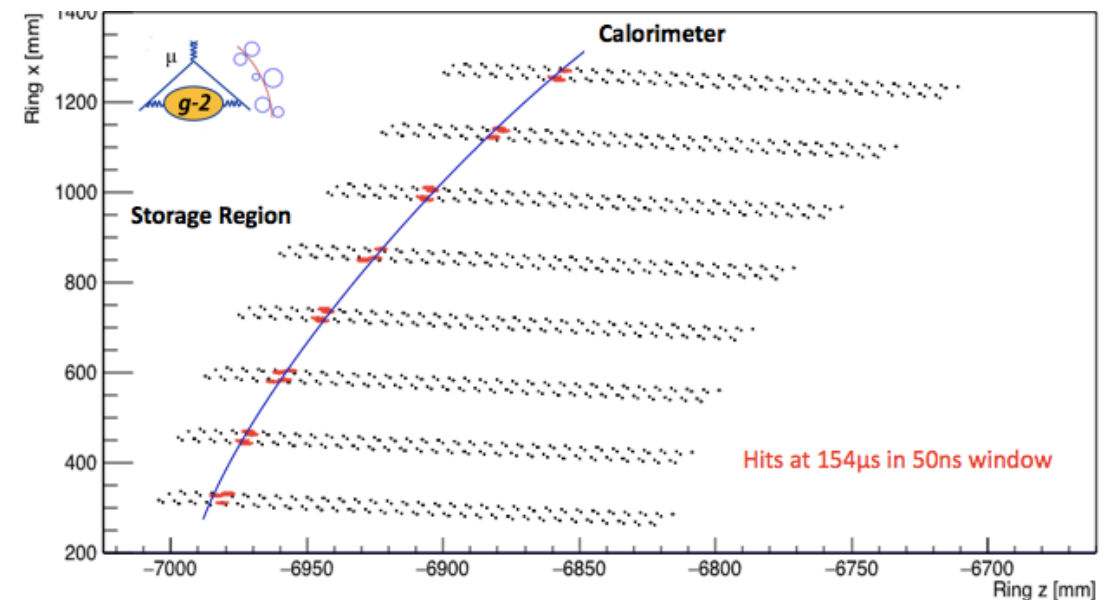


Beam reconstruction

The tracks are extrapolated back to the point of radial tangency as an approximation of the decay position

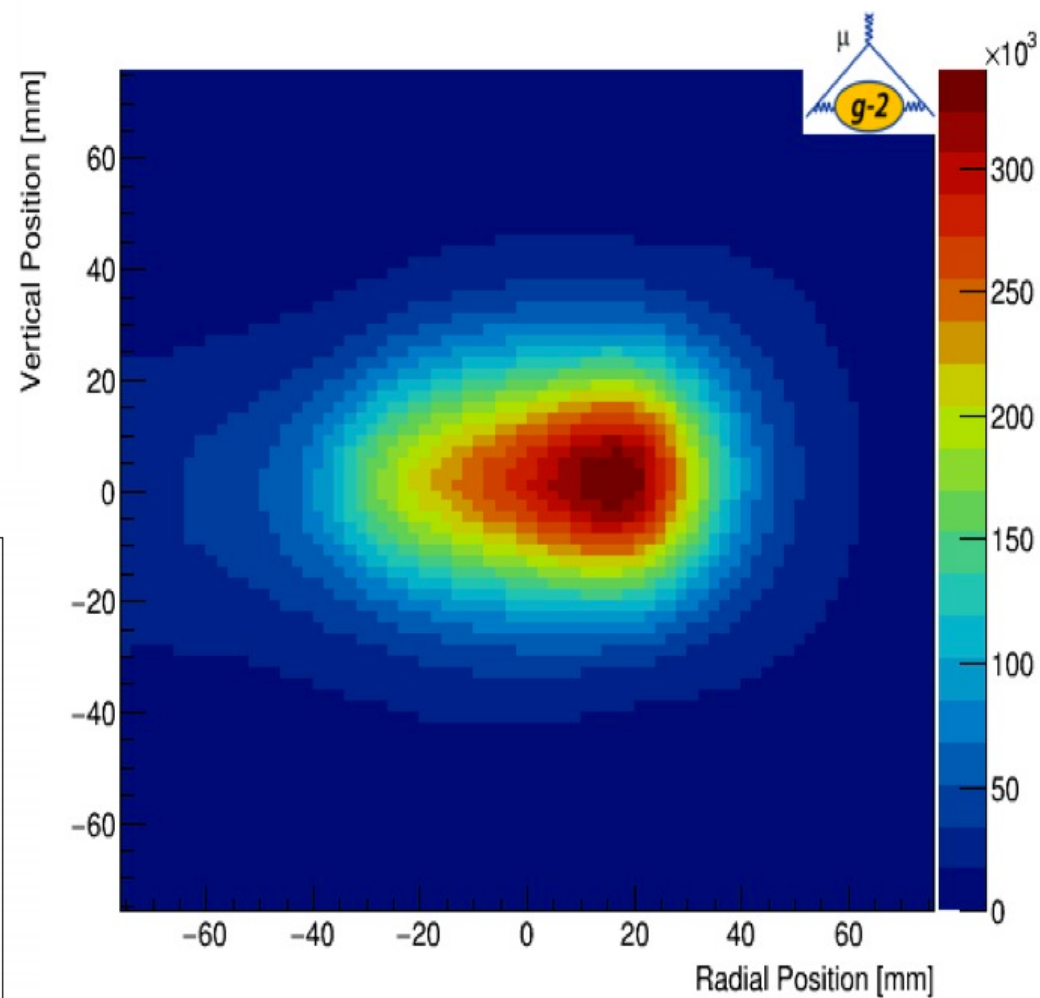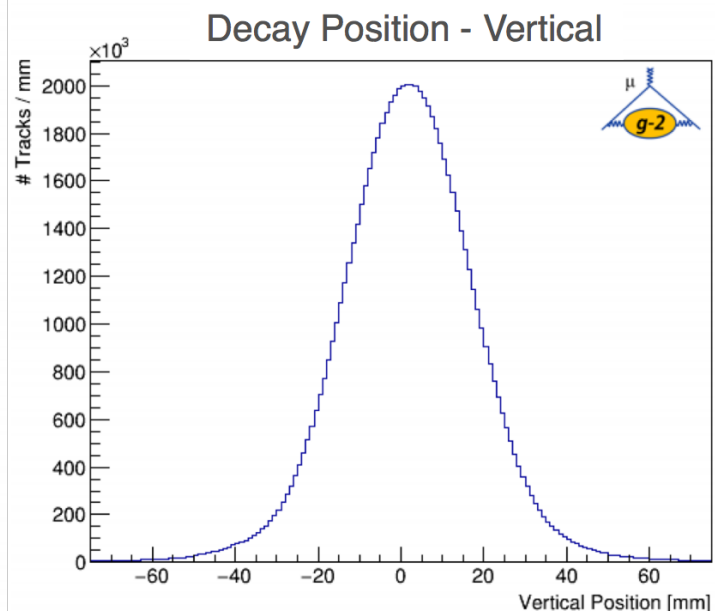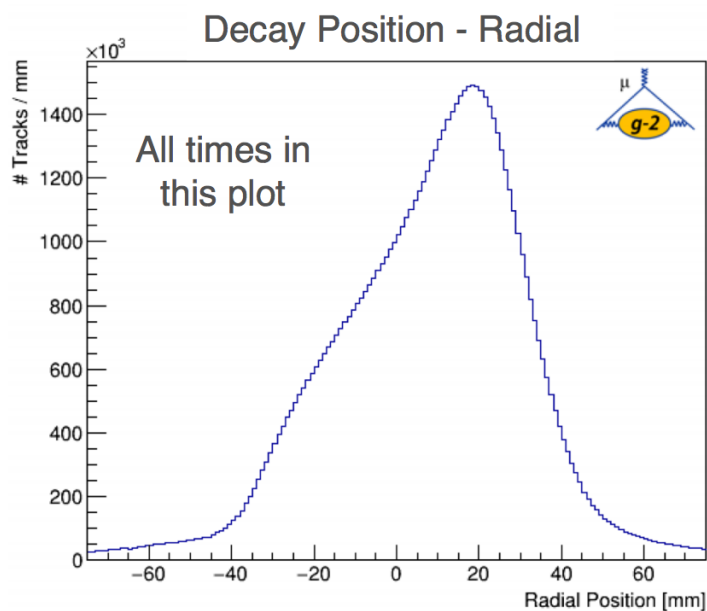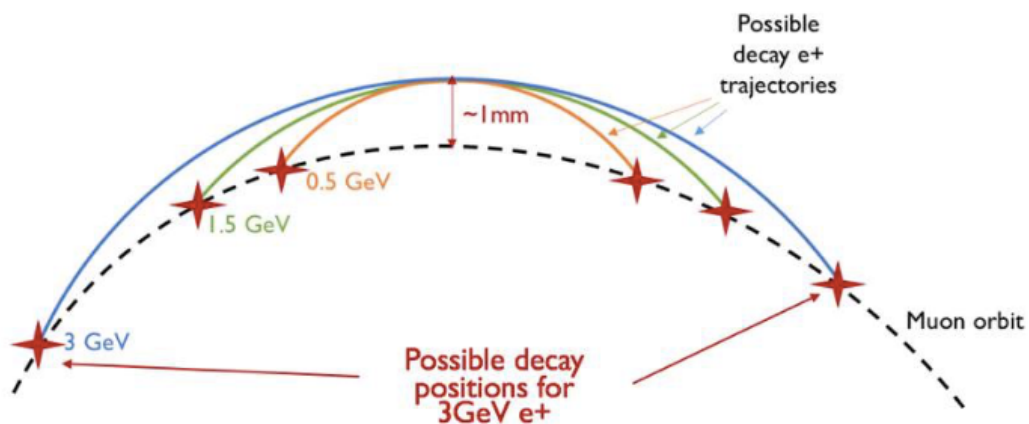


Vertical angle measurements


truth - reco vertical position

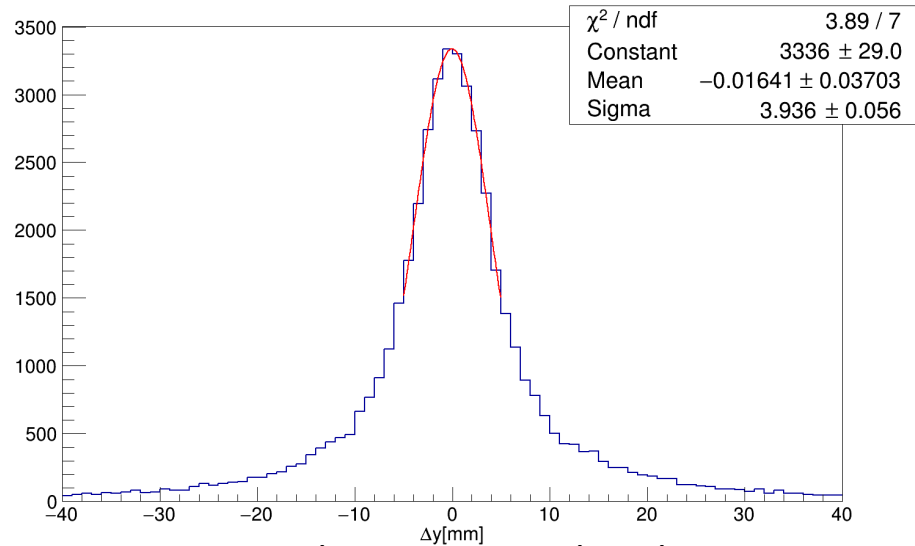


truth - reco vertical momentum

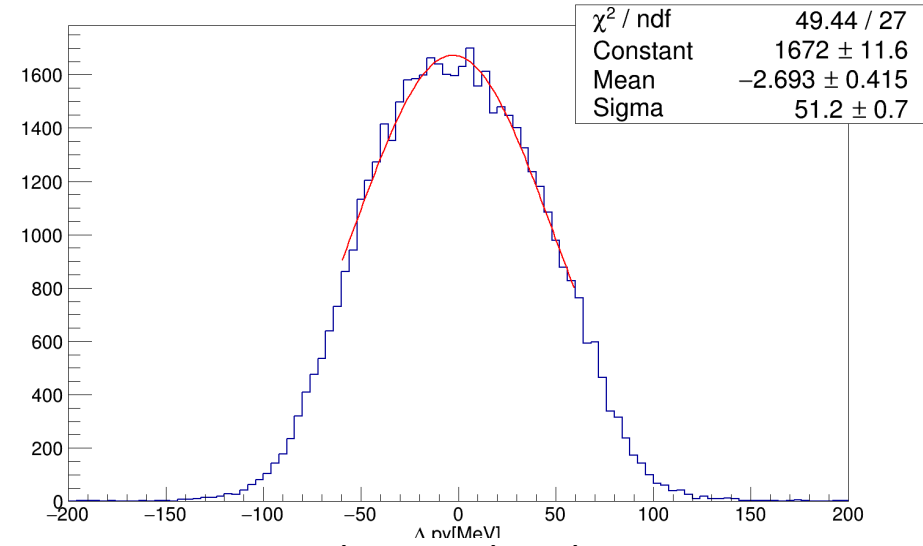


truth - reco vertical angle

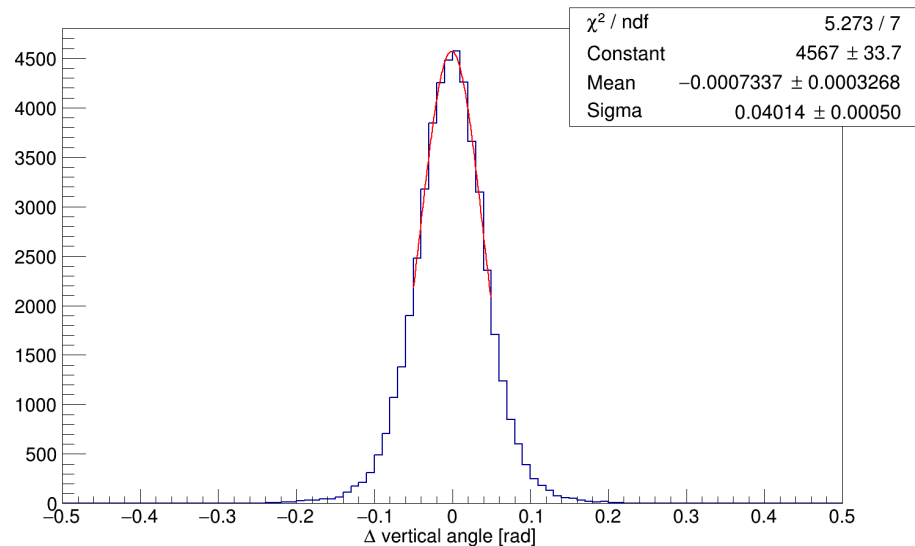

truth vertical angle


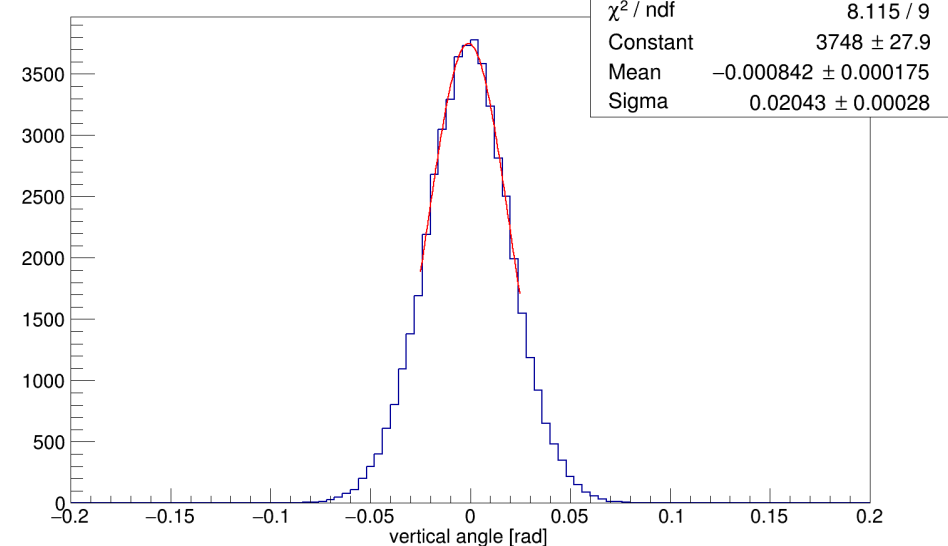


- The clock blinding used for the g-2 measurement is not sufficient to blind the EDM
- Instead generate an EDM centred around 3.5 times the BNL limit
- This produces a vertical oscillation out of phase with g-2, much larger than a potential EDM signal
- Once the analysis is complete unblind

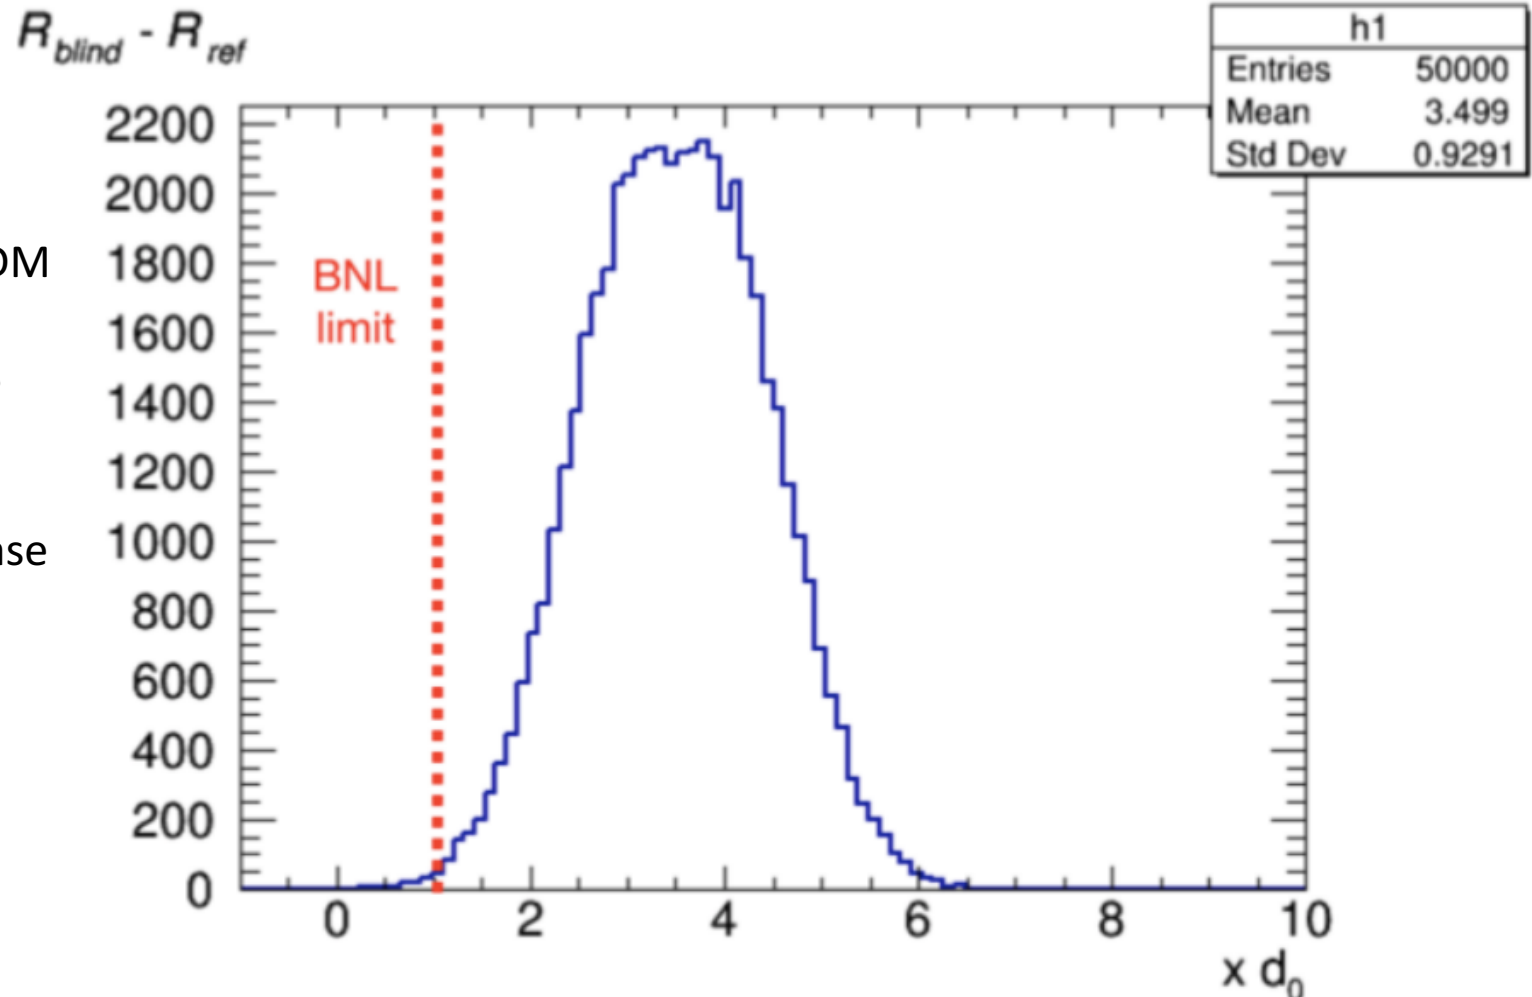

Beam oscillations - radial



The beam oscillates in the storage ring both radially and vertically

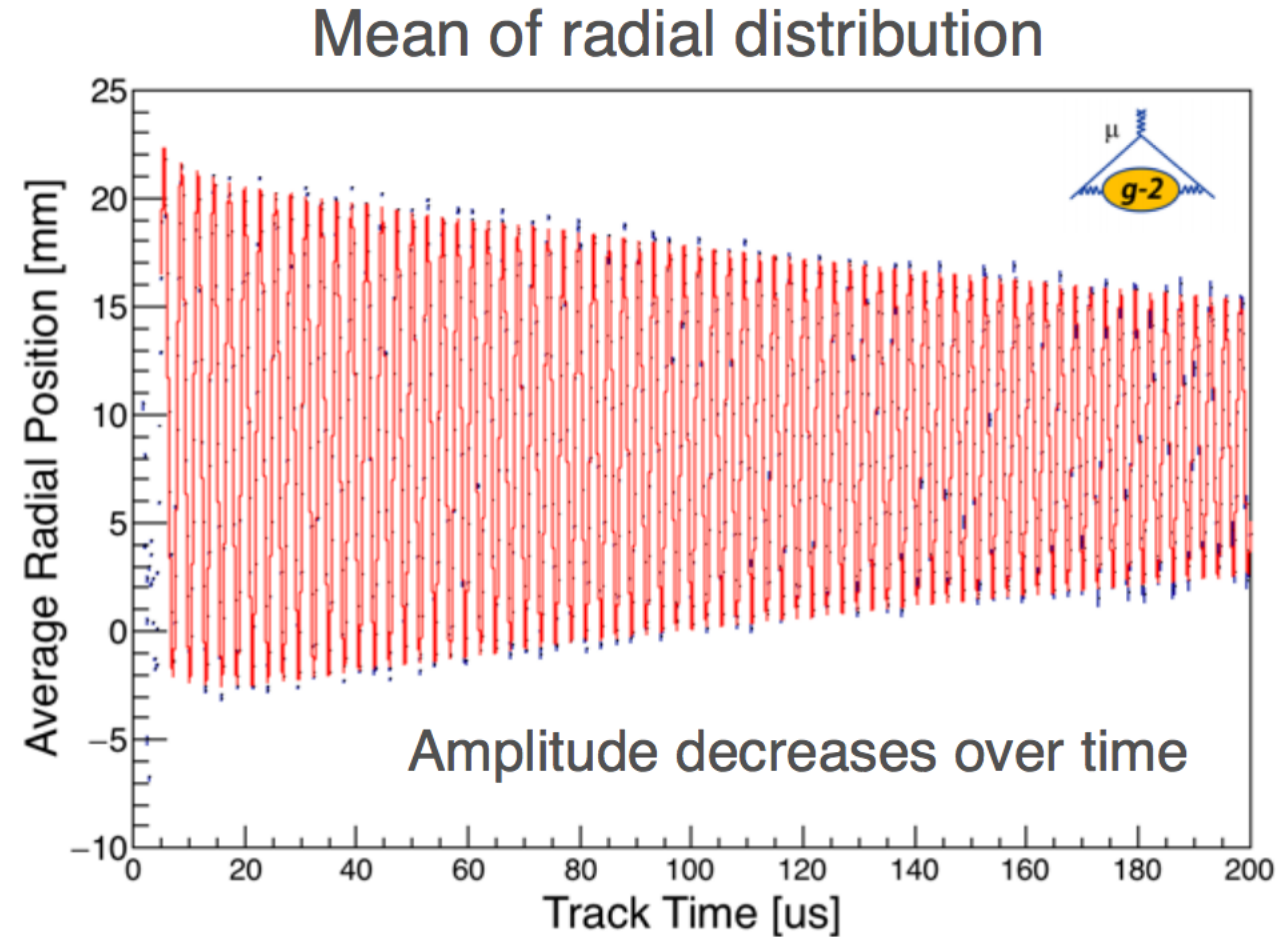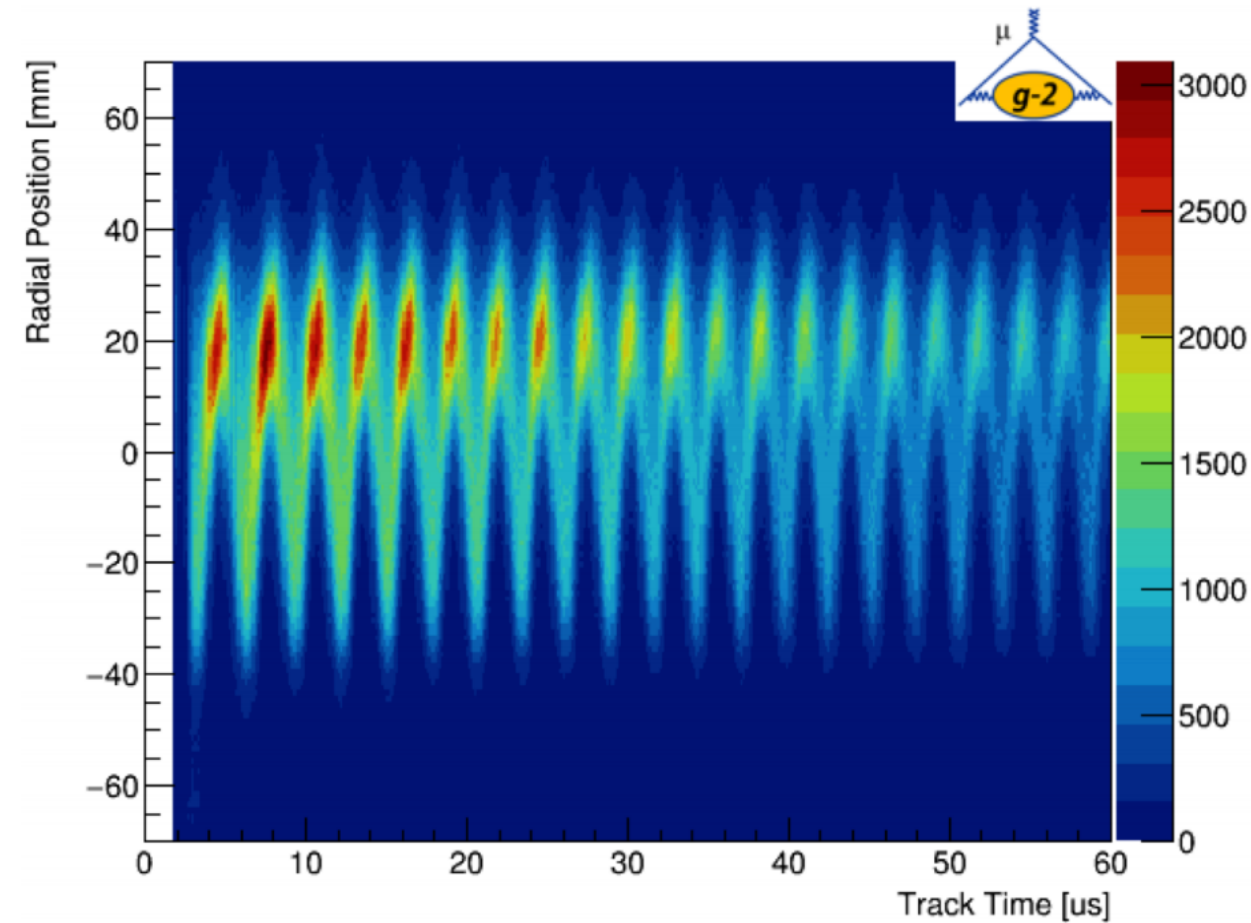

These beam oscillations affect the acceptance over time which can look like a vertical oscillation
The trackers allow for a full understanding of the beam motion which helps to improve the systematics

Beam oscillations - vertical

The beam oscillates in the storage ring both radially and vertically

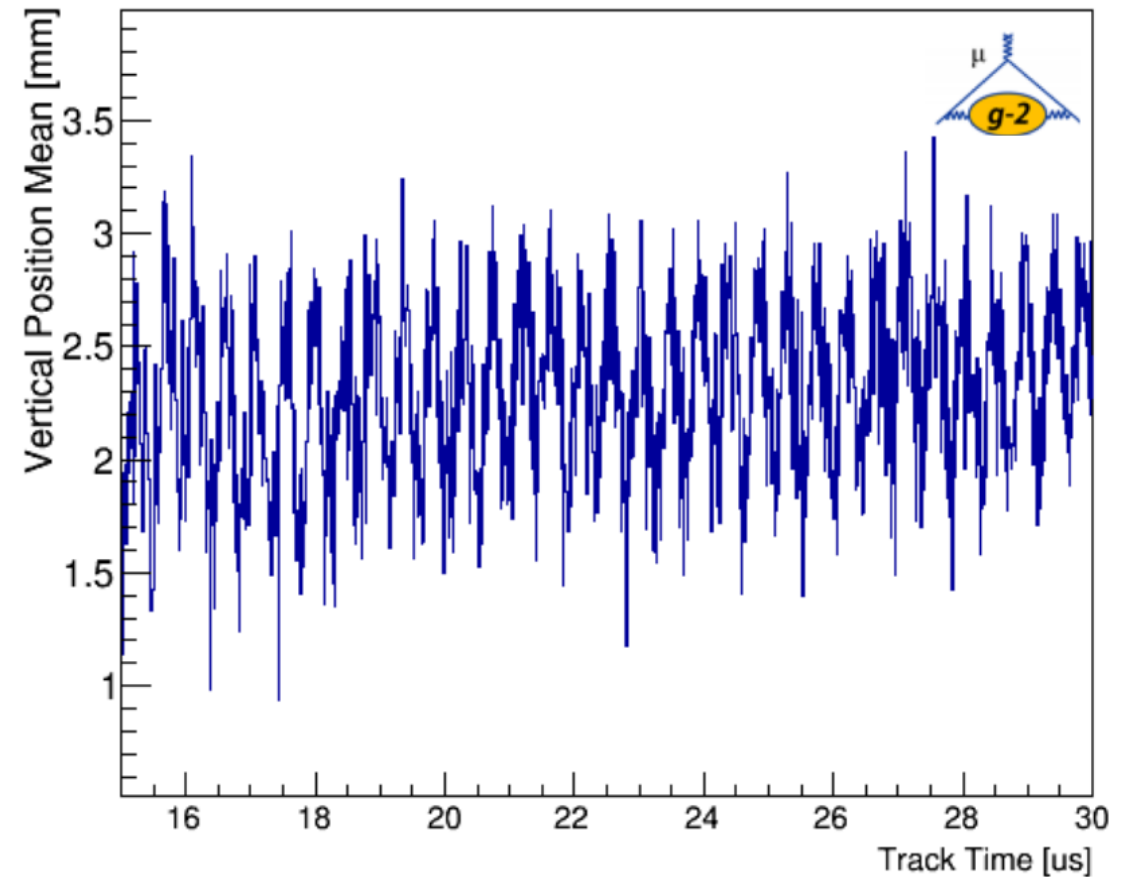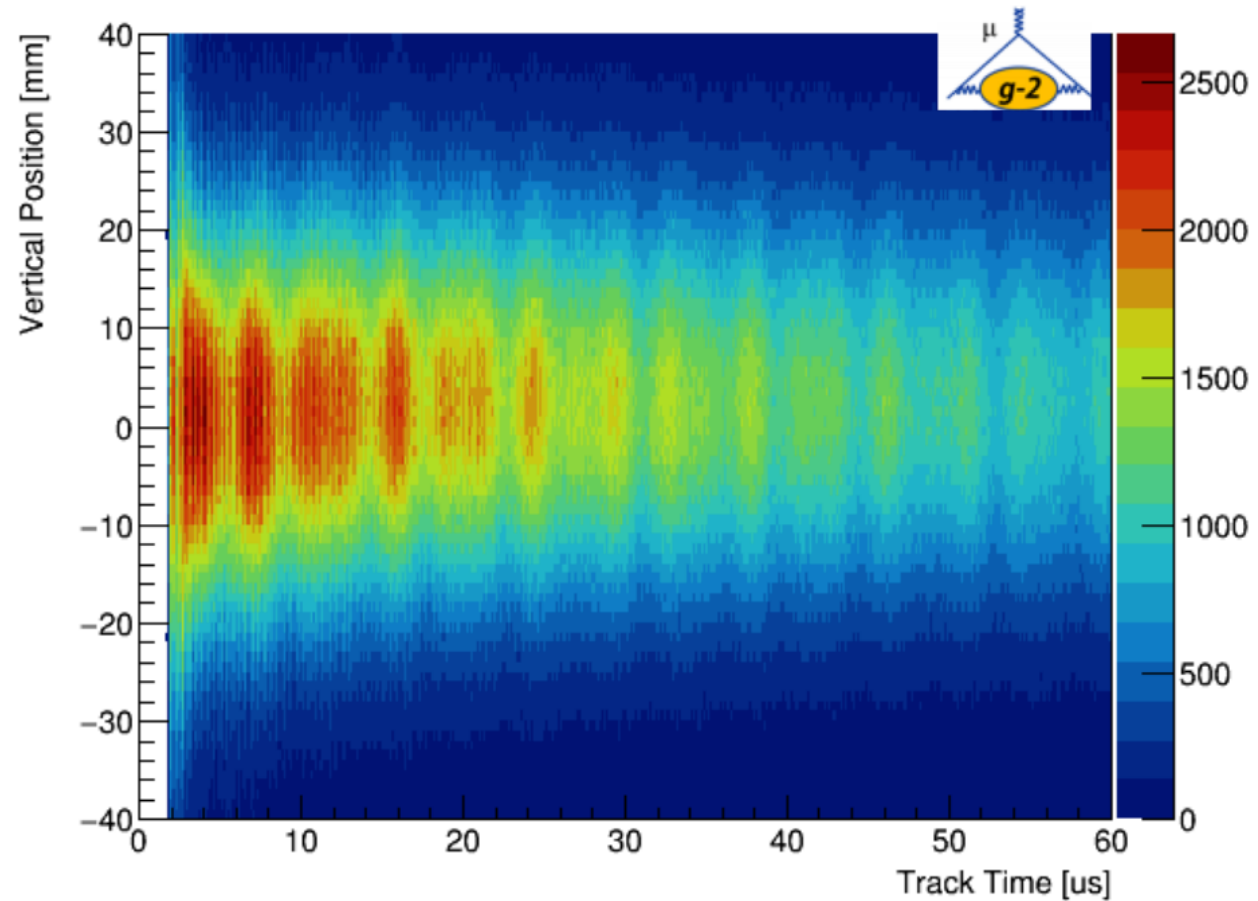


The vertical oscillations are smaller and at a higher frequency but can still feed into the measurement



Radial field

A radial field also tilts the precession plane, just like the EDM signal

The radial field was measured using a hall probe before the vacuum chambers were installed

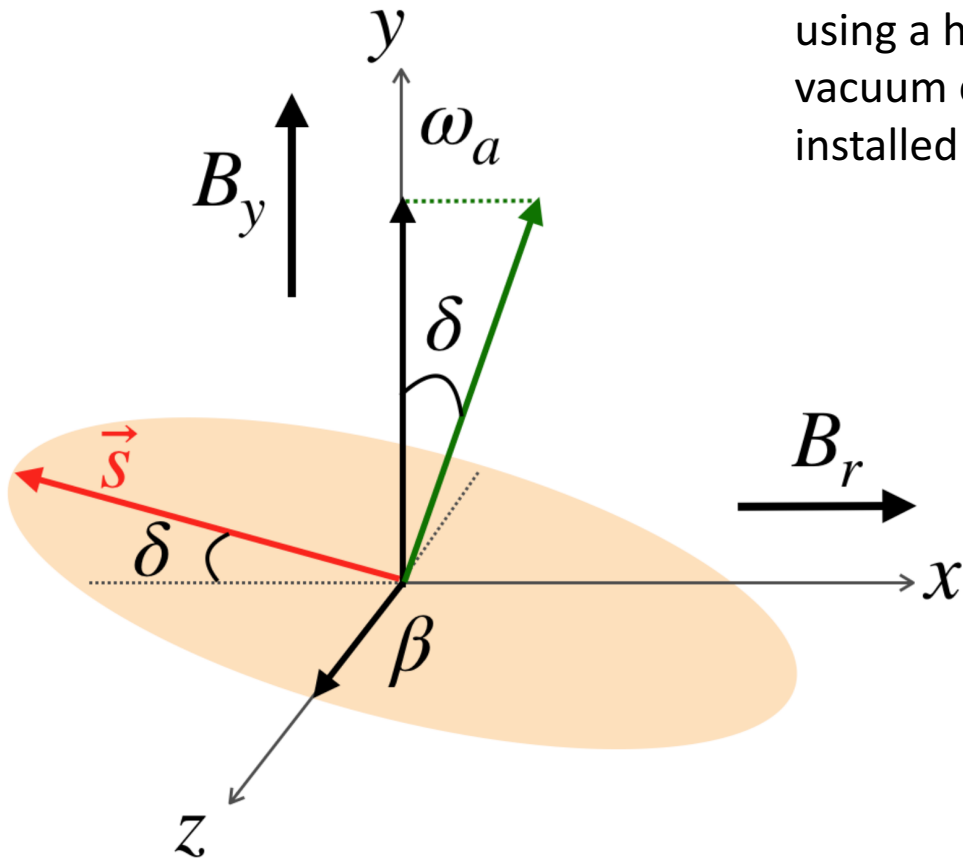

The surface coils are used to null the radial field

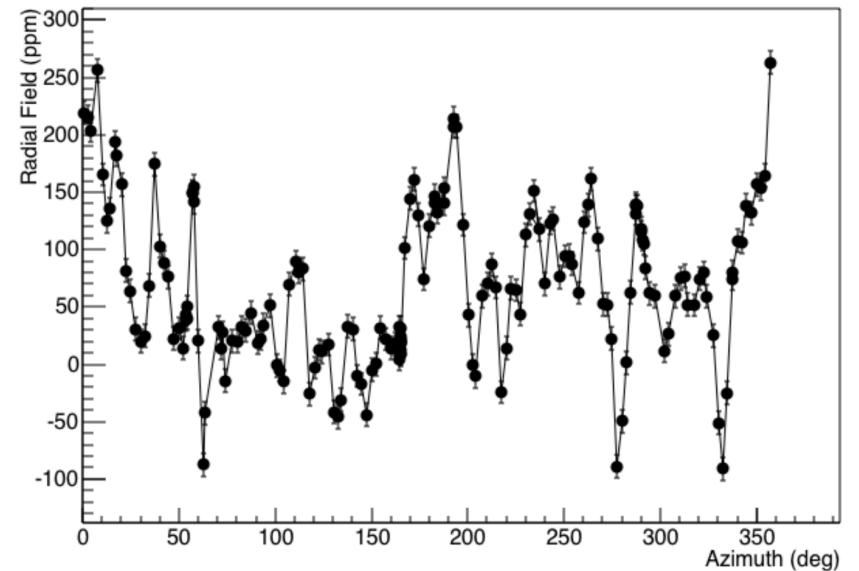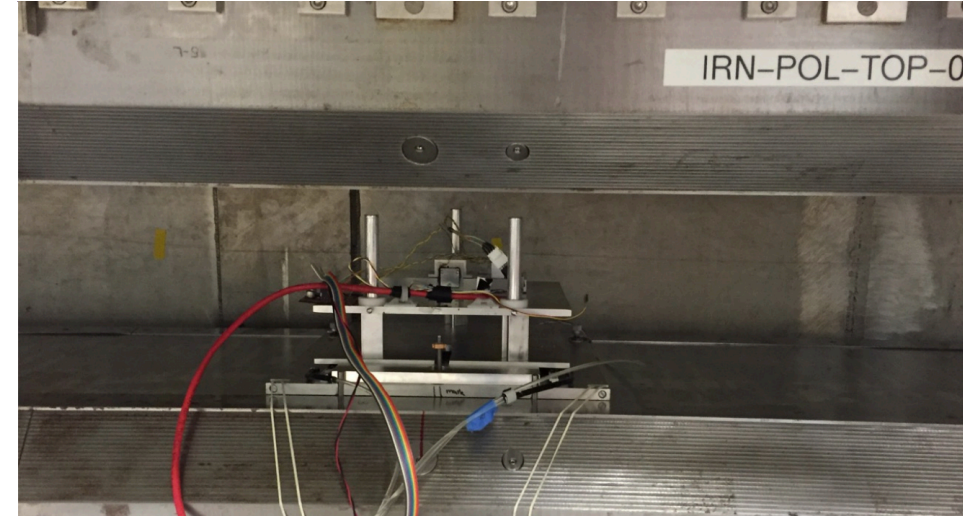

Average Radial Field: 68.5ppm

Measuring the radial field



The vertical position of the beam is affected by both the quads and the radial field

- A radial field causes the muons to experience a vertical force
- The quads focus vertically providing a restoring force

→ The vertical position of the beam depends on both of these
Vary the quad settings and look at how the vertical position changes


$$\langle y \rangle \sim \left(\frac{R_0}{n} \right) \left(\frac{\langle B_r \rangle}{B_0} \right)$$

For 13 and 20.4 kV quad settings

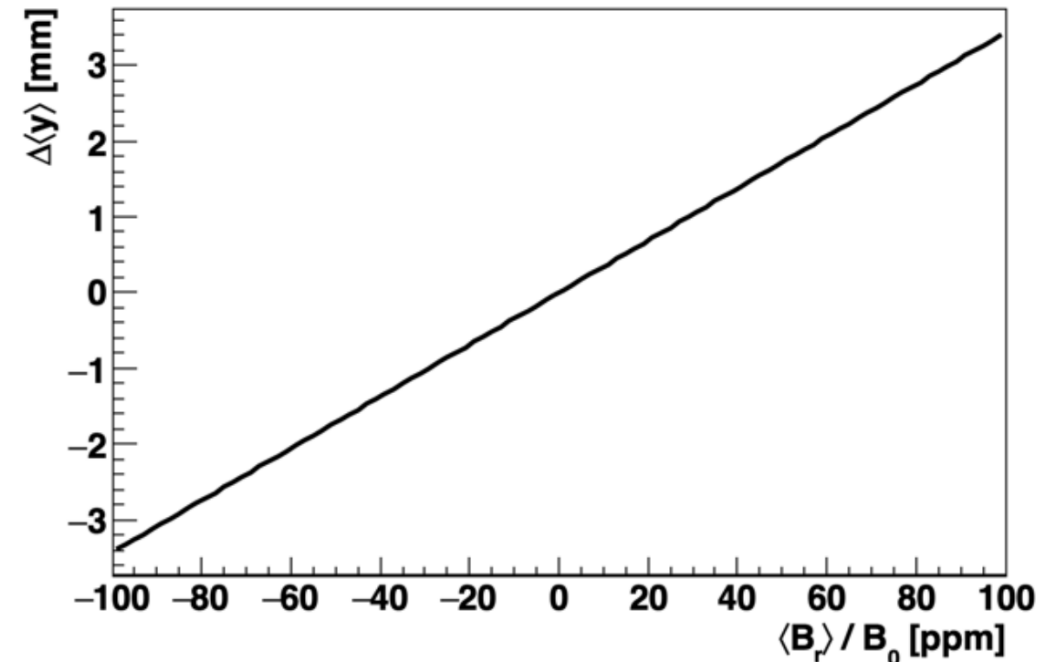
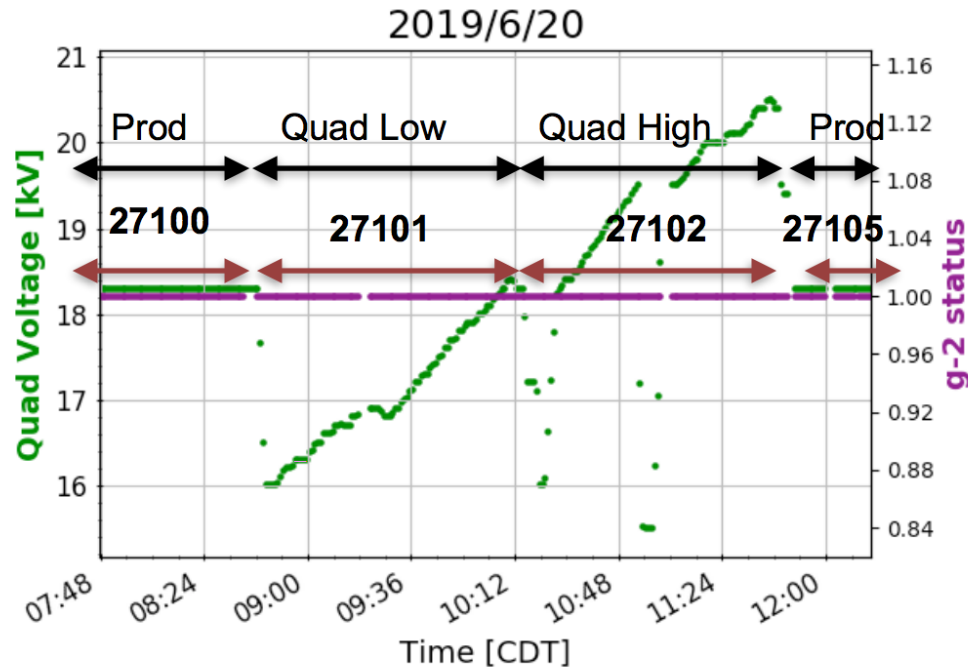


Measuring the radial field


The feasibility can be assessed using the quad scan data taken during run 2

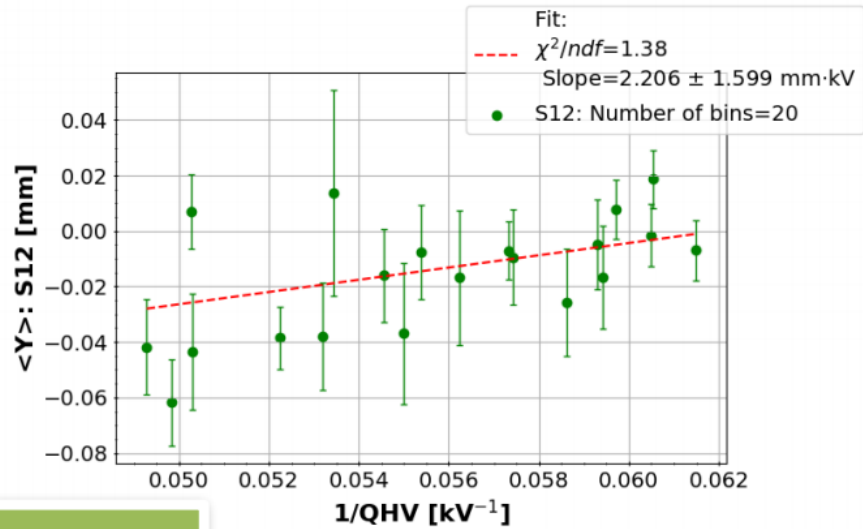

20 June

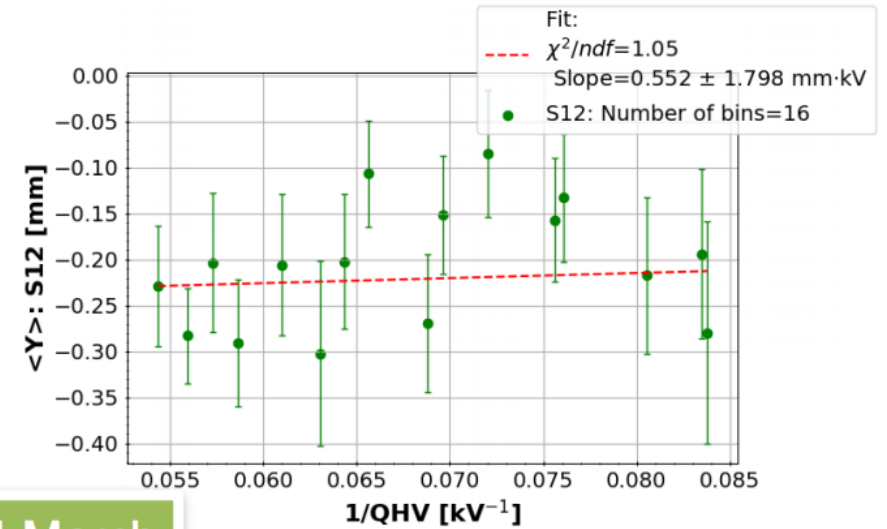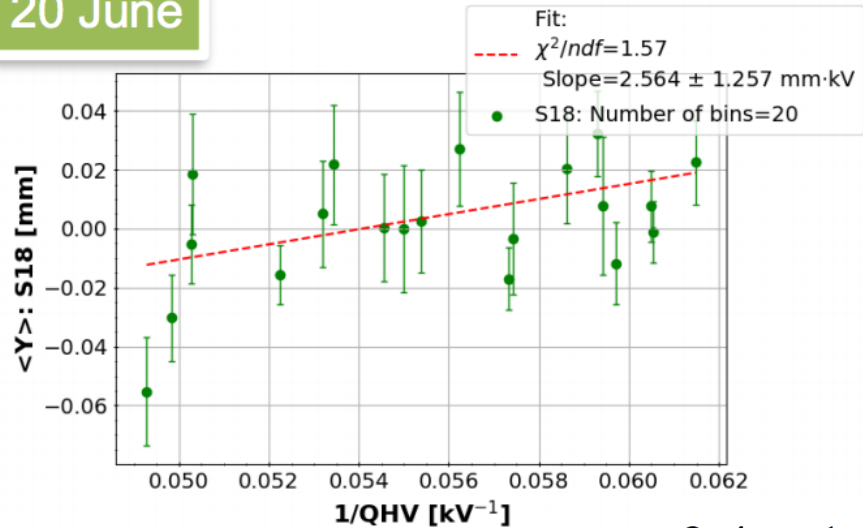



24 March

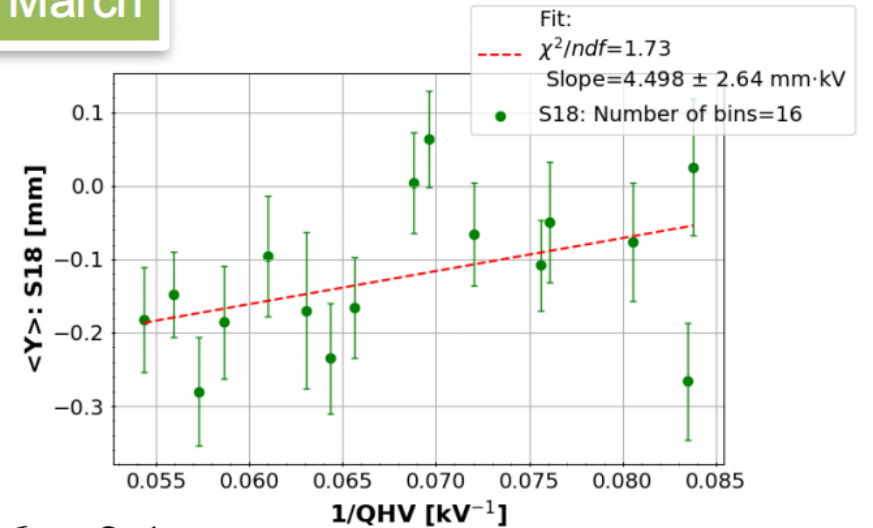

$$0.4 \pm 1.5 < B_r(\text{ppm}) < 3.6 \pm 2.1$$

Changing vertical position



Run 1:

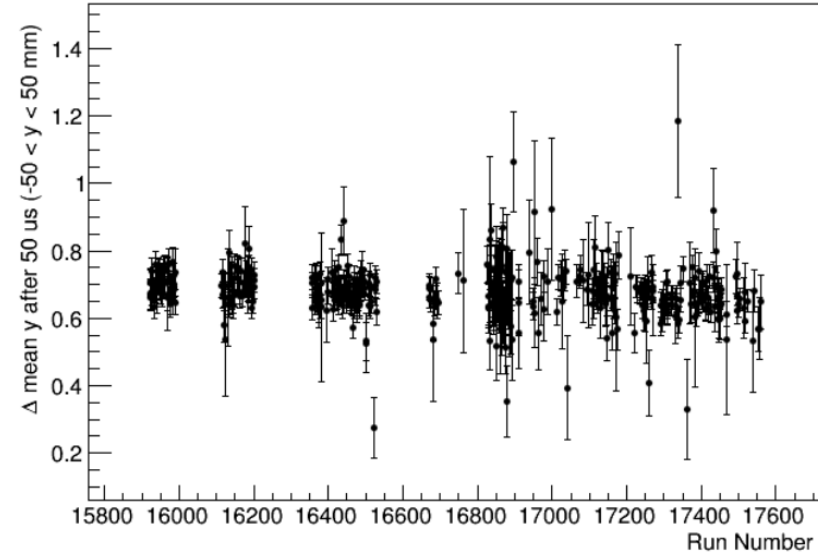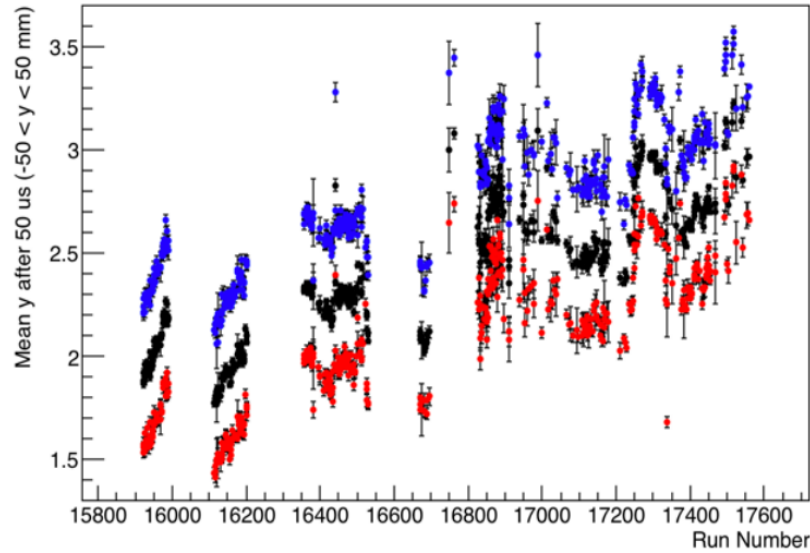


Mean Vertical Position

Difference between stations

Run 2:

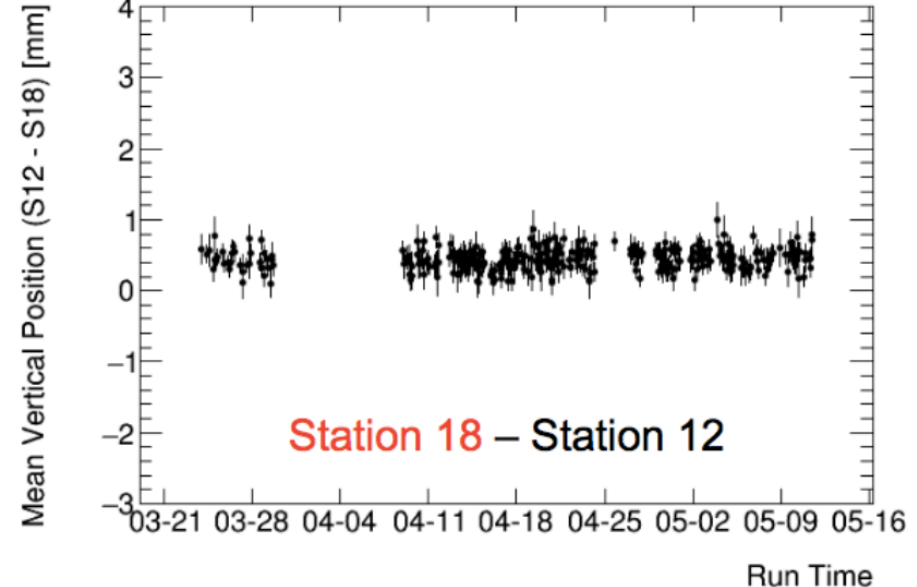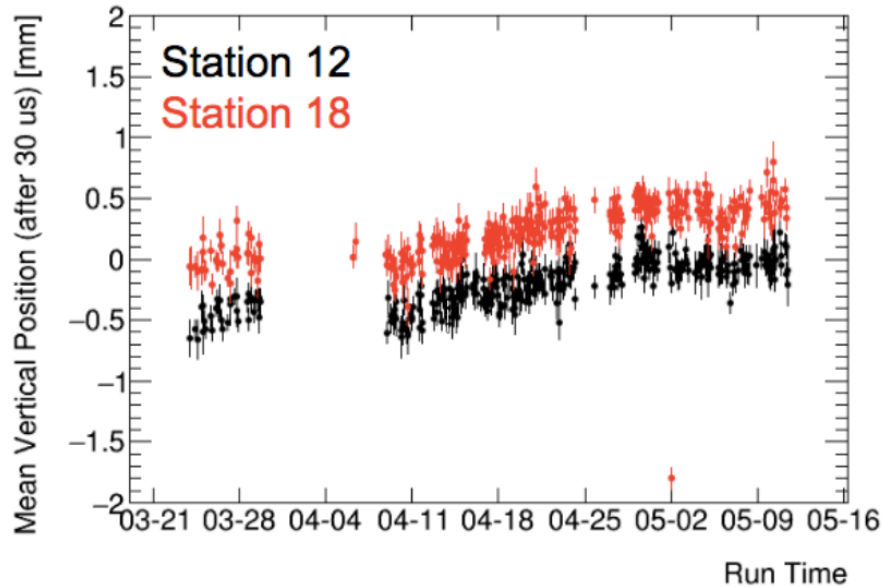


A longitudinal field induces a vertical oscillation in phase with the g-2 oscillation

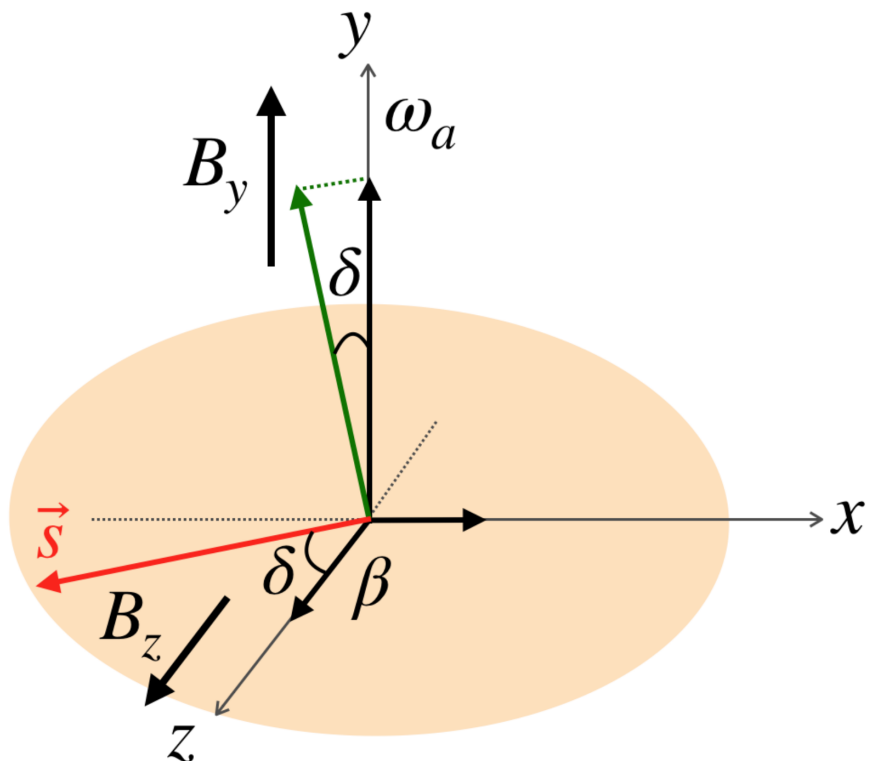

Measuring the longitudinal field is the same as the EDM analysis but in phase with g-2 :

- Allows the analysis tools to be developed
- The measurement is needed for the spin precession analysis

Can also look out of phase with the CBO to assess the sensitivity

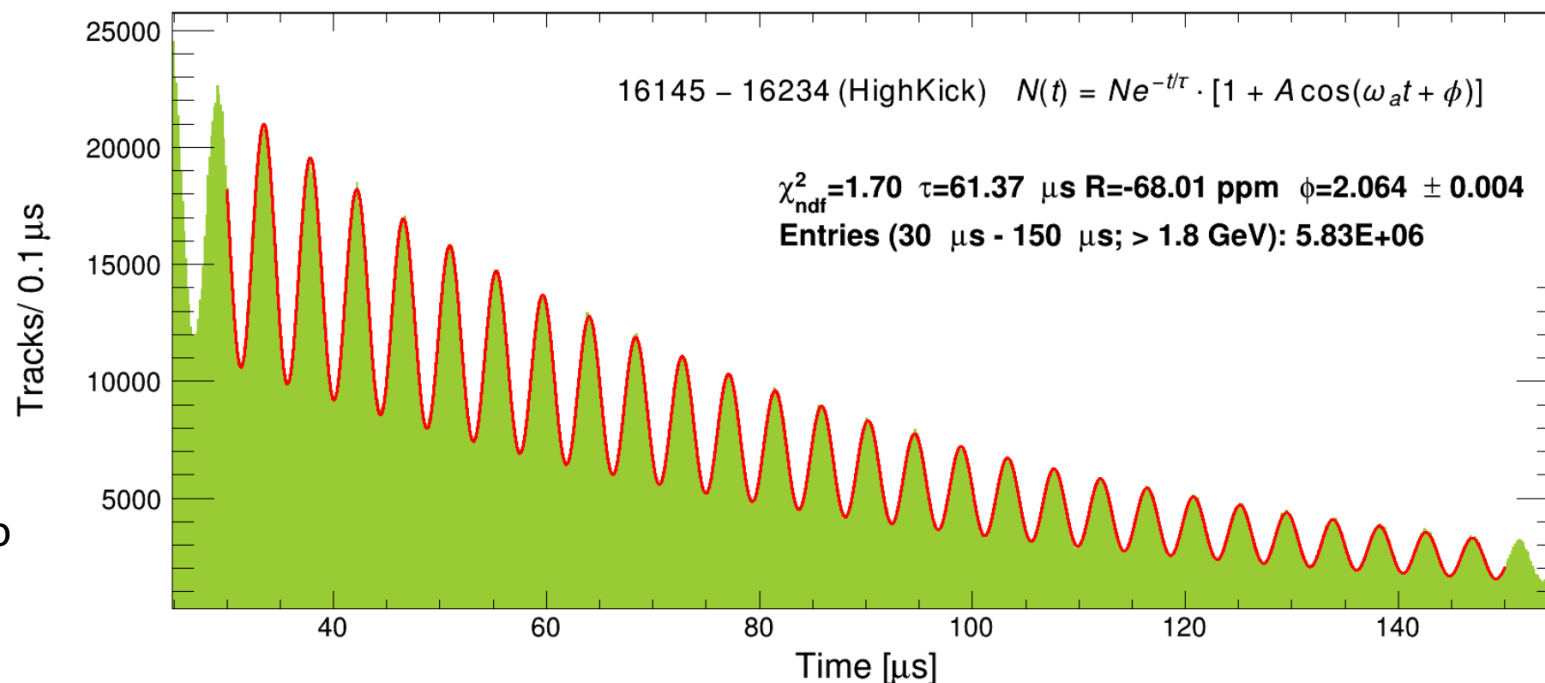

- The g-2 experiment at Fermilab is expected to improve upon the current limit on the muon EDM by at least one, approaching two orders of magnitude
- Enough data has already been collected to improve upon the BNL limit
 - We collect about the same number of tracks in every run!
 - Blinding is crucial before looking at any data
- The systematic errors will become more important for the Fermilab analysis
 - A method for constraining the radial field using the quads looks promising
 - The movements of the beam can be reconstructed using the trackers
- The analysis of the data is currently underway

Measuring the EDM – vertical position



Look for an oscillation in the average vertical position out of phase with the number oscillation

1. Plot the vertical RMS width as a function of time


Average width

$$f(t) = W + S_{g2} \sin(\omega t) + C_{g2} \cos(\omega t) + S_{2g2} \sin(2\omega t) + C_{2g2}(2\omega t) + e^{-t/\tau_{CBO}} \left[S_{CBO} \sin(\omega_{CBO}(t - t_0) + \Phi_{CBO}) + C_{CBO} \cos(\omega_{CBO}(t - t_0) + \Phi_{CBO}) \right] + Lt$$

Annotations:
 - W : fixed
 - $S_{g2}, C_{g2}, S_{2g2}, C_{2g2}$: g-2 terms: changes in average energy and time of flight
 - $S_{CBO}, C_{CBO}, \Phi_{CBO}$: CBO (coherent betatron oscillation) terms : different radii lead to different times of flight
 - Lt : deadtime

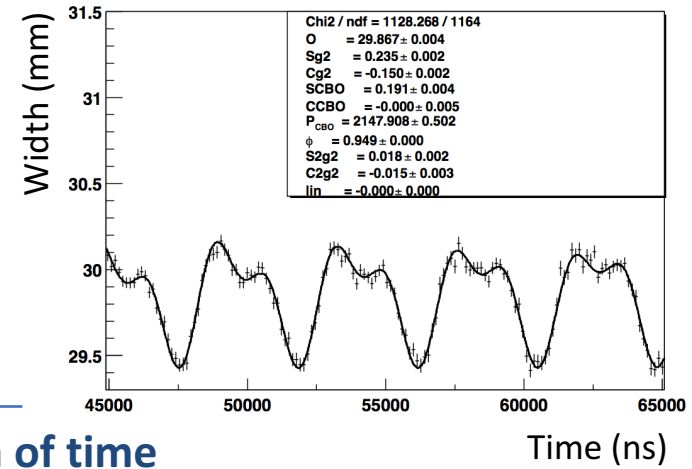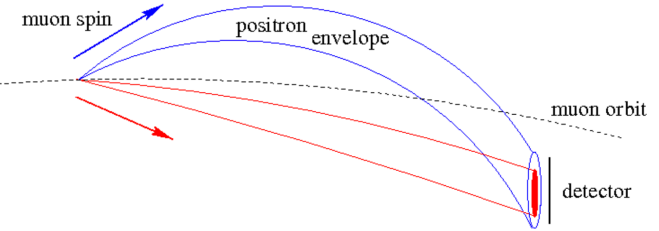

2. Plot the mean vertical position of hits of hits as a function of time

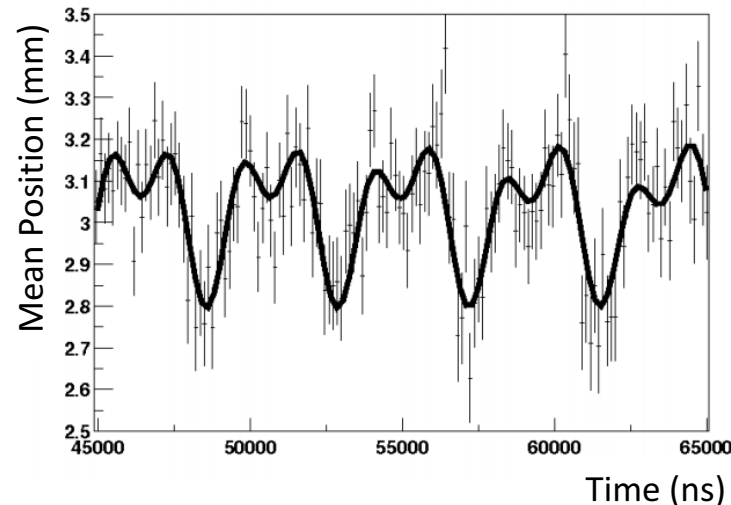


Detector misalignment

$$f(t) = K + S_{g2} \sin(\omega t) + C_{g2} \cos(\omega t) + e^{-t/\tau_{CBO}} \left[S_{CBO} \sin(\omega_{CBO}(t - t_0) + \Phi_{CBO}) + C_{CBO} \cos(\omega_{CBO}(t - t_0) + \Phi_{CBO}) \right] + Me^{-t/\tau_M}$$


Annotations:
 - $S_{g2} \sin(\omega t)$: EDM
 - $S_{CBO}, C_{CBO}, \Phi_{CBO}$: fixed
 - Me^{-t/τ_M} : Slow changes in detector response/pileup

Vertical position uncertainties

Horizontal oscillation + tilted detector

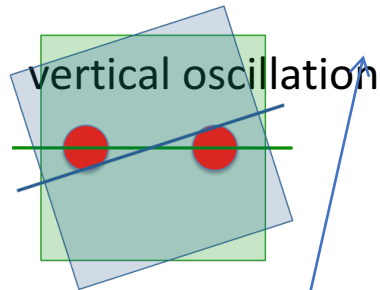

=

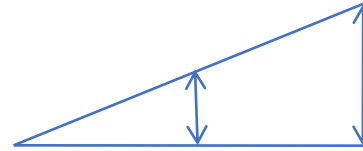

Vertical spin
+ longer path length
for outward positrons
= vertical oscillation

Statistical error
5.88 μm

Systematics dominated
measurement

Effect	Error (μm)
Detector Tilt	6.1
Vertical Spin	5.1
Quadrupole Tilt	3.9
Timing Offset	3.2
Energy Calibration	2.8
Radial Magnetic Field	2.5
Albedo and Doubles	2.0
Fitting Method	1.0
Total Systematic	10.4
Statistical	5.9
Total Uncertainty	11.9

Differences between the top and
bottom halves of the calorimeter

Would cause a tilt in the precession plane

Back scattering from the calorimeter


E821 : $S_{g2} = (1.27 \pm 11.9) \mu\text{m}$

$d_{\mu} = (-0.1 \pm 1.4) \times 10^{-19} \text{ e}\cdot\text{cm}$

$|d_{\mu}| < 2.9 \times 10^{-19} \text{ e}\cdot\text{cm} \text{ (95\% C.L.)}$


Measuring the EDM – phase

Consider the phase variation as a function of vertical position

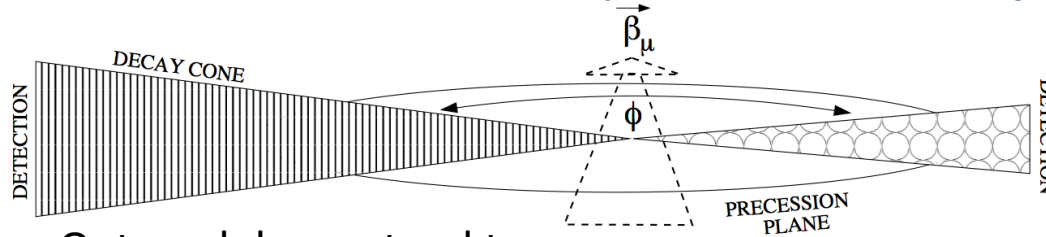


Decays that strike higher in the detector have to travel further

Outward decays tend to travel further up or down due to longer path length

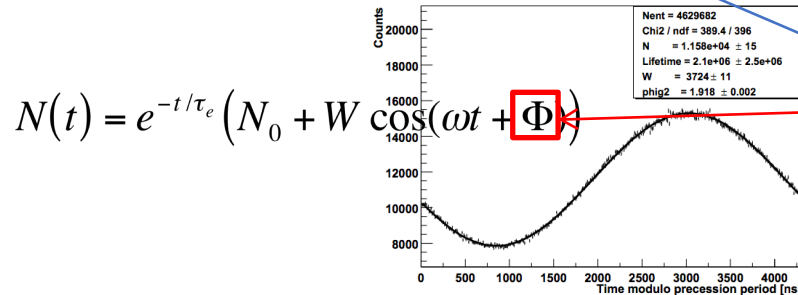

The fitted phase depends on the vertical position

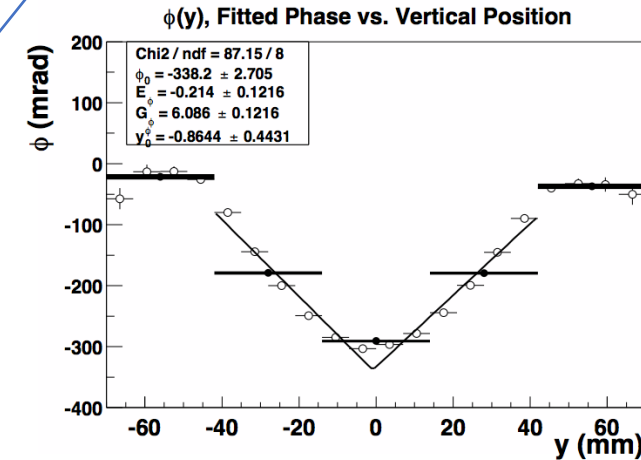

A non zero EDM tips the precession plane

- More outward decays at the top
- More inward decays at the bottom


→ suppresses the phase difference at the bottom of the calorimeter

$$\Phi(y) = p_0 + p_1(y - p_2) + |p_3(y - p_2)|$$

Up-down asymmetry


EDM

Phase changes not related to EDM

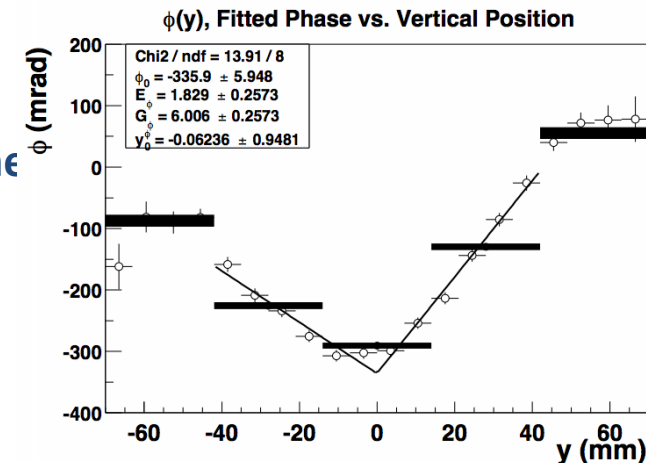


The systematic uncertainties are similar to the vertical position measurement

Detector misalignment is more important

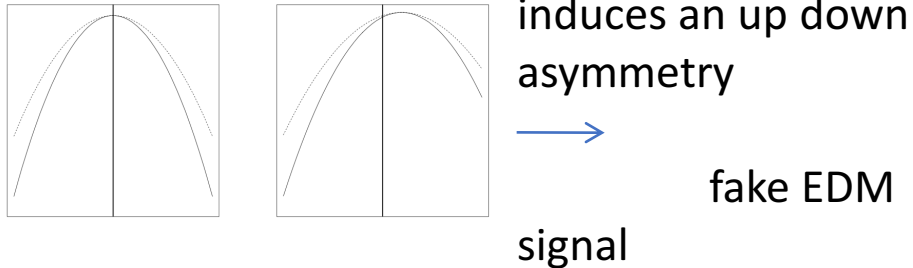

Detector Tilt

causes asymmetric vertical losses

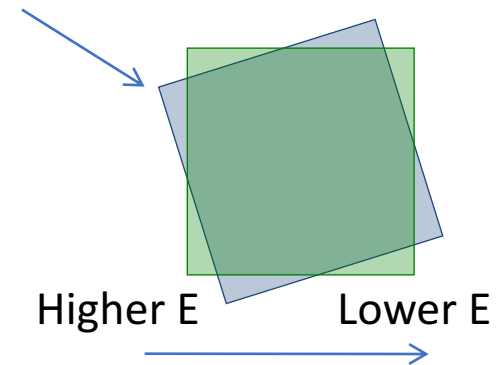

Source	Sensitivity	Result
Detector Tilt	$26 \mu\text{rad}/\text{mm}/\text{mrad} \times 0.75 \text{ mrad}$	$20 \mu \text{ rad}/\text{mm}$
Detector Misalignment	$138 \mu\text{rad}/\text{mm}/ \text{mm} \times 0.2 \text{ mm}$	$28 \mu \text{ rad}/\text{mm}$
Energy Calibration	$43 \mu\text{rad}/\text{mm}/ \% \times 0.1\%$	$4.3 \mu \text{ rad}/\text{mm}$
Muon Vertical Spin	$1.0 \mu\text{rad}/\text{mm} \times 8\%$	$8.0 \mu \text{ rad}/\text{mm}$
Radial B field	$0.72 \mu\text{rad}/\text{mm}/\text{ppm} \times 20.0 \text{ ppm}$	$14.4 \mu \text{ rad}/\text{mm}$
Timing	$17.0 \mu\text{rad}/\text{mm}/\text{ns} \times 0.2 \text{ ns}$	$3.4 \mu \text{ rad}/\text{mm}$
Total systematic		$38 \mu\text{rad}/\text{mm} (0.93 \times 10^{-19} \text{ e}\cdot\text{cm})$
Total statistical		$28 \mu\text{rad}/\text{mm} (0.73 \times 10^{-19} \text{ e}\cdot\text{cm})$
Total		$47 \mu\text{rad}/\text{mm} (1.2 \times 10^{-19} \text{ e}\cdot\text{cm})$

$$E821: d_{\mu} = (-0.48 \pm 1.3) \times 10^{-19} \text{ e}\cdot\text{cm}$$

Again systematics dominated, although statistics play a larger role