
PhD theses on collaborative studies between:

# - INFN / LNF and CERN and, possibly EIC, the funded Electron-Ion collider @ BNL)

### R. Cimino – LNF-INFN



# **CERN Accelerators Complex**

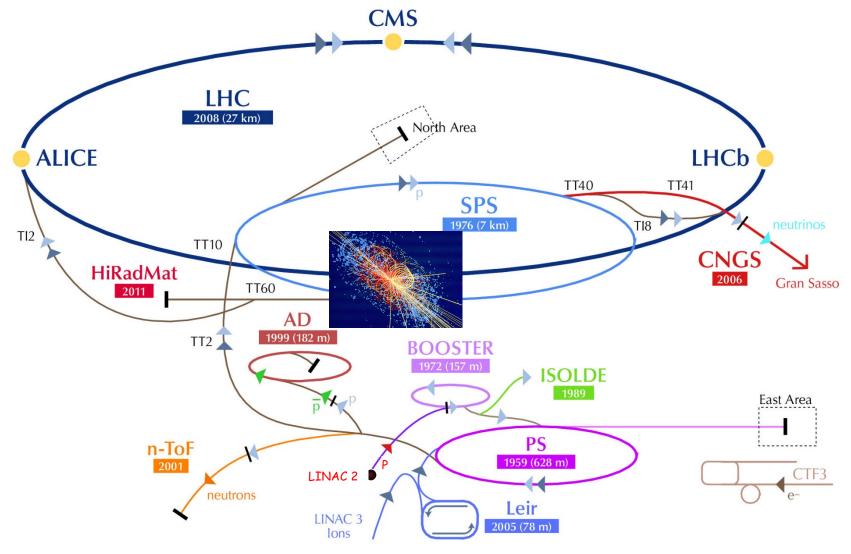

16/11/2020


## Upgrade of LHC (HL-LHC)




#### High Luminosity LHC Participants



### LHC / HL-LHC Plan

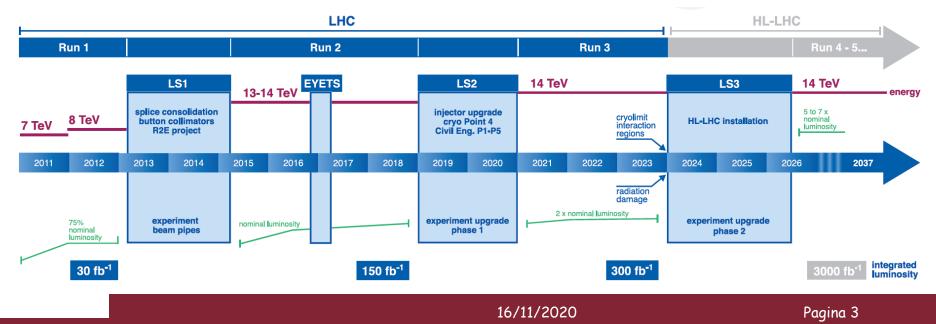


## The Future Circular Collider project (FCC)

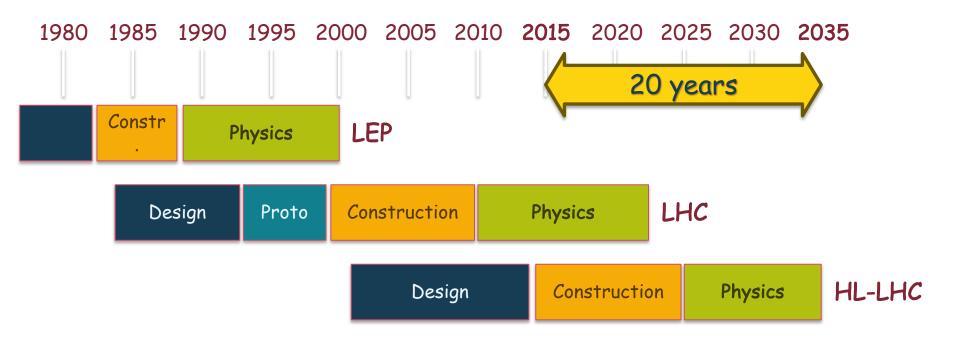

FCC	Design	Proto	Construction	Physics
-----	--------	-------	--------------	---------

#### The Future Circular Collider project (FCC)

- international FCC collaboration to study:
- *pp*-collider (*FCC-hh*) → main emphasis, defining infrastructure requirements
- 80-100 km infrastructure in ~16 T  $\Rightarrow$  100 TeV *pp* in 100 km
- e<sup>+</sup>e<sup>-</sup> collider (FCC-ee) as potential intermediate step
- p-e (FCC-he) option

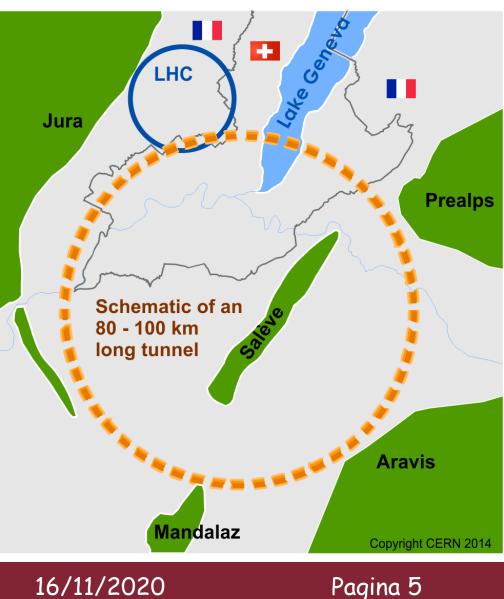

# FCC-ee Key Parameters

Juro	LHC Control Co	ł
	Source and	Prealps
5		

Parameter	FCC-ee		LEP2	
Energy/beam [GeV]	45	120	175	105
Bunches/beam	16700	1360	98	4
Beam current [mA]	1450	30	6.6	3
Luminosity/IP x 10 <sup>34</sup> cm <sup>-2</sup> s <sup>-1</sup>	28	6	1.8	0.0012
Energy loss/turn [GeV]	0.03	1.67	7.55	3.34
Synchr. Power [MW]	100			22
RF Voltage [GV]	2.5	5.5	11	3.5

# FCC-hh Key Parameters

Parameter	FCC-hh	LHC	
Energy [TeV]	100 c.m.	14 c.m.	
Dipole field [T]	16	8.33	nel
# IP	2 main, +2	4	
Luminosity/IP <sub>main</sub> [cm <sup>-2</sup> s <sup>-1</sup> ]	5-10 x 10 <sup>34</sup>	1 x 10 <sup>34</sup>	
Energy/beam [GJ]	8.4	0.39	
Synchr. rad. [W/m/apert.]	28.4	0.17	
Bunch spacing [ns]	25 (5)	25	

1120

Lake General

Prealps

÷

LHC


### **LHC Beam Screens Functionalities**

- Intercept the heat load induced by the circulating beam (impedance, synchrotron radiation, electron cloud)
- Operate between 5 and 20 K
- Non-magnetic stainless steel substrate to withstand quench forces (few tons) and to ensure a good field quality
- Copper colamination onto nonmagnetic stainless steel to reduce impedance



- Pumping holes to control the gas density
- Rounded pumping slots to reduce electromagnetic leakage towards the cold bore held at 1.9 K or 4.5 K
- Electron shield to protect the cold bore from the heat loads induced by the electron cloud
- Saw teeth to reduce photoelectron yield and forward reflectivity of photons to decrease the seed of electrons

# Any adopted solution for the Beam screen has to compel with many other requirements and boundary conditions.

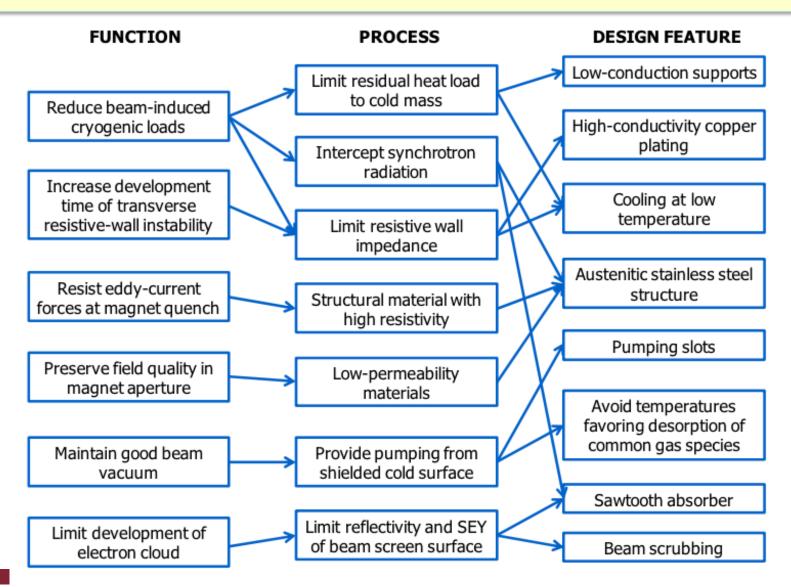

Functional design map of beam screen

#### **Electron cloud formation in a vacuum pipe**

Generation of electrons inside the vacuum chamber (primary, or seed, electrons) Acceleration of primary electrons in the beam field Secondary electron production when hitting the wall 1.0 1.4 1.2 1 SΕΥ 0.8 0.6 secondaries 0.4 Е true secondaries 0.2 reflected electrons total SEY 0 elastically 0 100 200 300 400 500 600 700 E (eV) reflected


### **Electron cloud formation in a vacuum pipe**

Generation of electrons inside the vacuum chamber (primary, or seed, electrons)

- Acceleration of primary electrons in the beam field
- Secondary electron production when hitting the wall
- Avalanche electron multiplication


Beam chamber

Time

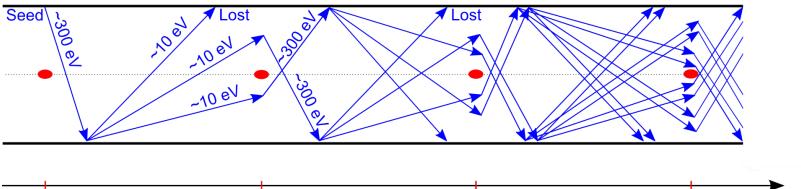

Bunch spacing (e.g. 25 ns)


#### Electron cloud formation in a vacuum pipe Could be simulated with SEY curve (and $\delta_{max}$ ) as input parameter

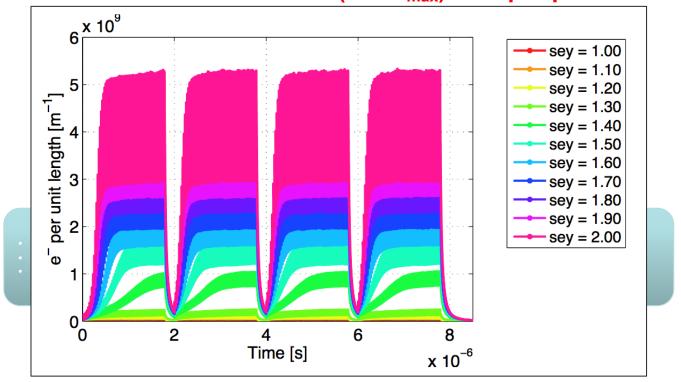

After the passage of several bunches, the electron distribution inside the chamber reaches a stationary state (electron cloud) → Several effects associated

### **Effects of the electron cloud**


The presence of an e-cloud inside an accelerator ring is revealed by several **typical signatures** 

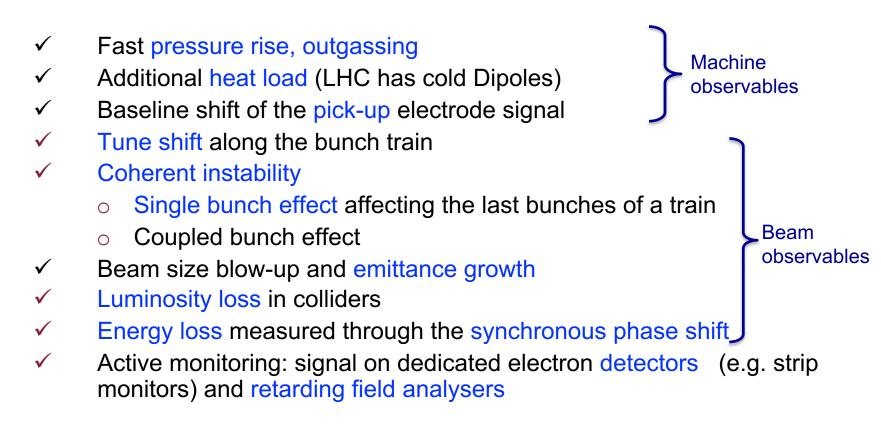

### PhD thesis in this research framework and in collaboration with those issues in collaboration with CERN and EIC:

# Experimental investigation on relevant material properties for FCC & Hi Lumi LHC

- Surface properties of Carbon and Cu Surfaces for HL-LHC (INFN project)
- electron induced Desorption (possibly an EU / INFN Project)
- photo desorption: Synchrotron radiation studies (MoU with CERN/ INFN)

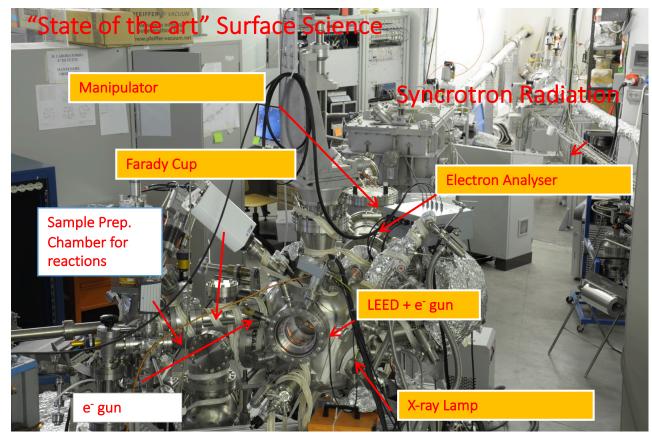


These PhD thesis foreseen experimental studies (with SR and Surface Science techniques) on material properties of interest to the accelerator community.

The interested candidate will work in an international contest, within various international collaborations and will be mainly performing experiments in Frascati National Lab but also in various Facilities around Europe.

Tesi da svolgere presso il Laboratori Nazionali di Frascati dell'INFN Contact person: R. Ciminę (roberto.cimino@lnf.infn.it)

# LHCspin: Surface properties study and validation of a scattering chamber to be inserted in LHC.

This thesis will be an R&D for the storage cell to be placed in front of LHCb detector during the long shutdown 3. This new vacuum chamber will be filled with various gasses and, in particular, with polarized atomic Hydrogen and Deuterium, bringing, for the first time, polarized physics at the LHC.

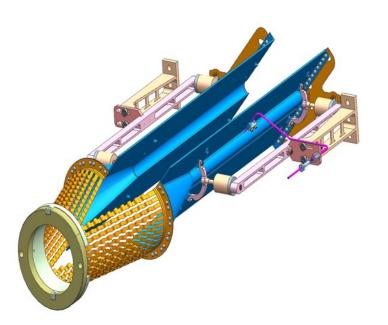

- Define a cold narrow coated tube to inhibit recombination.
- Should fulfill LHC requirements on Vacuum, e-cloud etc.
- Graphite, covered by a thin water layer should be the solution to be studied, optimized and validated.

Tesi da svolgere presso il Laboratori Nazionali di Frascati dell'INFN / CERN/ DASY Contact person: R. Cimino (<u>roberto.cimino@lnf.infn.it</u>) and <u>Pasquale.Dinezza@lnf.infn.it</u> SynchrotronradiationdesorptionstudiesofcandidatesmaterialstousedfortheHighLuminosityupgradefortheLHC at CERNLL



This thesis work will be done in close collaboration with CERN and is finalised to the optimization of the LHC upgrade. New vacuum chambers with integrated tungsten-shielded beam-screen (BS) will have to be installed. A thorough characterization of the surface properties of the BS needs to be done. In particular for the co-laminated copper with different surface treatment for electron cloud mitigation, like amorphous-carbon (a-C) thin film and laser-structured surfaces, with potential applications also for the Future Circular Collider (FCC) design study.

In addition, recent studies have pointed out that the heat load transferred by electron clouds to the LHC arcs' cryogenic systems will remain a subject of concern also in the HL-LHC era, when the number of SR photons will double. A better understanding of the role of synchrotron radiation in the electron cloud built-up process is essential.

Tesi da svolgere presso il Laboratori Nazionali di Frascati dell'INFN Contact person: R. Ciming (roberto.cimino@lnf.infn.it) Search of passivating coatings for ultimate performances Vacuum chambers



This thesis work will use the laboratory facilities to study surface preparation/modification apt to produce a vacuum chamber with minimal desorption properties, especially during photon or electron irradiation. The laboratory is equipped with all the technologies and instruments to study thermal, electron and photon stimulated desorption, and some facilities to produce specially designed surfaces and coatings.

Surface morphology modifications, thin film Carbon films, up to Graphene-like coatings, and NEG coatings will be studied to define, at least in principle the way to produce as inert as possible surfaces for Ultra high vacuum applications.

Tesi da svolgere presso il Laboratori Nazionali di Frascati dell'INFN Contact person: R. Ciminę (roberto.cimino@lnf.infn.it)

## One word on technological research:

- It qualifies you for jobs in many field of research and in industry (not necessarily accelerator's related);
- I makes accelerators work!

## Conclusion

- Phd Thesis is a very important transition from students to researchers
- One of the important skills you are supposed to have and develop is: choosing on what and with whom you want to work!
- So: read carefully, study, look on google scholar publication lists, check for grants available and capabilities of thesis proposers, talk to people, visit labs ... (Supervisors, ex-students, etc.)
- You need to choose where and with whom to spend your next 3 years.
- Take your time!