


New Frontiers in Lepton Flavor
Pisa, Italy | May 15-17, 2023

Background Studies and Normalization of Signal Events in the Mu2e Experiment


Reuven Rachamin for the Mu2e-collaboration



The Mu2e Experiment

- The Mu2e experiment is currently being constructed at Fermilab in the USA
- Goal: to search for the neutrino-less conversion of negative muons into electrons in the field of an aluminum nucleus ($\mu^- + Al \rightarrow e^- + Al$)

The principle of the Mu2e experiment

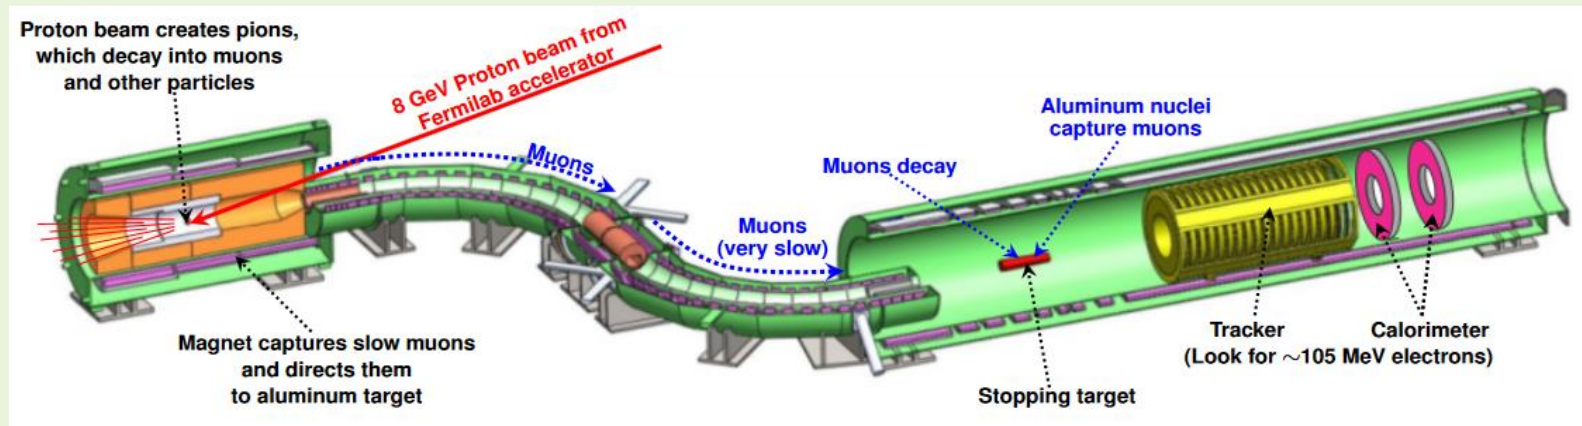

- 8 GeV proton beam hits a tungsten target and produces pions
- The pions are guided by a magnetic field toward the transport solenoid, where they decay into muons
- The muons hit the aluminum-stopping target, where they either decay or undergo a capture reaction
- Detectors (tracker and calorimeter) search for the conversion electrons

The Mu2e Experiment

- The muon-to-electron conversion process results in a monochromatic electron with an energy of 104.97 MeV
- The goal is to reach a single event sensitivity of 3×10^{-17} on the conversion ratio ($R_{\mu e} = \frac{\mu^- + Al \rightarrow e^- + Al}{\mu^- + Al \rightarrow \text{nuclear capture}}$)
 - four orders of magnitude higher than previous related experiments
- To reach the desired sensitivity, two important tasks should be accomplished:
 - all backgrounds that could mimic the conversion signal should be controlled
 - the signal events should be normalized accurately


Objectives

- to investigate the beam-related and cosmic rays-related backgrounds using several Monte Carlo (MC) codes
 - MC code: MCNP6, FLUKA2021, MARS15, and GEANT4 (the official Mu2e simulation code)
 - focus on the prediction credibility of each code
- to evaluate the performance of the detector system used for the signal events normalization

Background Investigation: MC Simulation Studies

Antiprotons beam-related background

- Protons hitting the tungsten target produce antiprotons that could reach the aluminum stopping target, annihilate and produce background electrons
- Pions created in the transport solenoid by antiproton interactions can produce background electrons via radiative pion capture
 - a part of this background can be rejected by a cut on the signal time window
- MC Investigation: antiproton yields from a 1.9 GeV/c and a 2.1 GeV/c antiproton pencil beam hitting a tungsten cylindrical target (R=0.315 cm, L=16 cm)


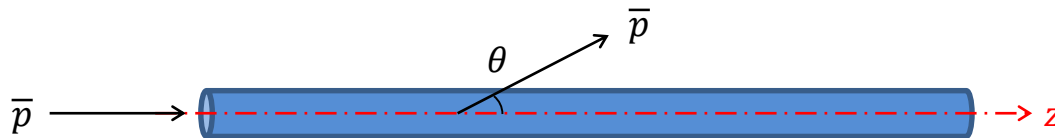


Background Investigation: MC Simulation Studies

\bar{p} beam momentum of 1.9 GeV/c							
θ	Geant4	MCNP6	Δ	FLUKA	Δ	MARS15	Δ
$0^\circ - 10^\circ$	3.11	3.23	3.7%	3.38	8.5%	3.19	2.4%
$10^\circ - 45^\circ$	$5.38 \cdot 10^{-2}$	$2.28 \cdot 10^{-2}$	-57.5%	$2.52 \cdot 10^{-2}$	-53.2%	$1.47 \cdot 10^{-2}$	-72.6%

\bar{p} beam momentum of 2.1 GeV/c							
θ	Geant4	MCNP6	Δ	FLUKA	Δ	MARS15	Δ
$0^\circ - 10^\circ$	3.01	3.04	1.0%	3.22	7.1%	3.01	0.1%
$10^\circ - 45^\circ$	$5.03 \cdot 10^{-2}$	$2.27 \cdot 10^{-2}$	-55.0%	$3.30 \cdot 10^{-2}$	-34.4%	$1.46 \cdot 10^{-2}$	-70.9%

Good agreement in the very forward direction

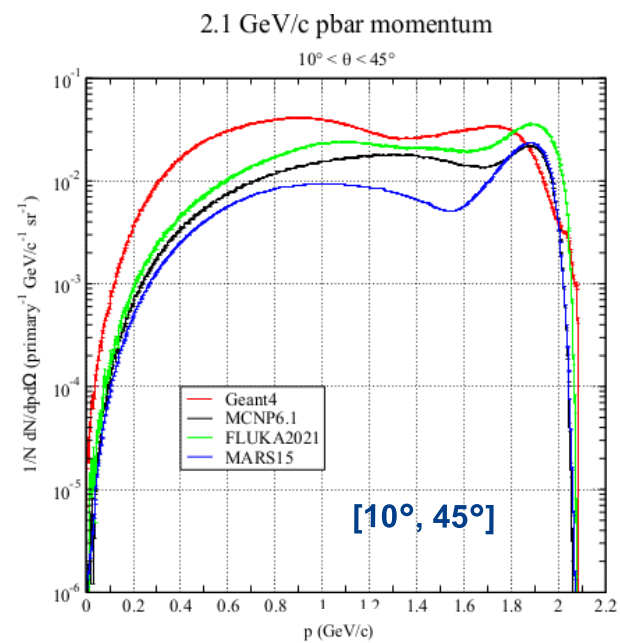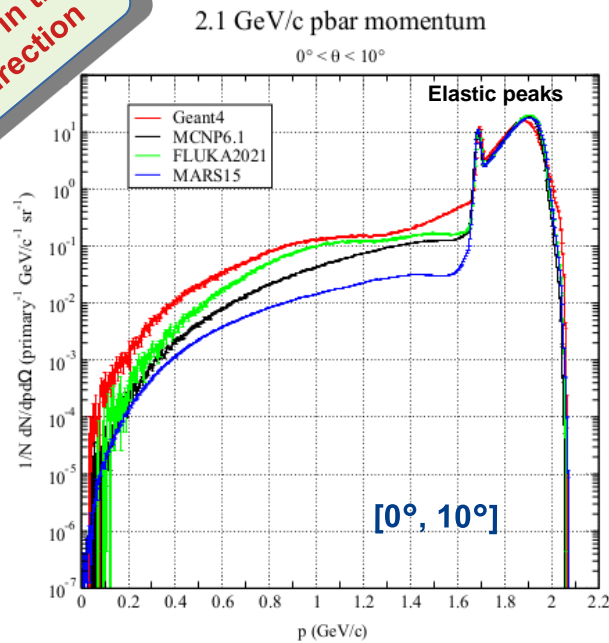


Background Investigation: MC Simulation Studies

\bar{p} beam momentum of 1.9 GeV/c							
θ	Geant4	MCNP6	Δ	FLUKA	Δ	MARS15	Δ
45° – 90°	$4.43 \cdot 10^{-3}$	$7.34 \cdot 10^{-4}$	-83.4%	$1.47 \cdot 10^{-3}$	-66.9%	$6.42 \cdot 10^{-4}$	-85.5%
90° – 135°	$7.87 \cdot 10^{-5}$	$3.13 \cdot 10^{-5}$	-60.3%	$5.47 \cdot 10^{-5}$	-30.4%	$3.28 \cdot 10^{-5}$	-58.3%
135° – 180°	$8.26 \cdot 10^{-6}$	$4.57 \cdot 10^{-6}$	-44.7%	$1.71 \cdot 10^{-6}$	-79.3%	$6.02 \cdot 10^{-6}$	-27.1%
\bar{p} beam momentum of 2.1 GeV/c							
θ	Geant4	MCNP6	Δ	FLUKA	Δ	MARS15	Δ
45° – 90°	$4.12 \cdot 10^{-3}$	$7.80 \cdot 10^{-4}$	-81.1%	$1.78 \cdot 10^{-3}$	-56.8%	$7.09 \cdot 10^{-4}$	-82.8%
90° – 135°	$2.35 \cdot 10^{-4}$	$3.17 \cdot 10^{-5}$	-86.5%	$6.70 \cdot 10^{-5}$	-71.5%	$3.53 \cdot 10^{-5}$	-84.9%
135° – 180°	$3.06 \cdot 10^{-5}$	$4.20 \cdot 10^{-6}$	-86.3%	$2.24 \cdot 10^{-6}$	-92.7%	$6.23 \cdot 10^{-6}$	-79.7%

GEANT4 overestimate the \bar{p} yield at large angles


2.1 GeV/c pbar momentum

45° < θ < 90°

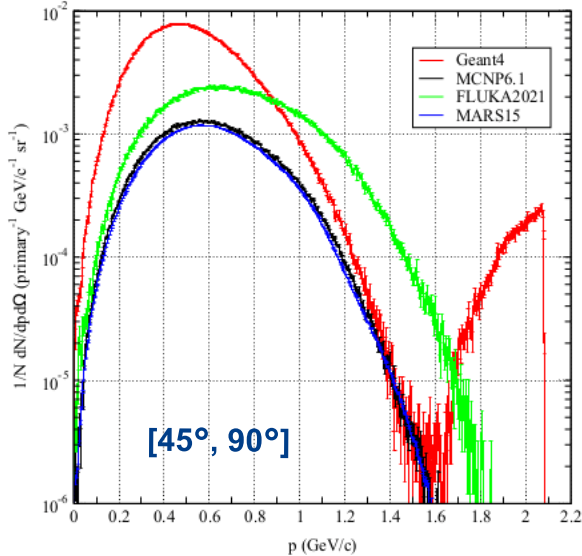


2.1 GeV/c pbar momentum

90° < θ < 135°

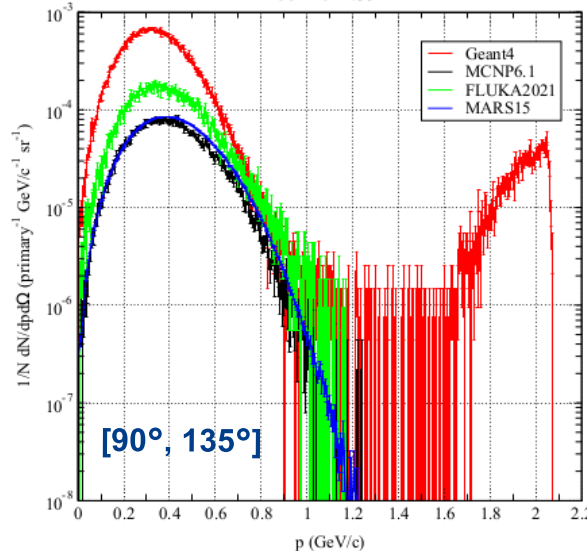

2.1 GeV/c pbar momentum



$\theta > 135^\circ$

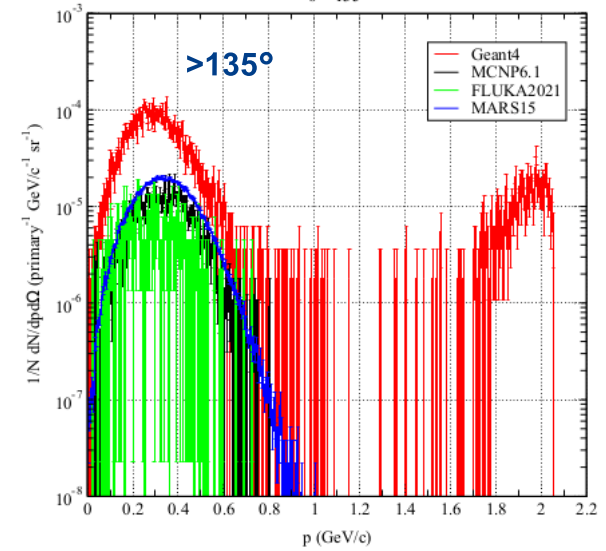

Background Investigation: MC Simulation Studies

Cosmic rays-related background



- The experiment has a cosmic ray veto (CRV) system, suppressing the background due to the cosmic rays that could hit the stopping target
- The CRV system is shielded by 1 m of (standard) concrete
- The concrete absorbs cosmic neutrons, forming an additional possible background source

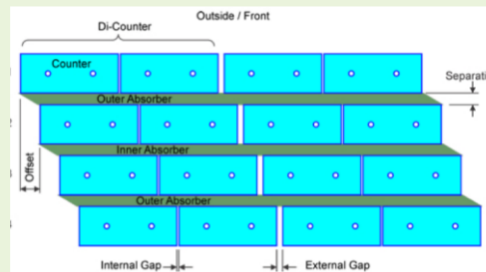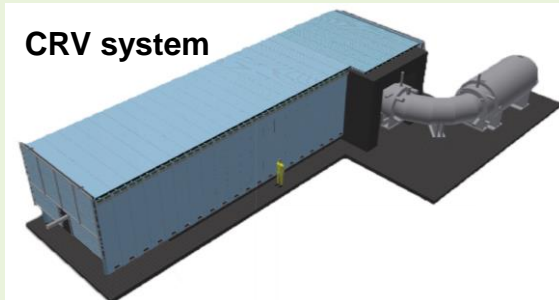

4 overlapping layers of scintillator bars with 2 wavelength-shifting fibers

Background Investigation: MC Simulation Studies


- MC Investigation: transmission of cosmic neutrons in a $10 \times 10 \times 1$ m³ block of concrete
 - neutron source: monoenergetic neutron pencil beams
 - $E_{kin} = 0.25$ GeV, 0.5 GeV, 2.5 GeV, 5.0 GeV, and 10 GeV

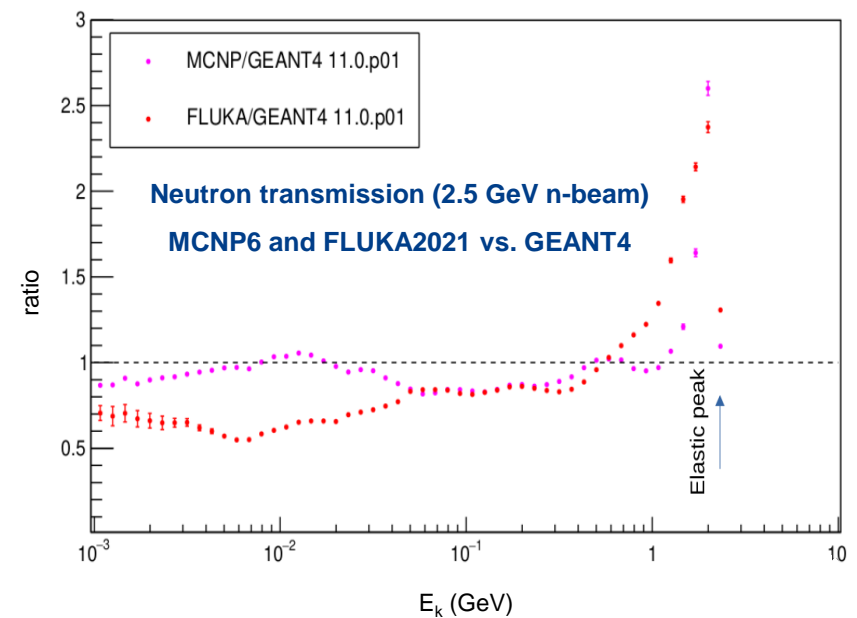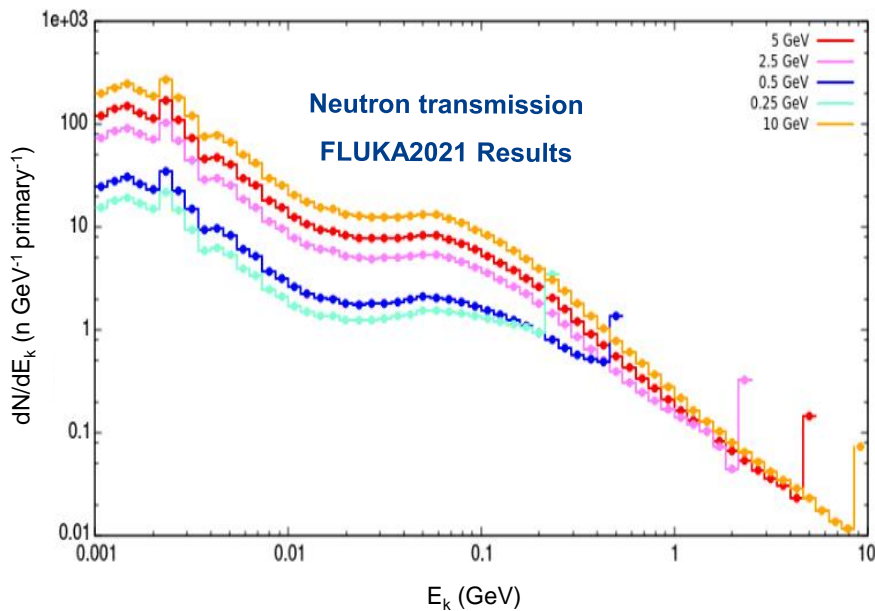

- Spectra of neutrons after 1 m concrete generally differ by less than a factor 2
- The elastic peak: GEANT4 is about 2.5 lower than MCNP6 and FLUKA2021

Normalization of Signal Events: Detector Studies

- The normalization of the signal events is planned to be done using a detector system made of an HPGe detector and a Lanthanum Bromide detector
 - will measure the rate of muons stopped on the aluminum target
 - looking at the emitted characteristic X- and γ -rays of energies up to 1809 keV

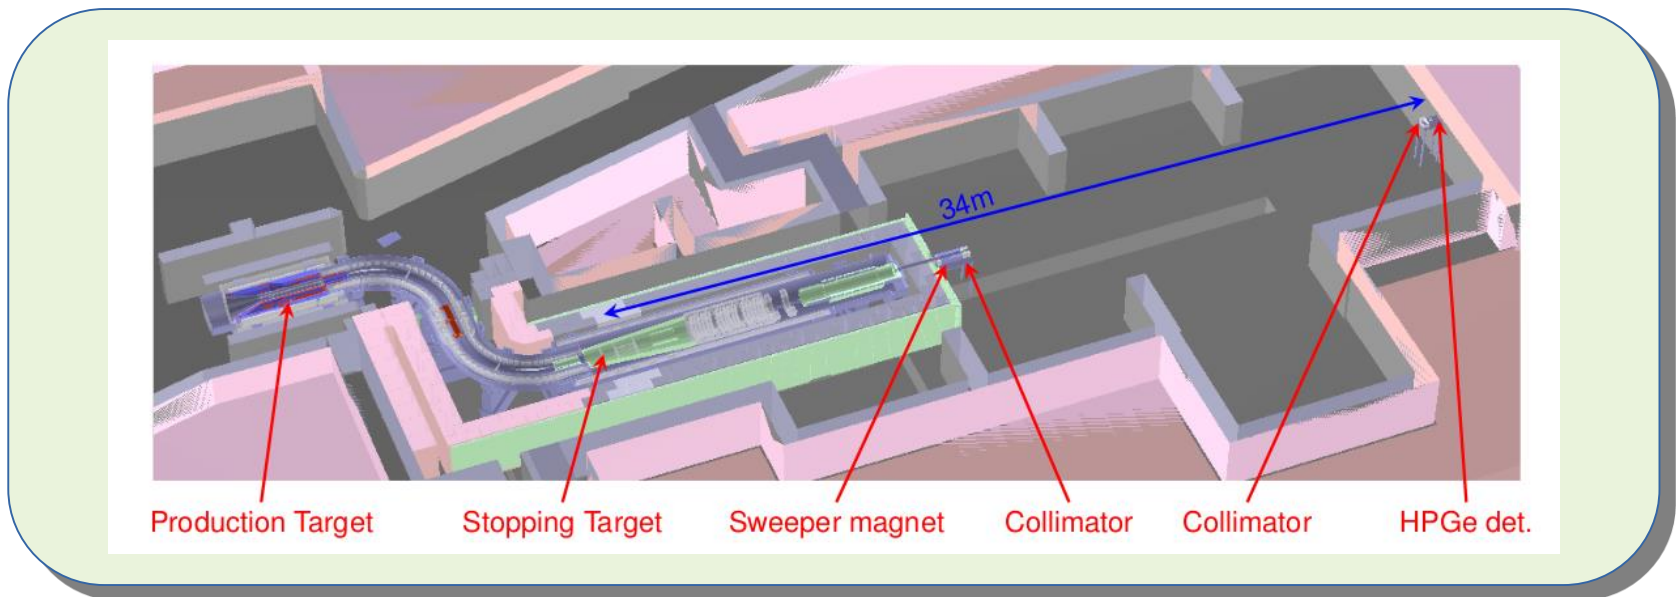


- The detector system was tested at the ELBE facility (HZDR)
 - under conditions similar to the ones expected at the Mu2e experiment


Normalization of Signal Events: Detector Studies

Mu2e@HZDR: The ELBE radiation source

$E_e \leq 40 \text{ MeV}$; $I_e \leq 1 \text{ mA}$; Micropulse duration $10 \text{ ps} < \Delta t < 1 \text{ }\mu\text{s}$

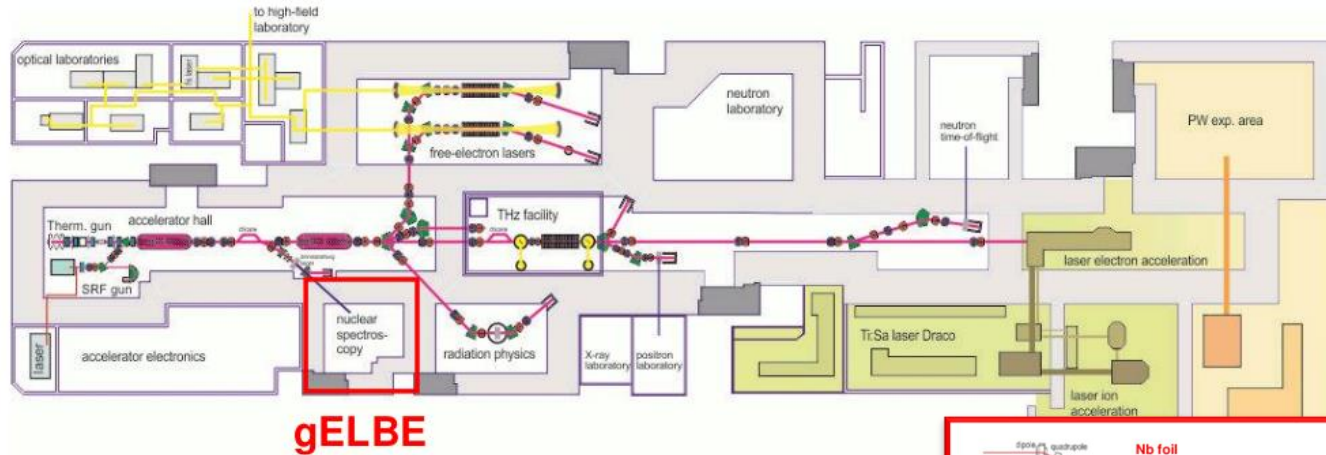




- gELBE produces bremsstrahlung from an electron beam impinging on niobium radiator foils
- Using the gELBE pulsed bremsstrahlung spectrum and calibration sources (^{137}Cs , ^{60}Co , ^{88}Y) allows to simulate the Mu2e conditions
- **3 Irradiation Campaigns:** HPGe test (2017), LaBr₃ test (2021), Test of full system (2022)

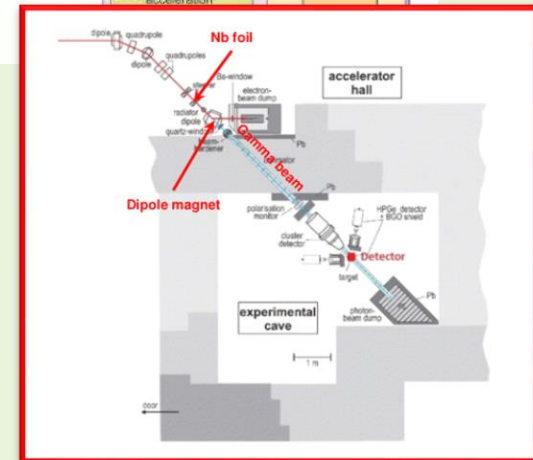

Normalization of Signal Events: Detector Studies

August 2017: Test of a HPGe detector

- Aim: to measure HPGe detector performance in terms of energy resolution and radiation damage and to understand the best detector geometry and position

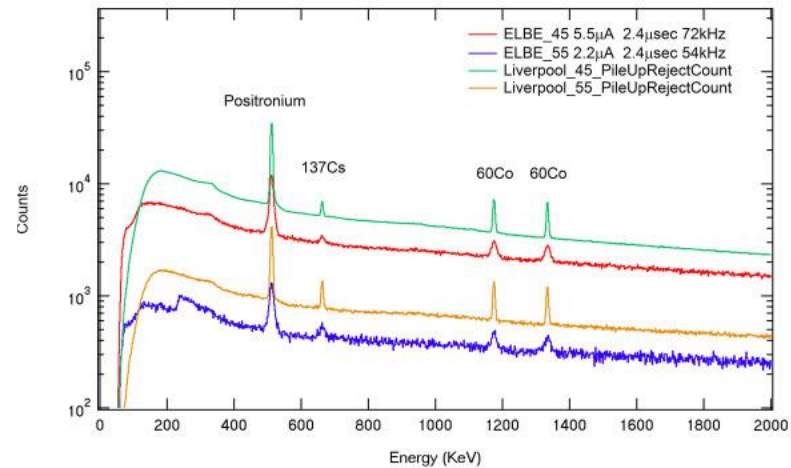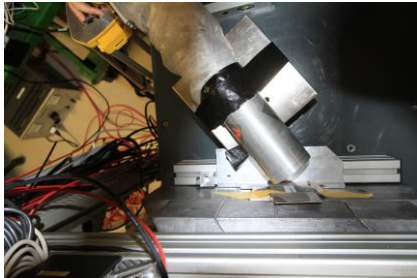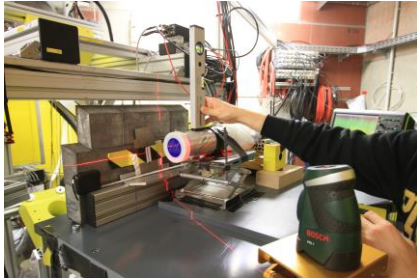

Energy resolution from spectrum analysis between 3 keV and 6 keV

- No radiation damage on the detector found after beamtime
- No degradation in energy resolution after beamtime
- The data has been used to exercise and test reconstruction algorithms
- Observation of single spectral lines over high-rate bremsstrahlung background with high average photon energy is possible


Normalization of Signal Events: Detector Studies

Sept 2021: Test of the LaBr₃ detector

- Aim: to test whether the LaBr₃ detector system could deal with the rate fluctuations anticipated at the Mu2e experiment
- A calibration source including Y-88 line at 1836 keV was used to mimic the muon capture on aluminum emission at 1809 keV
 - determine energy resolution for 1836 keV line over Bremsstrahlung spectrum at increasing levels of gELBE electron current
- “Nominal” expected Mu2e conditions were found at a pulse frequency of 813 kHz and 1.1 μA electron current
 - 150 kcps with 3.8 MeV average photon energy



Calibration Source
(Including Yttrium-88)

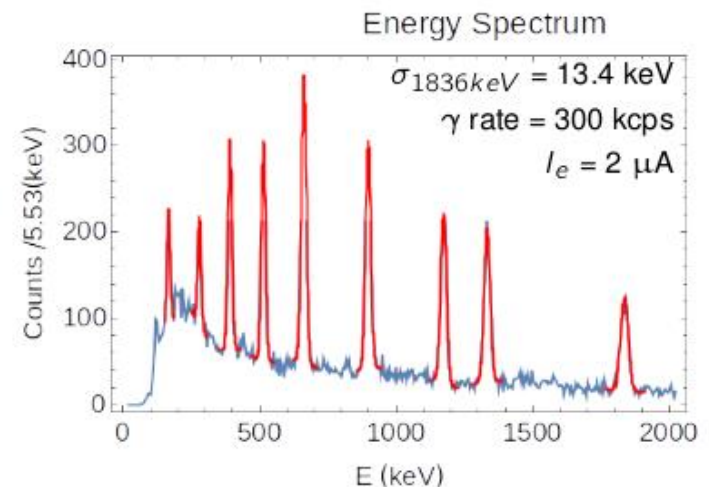

- Detector system can handle data taken at twice the expected photon rate (813 kHz pulse frequency)



Summary

- Two tasks for supporting the Mu2e experiment design were performed:
 - investigation of the backgrounds via MC simulations
 - testing of the detector system for the signal events normalization
- The MC simulations were performed using GEANT4, FLUKA2021, MCNP6, and MARS15 codes
 - to evaluate the prediction credibility of the codes and tune the simulation setup
- The normalization will be provided by measuring the total number of muon captures via a system of HPGe + LaBr₃ detectors
 - will measure the rate of 1809 keV γ -rays emitted from the stopping target's aluminum discs when muons are captured
- The detectors are currently being set up in Mu2e building

Thank you for your attention!


The Stopping-Target Monitor shieldhouse design

- HPGe detector needs to be in an angled position due to limited space
- Detectors “see” the Aluminum stopping target through collimator holes in tungsten shielding block.

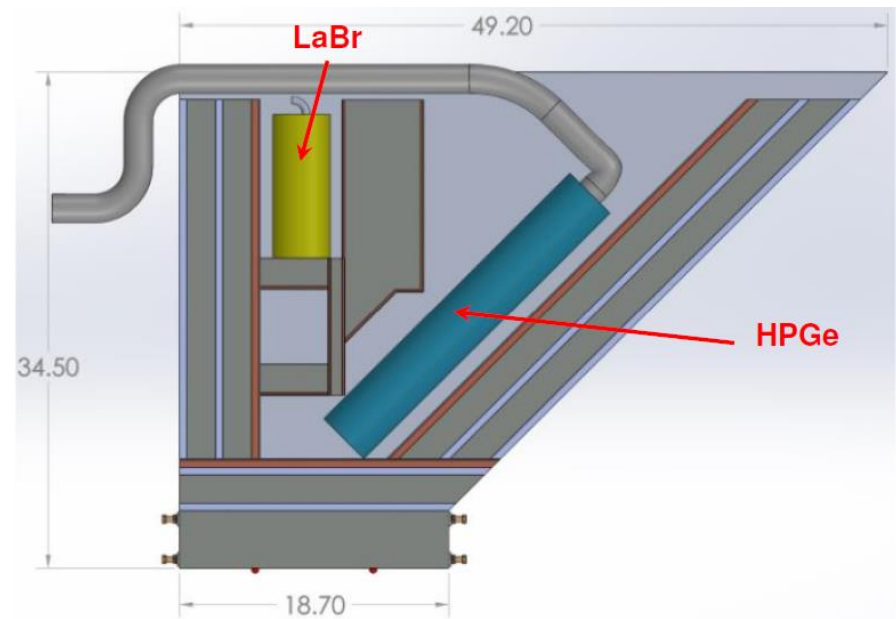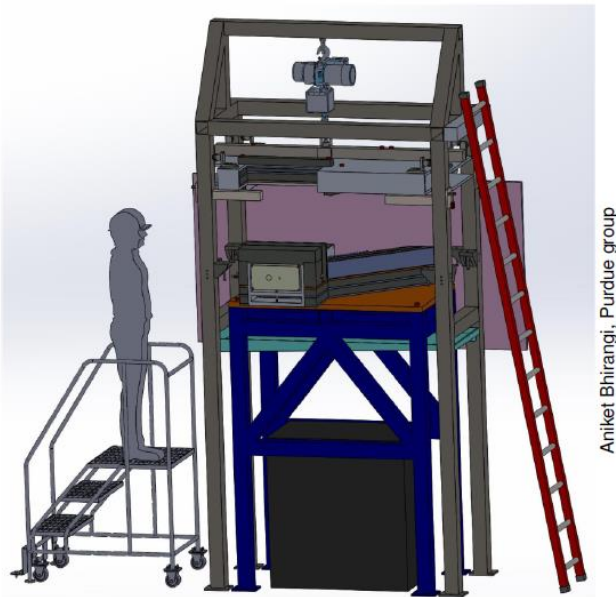

The Mu2e Experiment

Pulsed proton beam allows definition of a “Live Window” for the signal to suppress prompt background (1695 ns peak-to-peak):

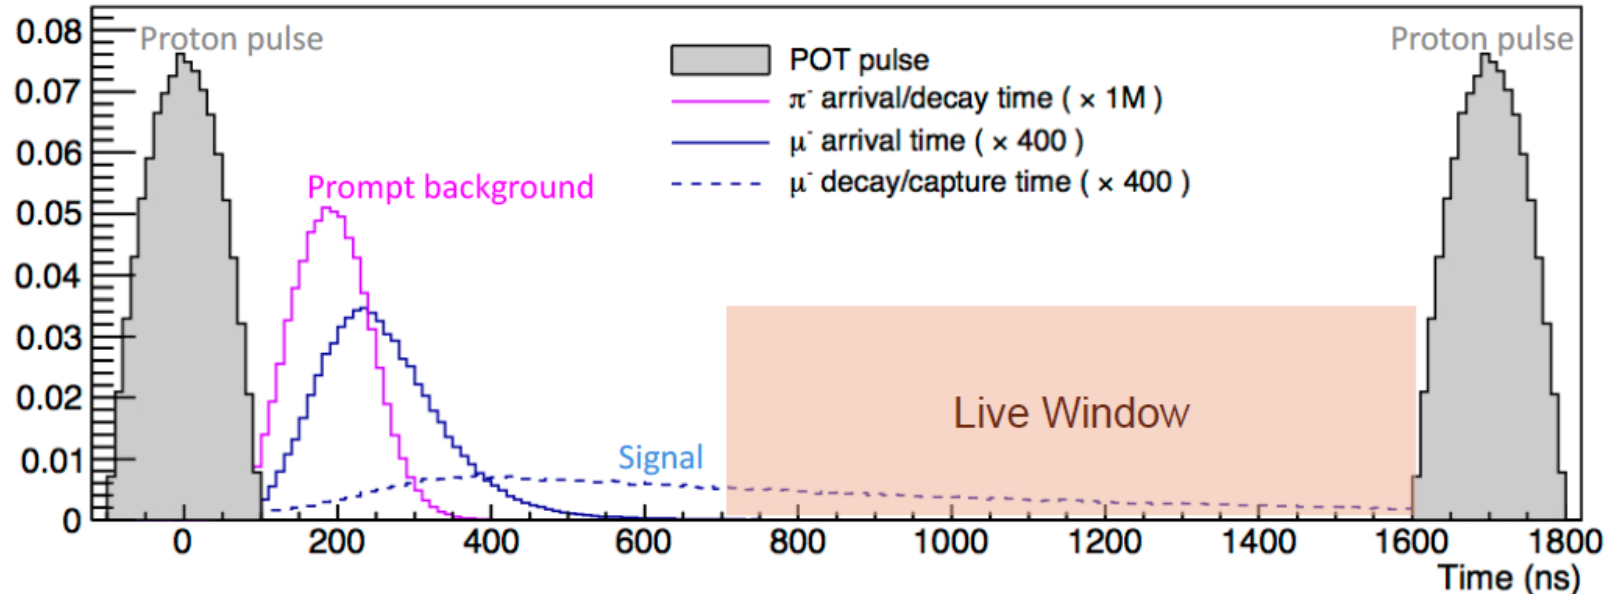

- Fermilab accelerator complex provides optimal pulse spacing for Mu2e
- 700 ns delay allows to suppress prompt background from pions by $\sim 10^{-11}$
- Must achieve extinction $(N_{p^+ \text{ out of bunch}})/(N_{p^+ \text{ in bunch}}) \leq 10^{-10}$