


The EIC Accelerator – Design Highlights and Project Status

Christoph Montag, BNL

EINN 2023

Paphos, Cyprus

October 31 – November 4, 2023

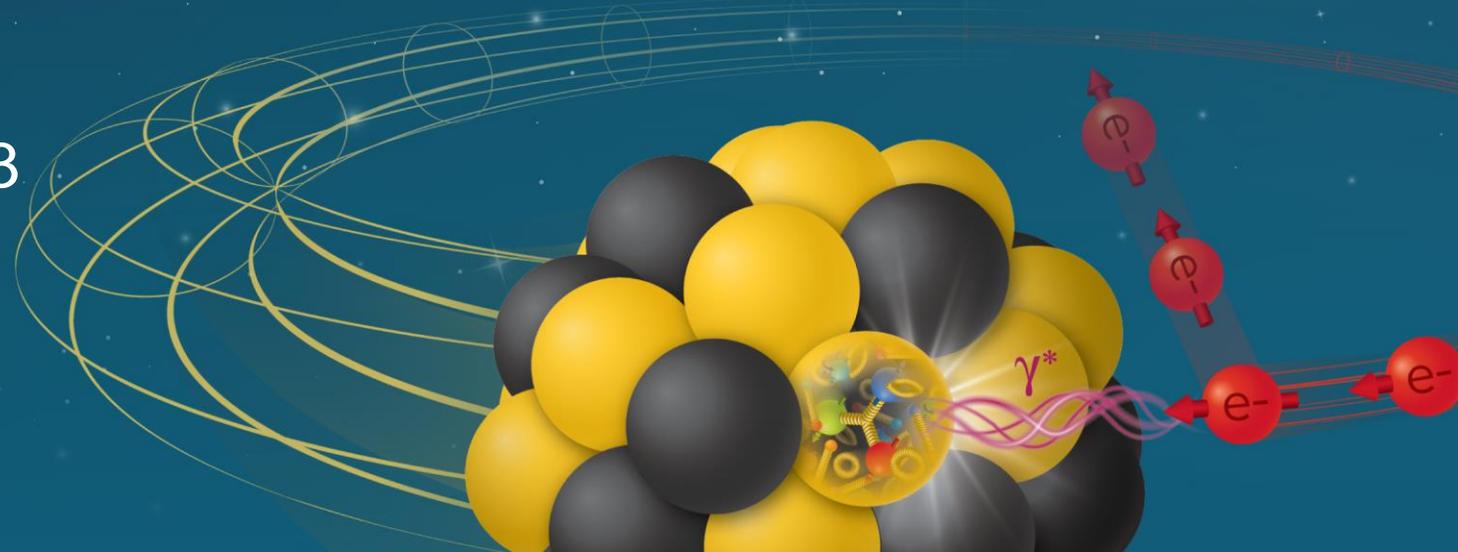


EIC Requirements

- **High luminosity**: $L = 10^{33}$ to 10^{34} $\text{cm}^{-2}\text{sec}^{-1}$ - factor 100 to 1000 beyond HERA
- Large range of center-of-mass **energies** $E_{\text{cm}} = 29$ to 140 GeV
- **Polarized beams** with flexible spin patterns
- Favorable condition for **detector acceptance** such as $p_{\text{T}} = 200$ MeV/c
- Large range of **hadron species**: protons ... Uranium
- Collisions of electrons with **polarized protons and light ions** (${}^3\text{He}$, d , ...)

→ EIC meets or exceeds the requirements formulated in the White Paper

Relativistic Heavy Ion Collider (RHIC)

- Two superconducting storage rings
- 3.8km circumference
- Energy up to 255GeV protons, or 100GeV/n gold
- 110 bunches/beam
- Ion species from protons to uranium
- 60% proton polarization – **world's only polarized proton collider**
- **Exceeded design luminosity by factor 44 - unprecedented**
- 6 interaction regions, 2 detectors
- In operation since 2001

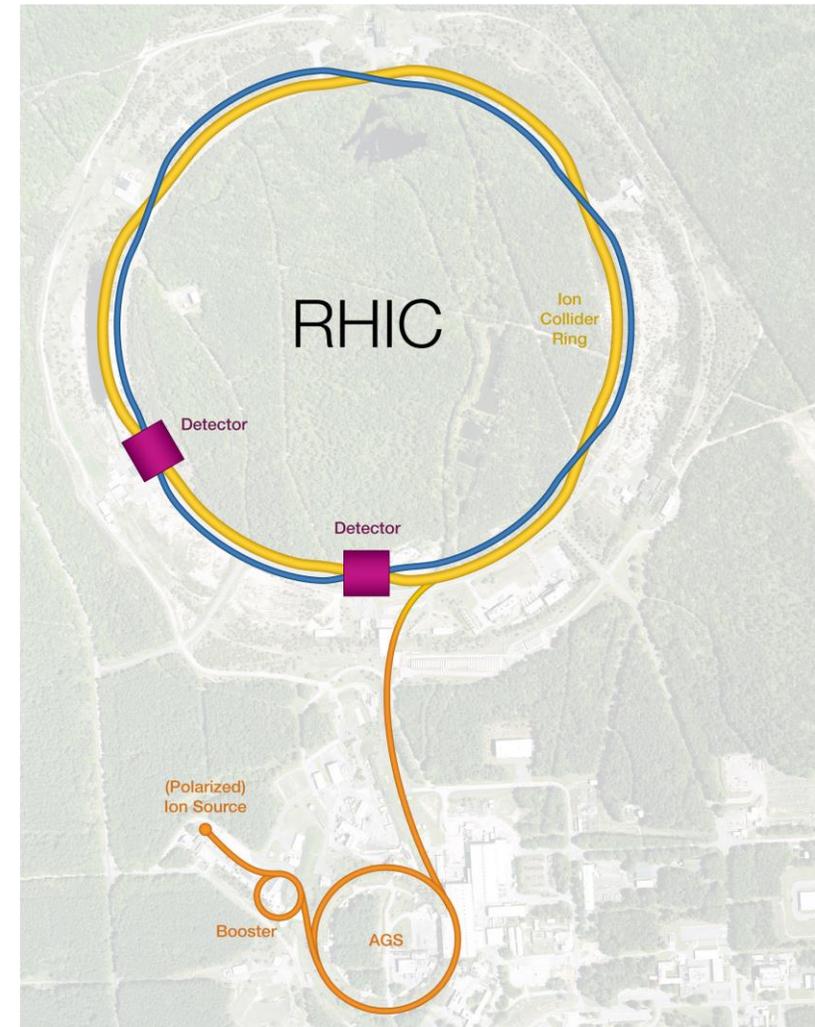


EIC Design Concept


- EIC is **based on the RHIC complex**: Hadron Storage Ring (HSR), injectors, ion sources, infrastructure; needs only **relatively few modifications and upgrades**
- **Today's RHIC beam parameters are close** to what is required for EIC (except number of bunches, 3 times higher beam current, and vertical emittance)
- Add a **5 to 18 GeV electron storage ring** & its injector complex to the RHIC facility → $E_{cm} = 29-141 \text{ GeV}$
- Design and built a suitable **interaction region**

Facility layout

- Hadron Storage Ring comprised of “Blue” and “Yellow” RHIC arcs
- Retaining RHIC injector chain
- Electron complex to be installed in existing RHIC tunnel – cost effective

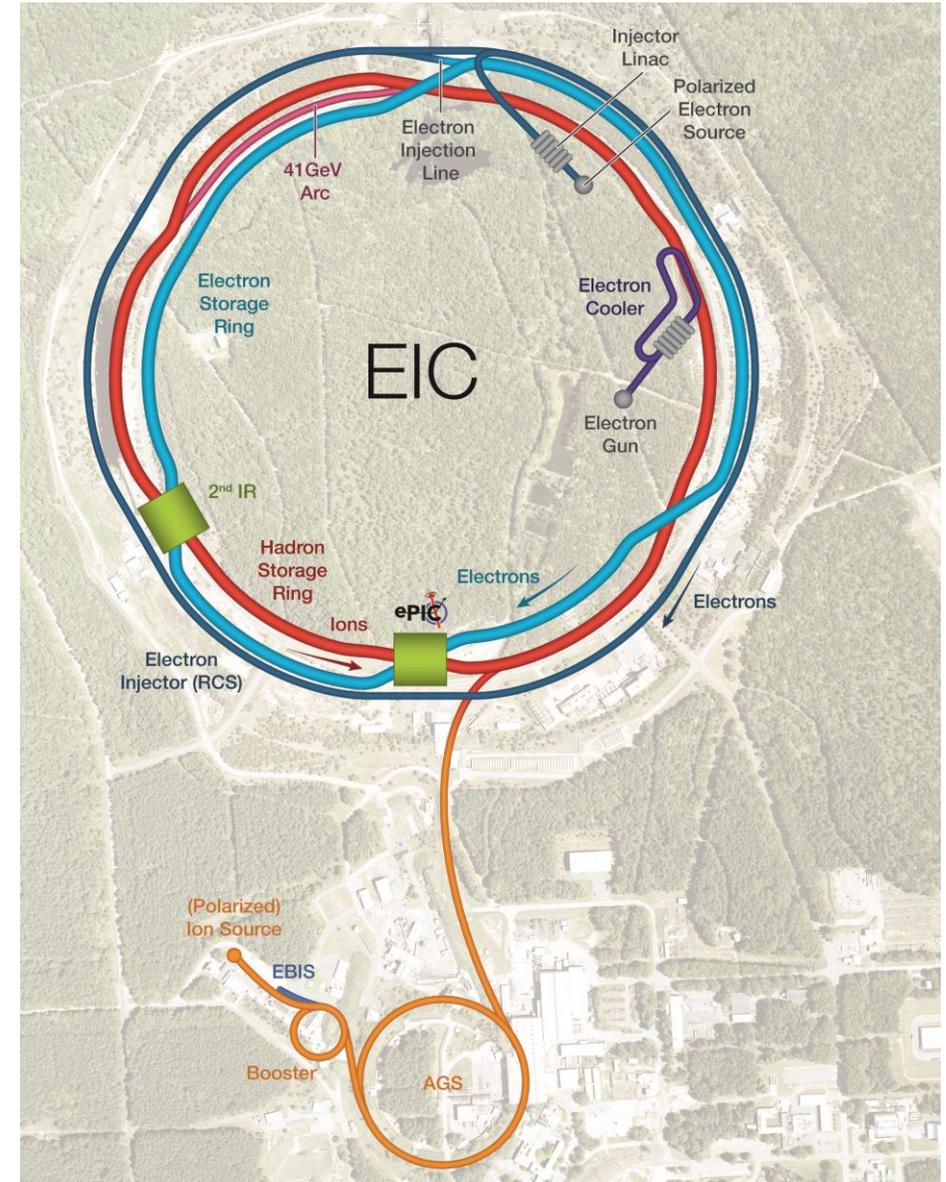

e-p Luminosity versus Center-of-Mass Energy

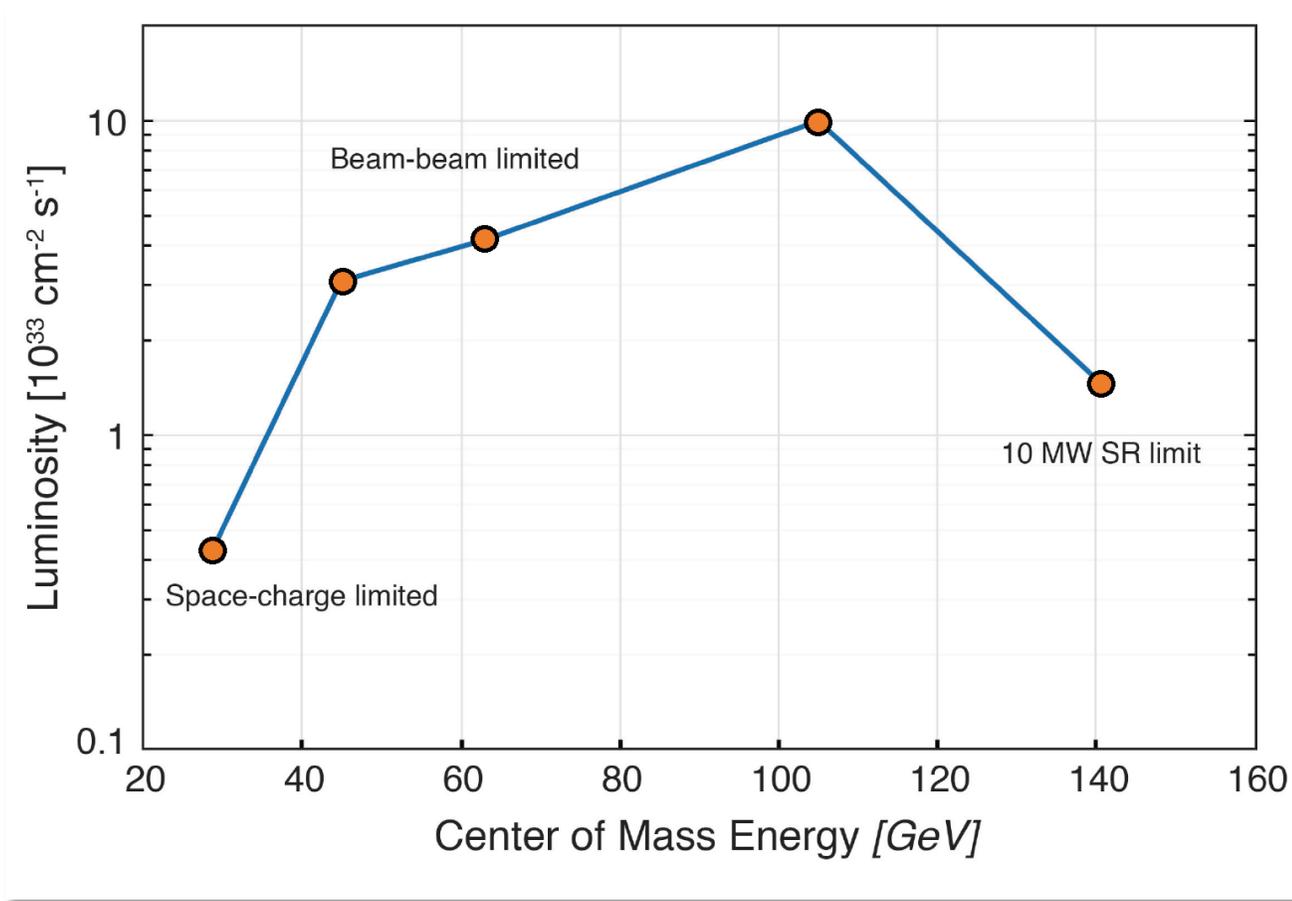

Electron-nucleon luminosities in e-A collisions are similar within a factor of 2 to 3

Parameters for Highest e-p Luminosity

	proton	electron
no. of bunches		1160
energy [GeV]	275	10
bunch intensity [10^{10}]	6.9	17.2
beam current [A]	1.0	2.5
ϵ_{RMS} hor./vert. [nm]	9.6/1.5	20.0/1.2
$\beta_{x,y}^*$ [cm]	90/4	43/5
b.-b. param. hor./vert.	0.014/0.007	0.073/0.100
σ_s [cm]	6	2
$\sigma_{dp/p}$ [10^{-4}]	6.8	5.8
τ_{IBS} long./transv. [h]	3.4/2.0	N/A
L [$10^{33} \text{ cm}^{-2} \text{ sec}^{-1}$]		10.05


- Hadron beam parameters similar to present RHIC, but smaller vertical emittance and many more bunches
- 2 hour IBS growth time requires strong hadron cooling
- Electron beam parameters resemble a B-Factory

Luminosity Sharing with two IRs

- Both electrons and hadrons are at the **beam-beam limit** with one collision point – they would not “survive” a second IR
- To enable **two collision points**, both electron and hadron bunch **intensity would have to be reduced by a factor two** – resulting luminosity at each IR would be **factor 4 smaller**
- Instead, we modify the fill pattern such that half the bunches collide in IR6, while the other half collides in IR8
- As a result, total luminosity is preserved, and **each detector gets half of the total**

Collision Synchronization

- HSR needs to operate over a **wide energy range**
- Changing the beam energy in the HSR causes a **significant velocity change**
- To **keep the two beams in collision**, they have to be synchronized so bunches arrive at the detector(s) at the same time
- Synchronization accomplished by **path length change**
- Between **100 and 275 GeV (protons)**, this can be done by a **small radial shift** – there is enough room in the beampipe
- For lower energies, use an inner instead of an outer arc as a **shortcut**. 90 cm path length difference corresponds to **41 GeV** proton beam energy

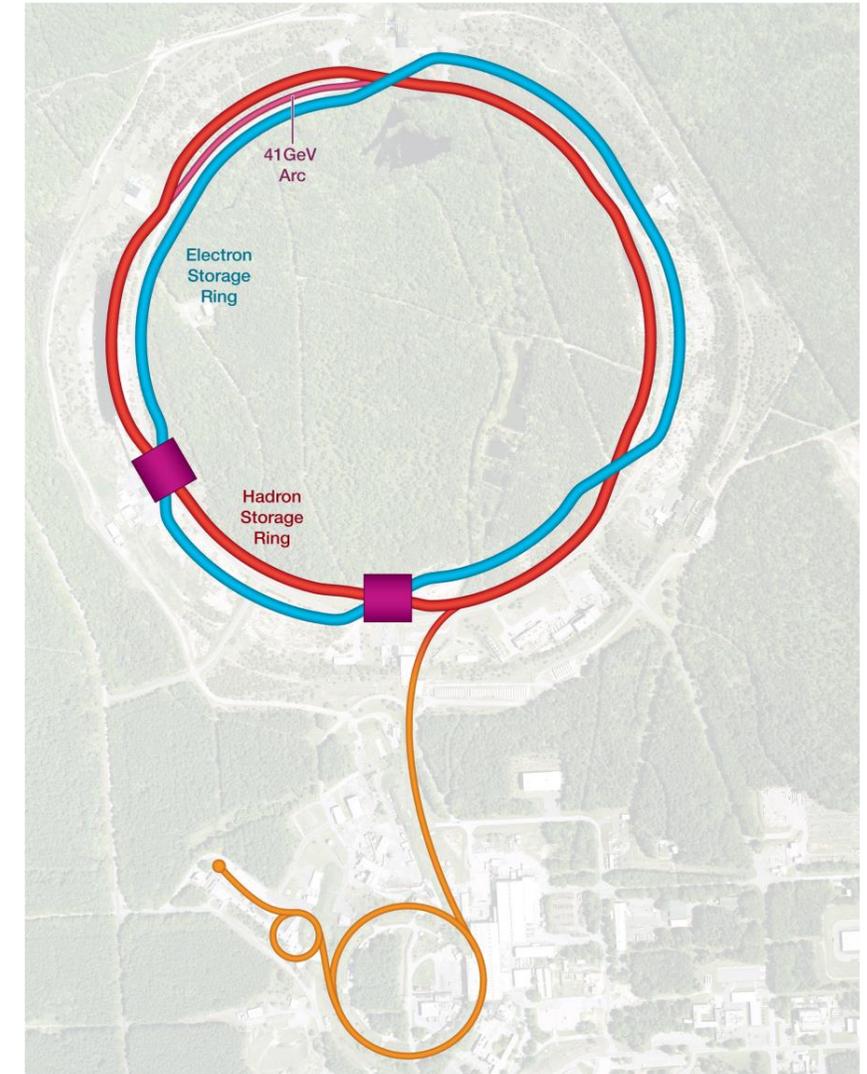


Emittance Control in the ESR

- EIC needs **24 nm emittance from 5 to 18 GeV for optimum luminosity**, but equilibrium emittance in an electron storage ring depends on beam energy:


$$\epsilon_x = C_q \frac{\gamma^2}{J_x} \frac{I_5}{I_2}, \quad \text{with} \quad C_q = \frac{55}{32\sqrt{3}} \frac{\hbar c}{mc^2}$$

- Betatron phase advance μ per FODO cell is the “knob” to adjust the emittance
- **60 degrees at 10 GeV and 90 degrees at 18 GeV both yield ~24 nm**
- **“super-bends” for emittance generation below 10 GeV**

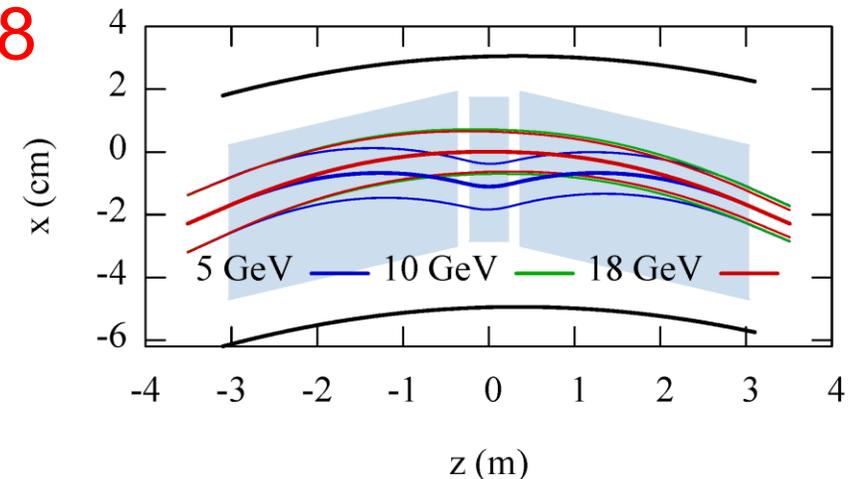

Beam Energies

- γ range for hadrons:
 - $\gamma = 43.7$ through “41 GeV arc”
 - $107 < \gamma < 293$ with radial shift
- Maximum hadron energy:
 - $E [\text{eV}] < 916 * c [\text{m/sec}] * Z/A$
- Electron energies:
 - 5 to 10 GeV, with 60 degree lattice and super-bends
 - 18 GeV, with 90 degree lattice
 - Energies between 10 and 18 GeV are feasible, but at somewhat reduced luminosity due to non-optimum emittance, scaling as γ^2

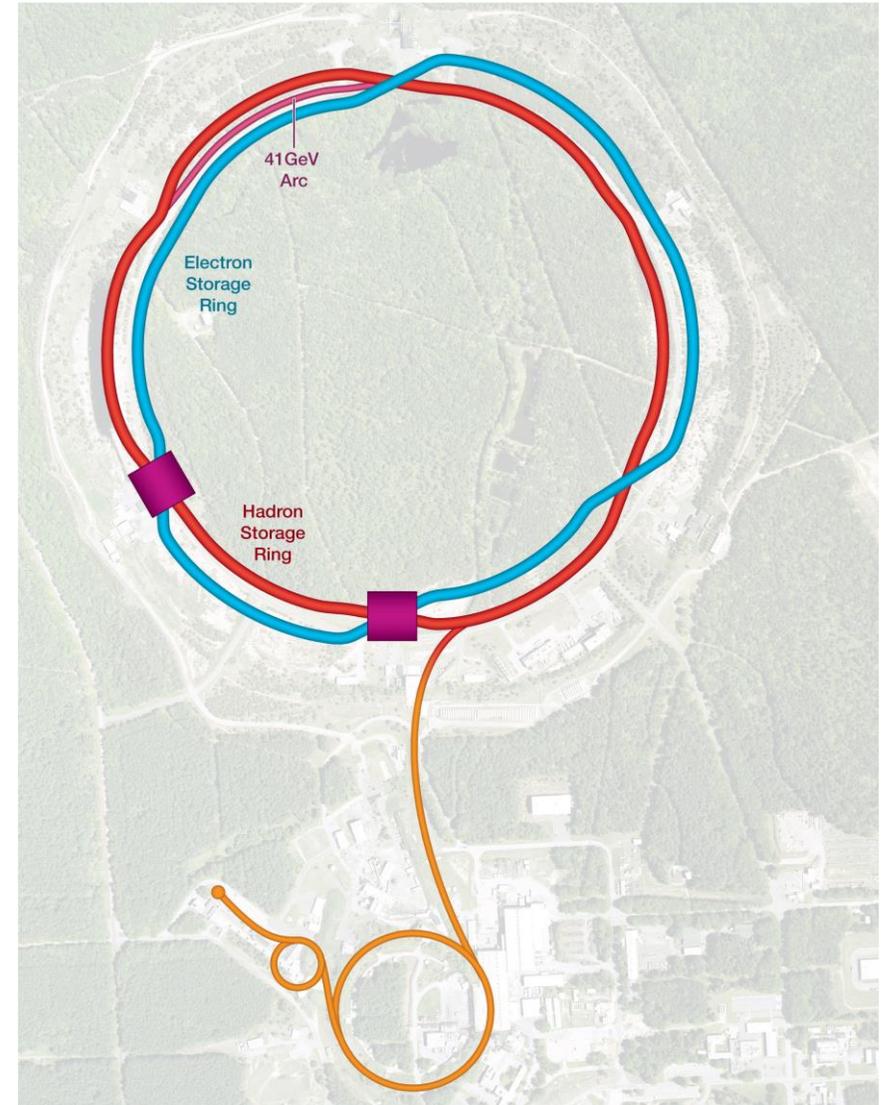

EIC Electron Polarization


- Physics program requires bunches with **spin “up” and spin “down”** (in the arcs) to be stored **simultaneously**
- Sokolov-Ternov **self-polarization** would produce only polarization **anti-parallel** to the main dipole field
- Only way to achieve required spin patterns is by **injecting bunches with desired spin orientation at full collision energy**
- **Sokolov-Ternov will over time re-orient all spins** to be anti-parallel to main dipole field
- **Spin diffusion** reduces equilibrium polarization
- Need **frequent bunch replacement** to overcome Sokolov-Ternov and spin diffusion

High Average Electron Polarization

- **Frequent injection** of bunches with high initial polarization of 85%
- Initial **polarization decays** towards P_∞
- At 18 GeV, every **bunch is replaced** (on average) after 2.2 min with RCS cycling rate of 1Hz



B P
↓↑ Refilled every 1.2 minutes

B P
↓↑ Refilled every 3.2 minutes

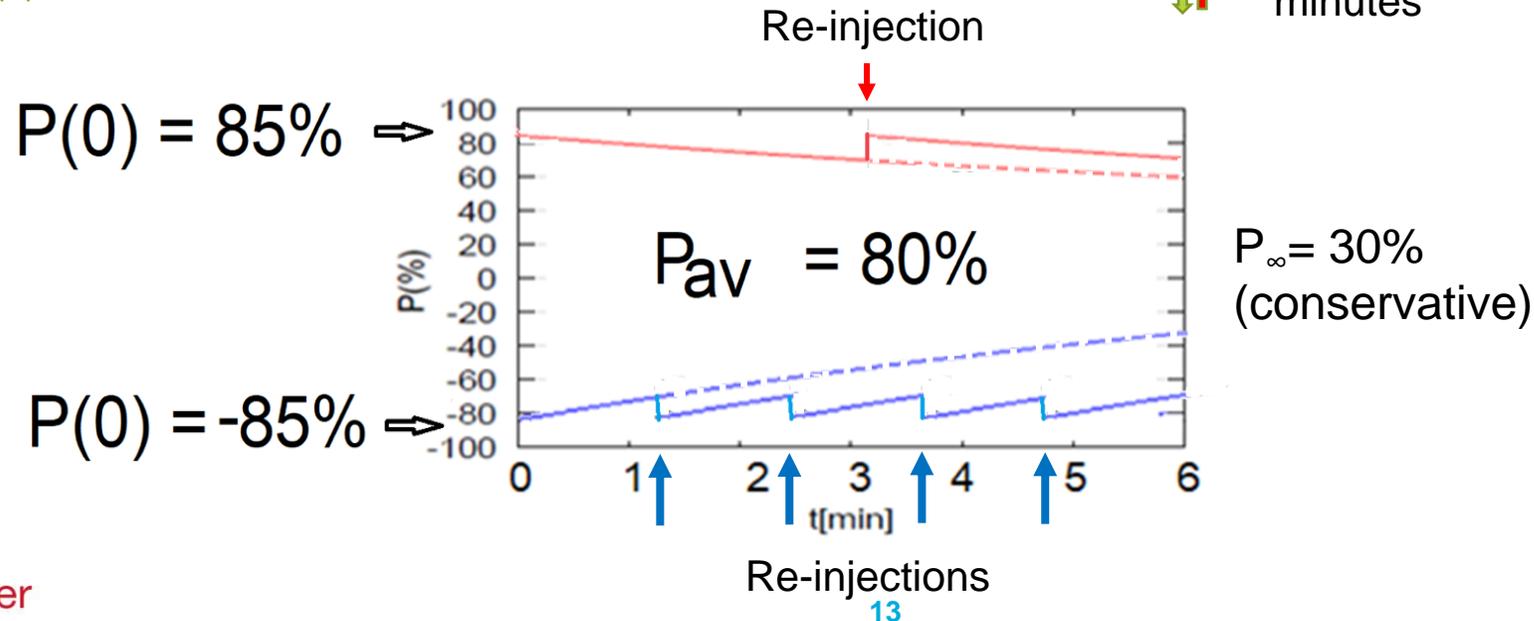


Crossing Angle and Luminosity

- EIC interaction region is based on a 25 mrad crossing angle for beam separation and luminosity maximization
- In head-on collisions, every beam particle in one beam can potentially interact with every particle in the other beam
- Long ($\sim\pm 6$ cm), skinny (100 μm) bunches colliding at an angle have very little overlap
- With 25 mrad crossing angle, each electron can only interact with a thin slice of the ± 6 cm long oncoming hadron bunch

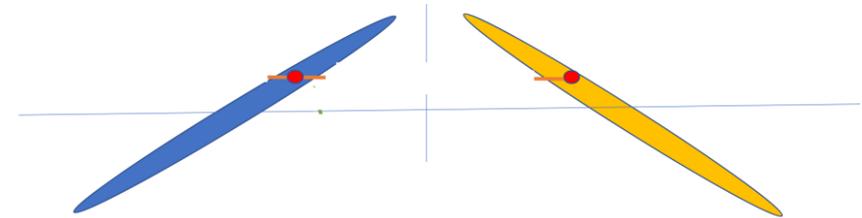



Crab Crossing


- Head-on collision geometry is restored by rotating the bunches before colliding (“crab crossing”)
- Bunch rotation (“crabbing”) is accomplished by transversely deflecting RF resonators (“crab cavities”)
- Actual collision point moves laterally during bunch interaction – to be taken into account in analysis

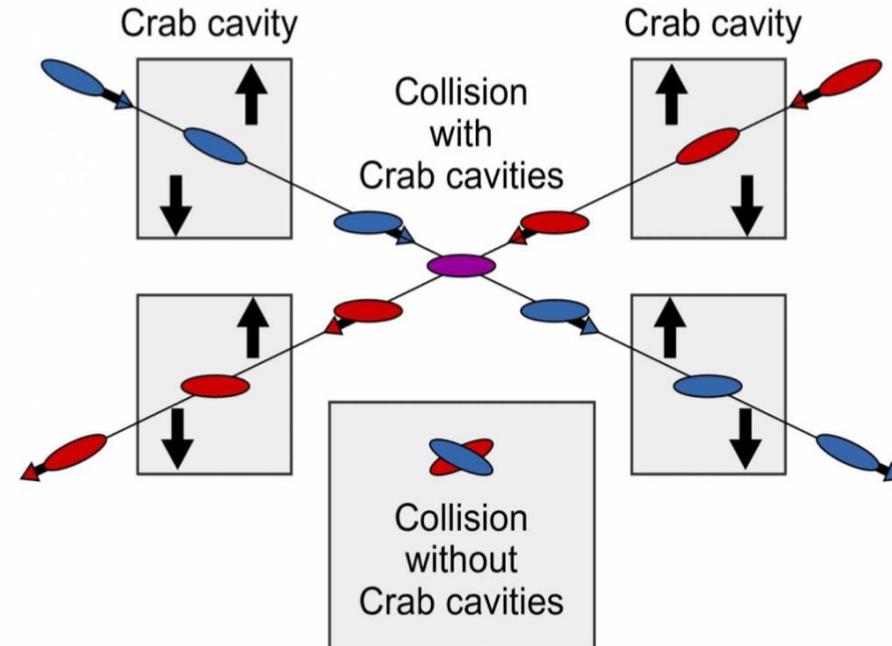


HSR layout in IR6

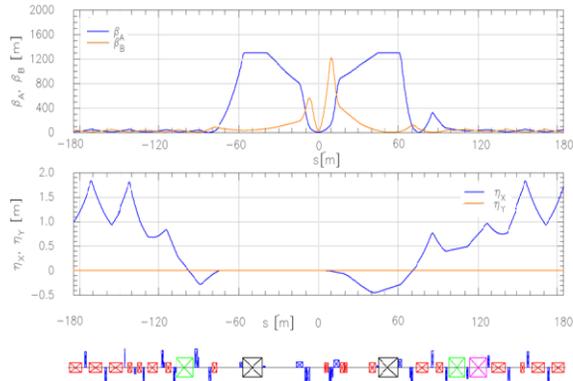

B0pF spectrometer

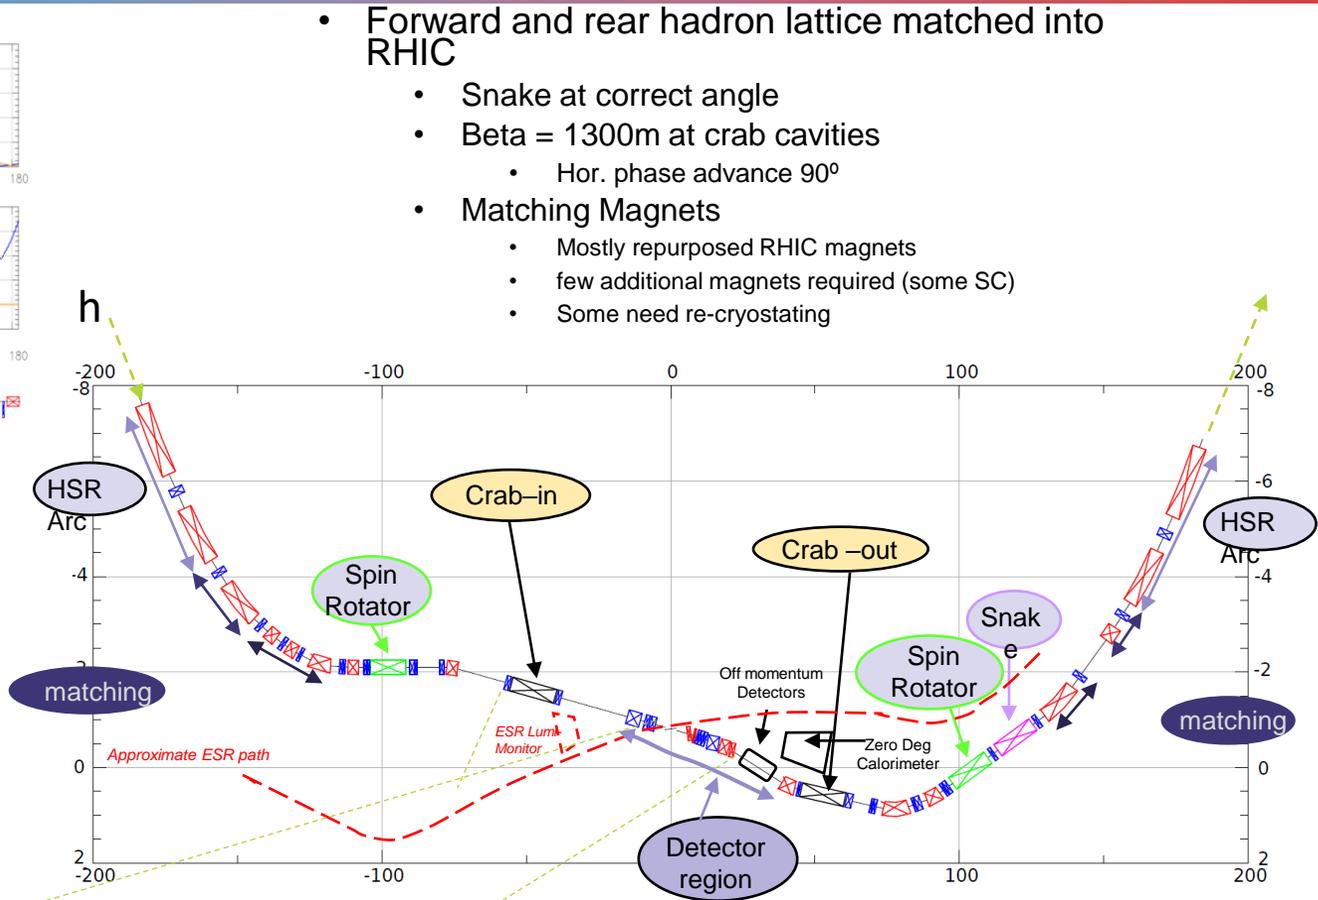


Nov 2021 layout
3 Dipoles and 3 Quadrupoles in one shared cryostat

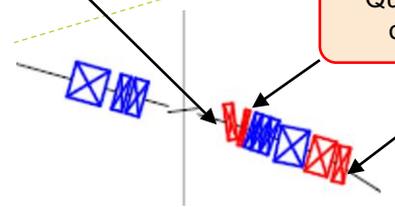


- Forward and rear hadron lattice matched into RHIC
 - Snake at correct angle
 - Beta = 1300m at crab cavities
 - Hor. phase advance 90°
 - Matching Magnets
 - Mostly repurposed RHIC magnets
 - few additional magnets required (some SC)
 - Some need re-cryostating

ESR layout in IR6

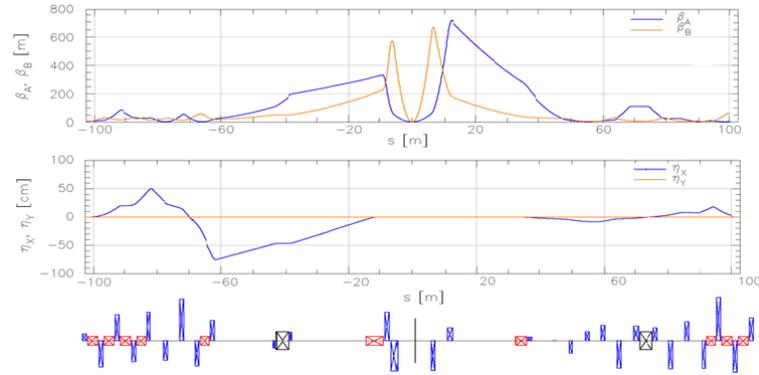

Design to:

- Provide room for detector components
- Mitigate synchrotron radiation issues
- Provide longitudinal spin (new spin rotators)
- Match into the arcs
- Provide conditions for crabbing
- Allow 3 rings and beam elements

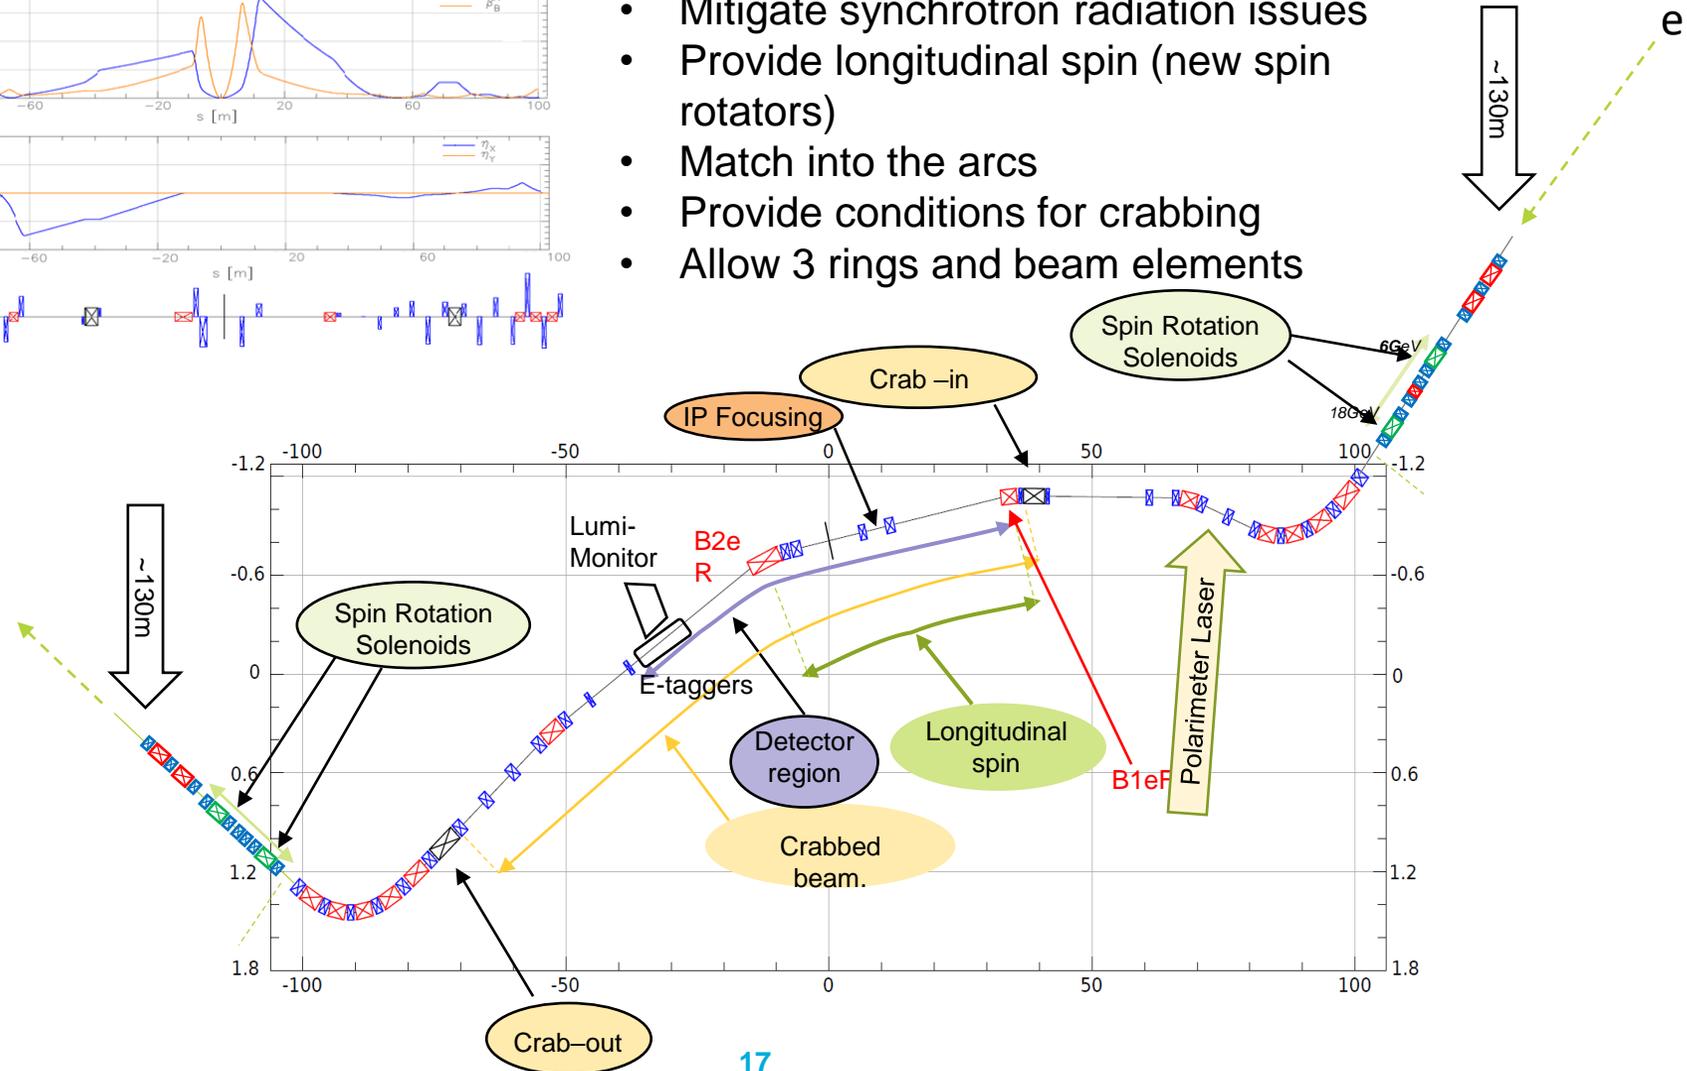

EIC IR Layout

High luminosity:


- Small β^* for high luminosity
- Limited IR chromaticity contributions
- Large final focus quadrupole aperture

Physics requirements:

- Large detector acceptance
- Forward spectrometer
- No machine elements within +/- 4.5m from the IP
- Space for luminosity detector, neutron detector, "Roman Pots"





Multi-stage separation:

- Electrons from protons
- Protons from neutrons
- Electrons from Bethe-Heitler photons (luminosity monitor)

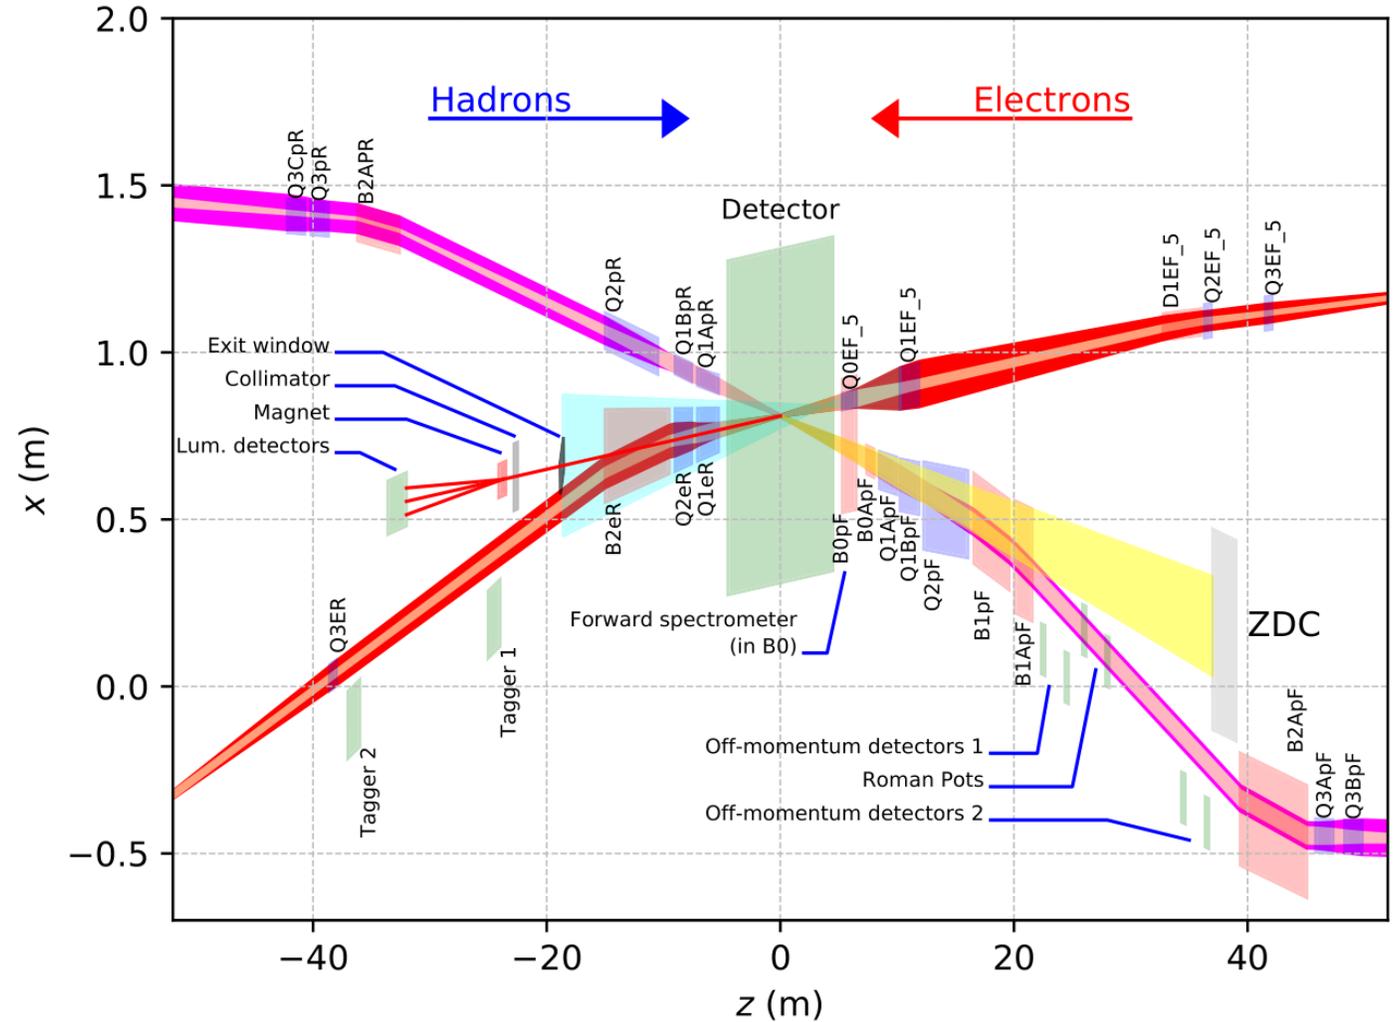

Latest Highlight #1 – Flat Hadron Beam Collisions

- EIC is based on “flat” hadron beams with an emittance ratio of $\frac{\epsilon_y}{\epsilon_x} = 0.1$
- Successfully demonstrated during beam studies at RHIC

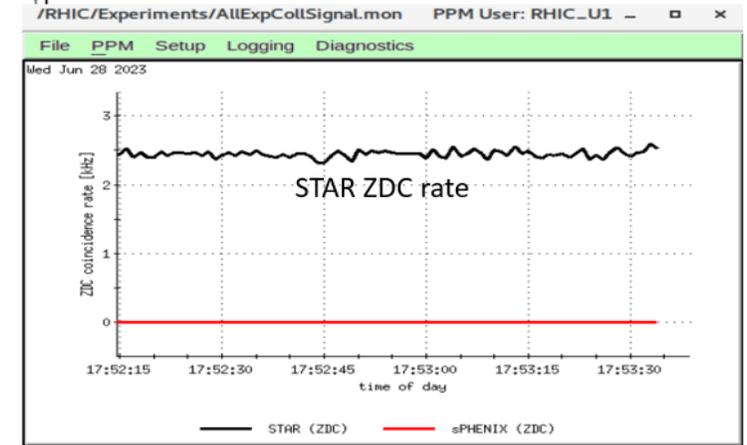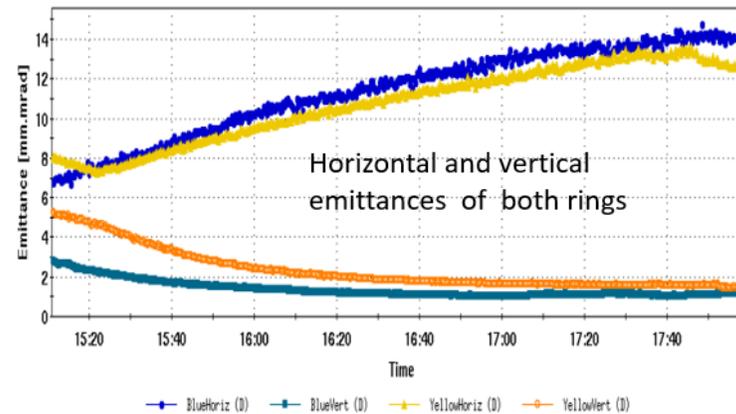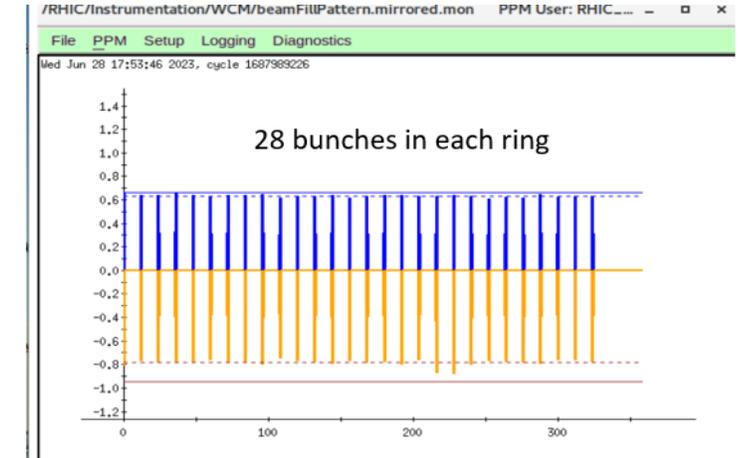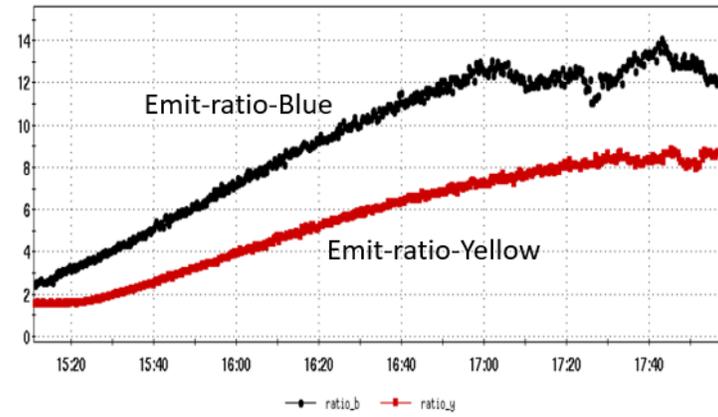

Latest Highlight #2 – Magnets for the ESR

- 400 Quadrupoles and 280 Sextupoles from the Advanced Photon Source at ANL to be repurposed for ESR
- ~ \$7M cost savings
- Received first girders on September 13



Summary

- The EIC will be the next large nuclear physics facility, starting operations ~2032
- It fulfills all the requirements listed in the White Paper, facilitating a rich physics program
- These requirements make it a very challenging machine – high beam currents, polarization, novel hadron cooling technique, large energy range, ...