

Towards an Estimation of the fluxes in highly granular calorimeters

V. Boudry, K. Hassouna, L. Portales*

LMR


Institut Polytechnique de Paris
* IPP PSEI and U. of Hawaii at Manoa

**2nd ECFA WS on HET factories
Paestum, 11/10/2023**

Rationale

ILD high granularity calorimeters

- Designed for ILC
 - Power pulsing, low occupancy
- Marginally adapted for CLIC and CLD
 - Physics : number of layers
- Partially adapted for CEPC
 - Lower granularity
- Needs strong adaptation for EW physics and continuous operation
 - Rates, Heat, Electronics

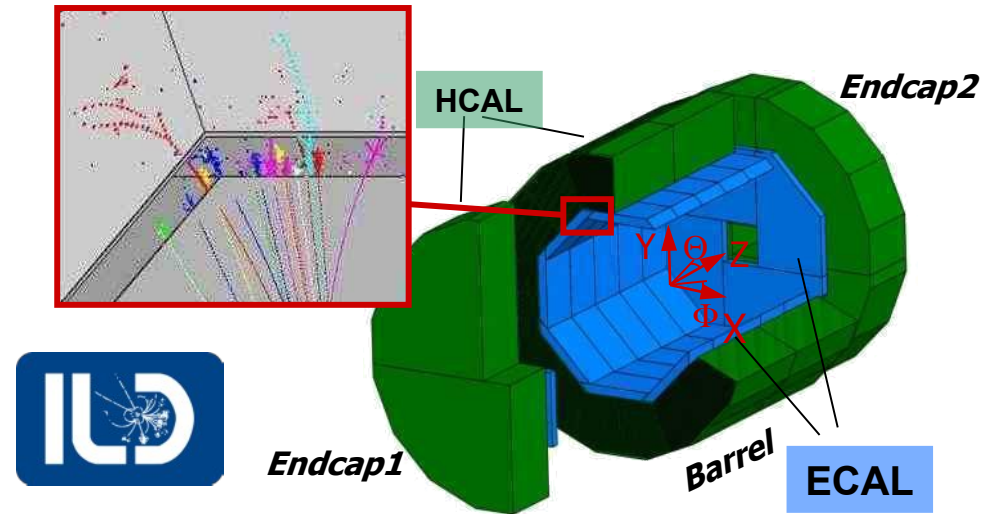

ECAL: 30 layers

- SiW-ECAL²: $0.5 \times 0.5 \text{ cm}^3$ Si cells
- ScECAL: $0.5 \times 5 \text{ cm}^2$ Scint strips

10–100M channels

HCAL: 48 layers

- AHCAL: $3 \times 3 \text{ cm}^3$ scint. cells
- ScECAL: $1 \times 1 \text{ cm}^2$ RPC cells

10–70M channels

Revisiting the HG calorimeters for ee-Colliders

Large panel of running conditions

- $90\text{GeV} \times 10^7 \text{ fb} \times 5 \cdot 10^{36} \text{ cm}^{-2} \text{ s}^{-1}$ ($qq \times 20000 \text{ ILC @ 250}$)
- $150 \text{ GeV (WW)} + 250 \text{ GeV (ZH)} + 280 \text{ GeV (tt)}$
 $\sim 10^4 \text{ fb} \times 5 \cdot 10^{35} \text{ cm}^{-2} \text{ s}^{-1}$ ($qq \times 5\text{--}10 \text{ ILC @ 250}$)

Are the current hypothesis viable ?



- Occupancy,
DAQ,
Cooling



– 1 detector fit-all ?

- What are the limits :

- power vs Granularity vs active cooling ?

– New electronics (DRD6):

- TSMC 130 nm vs AMS 130 nm (or 65nm)
- Running mode (continuous, trigger-less)
 - Trigger for other detectors ?

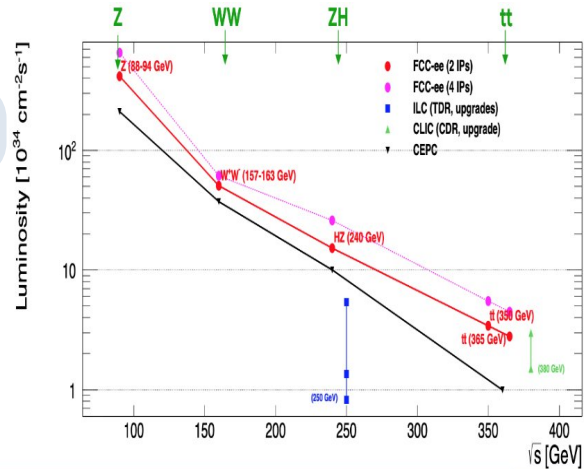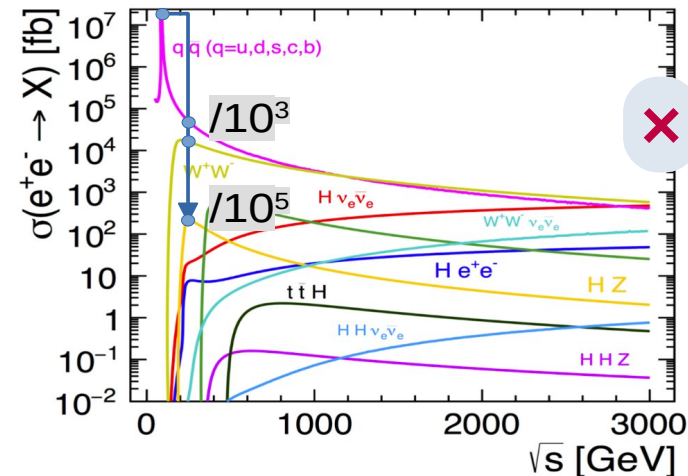


Calorimeter Fluxes from Full Simulations

Quantities useful for self-triggering, low occupancy, Front-End electronics & Design


- Number of hits/s per ASICs
 - Power (Energy per conversion)
 - Memory size
- Distribution of Energy & Time
 - Dynamic ranges
 - Power per conversion (Wilkinson ADCs)
 - Double hits
- Data output
 - Data Flux per readout partition (DAQ)
 - DAQ scheme (Calo trigger to other parts ?)

Other quantities


- Deposited energies
 - Radiation

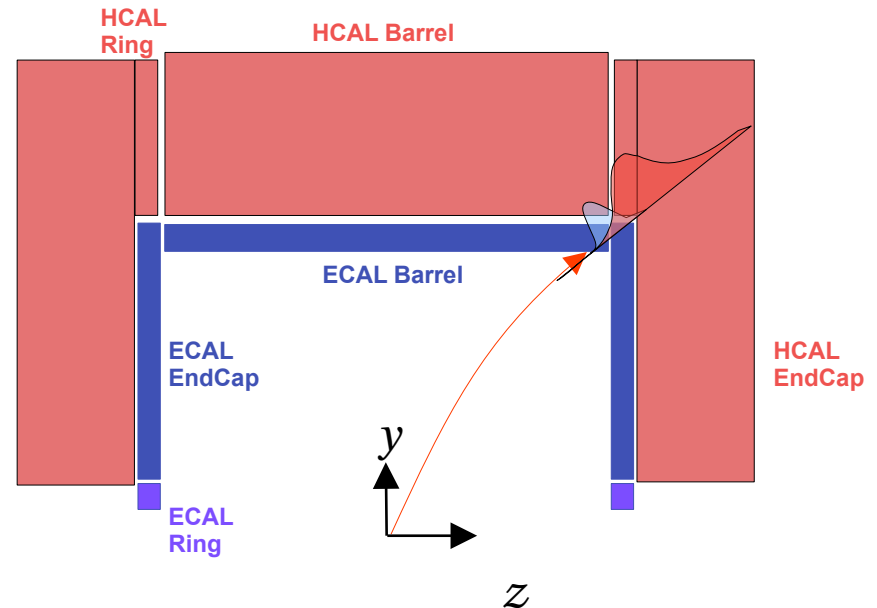

Processes to Fluxes

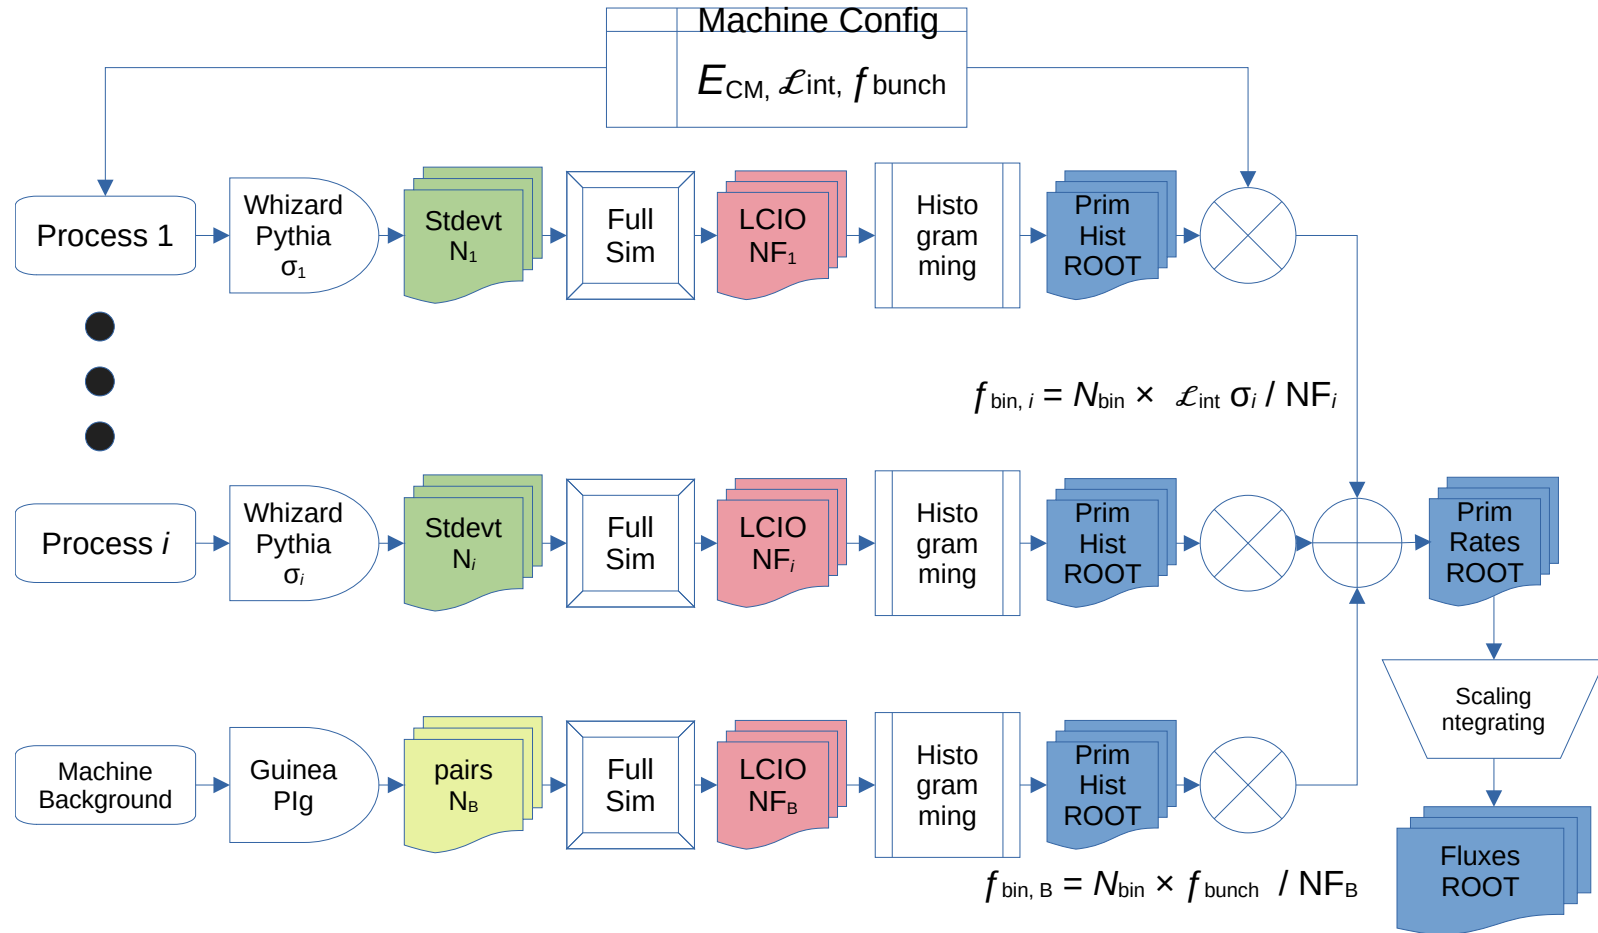


Primary histograms: per cell distributions

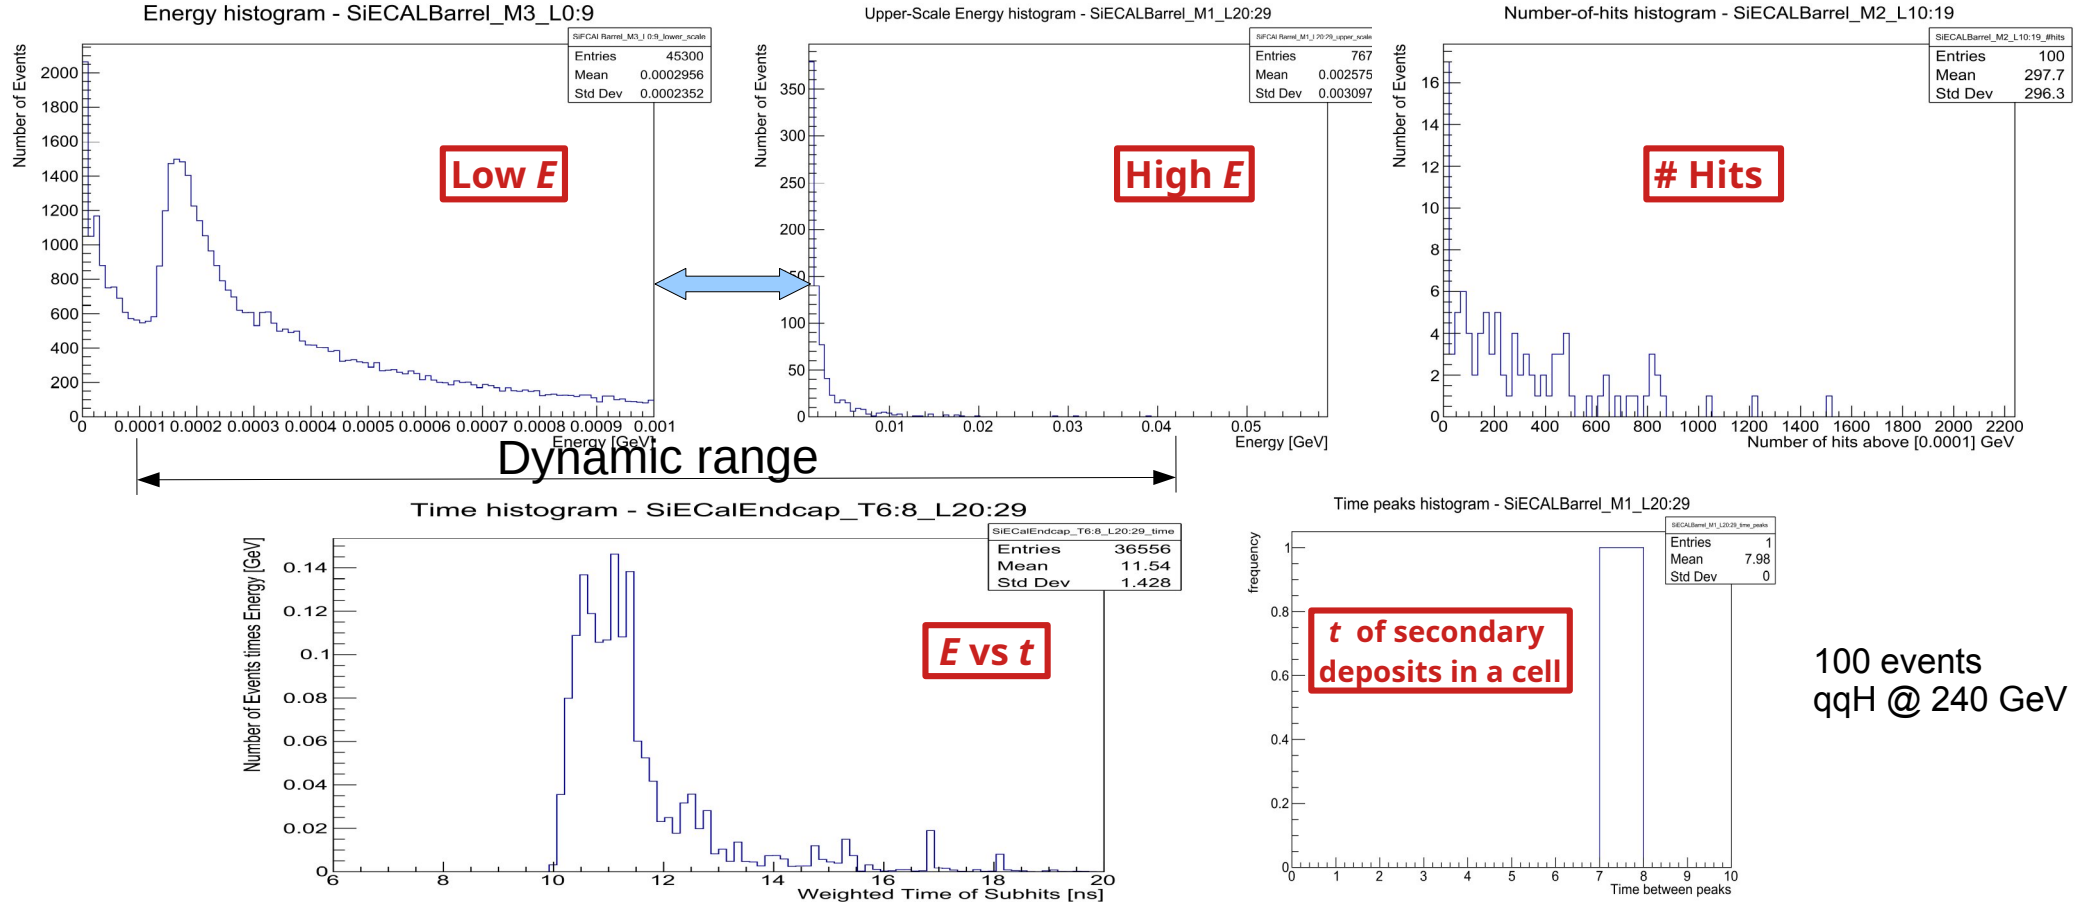

Segmentation by “Logical Geometry” C:M:S:T:L:I:J


Calorimeters systems C

r:z:C

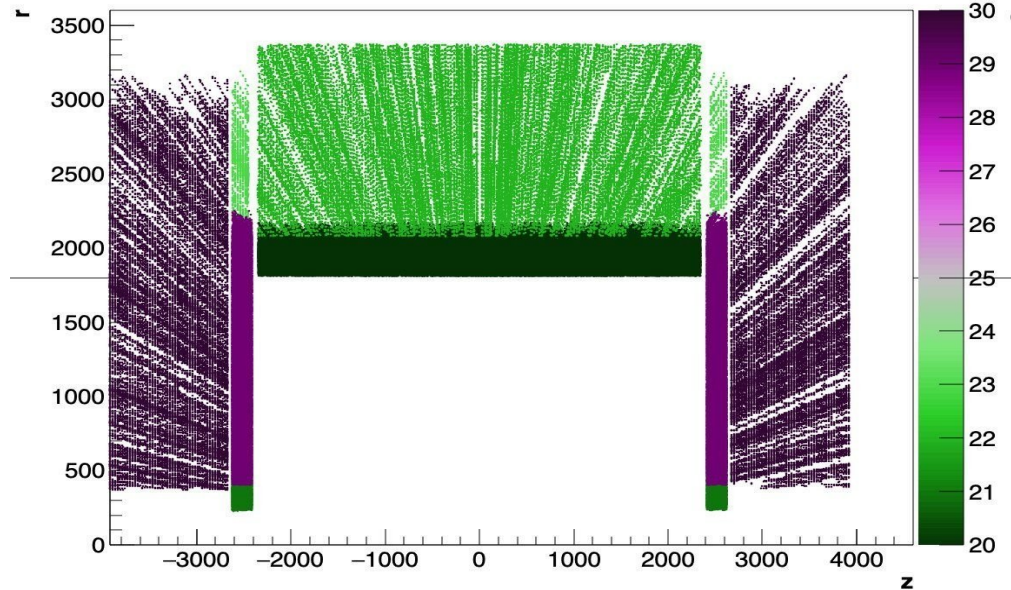

Calorimeters Modules

r:z:M

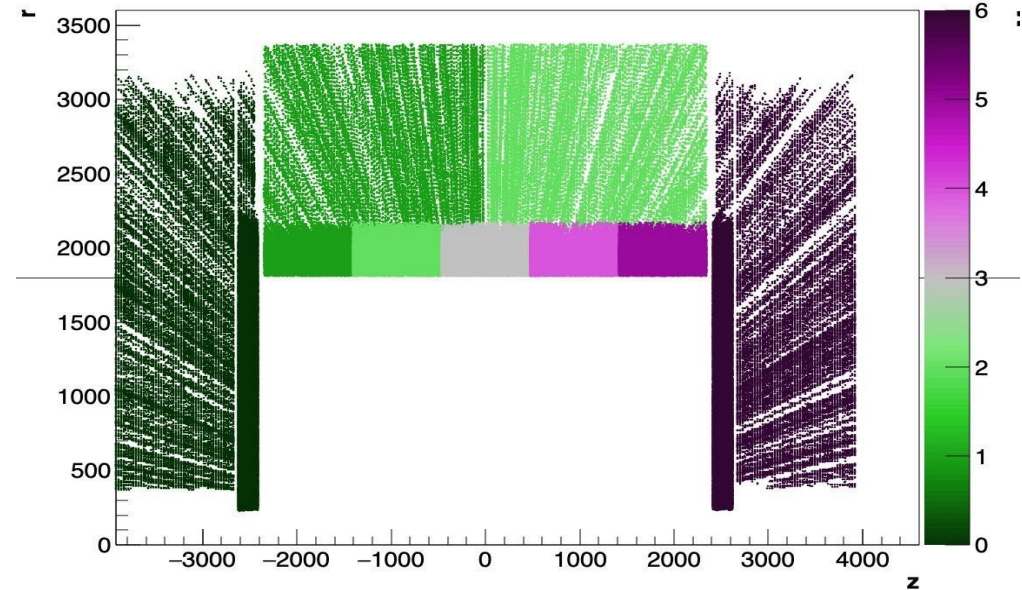

Useful segmentation & grouping:


- Physics: Group of uniform (rates) regions ($\sim \cos\theta$)
- Technical: Readout & Cooling Partition (ASIC, SLAB, Tower, Module)

Useless individuation:


- (Individual layers)
- Symmetrical : staves (φ), Forward–Backward ($\pm\theta$)

Logical Geometry : towers & staves



$x:y:T \{C==30 \ \&\& \ \log_{10}(E)<-6\}$

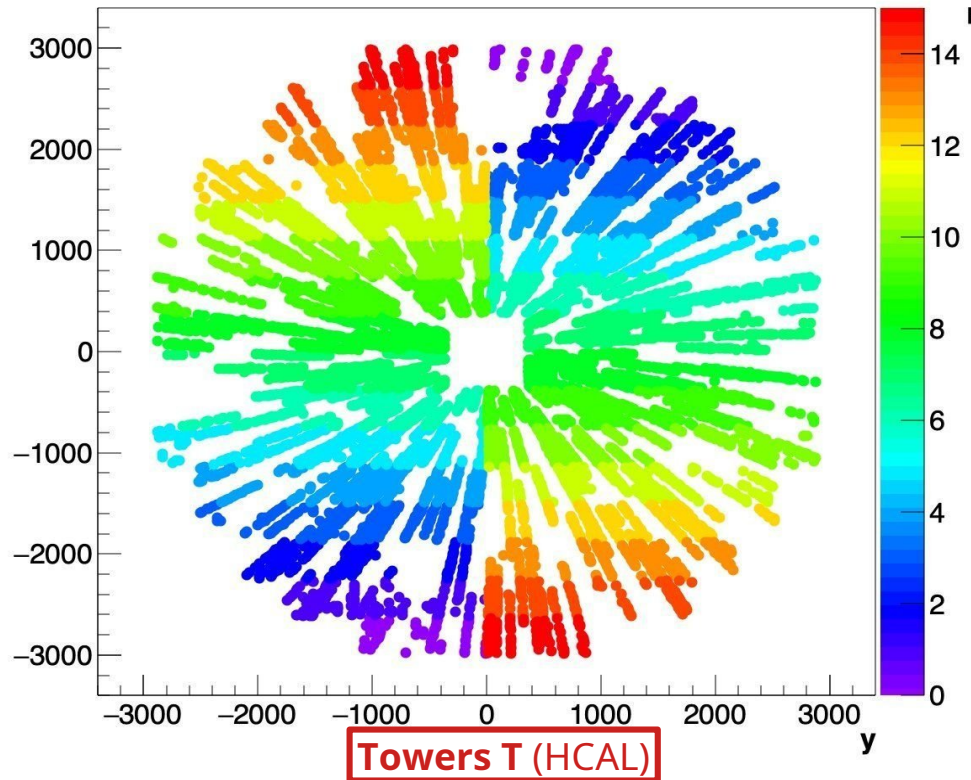


$y:x:S \{M==0 \ \&\& \ C==29\}$

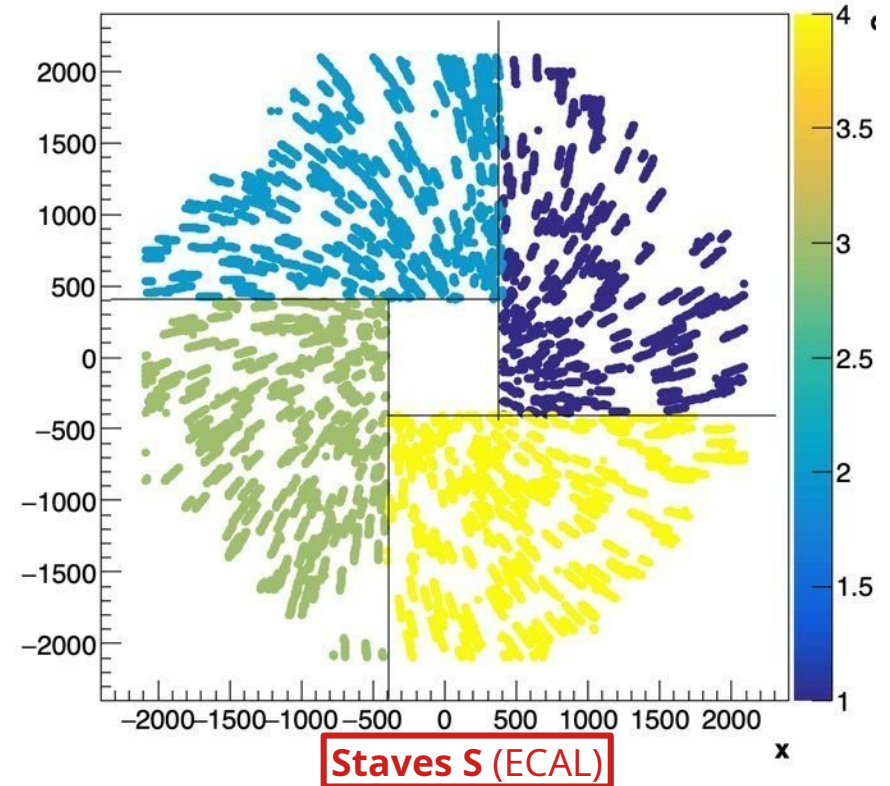




Logical Geometry (ECAL)

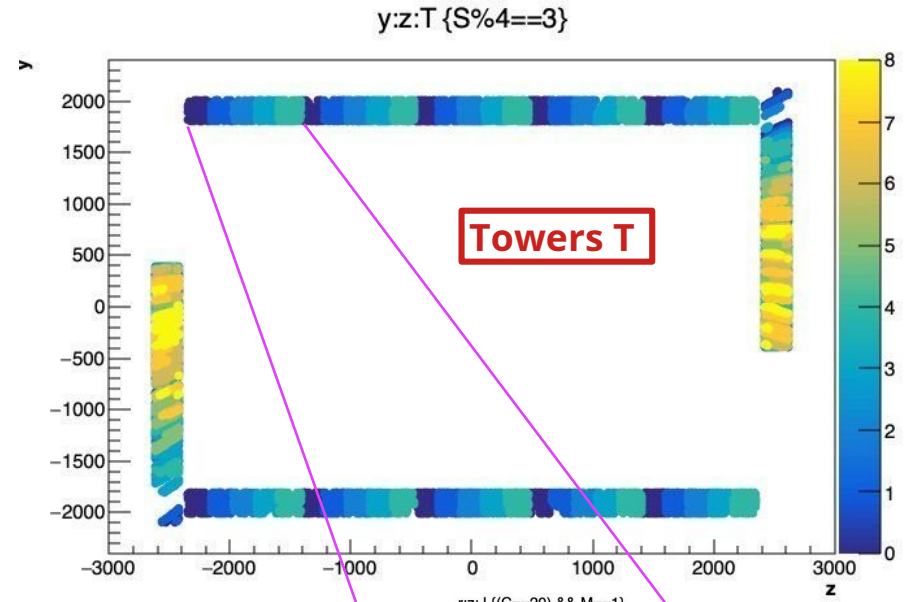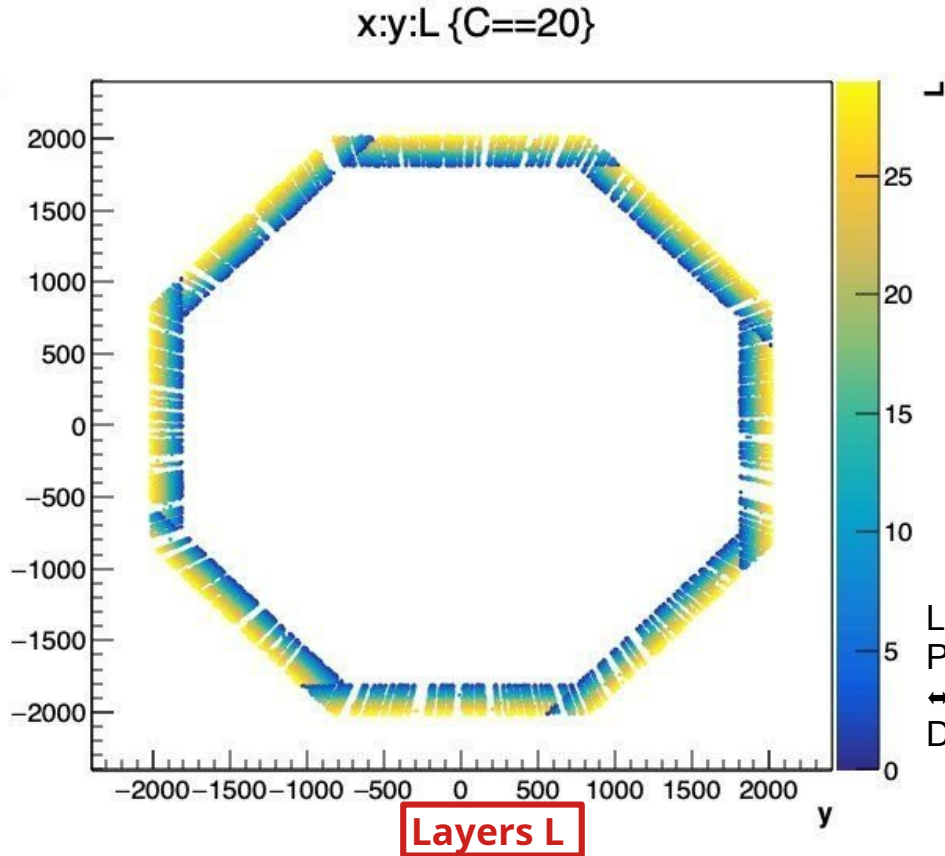


Layers \oplus Towers \oplus Positions
↔ services geometry :
DAQ and cooling

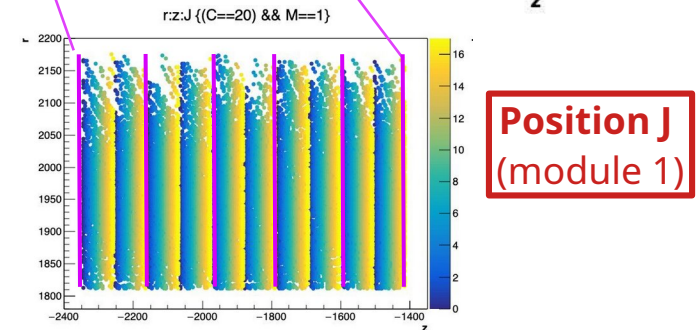

Cross-check : muons

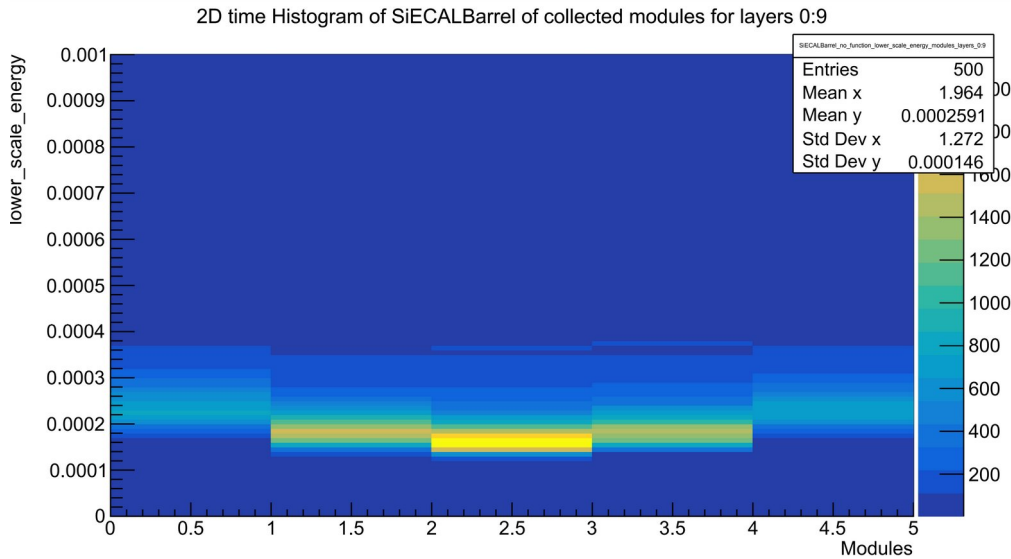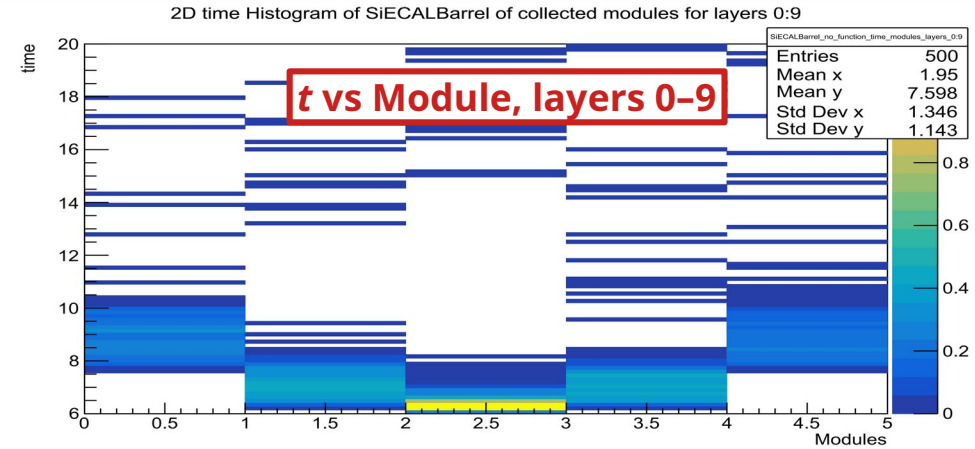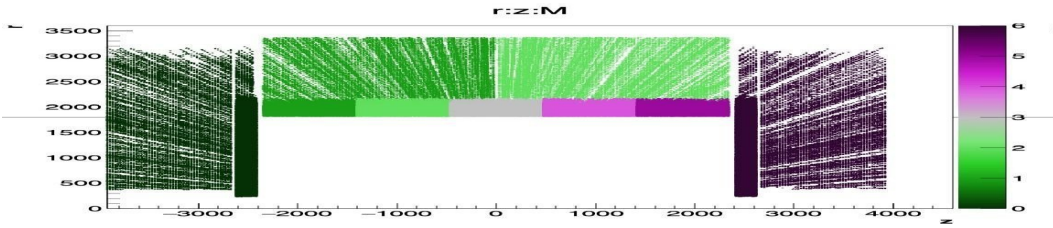

Low E vs Module

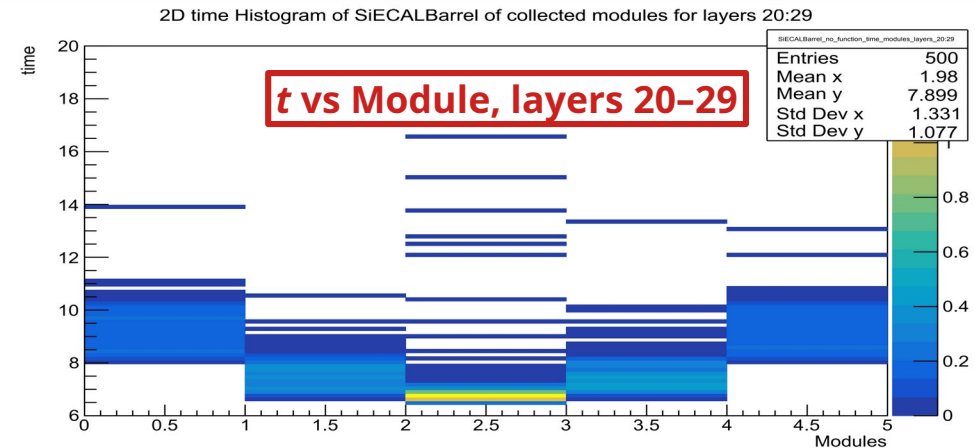


t vs Module, layers 20-29

System low energy & #hit responses

raw energies (no digitization)


SDHCAL

Energy histogram - RPCHCalBarrel_L0:15

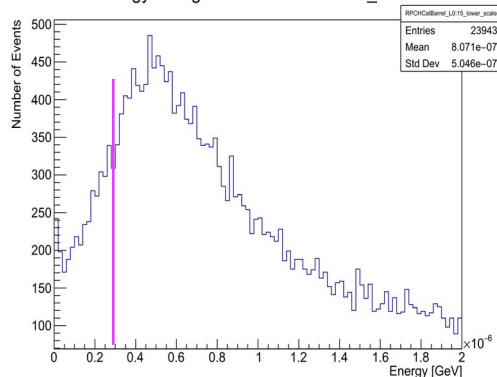


AHCAL

Energy histogram - ScHcalBarrel_L0:15

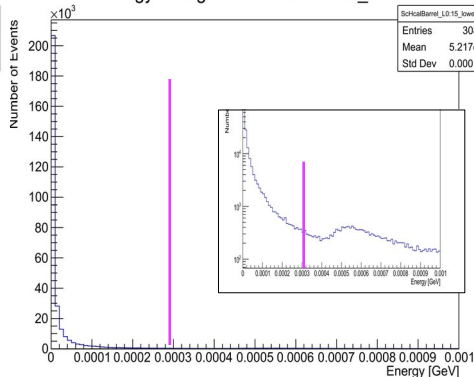


Sc ECAL

Energy histogram - ScECALBarrel_M3_L10:19

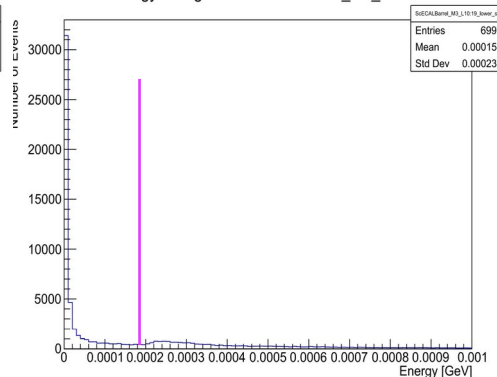


Si ECAL


Energy histogram - SIECALBarrel_M3_L10:19

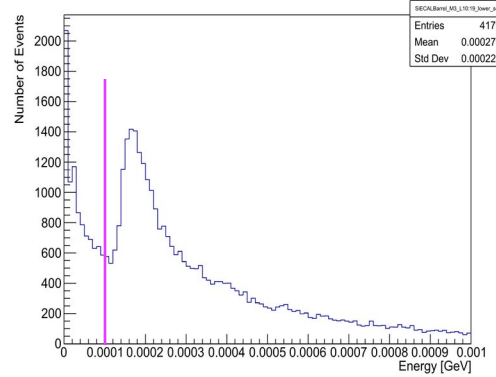


Number-of-hits histogram - RPCHCalBarrel_L0:15

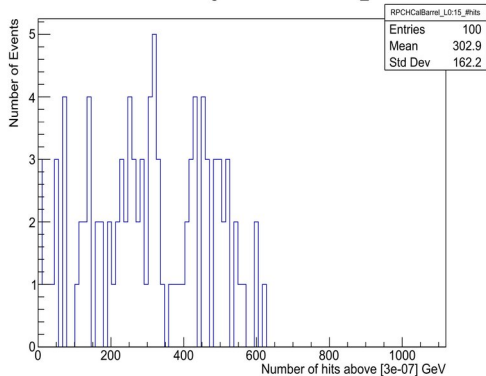


Number-of-hits histogram - ScHcalBarrel_L0:15

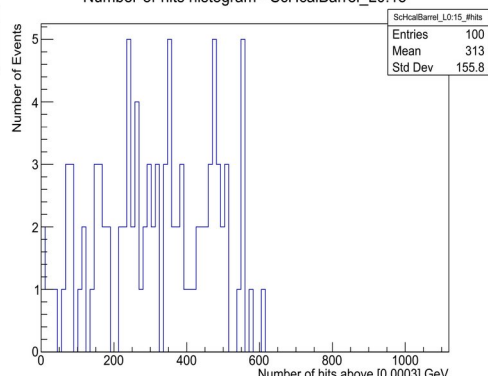

Number-of-hits histogram - ScECALBarrel_M3_L10:19

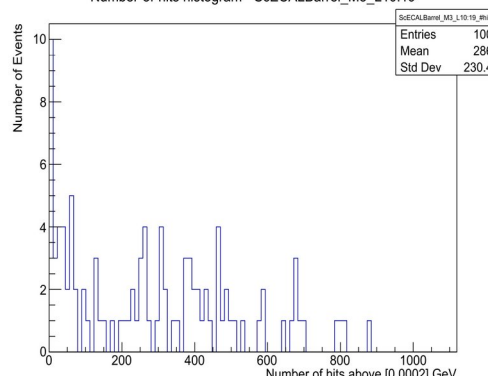


Number-of-hits histogram - SIECALBarrel_M3_L10:19

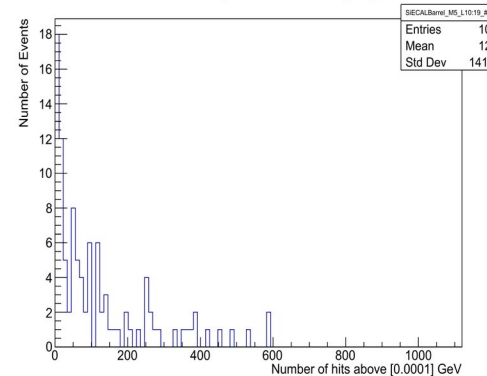


Logical Geometry (HCAL BARRELS)


y:x:l {(C==22) && log10(E)<-5}

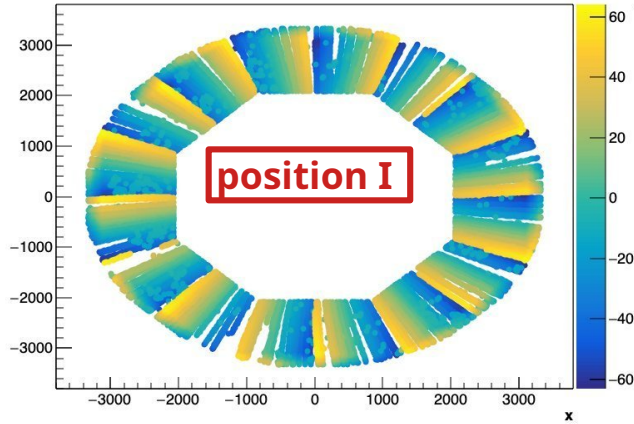


r:z:J {(C==22 lIC==30) && log10(E)<-5}

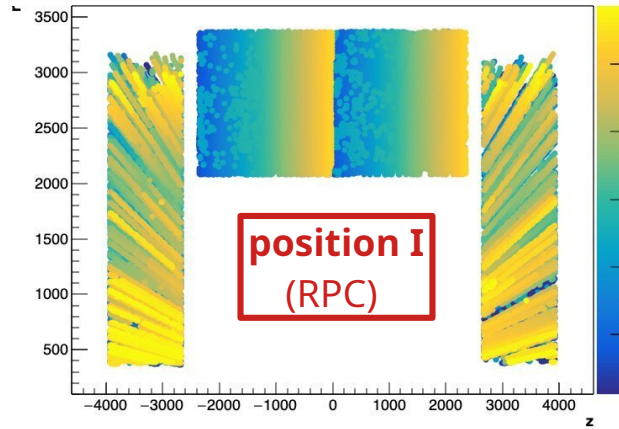


r:z:(J*(M-1.5)*2+117) {C==22 && log10(E)<-6}

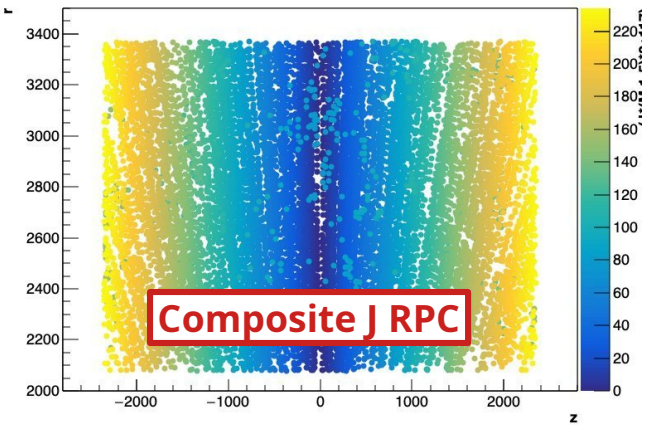


y:x:T {(C==22) && log10(E)<-5}

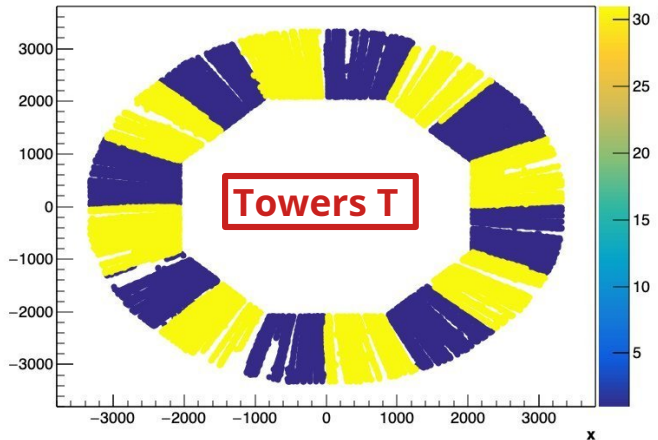

r:z:J {(C==22 lIC==30) && log10(E)>-4}

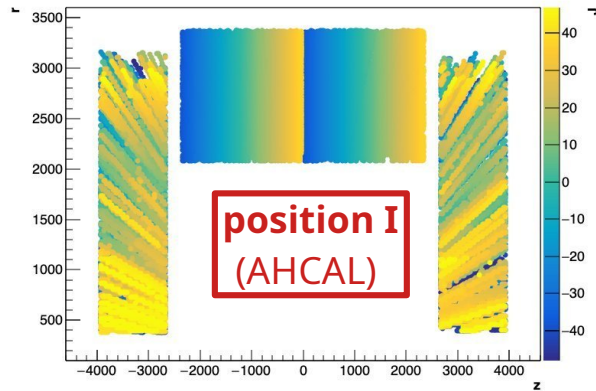

r:z:(J*(M-1.5)*2+38) {C==22 && log10(E)>-4}

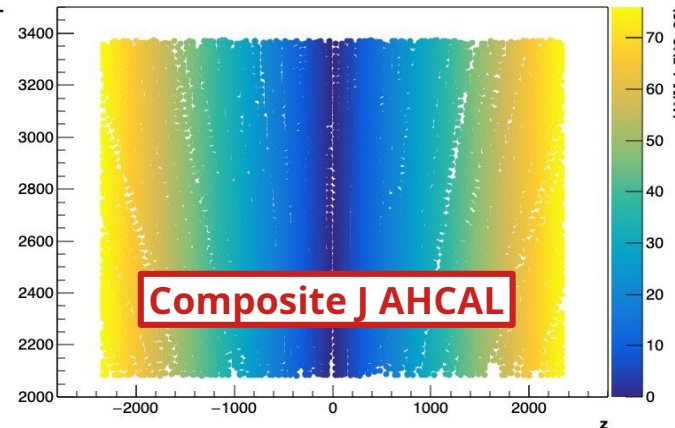

Code

K. Hassouna

Python code

Production of Primary histograms

- LcioReader from pyLCIO
- Mapping & Selection
 - Cell_id decoding [J. Kunath]
 - Highly configurable
- ROOT histograms
 - System and histo type hierarchie
 - Auto-rescalable (high E)

Secondary histograms

- Scaling : e.g. power, datasize = $f(\#hits, Energy)$
- 2D histograms

Summing-up of processes & background


- from table

```

system_limits = {"ECALBarrel" : (8, 5, 5, 30), "EndCaps" : (4, "0-6", 5, 30)}
#selection format "S:M:T:L" conditions => "*:*:2:0-4,5-10" means no selection on M, S, 1 histo per 2 tower , 1 for layer 0 to 5, and one for 1
#The keys of the dictionary are the system names. Each key has a value composed of 4 lists.
# The first list has the collections' names.
# The second one has the selections we impose on the histograms made in the order given above.
# The third list has 4 lists each with 2 arguments. Each list has the bin number (the first argument) and the maximum of the range of the histo
# The fourth list has the energy threshold that we use in the Nhits histogram.
dictionary_of_system = {}
#
# System      Xollwctiona      Stave  M0dules      Towers      Layers
"SiECalEndcap": (["ECalEndcapSiHitsEven", "ECalEndcapSiHitsOdd"], [{"*"}, {"*"}], [{"0"}, {"1:2"}, {"3:5"}, {"6:8"}], [{"0:9"}])
"SiECALBarrel": (["ECalBarrelSiHitsEven", "ECalBarrelSiHitsOdd"], [{"*"}, {"*1"}, {"*2"}, {"*3"}, {"*4"}, {"*5"}], [{"*"}], [{"0:9"}])
"SiECalRing": (["EcalEndcapRingCollection"], [{"*"}, {"*"}], [{"*"}], [{"0:9"}])
"ScEcalEndcap": (["EcalEndcapScHitsEven", "EcalEndcapScHitsOdd"], [{"*"}, {"*"}], [{"0"}, {"1:2"}, {"3:5"}, {"6:8"}], [{"0:9"}])
"ScECALBarrel": (["ECalBarrelScHitsEven", "ECalBarrelScHitsOdd"], [{"*"}, {"*1"}, {"*2"}, {"*3"}, {"*4"}, {"*5"}], [{"*"}], [{"0:9"}])
"RPCHCalEndcap": (["HCalEndcapRPCHits"], [{"*"}, {"*"}], [{"0:3"}, {"4:7"}, {"8:11"}, {"12:15"}], [{"0:15"}])
"RPCHCalBarrel": (["HCalBarrelRPCHits"], [{"*"}, {"*"}], [{"*"}], [{"0:15"}])
"RPCHCalECRing": (["EcalEndcapRingCollection"], [{"*"}, {"*"}], [{"*"}], [{"*"}])
"ScHcalEndcap": (["HcalEndcapsCollection"], [{"*"}, {"*"}], [{"0:3"}, {"4:7"}, {"8:11"}, {"12:15"}], [{"0:15"}])
"ScHcalBarrel": (["HcalBarrelRegCollection"], [{"*"}, {"*"}], [{"*"}], [{"0:15"}])
"ScHcalECRing": (["EcalEndcapRingCollection"], [{"*"}, {"*"}], [{"*"}], [{"*"}])
    
```


```

highE bin/max #hits bin/max EThr Split Func:ranges
100, 0.03], [100, 35]], [[0.0001]], {},
100, 0.03], [100, 35]], [[0.0001]], {},
100, 0.03], [100, 35]], [[0.0001]], {},
100, 0.03], [100, 35]], [[0.0003]], {},
100, 0.03], [100, 35]], [[0.0002]], {},
100, 3e-5], [100, 35]], [[3e-7]], {},
100, 3e-5], [100, 35]], [[3e-7]], {complex_sad:["0:79", "80:159", "160:234"]}],
100, 0.03], [100, 35]], [[0.0001]], {},
100, 0.03], [100, 35]], [[0.0001]], {},
100, 0.03], [100, 35]], [[0.0003]], {complex_happy:["0:29", "30:59", "60:76"]}],
100, 0.03], [100, 35]], [[0.0001]], {}
    
```

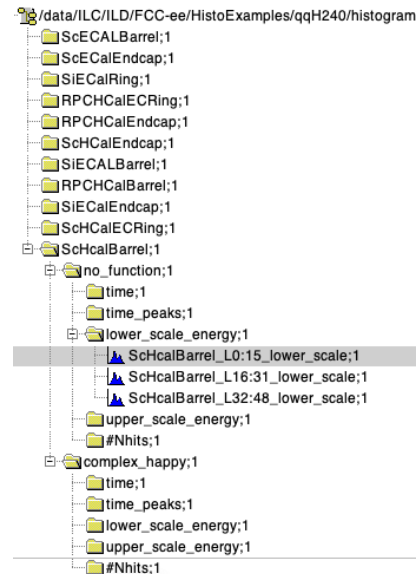

Processes & Configurations

- Order of magnitude → Statistics ?
- Minimum bias
- Leading processes (at all angles)
- Worse case (scans)

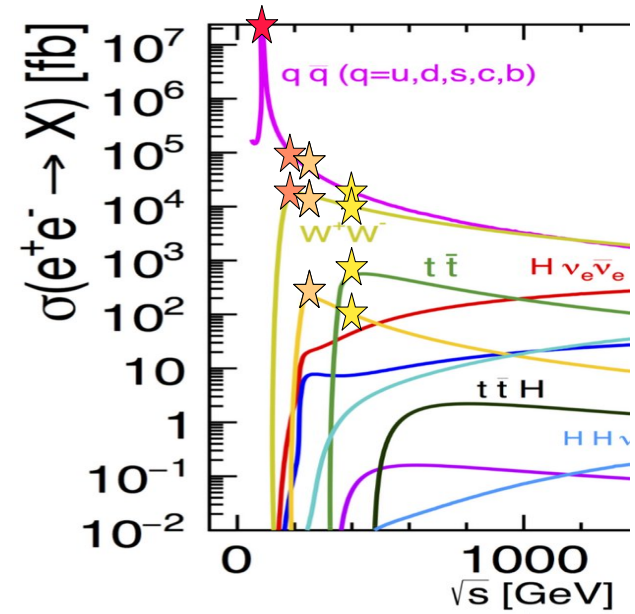

- Processes: min. bias
- All
 - $ee \rightarrow qq$
 - $ee \rightarrow \mu\mu, \tau\tau$
 - $ee \rightarrow ee$ (\Rightarrow Bhabha)
 - $\gamma\gamma \rightarrow VV$
 - Machine background (ee pairs)
 - $E_{CM} \geq 160$ GeV
 - $ee \rightarrow WW$
 - ($E_{CM} \geq 240$ GeV)
 - $ee \rightarrow HZ$
 - ($E_{CM} \geq 360$ GeV)
 - $ee \rightarrow t\bar{t}$

Config	#IP	E_{Beam}	#BX	\mathcal{L} [$10^{34}/cm^2/s$]	ΔT [μs]	Freq[Hz]	\sqrt{s} [GeV]
FCC-Z2	2	45,6	12000	180,0	0,025		91,2
FCC-Z4	4	45,6	15880	140,0	0,019		91,2
FCC-W	4	81,3	688	21,4	0,442		162,5
FCC-ZH	4	120,0	260	6,9	1,169		240,0
FCC-tt	4	182,5	40	1,2	7,600		365,0
ILC250 [1]	1	125,0	1312	1,4	0,554	5,0	250,0
ILC500	1	250,0	1312	1,8	0,554	5,0	500,0
ILC1000	1	500,0	2450	4,9	0,366	5,0	1000,0
CLIC380	1	160,0				10,0	380,0
ILC-GZ	1	45,6				5,0	91,2
ILC250-HL	1	125,0	2625	2,7	0,366	5,0	250,0
CEPC							
C ³							
:							

ILC from: P. Bambade et al., The International Linear Collider: A Global Project, arXiv:1903.01629 [Hep-Ex, Physics:Hep-Ph, Physics:Physics]. (2019).
 FCC from: [Tor Raubenheimer, FCC Week June 2023](#)

ILD simulation

ILD_I5_v02 with crossing angle = 14mrad.
on going...

Process	91 GeV	162 GeV	240 GeV	365 GeV
	Gen/Sim/Hist	Gen/Sim/Hist	Gen/Sim/Hist	Gen/Sim/Hist
Machine background [1]	100 BX/NA/NA	NA	NA	100 BX/NA/NA
ee → eey	NA	NA	NA	NA
ee → eeyγ (γ → V)	NA	NA	NA	NA
ee → ee, M _{ee} < 30 (bhabha)	10k/10k/NA	10k/10k/NA	10k/10k/NA	10k/2.4k/NA
ee → ee, 150 > M _{ee} > 30	10k/10k/NA	10k/10k/NA	10k/4414/NA	10k/1745/NA
ee → (Z/Gamma*) → qq	10k/7018/NA	10k/10k/NA	10k/10k/NA	10k/9847/NA
ee → (Z/Gamma*) → ℓℓ (τ, μμ)	10k/10k/NA	10k/9583/NA	10k/9678/NA	10k/9999/NA
ee → WW (→ qqqq, qqℓℓ, ℓℓℓ)		10k/9934/NA	10k/10k/NA	10k/9999/NA
ee → ZH → qqH			10k/10k/NA	
ee → tt				10k/9999/NA

[1] Incoherent pair production from Andrea Ciarma; 13/12/2022, same data as D. Jeans

Table I-1.3
Background sources for
the nominal 500 GeV
beam parameters.

Source	#particles per bunch	< E > (GeV)
Disrupted primary beam	2×10^{10}	244
Bremstrahlung photons	2.5×10^{10}	244
e ⁺ e ⁻ pairs from beam-beam interactions	75k	2.5
Radiative Bhabhas	320k	195
γγ → hadrons/muons	0.5 events/1.3 events	-

T. Behnke, et al.

The International Linear Collider Technical Design Report - Volume 4: Detectors,
arXiv:1306.6329 [Physics]. (2013)

Status & Perspectives

Simulation:

- Simulate backgrounds in ILD at 90 and 160 GeV
- Include digitization (esp. RPCs)
- Check differences ILD vs ILD' for calos on key process
(influence of trackers)

Histograms

- Produce the primary histograms (on-going)
- Sum to get first estimations of rates & errors

Checks:

- Check the statistics vs angular distribution for processes
 - Rate from single particles \times population (“fast sim”)

Instrumentation:

- Feed in realistic electronics numbers
 - \rightarrow secondary histograms : Power, bits per hit
- Test electronics hypothesis
 - ADC types, cell grouping, DAQ, ...

Code (later)

- Adapt to key4hep
 - Digitization and Performance
- Make it “generic” for all detector types
 - Trackers, CLD, IDEA, ALLEGRO

Extras

ee Higgs factories: configs & backgrounds

Running mode	Z	W	ZH	tt	
Number of IPs	2	4	4	4	
Beam energy (GeV)	45.6		80	120	182.5
Bunches/beam	12000	15880	688	260	40
Beam current [mA]	1270	1270	134	26.7	4.94
Luminosity/IP [$10^{34} \text{ cm}^{-2} \text{ s}^{-1}$]	180	140	21.4	6.9	1.2
Energy loss / turn [GeV]	0.039	0.039	0.37	1.89	10.1
Synchr. Rad. Power [MW]			100		
RF Voltage 400/800 MHz [GV]	0.08/0	0.08/0	1.0/0	2.1/0	2.1/9.4
Rms bunch length (SR) [mm]	5.60	5.60	3.55	2.50	1.67
Rms bunch length (+BS) [mm]	13.1	12.7	7.02	4.45	2.54
Rms hor. emittance $\epsilon_{x,y}$ [nm]	0.71	0.71	2.16	0.67	1.55
Rms vert. emittance $\epsilon_{x,y}$ [pm]	1.42	1.42	4.32	1.34	3.10
Longit. damping time [turns]	1158	1158	215	64	18
Horizontal IP beta β_x^* [mm]	110	110	200	300	1000
Vertical IP beta β_y^* [mm]	0.7	0.7	1.0	1.0	1.6
Beam lifetime (q+BS+lattice) [min.]	50	250	—	<28	<70
Beam lifetime (lum.) [min.]	35	22	16	10	13

P. Bambade et al., The International Linear Collider: A Global Project, arXiv:1903.01629 [Hep-Ex, Physics:Hep-Ph, Physics:Physics]. (2019).

Quantity	Symbol	Unit	Initial	\mathcal{L} Upgrade	TDR	Upgrades	
Centre of mass energy	\sqrt{s}	GeV	250	250	250	500	1000
Luminosity	\mathcal{L}	$10^{34} \text{ cm}^{-2} \text{ s}^{-1}$	1.35	2.7	0.82	1.8/3.6	4.9
Polarisation for $e^- (e^+)$	$P_- (P_+)$		80%(30%)	80%(30%)	80%(30%)	80%(30%)	80%(20%)
Repetition frequency	f_{rep}	Hz	5	5	5	5	4
Bunches per pulse	n_{bunch}	1	1312	2625	1312	1312/2625	2450
Bunch population	N_e	10^{10}	2	2	2	2	1.74
Linac bunch interval	Δt_b	ns	554	366	554	554/366	366
Beam current in pulse	I_{pulse}	mA	5.8	5.8	8.8	5.8	7.6
Beam pulse duration	t_{pulse}	μs	727	961	727	727/961	897
Average beam power	P_{ave}	MW	5.3	10.5	10.5	10.5/21	27.2
Norm. hor. emitt. at IP	$\gamma\epsilon_x$	μm	5	5	10	10	10
Norm. vert. emitt. at IP	$\gamma\epsilon_y$	nm	35	35	35	35	30
RMS hor. beam size at IP	σ_x^*	nm	516	516	729	474	335
RMS vert. beam size at IP	σ_y^*	nm	7.7	7.7	7.7	5.9	2.7
Luminosity in top 1%	$\mathcal{L}_{0.01}/\mathcal{L}$		73%	73%	87.1%	58.3%	44.5%
Energy loss from beamstrahlung	δ_{BS}		2.6%	2.6%	0.97%	4.5%	10.5%
Site AC power	P_{site}	MW	129		122	163	300
Site length	L_{site}	km	20.5	20.5	31	31	40

TABLE I: Summary table of the ILC accelerator parameters in the initial 250 GeV staged configuration (with TDR parameters at 250 GeV given for comparison) and possible upgrades. A 500 GeV machine could also be operated at 250 GeV with 10 Hz repetition rate, bringing the maximum luminosity to $5.4 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ [10].

Tor Raubenheimer, FCC Week June 2023

Summary of Backgrounds

The background sources have been investigated in various studies. For example, the beam-beam interaction and pair generation, radiative Bhabhas, disrupted beams and beamstrahlung photons for the 500 GeV ILC were studied with GUINEAPIG [333]. Also, the $\gamma\gamma$ hadronic cross section was approximated in the Peskin-Barklow scheme [2]. Based on these studies densities of particles which will reach the different sun-detectors have been estimated. Table I-1.3 summarises these estimates.

Table I-1.3
Background sources for the nominal 500 GeV beam parameters.

Source	#particles per bunch	$\langle E \rangle$ (GeV)
Disrupted primary beam	2×10^{10}	244
Bremstrahlung photons	2.5×10^{10}	244
e^+e^- pairs from beam-beam interactions	75k	2.5
Radiative Bhabhas	320k	195
$\gamma\gamma \rightarrow$ hadrons/muons	0.5 events/1.3 events	—

T. Behnke, et al.

The International Linear Collider Technical Design Report - Volume 4: Detectors, arXiv:1306.6329 [Physics]. (2013)

Machine backgrounds

Files produced by Andrea Carma at Z peak and Top threshold.

```
=====
= A. Carma -- 13/12/2022 =
=====
```

Incoherent Pairs Creation (IPC) output files from GuineaPig++ for FCC-ee 4IP lattice
nominal beam energy: 45.6GeV @Z - 182.5GeV @Top

Each file corresponds to pairs created during 1BX
each line corresponds to a particle

The format of the line is:

```
m_input >> PHEP4                // energy [GeV]
    >> PHEP1 >> PHEP2 >> PHEP3    // momentum component [rad]
    >> VHEP1 >> VHEP2 >> VHEP3    // vertex coordinates [nm]
    >> process >> trash >> id_ee; // process type; internal flag; id of the single particle - all useless for
tracking in the detector
```

Charge and PID should be manually set, according to the sign of the energy

```
PHEP4>0 -> IDHEP = 11; CHARGE =-1;
PHEP4<0 -> IDHEP =-11; CHARGE = 1;
```

A Lorentz boost should be applied along X to account for the fact that GP produces particles in the rest frame of the two beams,
which due to the crossing angle (15 mrad) moves w.r.t. the detector.