

LEAP HORIZON

The HORIZON project : towards face-cooled kiloWatt-class Yb:YAG laser systems

Ph. Balcou, J Lhermite, J. Brandam, M. Lachat, C.Féral, D. Marion,
A. Rohm, D. Descamps, S. Petit, M.C. Nadeau, E. Mével

LEAP

AXE A	<p>Matériaux Yb Pompage diode 1 kHz - 1J</p>   <p>Yb 70 173.04 Ytterbium</p>	AXE B	<p>Matériaux Nd Pompage diode 10 Hz - 2J</p>   <p>Nd 60 144.24 Neodymium</p>	AXE C	<p>Matériaux Nd Pompage flash 1 kJ - 1 tir/min</p>  	AXE D	<p>Upgrade Eclipse Radioprotection 1,5 J - 1Hz</p>  
	HORIZON				FLASHDENCE		


XPulse → Xray generation for oncology



Convergence → Technology maturation



LEAP HORIZON
1kW - 1kHz - 1ps² in 2024

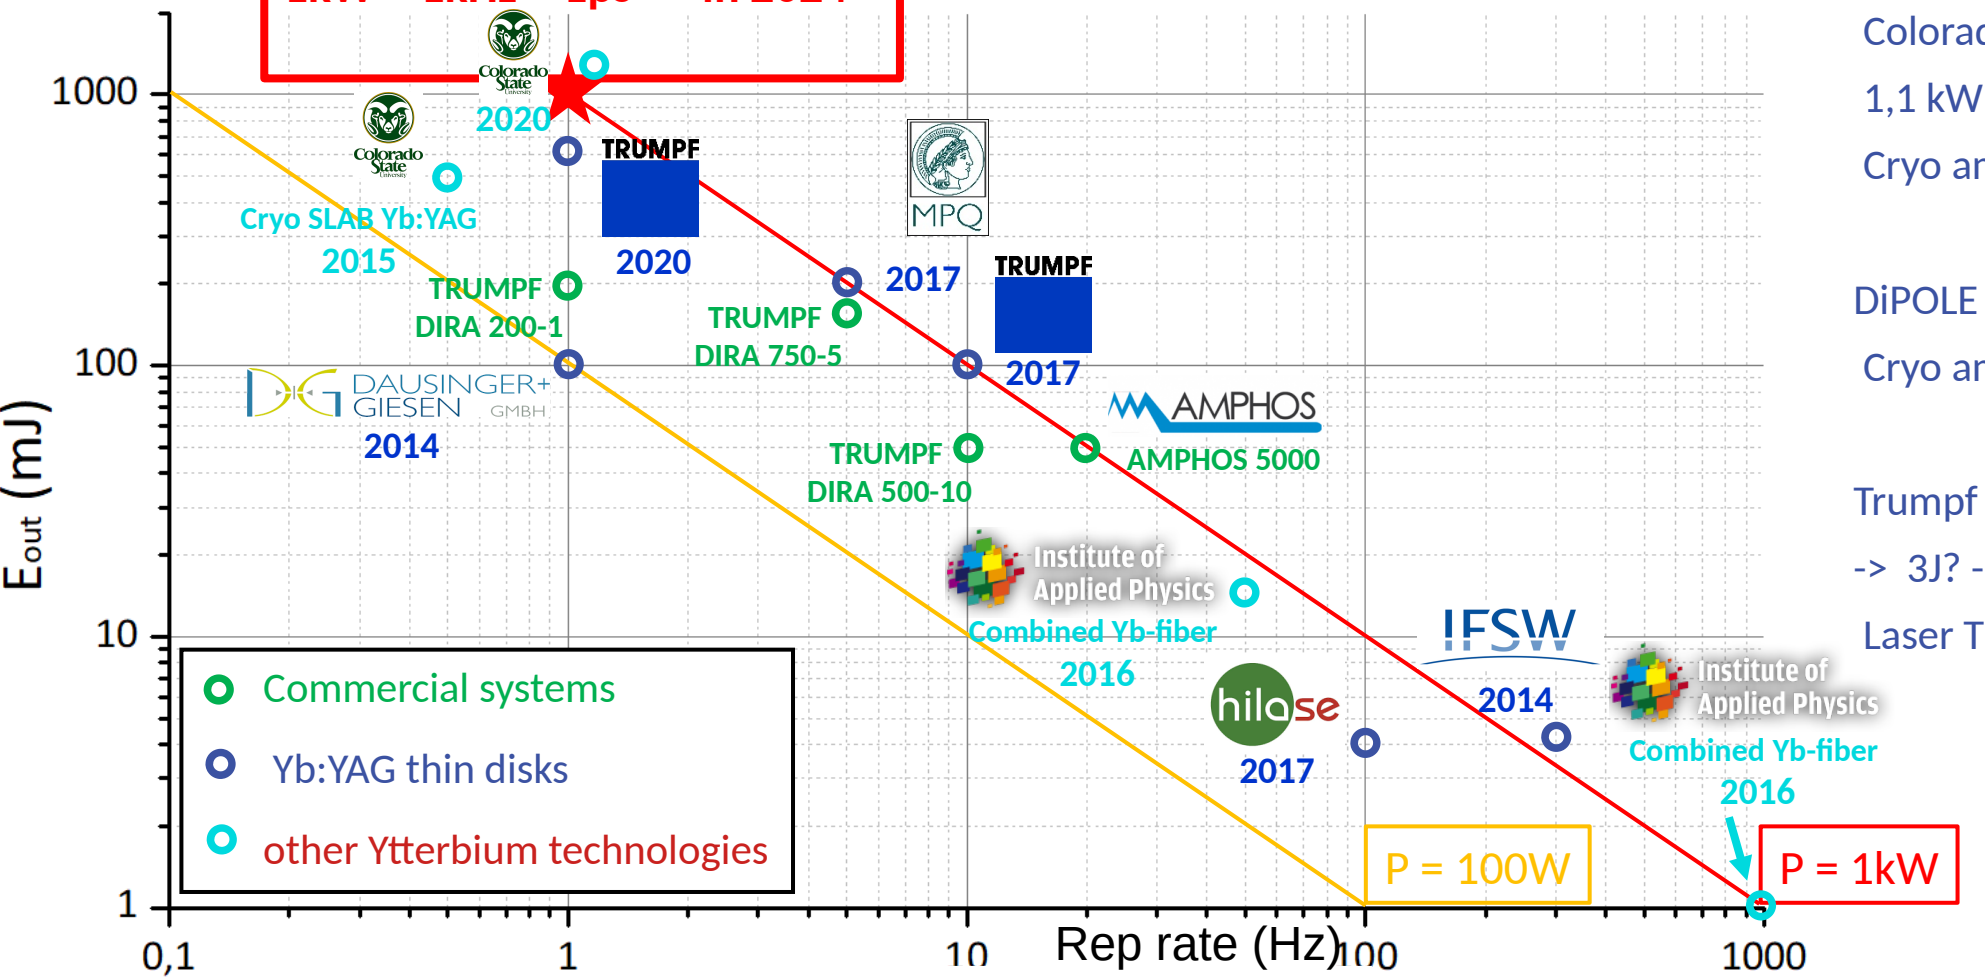

Main contenders :



Colorado State University

1,1 kW - 1kHz - 4,5ps

Cryo amplifier, active mirrors



DiPOLE / BiJOV

Cryo amplifier, He flow, multi-slabs



Trumpf scientific

-> 3J? - 1kHz - 1ps

Laser Thin disks / multiple heads

All developments based on Yb :YAG

Main challenges :

High Yb:YAG saturation fluence ($\sim 9 \text{ J/cm}^2$)

Bandwidth optimization for « short » pulse operation

Thermal issues @ high average powers



Wish to explore other technologies :

no active mirrors, no cryo ; tests of thin disks


Issues explored :

- Spectral control
- Coherent pulse stacking
- Thin-disk tech for regen
- Top-hat mode amplification
- **Liquid face-cooling of power amp**

HORIZON prototype scheme

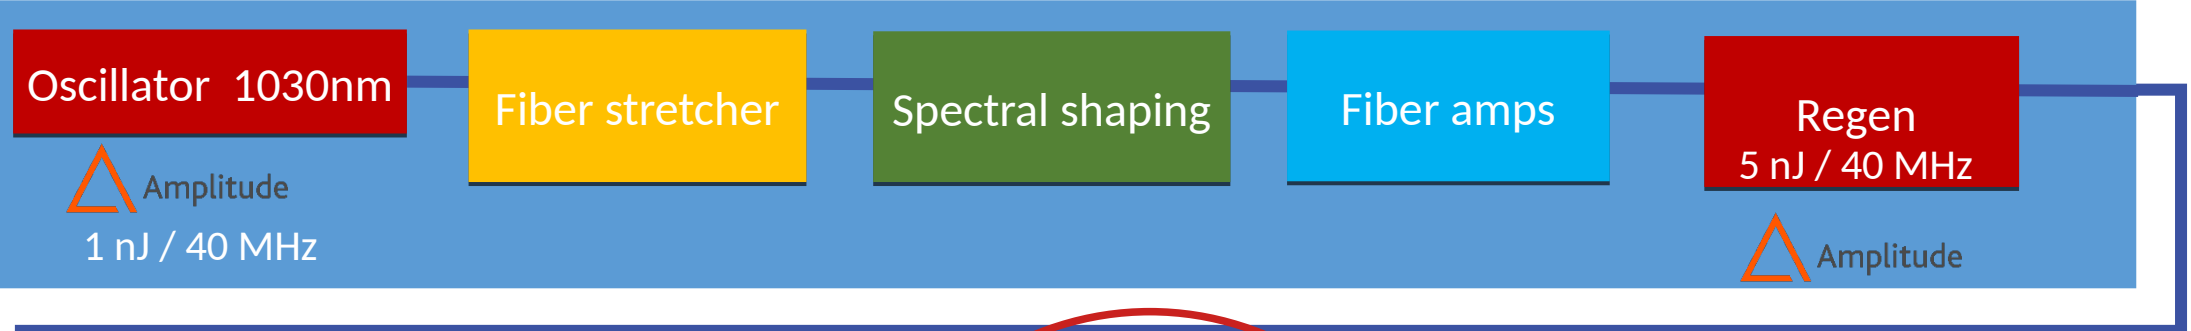

2 mJ - 1kHz
 $\Delta\lambda = 3 \text{ nm}$

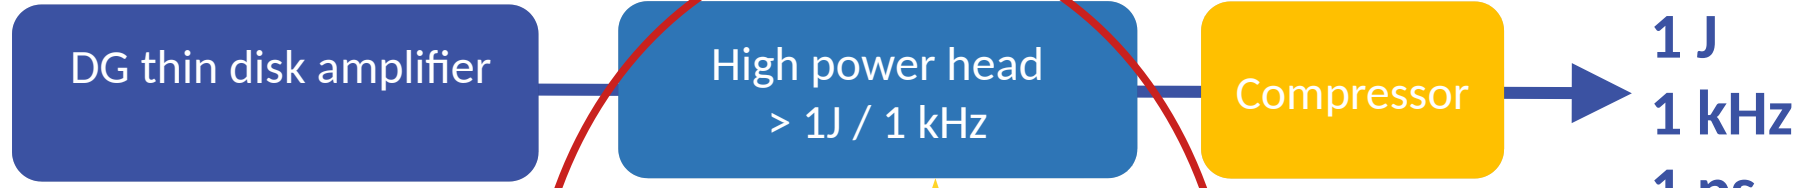


Fiber transport





Pump power : 13 kW, 940 nm

Output power : > 1 kW

1) Rotating multi-disks

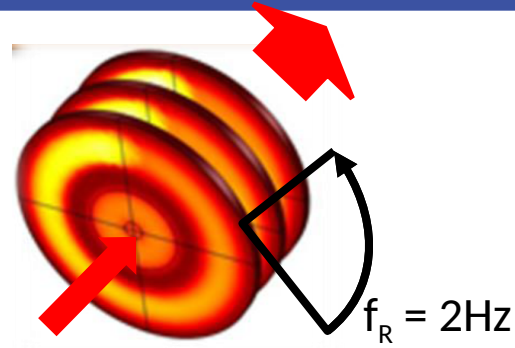


2) ASE transport & mitigation

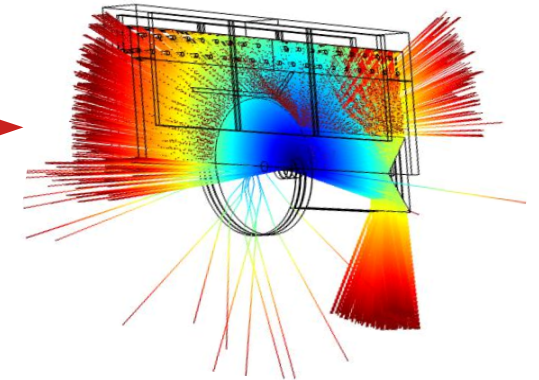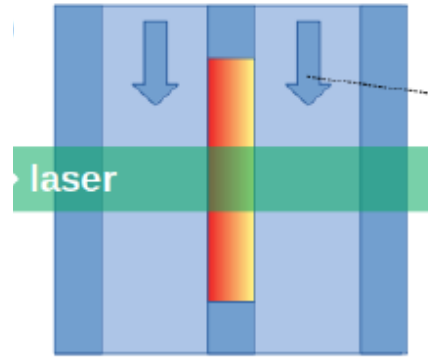


3) Liquid face-cooling

4) Index leveling in face-cooling

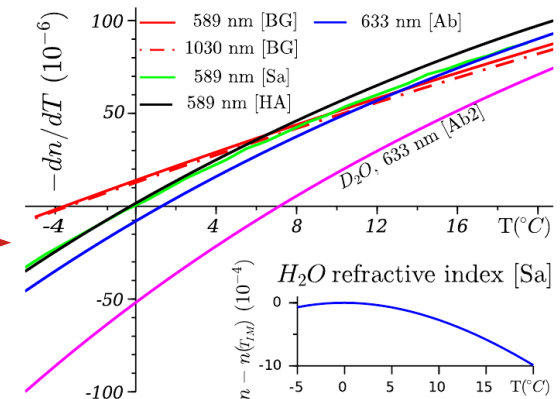

Starting postulates :

- 3 Yb:YAG slabs, $d=70\text{mm}$, $e=2\text{mm}$
- Heavy water face cooling
- Slab spacing : $500\ \mu\text{m}$
- Pump & laser through coolant

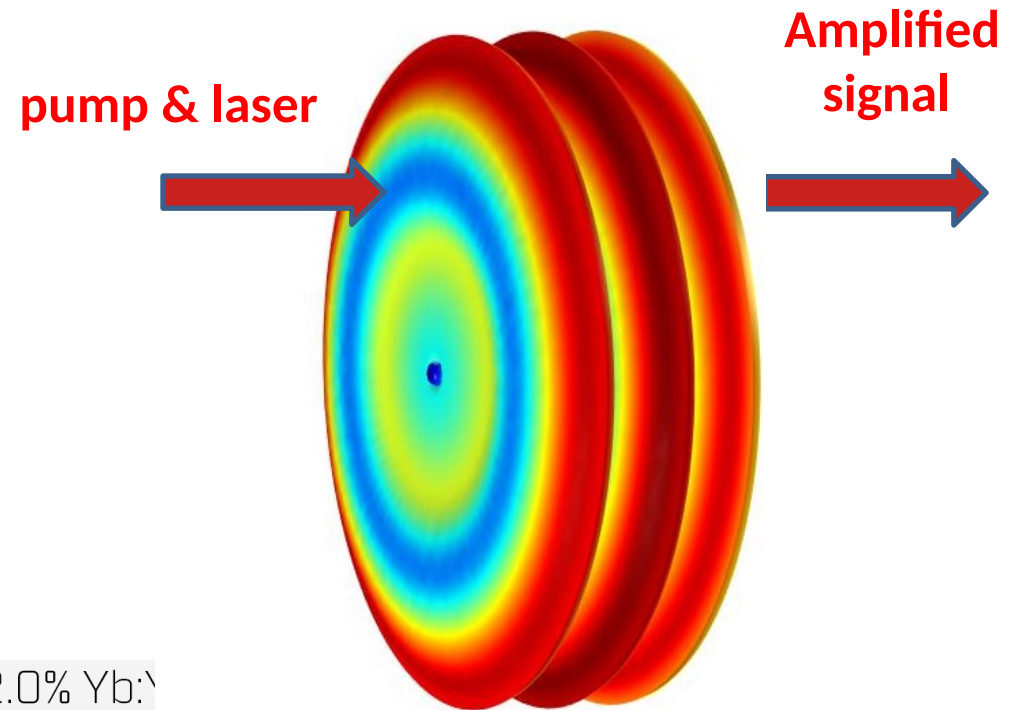


Slab procurement :
Scientific Materials

SN 13-0437, 2.0% Yb:\




No rotation? COMSOL modeling (thermal/hydro/optical)

Profil de température (degC)

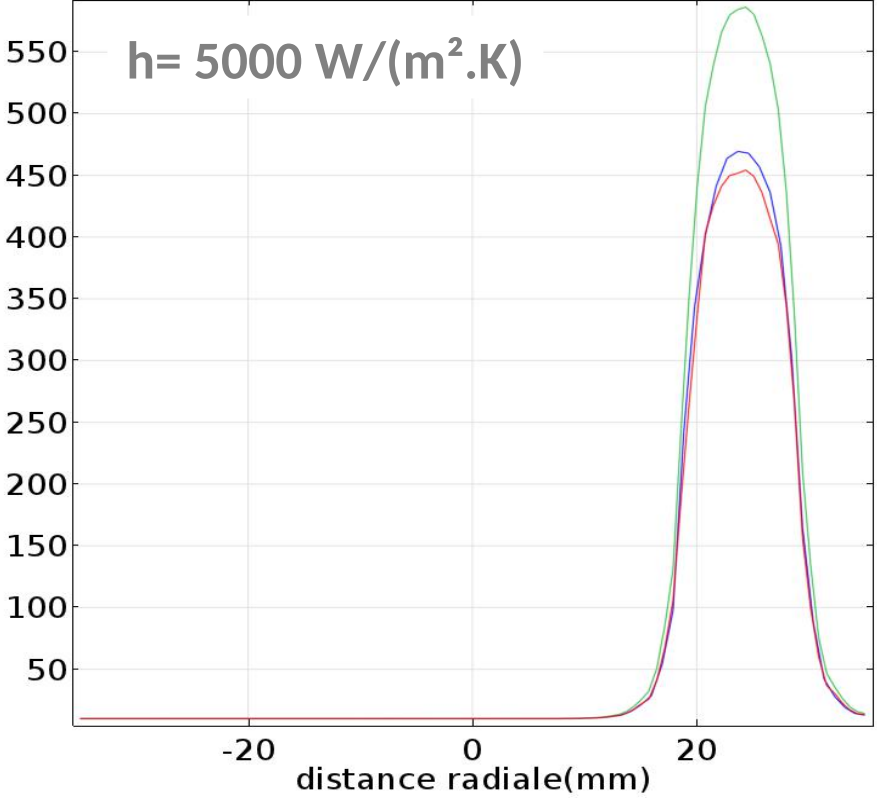


Température (degC) suivant l'épaisseur

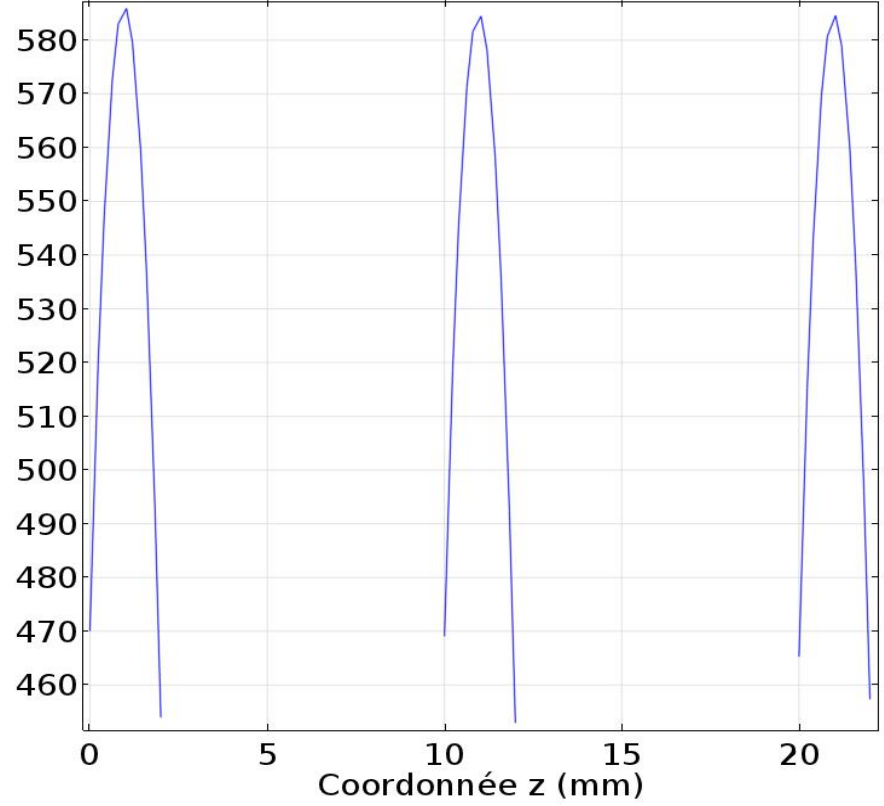


Simulation parameters:

- Pump P density: 16kW/cm²
- Pump diameter: 10mm
- Signal diameter : 8mm


Radial cut




Longitudinal cut



T max = 585 °C





Rotation of the multi-slab structure

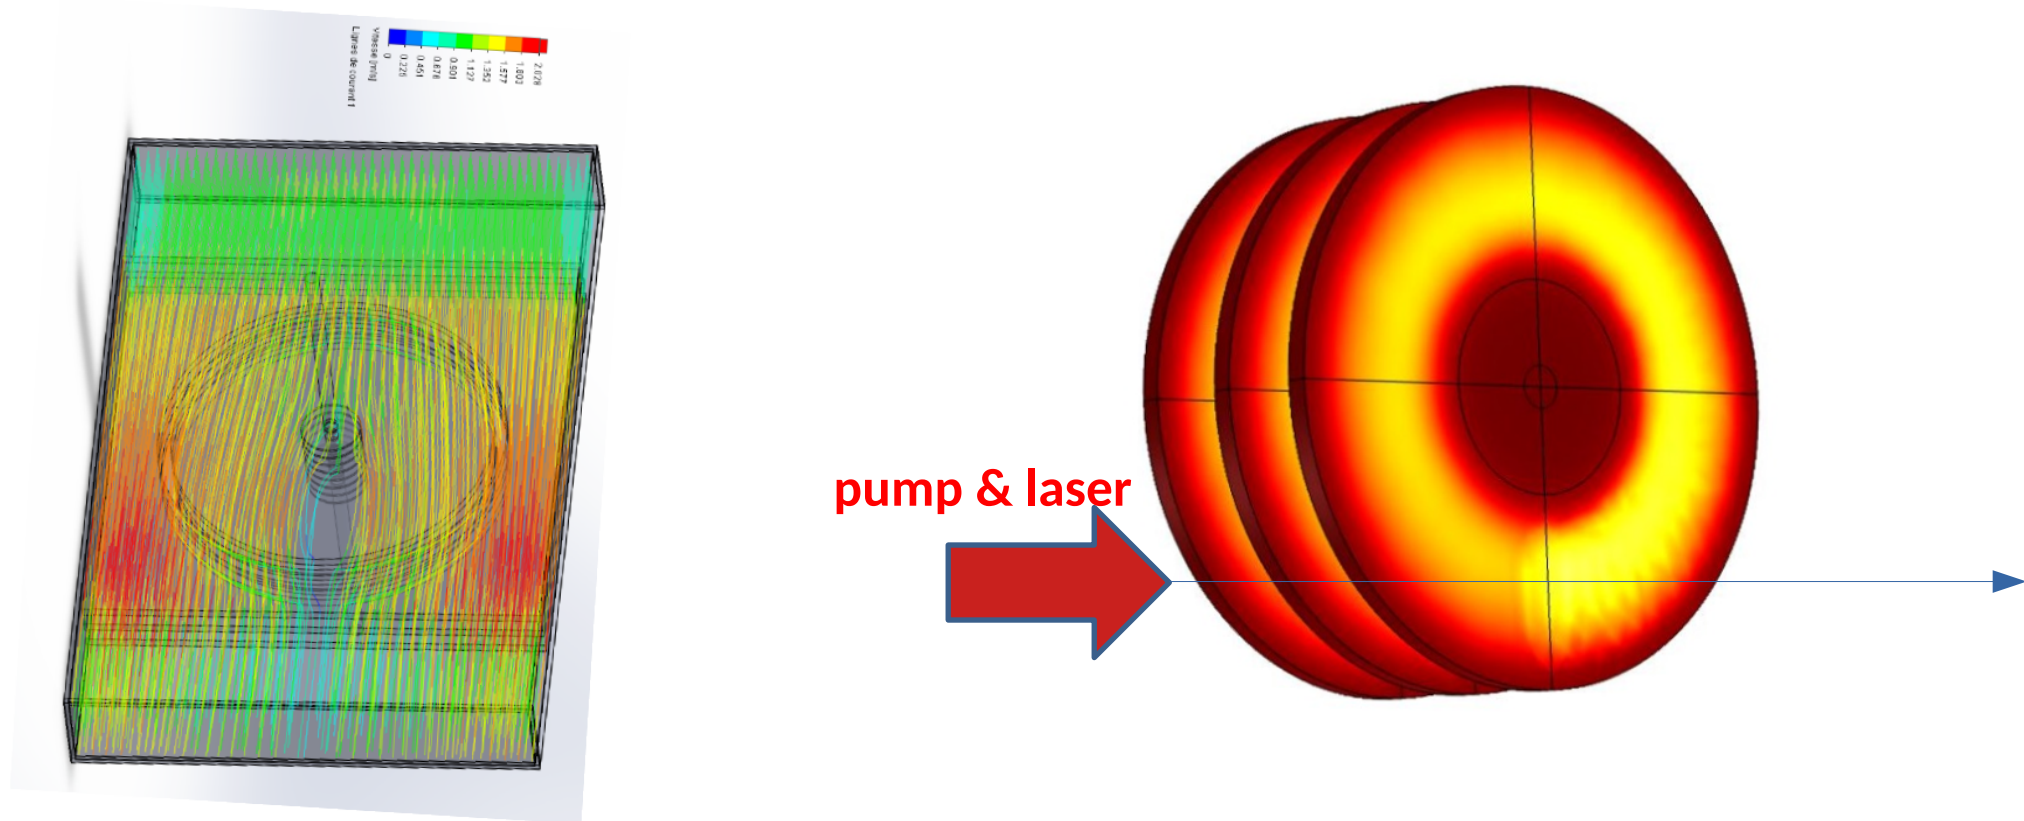


-> Spread the thermal load on large ring


Extensive thermal and hydrodynamic modeling

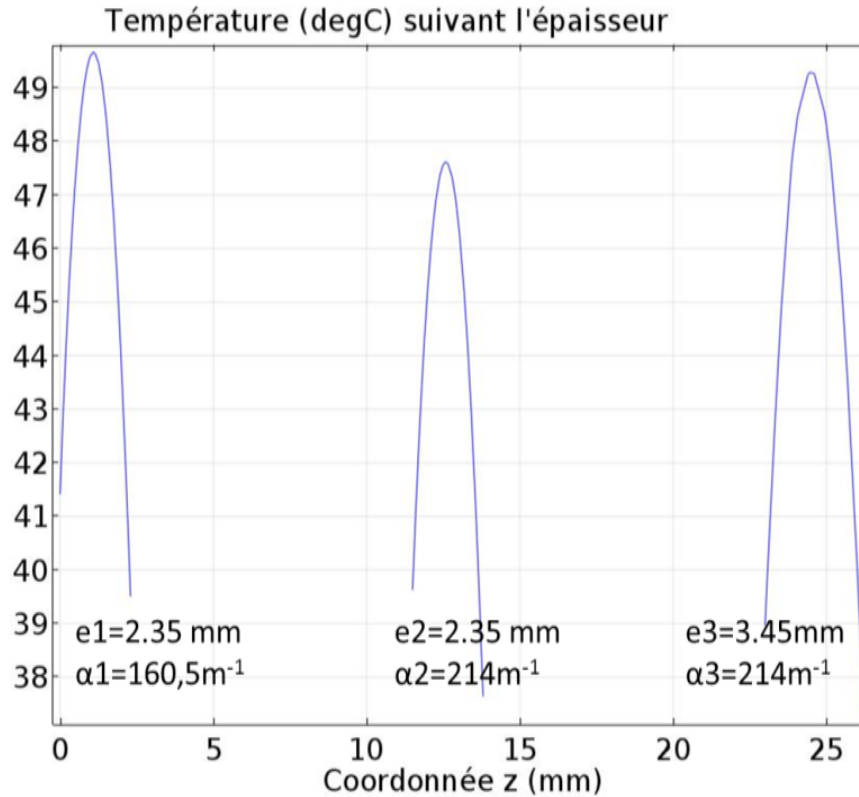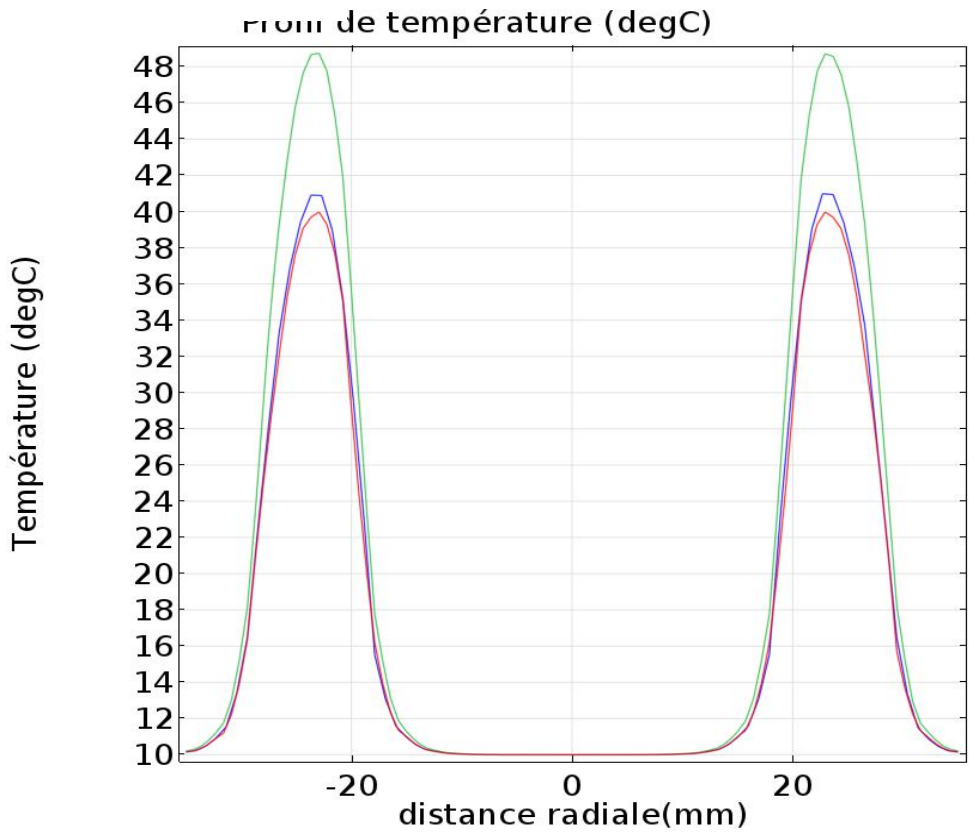

**Rotation frequency :
2Hz**

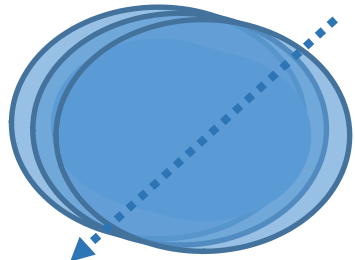


Radial cut




Longitudinal cut

T max = 49 °C



Insertion of ASE waveguides next to lasing region

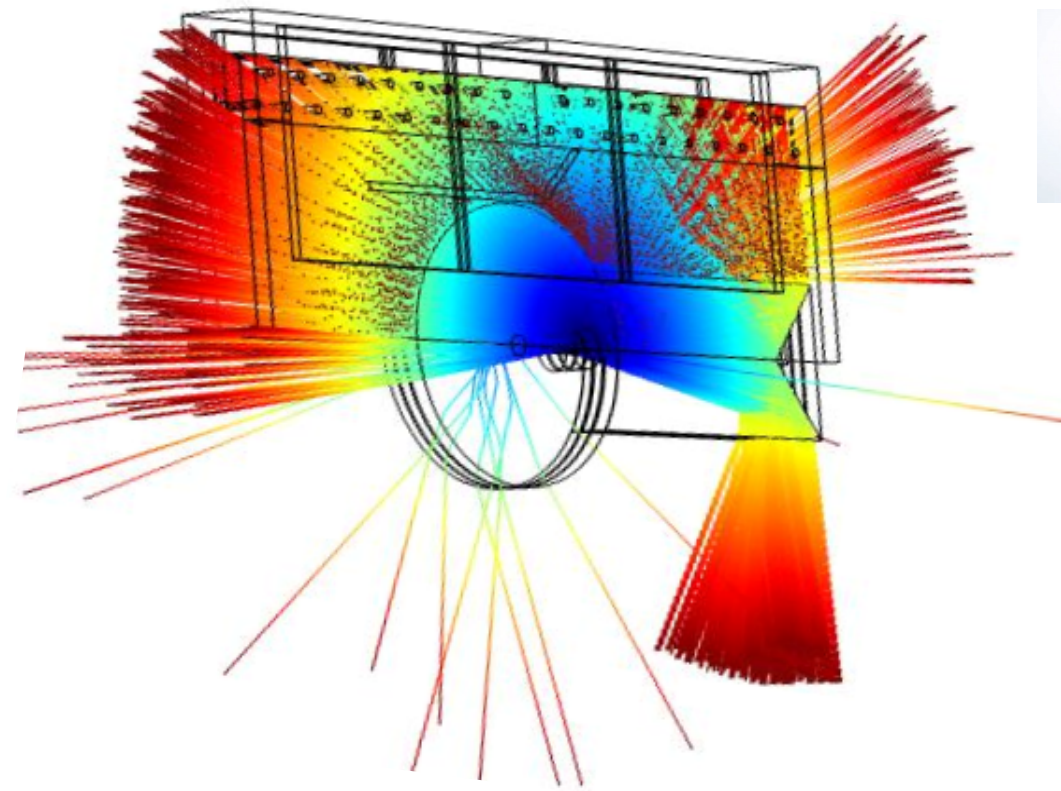


ray tracing

→ ASE energy transferred far from lasing region




Face cooling : laser goes through the cooling fluid

Is the flow regime laminar ?

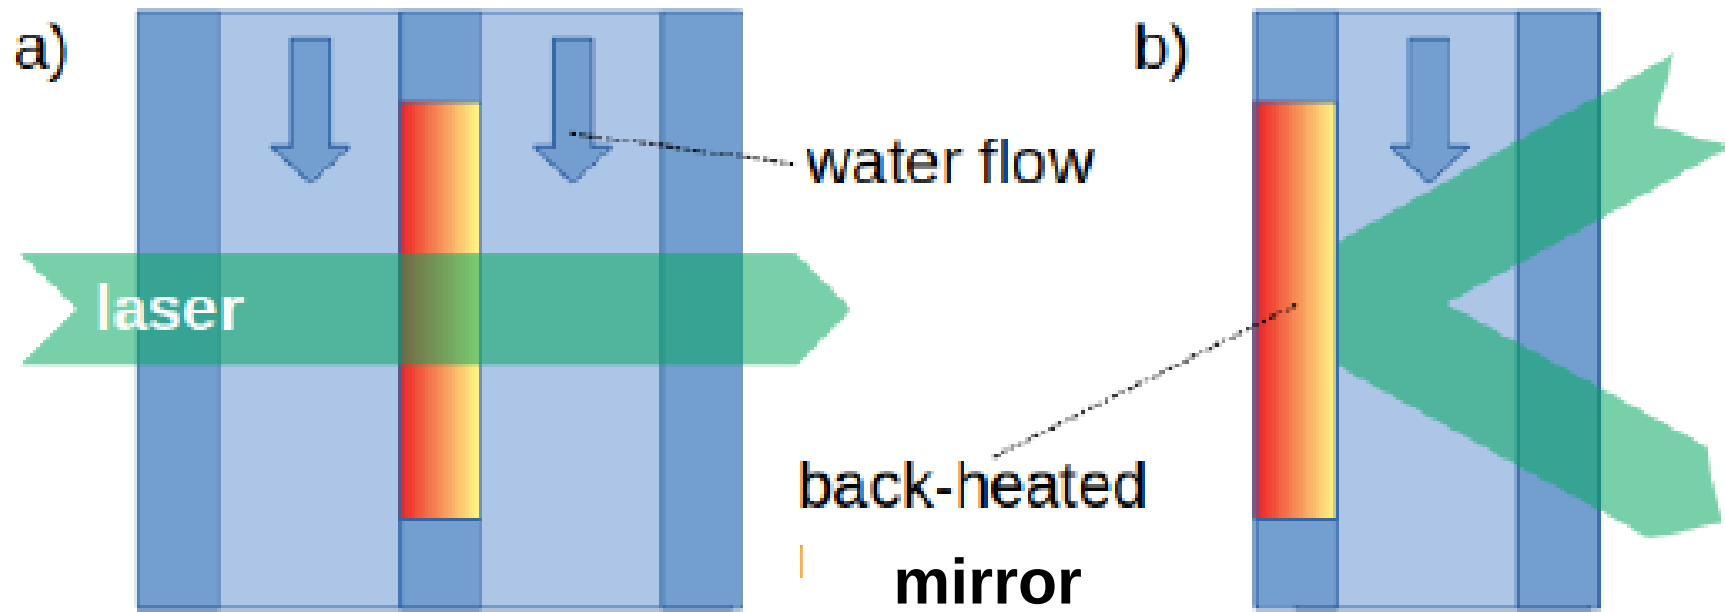

What happens in the coolant? "Waterbox" studies



Transverse imaging :

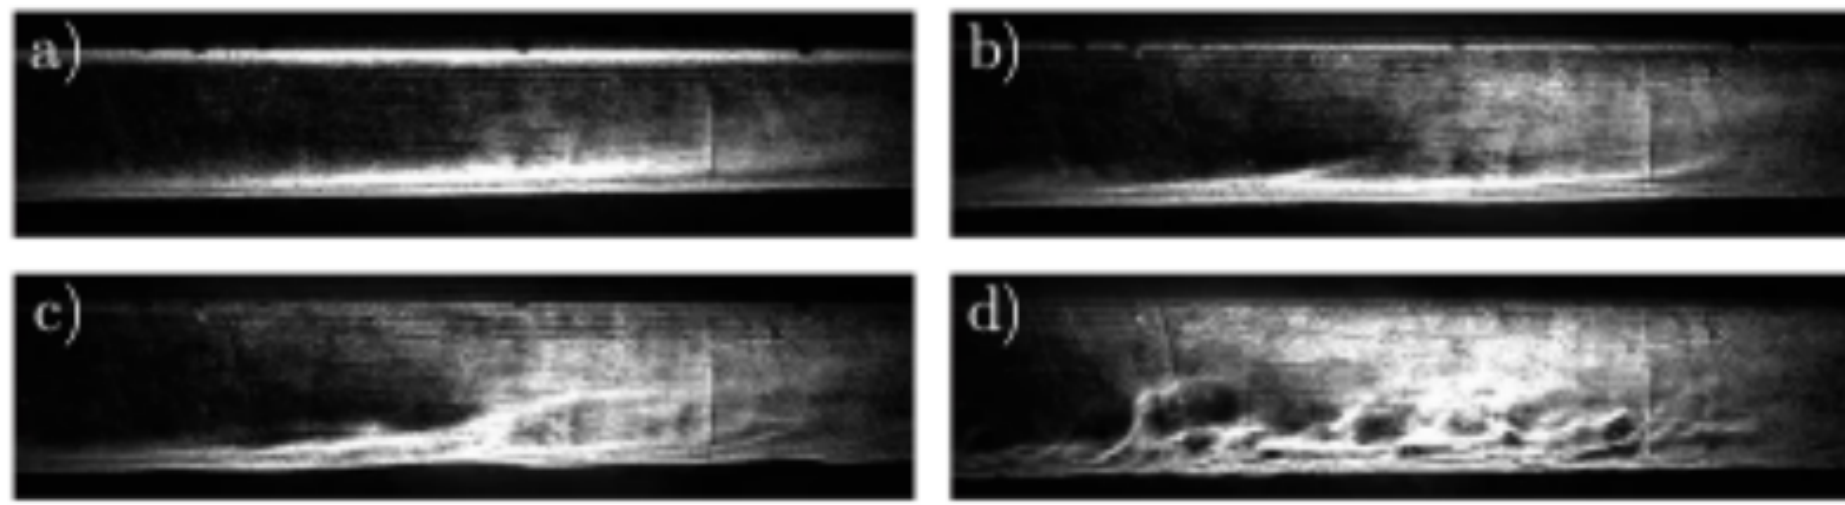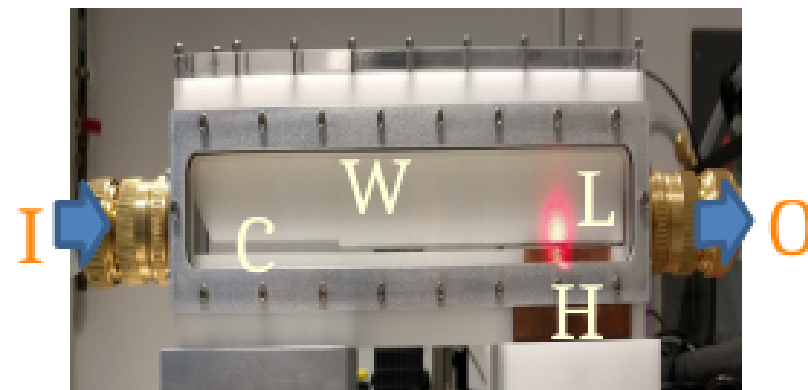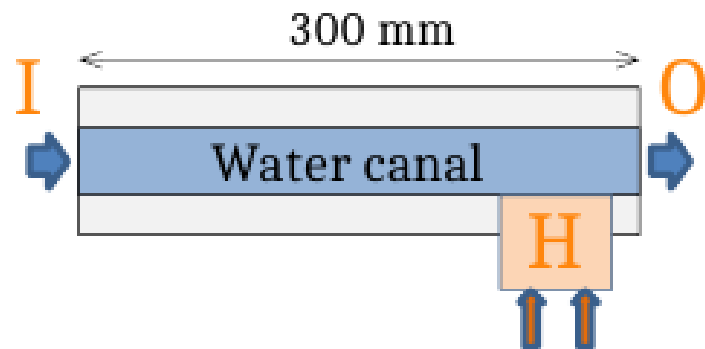


strioscopic imaging


What happens in the coolant? "Waterbox" studies

imaging along laser axis :

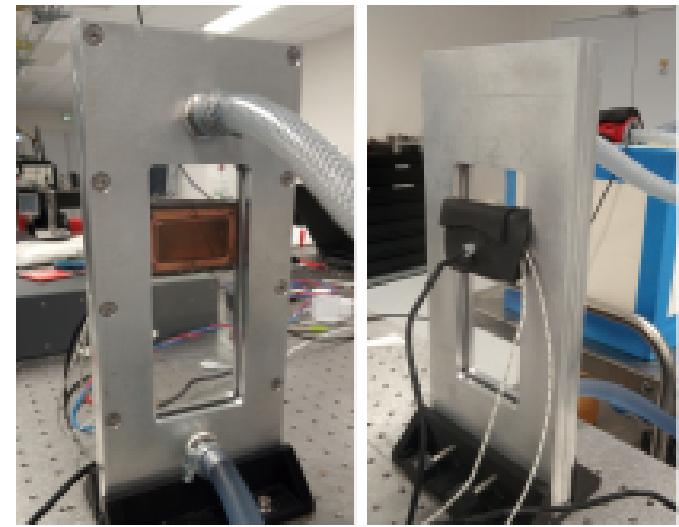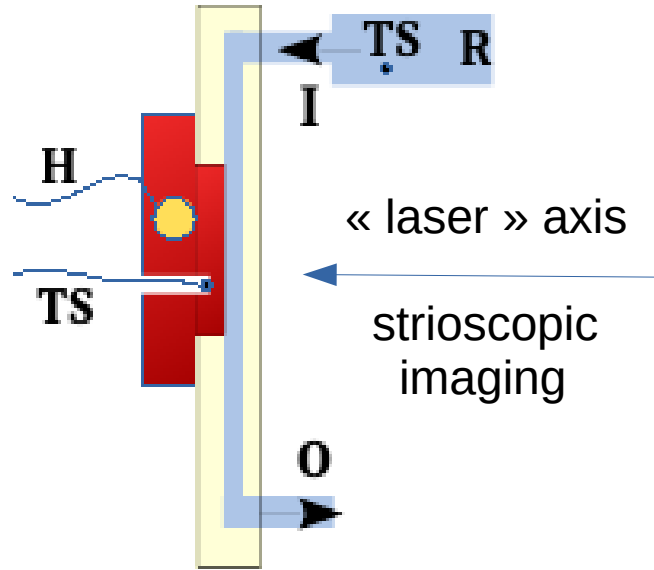




Appearance of a thermal streaking hydrodynamic instability :

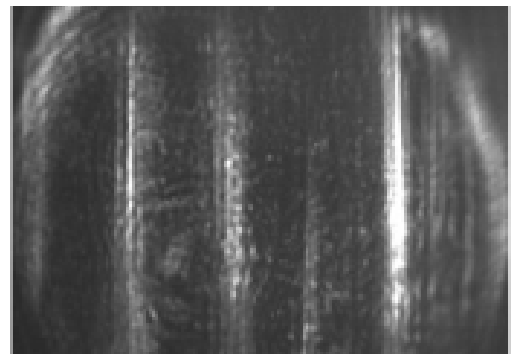

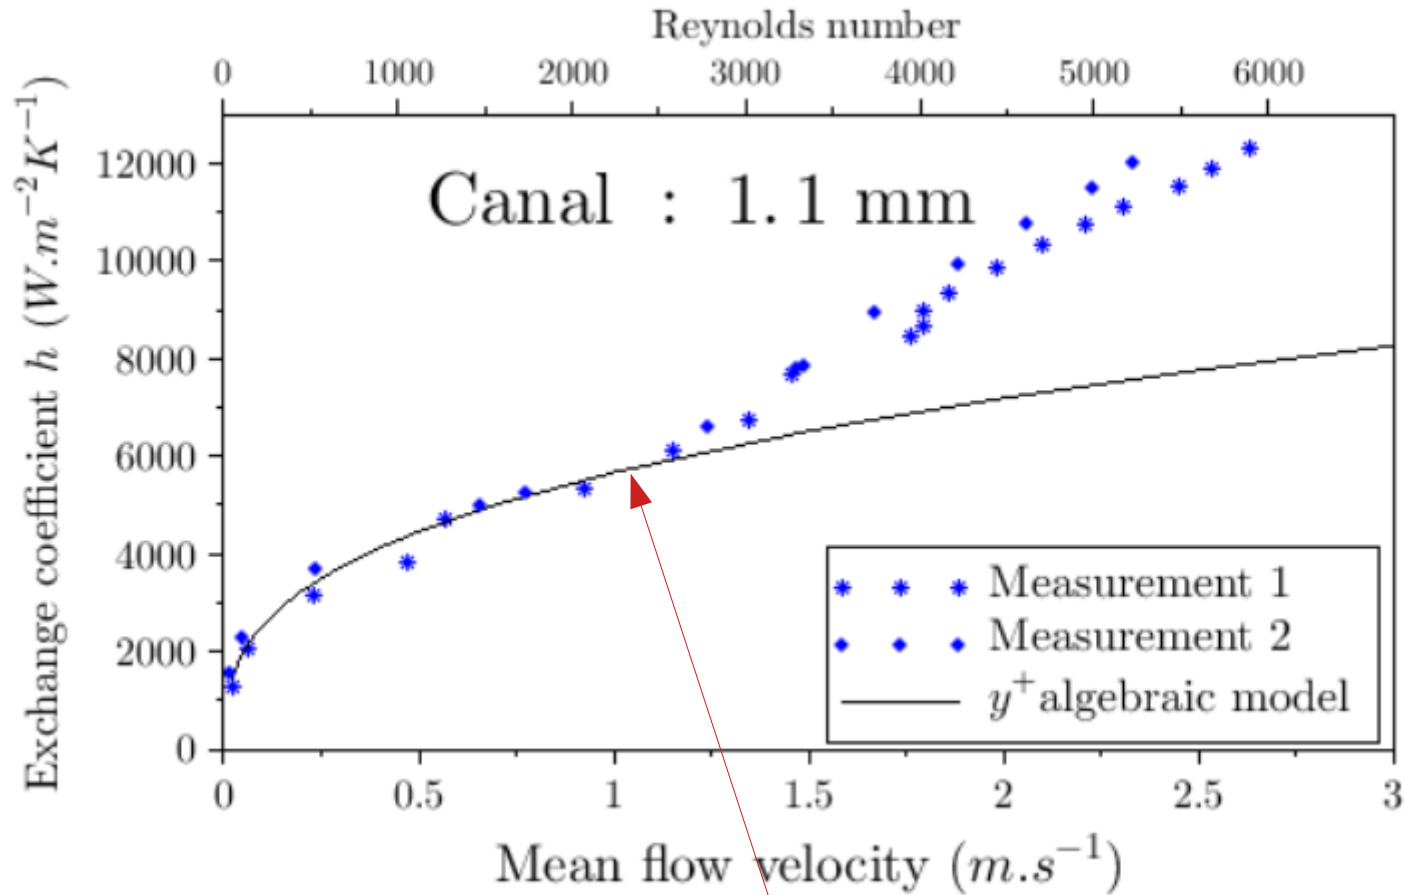

Onset of streaking hydro instability


Collaboration with Laurent Lamaignère, CEA/CESTA/DLP/LMO

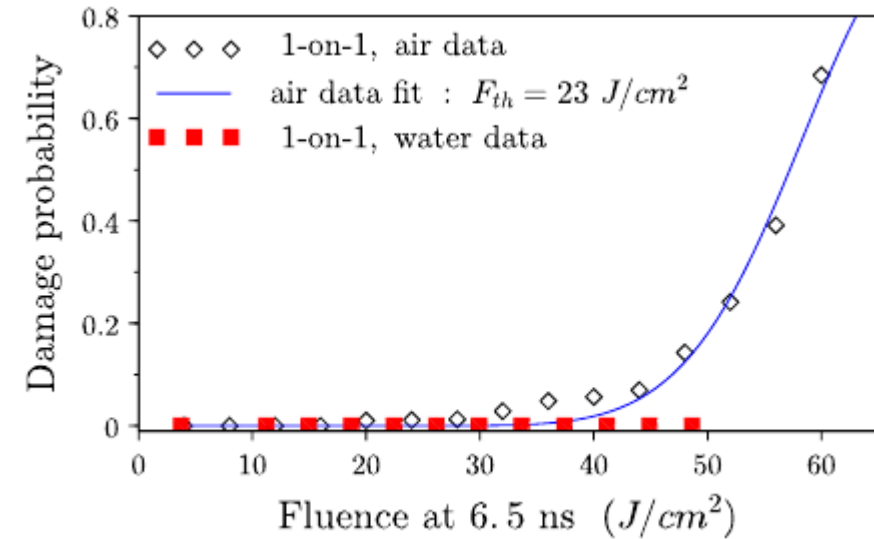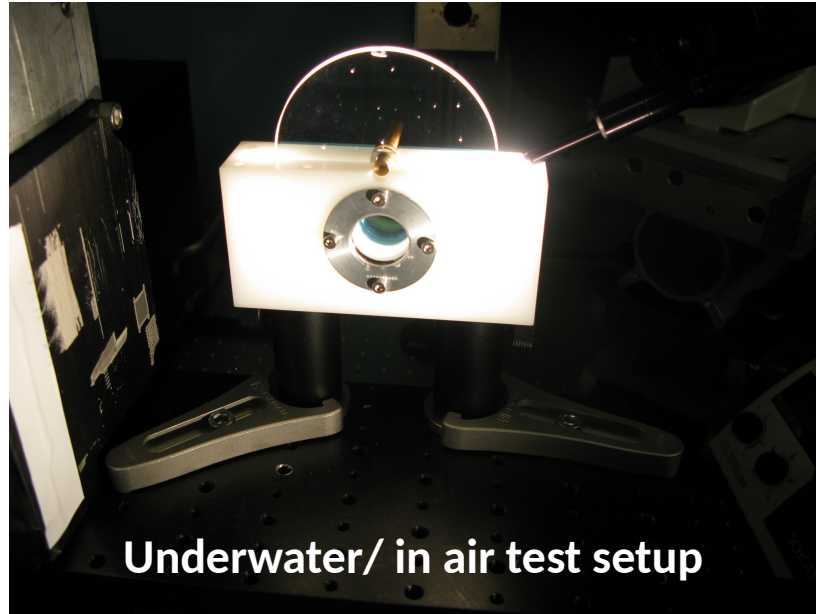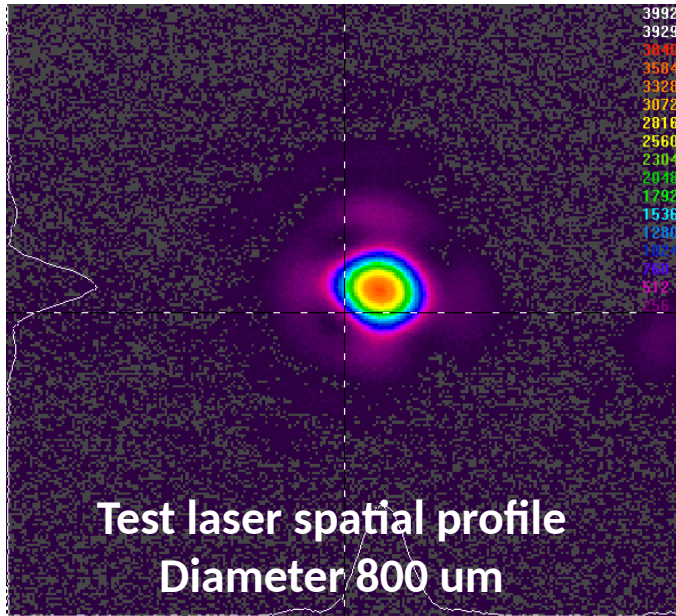

On average, LIDT is better underwater than in air !

→ opens the possibility to operate at higher fluences // better extraction

The rotating disk laser head

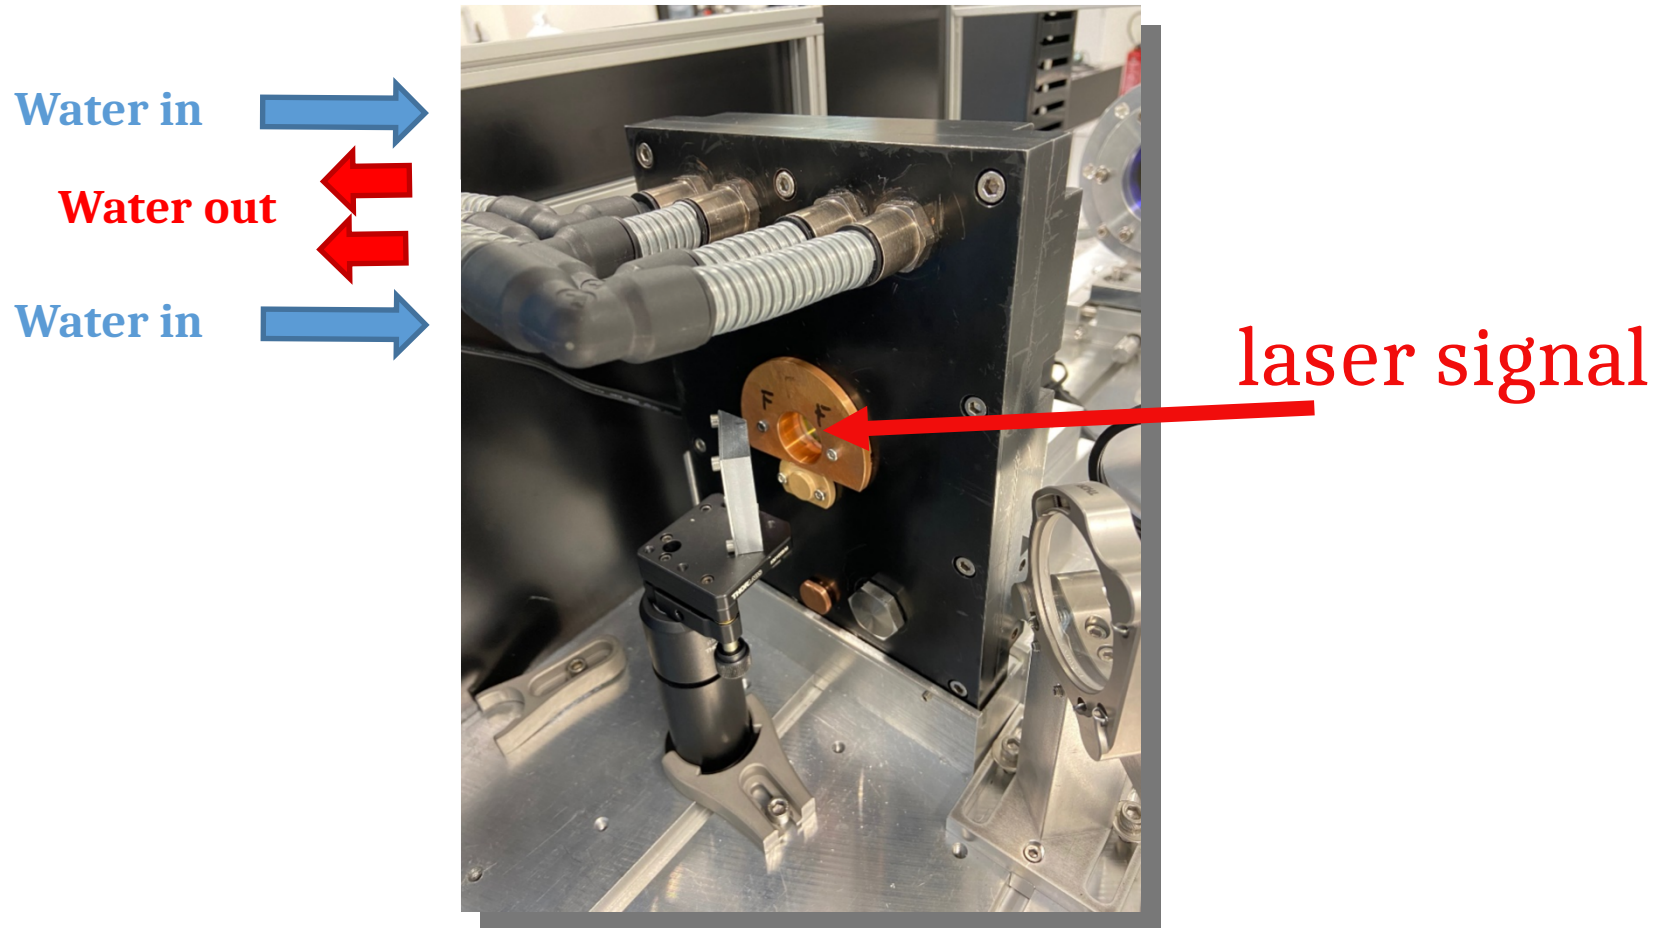

Patent : INPI 1860215 // EP19790017.8A


2018-11-06 (CNRS – Univ Bordeaux – CEA)

Inventors : C. Féral (CEA), J. Brandam (CNRS), J. Lhermite (CNRS), D. Marion (CEA)

Turbulence or hydro instabilities:

random mixing of « fluid particles » with different (T,P)


Hydro assumption : $P \sim \text{constant}$
 → dominant T effect
 → Main parameter : dn/dT

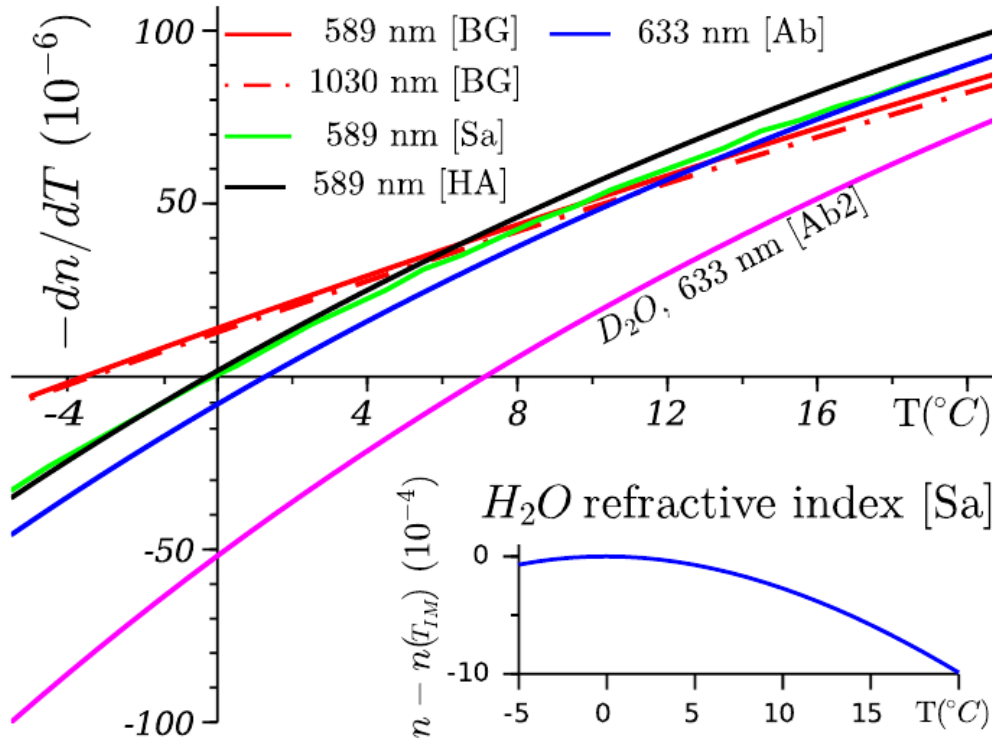

For water :
 $\sim 0^\circ\text{C}, dn/dT \sim 0!$


→ **n independent of T :**
« index leveling »
 → **can it bleach index inhomogeneities ?**

Optical test on an amplifier maquette




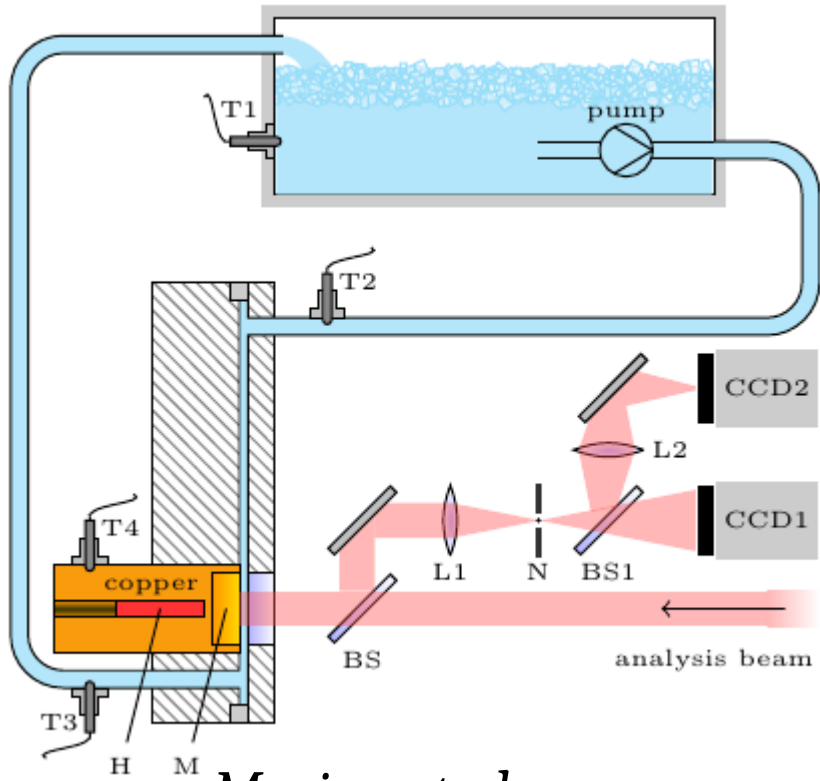


Marion et al.

Opt Lett. 47(11), 2850 (2022)
+ patent WO2023117482A1

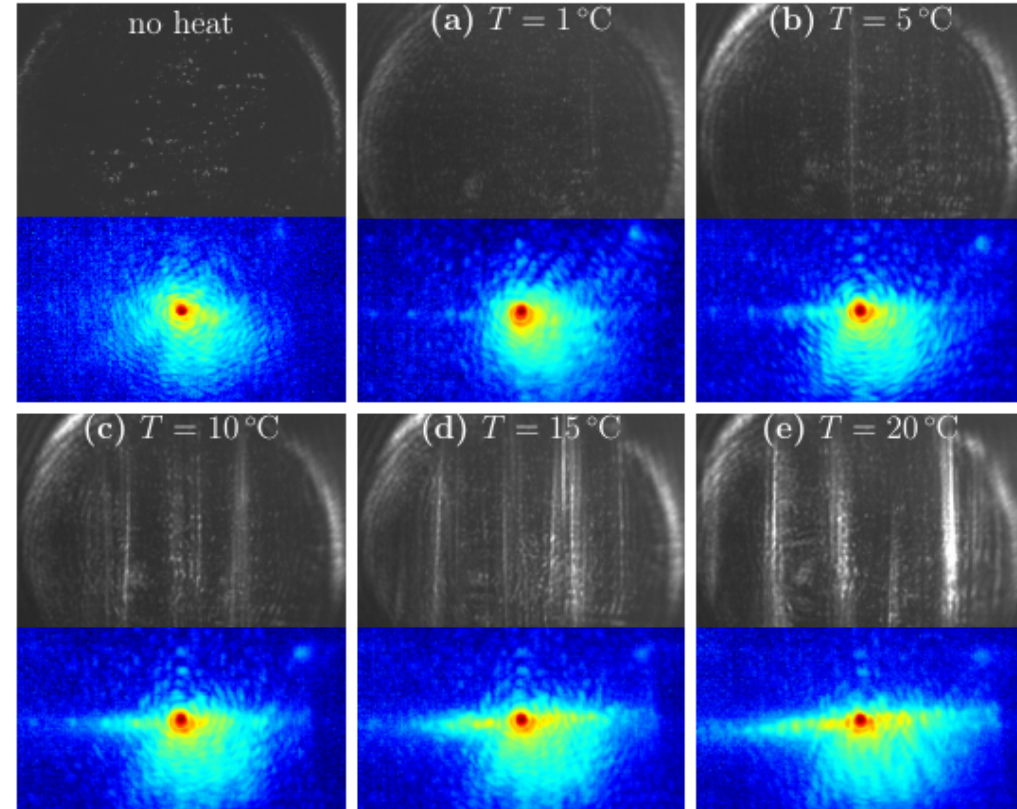

- Same thermo-hydrodynamic conditions
- Effective bleaching of streaks at index leveling

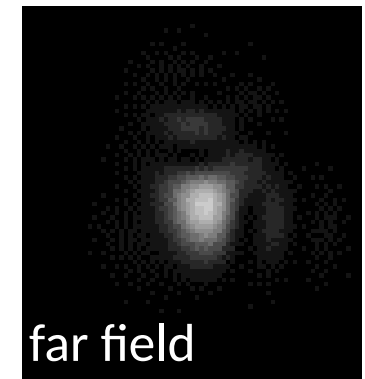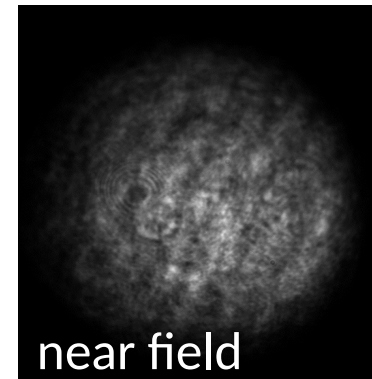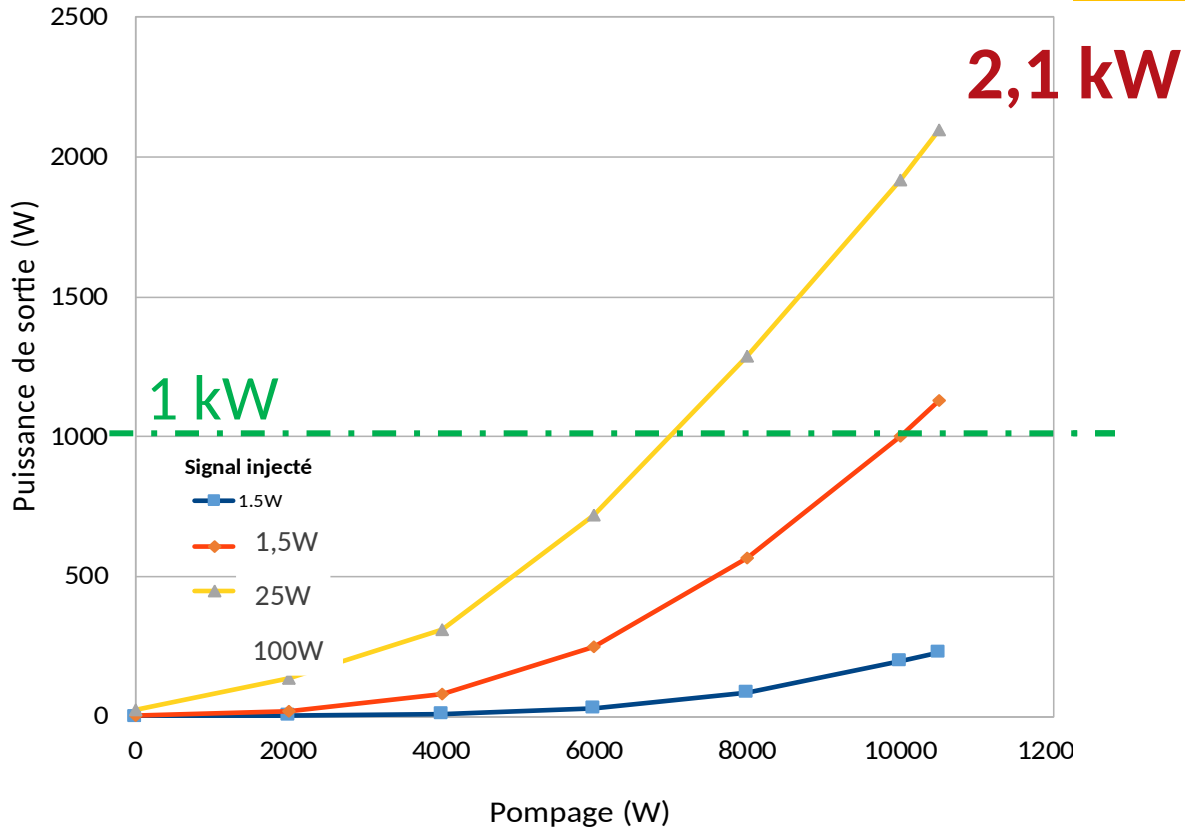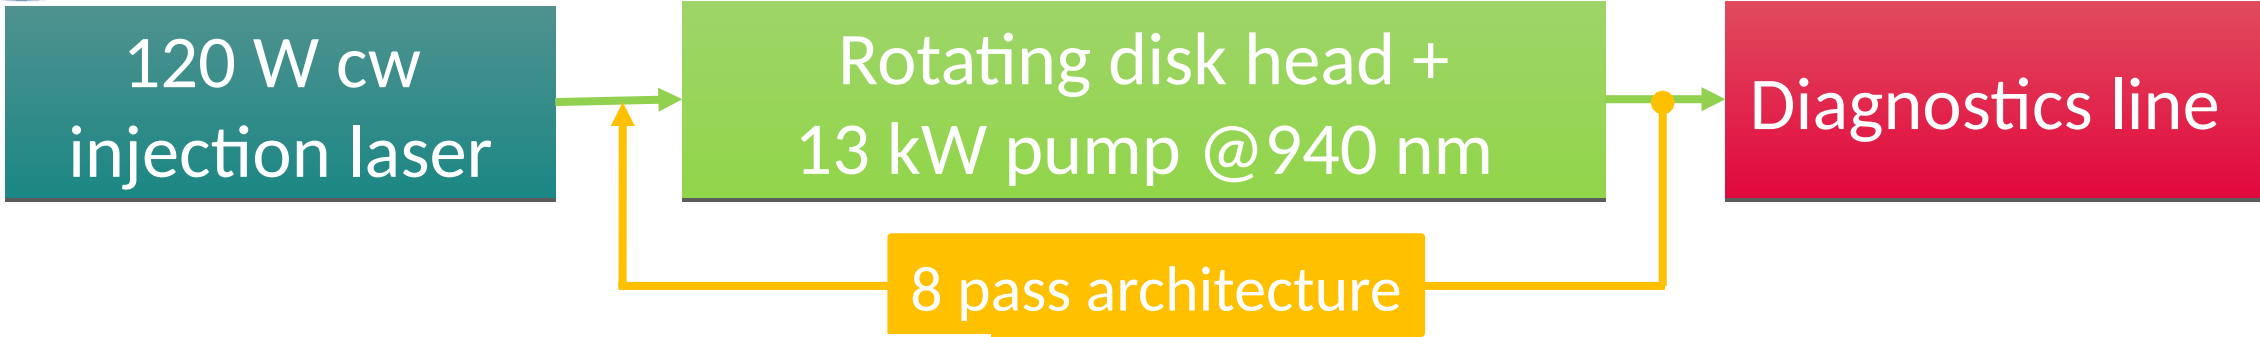

- ▶ Experimental data : 2.1 kW at 10 kW pump power
- ▶ Simulation results : 2.85 kW at 13 kW !

- **New cooling techniques for multi-disks @ room T**
- **2.1 kW achieved in cw, >1 kW probable at kHz soon**
- **Start to understand the hydrodynamics of liquid cooling**
- **Index leveling should enhance output powers**
- **Scalable to other materials / working points (size, rep...)**
- **more to come ?**