

DarkSide-20k

Liquid Ar-Based **Dark Matter** Search Experiment

Masayuki Wada

AstroCeNT, Warsaw




for the **DarkSide-20k Collaboration**

March 5 2024


LaThuile2024




EVIDENCES FOR DARK MATTER

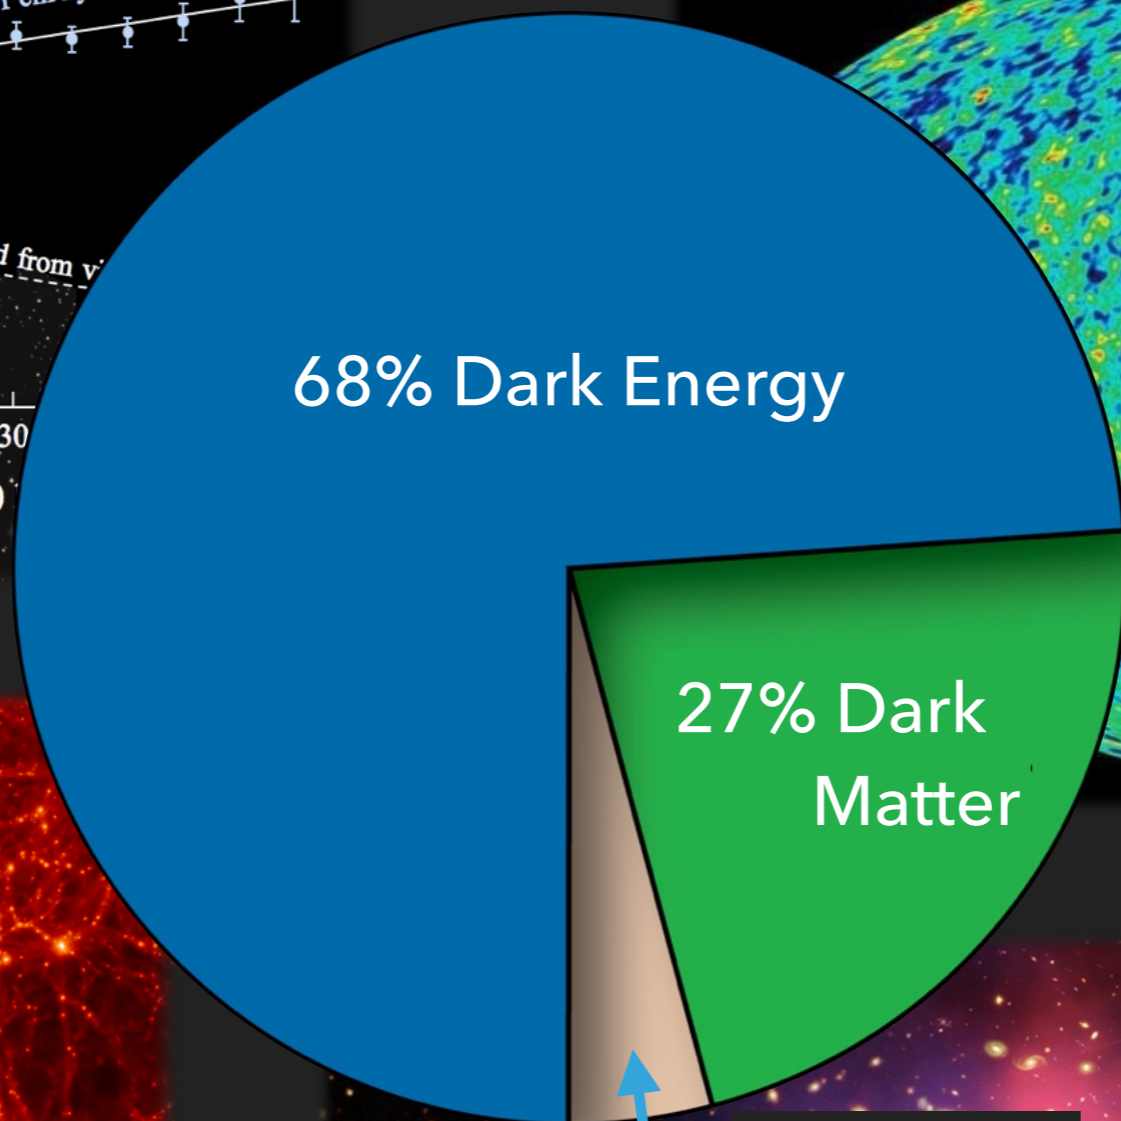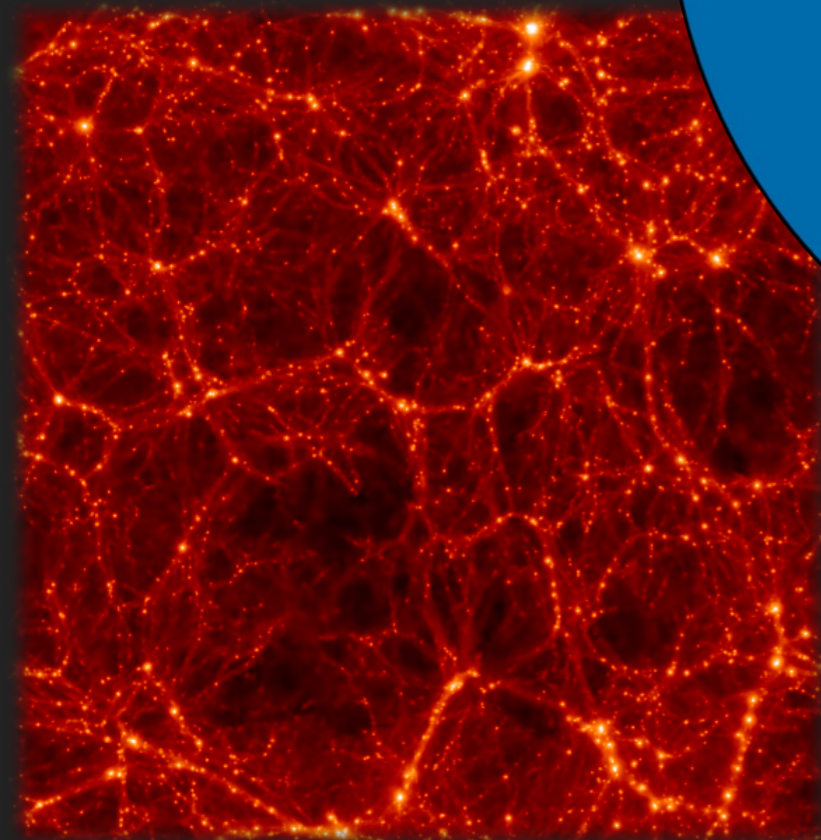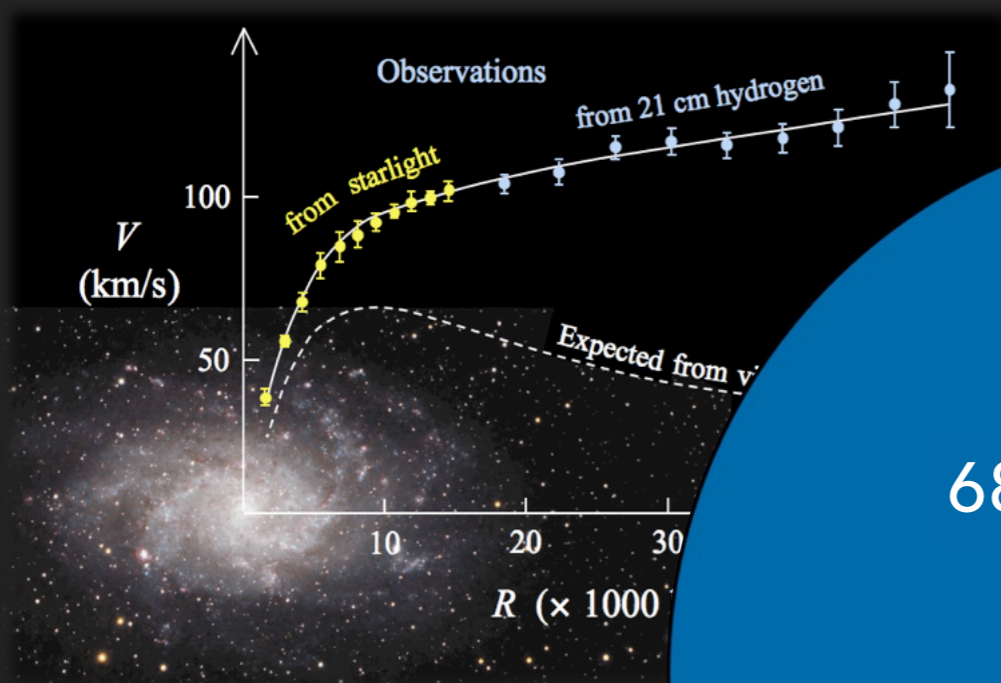

5% Atoms

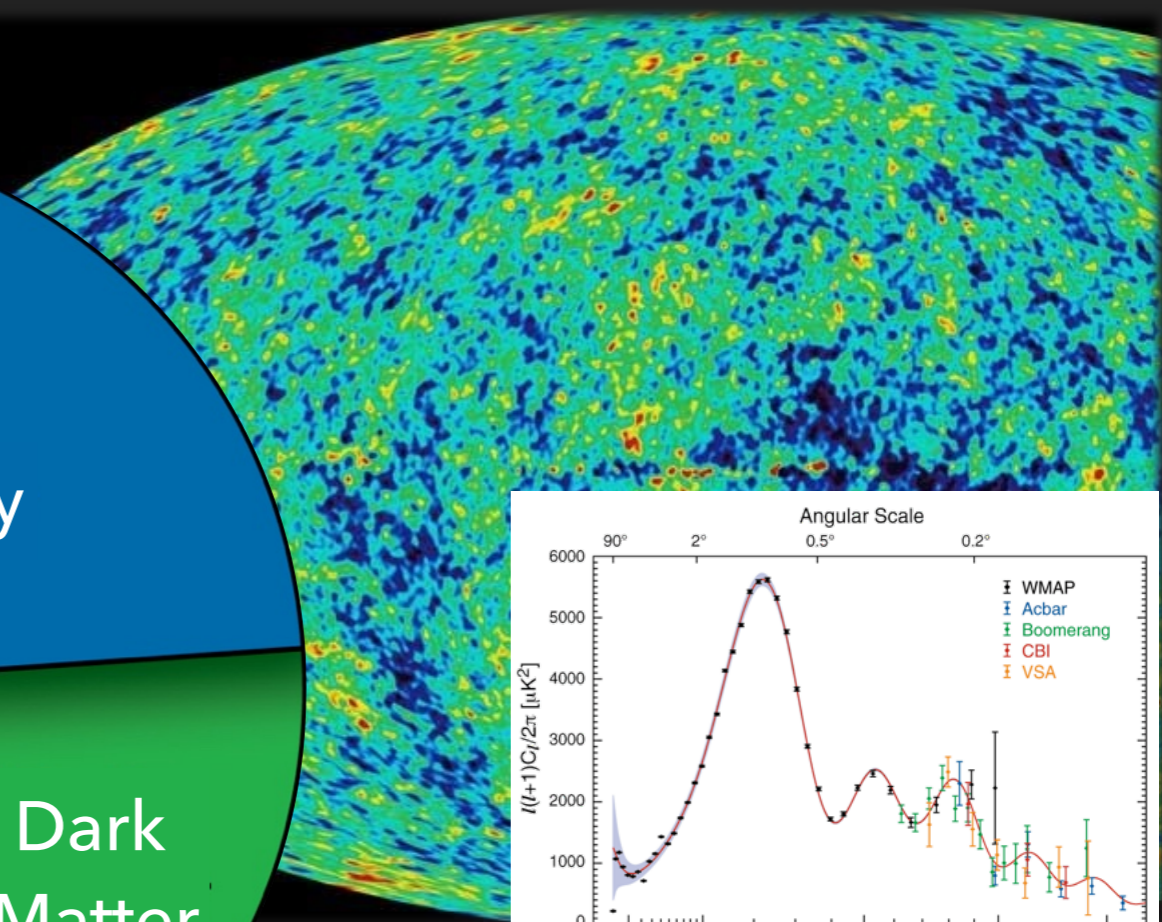

DARK MATTER PROPERTIES

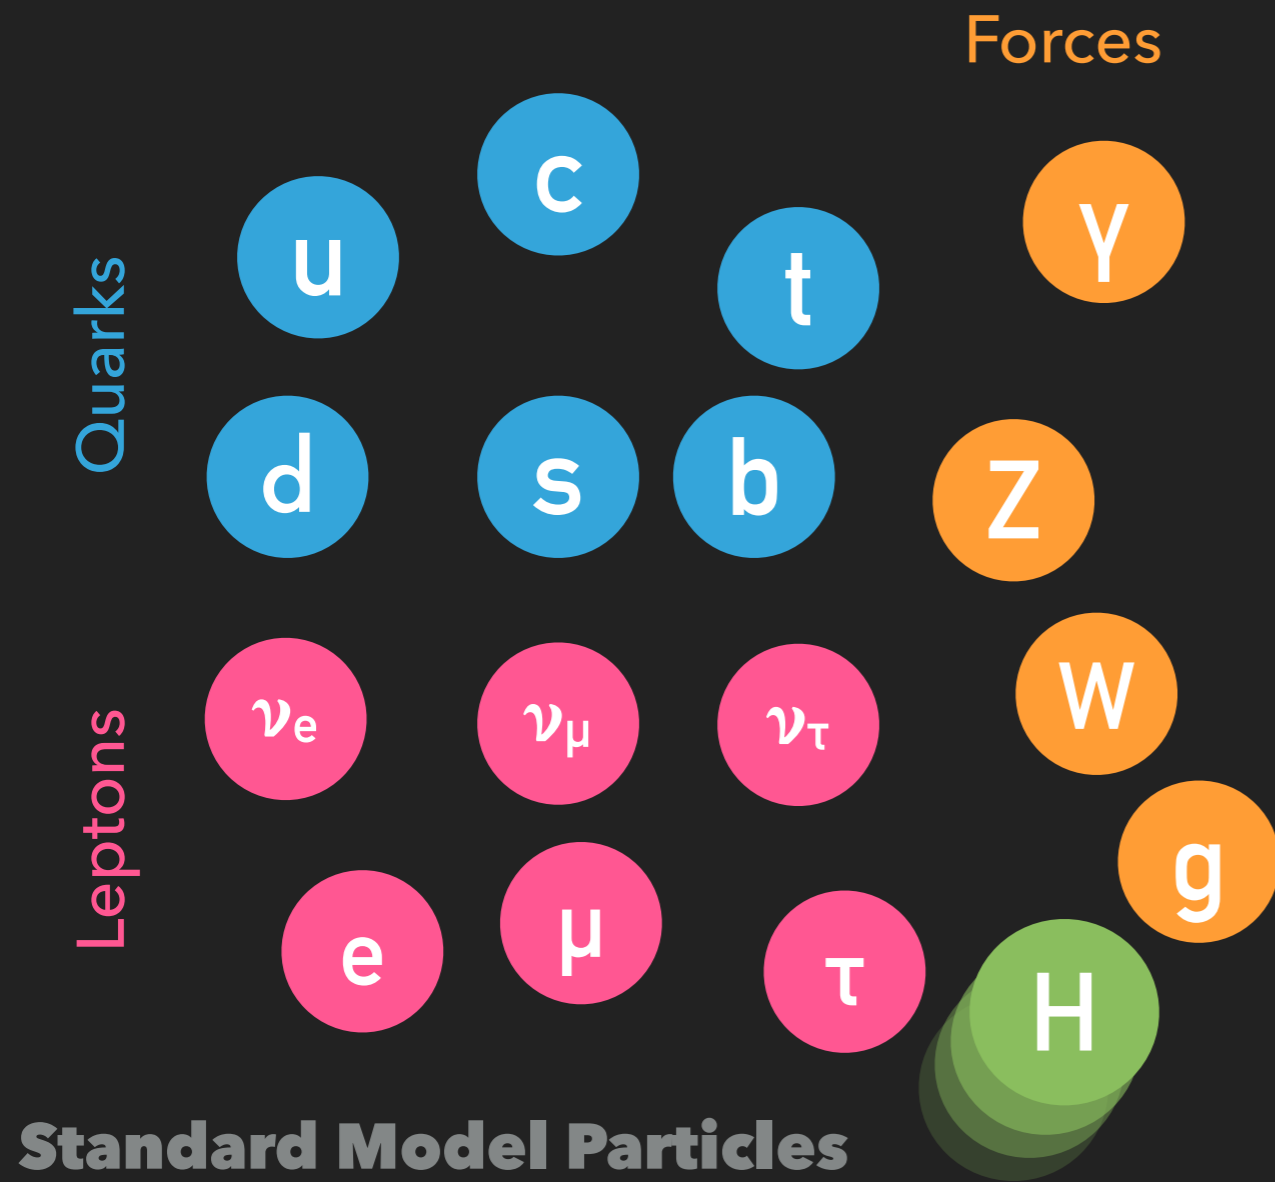


- ▶ Gravitationally interacting
- ▶ Stable particle
- ▶ Not Hot (Heavy)
- ▶ Not Baryon (Big Bang nucleosynthesis)

New Physics Beyond Standard Model!!

One of the candidates is **WIMPs**.

DARK MATTER PROPERTIES

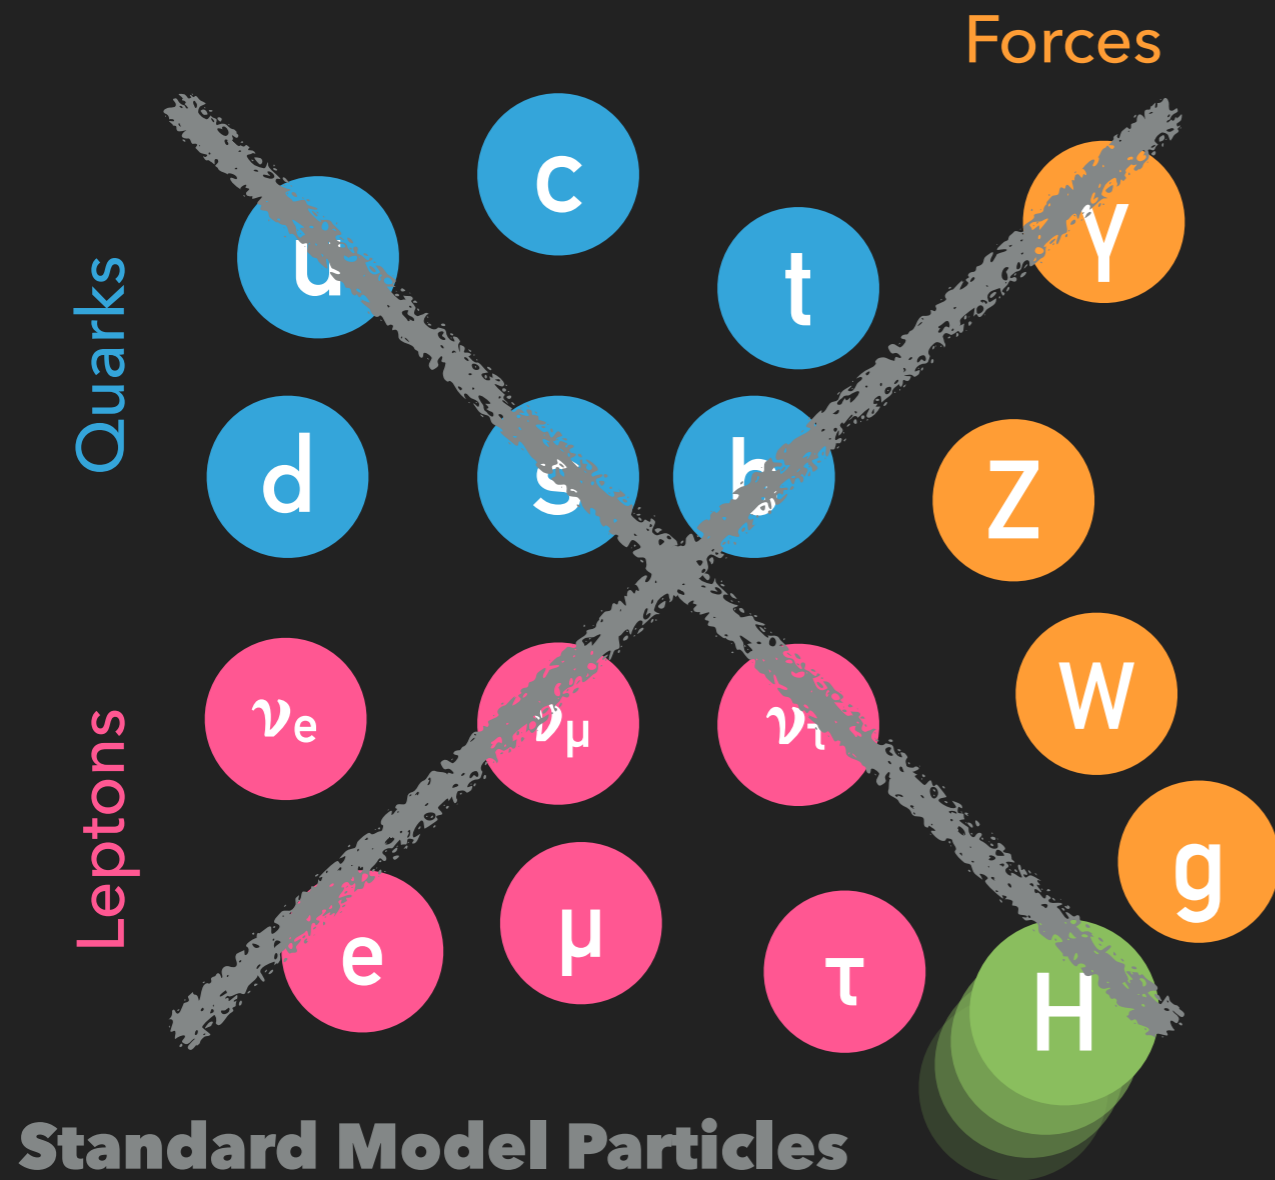

- ▶ Gravitationally interacting
- ▶ Stable particle
- ▶ Not Hot (Heavy)
- ▶ Not Baryon (Big Bang nucleosynthesis)

New Physics Beyond Standard Model!!

One of the candidates is **WIMPs**.

FEATURES OF NOBLE LIQUID DETECTORS

- ▶ **Dense** and **easy to purify** (good scalability, advantage over gaseous and solid target)
- ▶ High **scintillation & ionization** (low energy threshold, not low enough to search $< 1 \text{ GeV}/c^2$ DM)
- ▶ **Transparent** to own scintillation
- ▶ **No mechanical stress** on target materials (one origin of low-energy backgrounds)
- ▶ **Purification in situ** after commissioning

For TPC

- ▶ High electron **mobility** and **low diffusion**
- ▶ Amplification (electroluminescence gain) for **ionization signal**
- ▶ **Discrimination** electron/nuclear recoils (**ER/NR**) via **ionization/scintillation ratio**

Liquid **Xenon**

- ▶ Denser & Radio pure
- ▶ Lower energy threshold
- ▶ Sensitive to low mass WIMP

Liquid **Argon**


- ▶ lower temperature (Rn removal is easier)
- ▶ **Stronger ER discrimination** via pulse shape
- ▶ **Intrinsic ER BG from ^{39}Ar**
- ▶ **Need wavelength shifter**
- ▶ Higher sensitivity at low mass WIMP

DARKSIDE PROGRAM


- ▶ **Direct detection** search for **WIMP** dark matter
- ▶ Based on a **two-phase argon** time projection chamber (**TPC**)
- ▶ Design philosophy based on having very low background levels that can be further reduced through **active suppression**, for **background-free** operation from both neutrons and β/γ 's



DarkSide-10

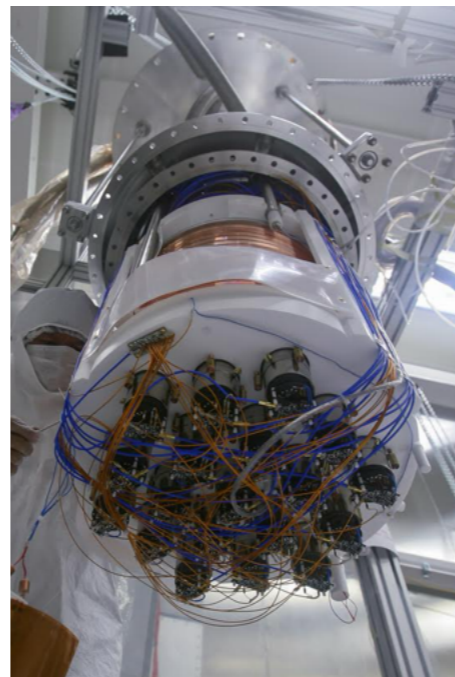


DarkSide-50

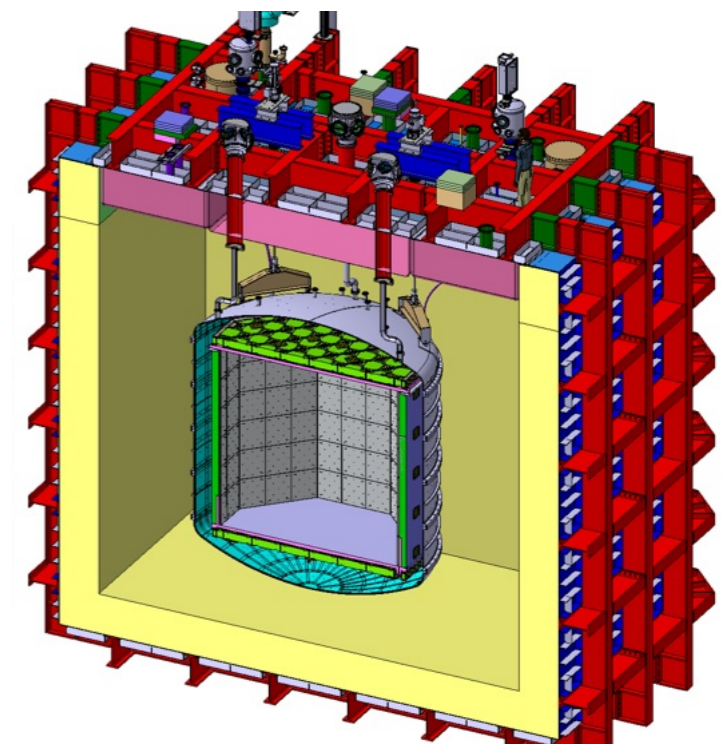


DarkSide-20k

and **DarkSide-LowMass**
for low-mass dark matter searches


THE TIME-PROJECTION CHAMBER (TPC)

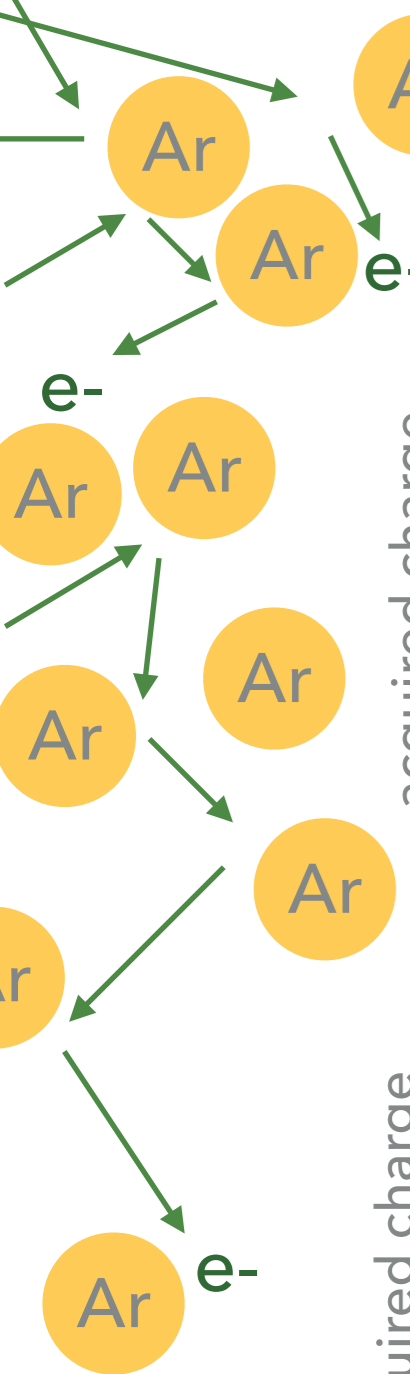



Electron Recoil (ER)

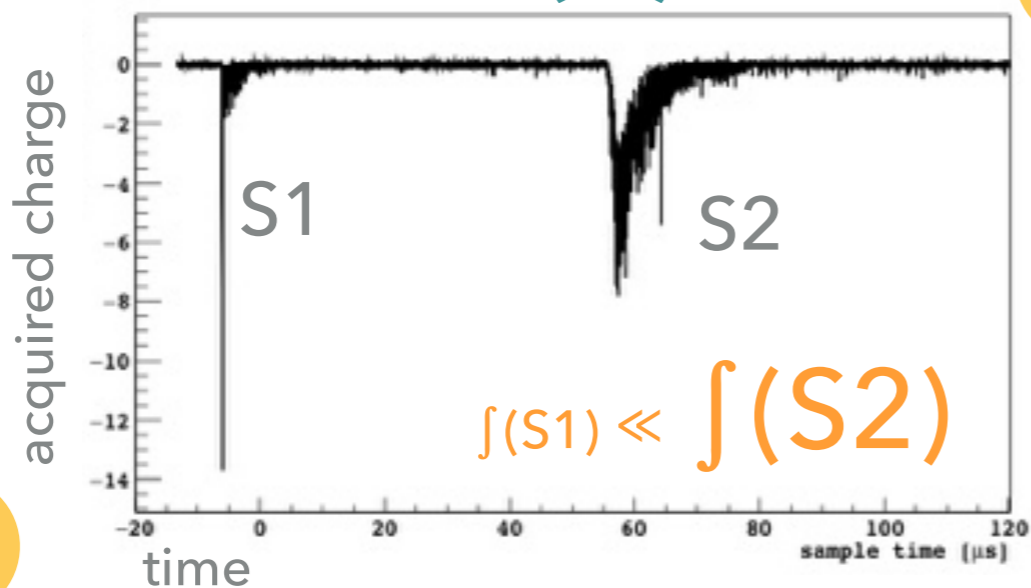

Nuclear Recoil (NR)

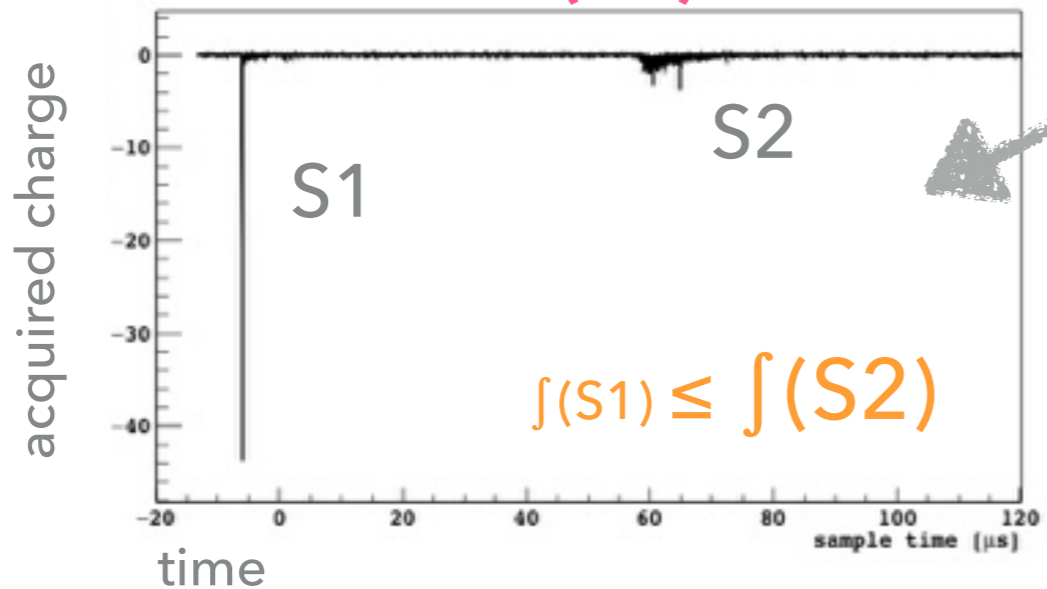

WIMP-like signal!

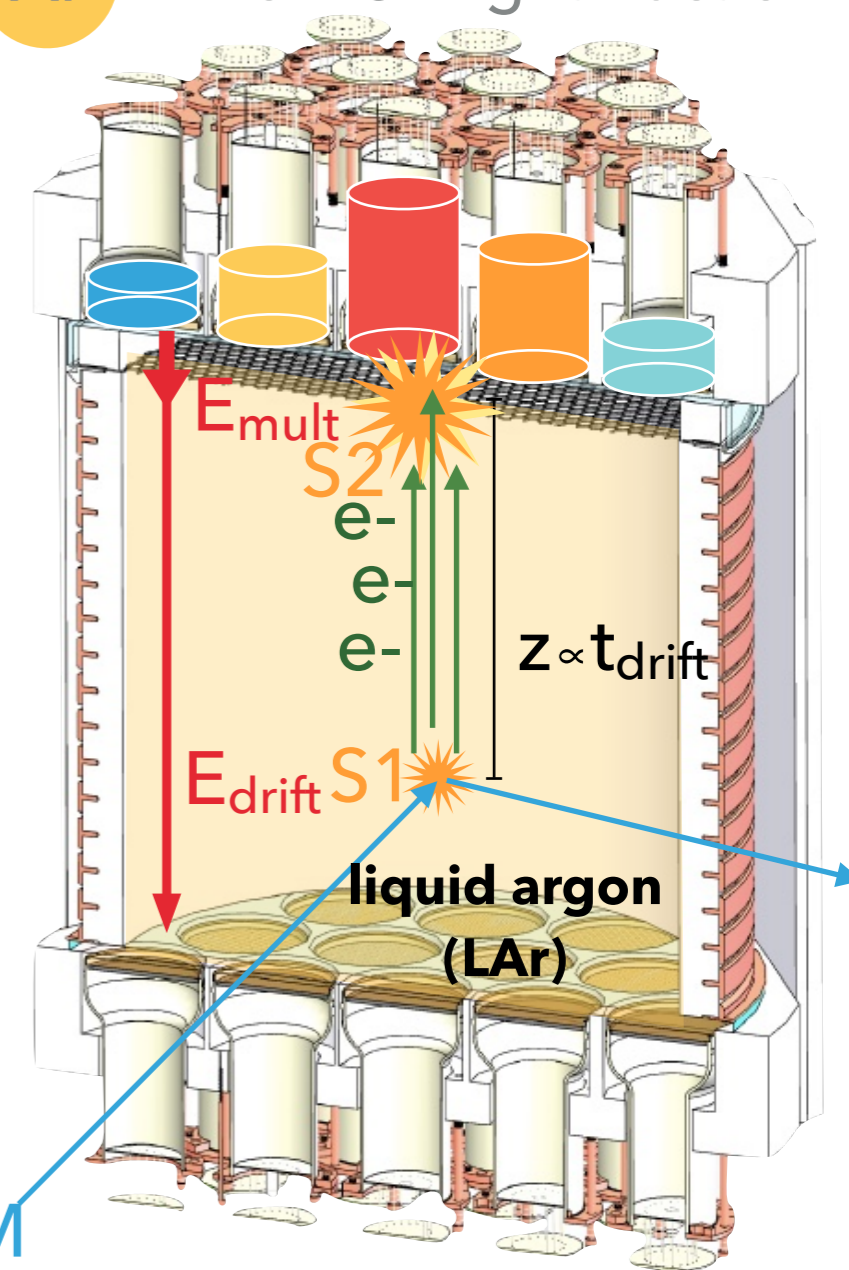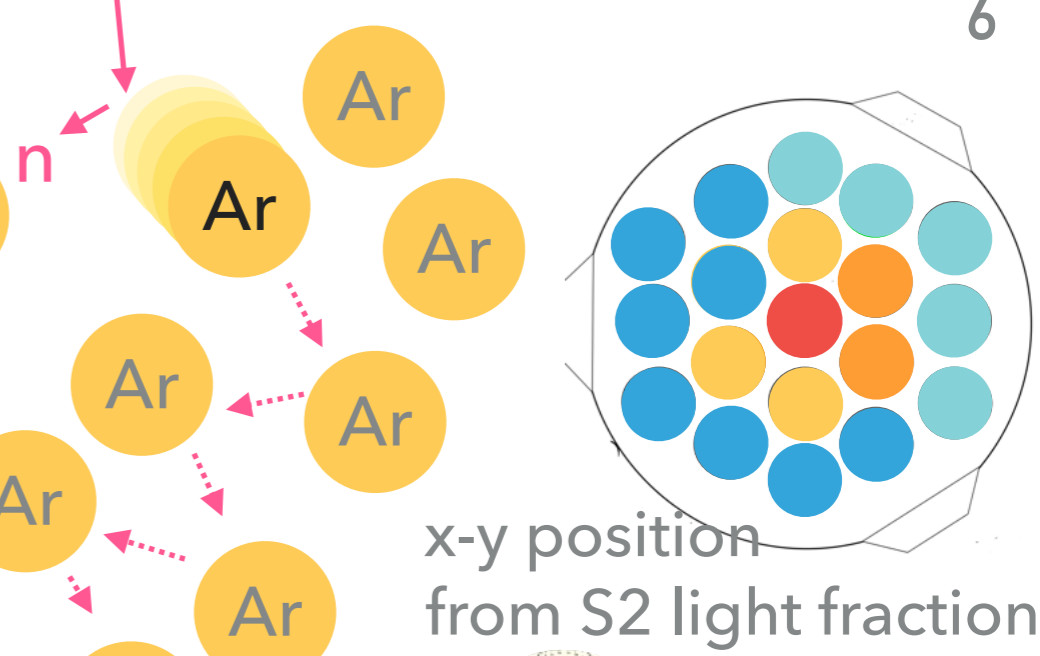

S2/S1 ratio and **Pulse Shape Discrimination (PSD)**

WIMPs will generate nuclear recoils (NRs)

DM

PULSE SHAPE DISCRIMINATION




β & γ
Rejection

- ▶ Electron and nuclear recoils produce different excitation densities in the argon, leading to different **ratios of singlet and triplet excitation states**

A. Hitachi et al. Phys. Rev. B 27 (1983) 5279

PSD parameter M. G. Boulay and A. Hime, Astropart. Phys. 25 (2006) 179

F90: Ratio of detected light in the first 90 ns*, compared to the total signal
~ Fraction of singlet states

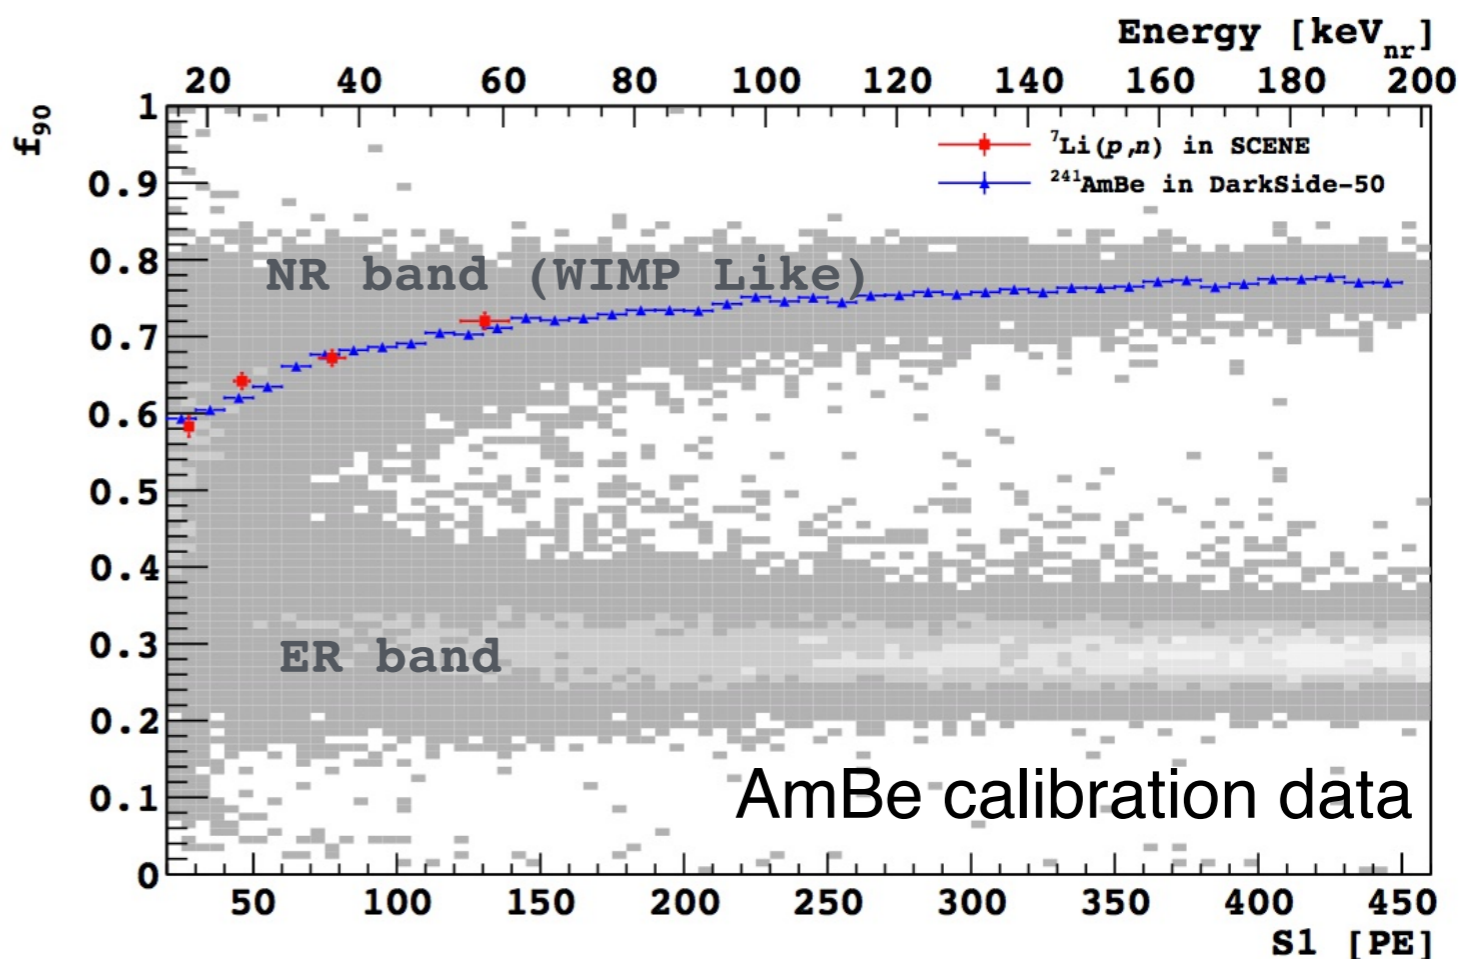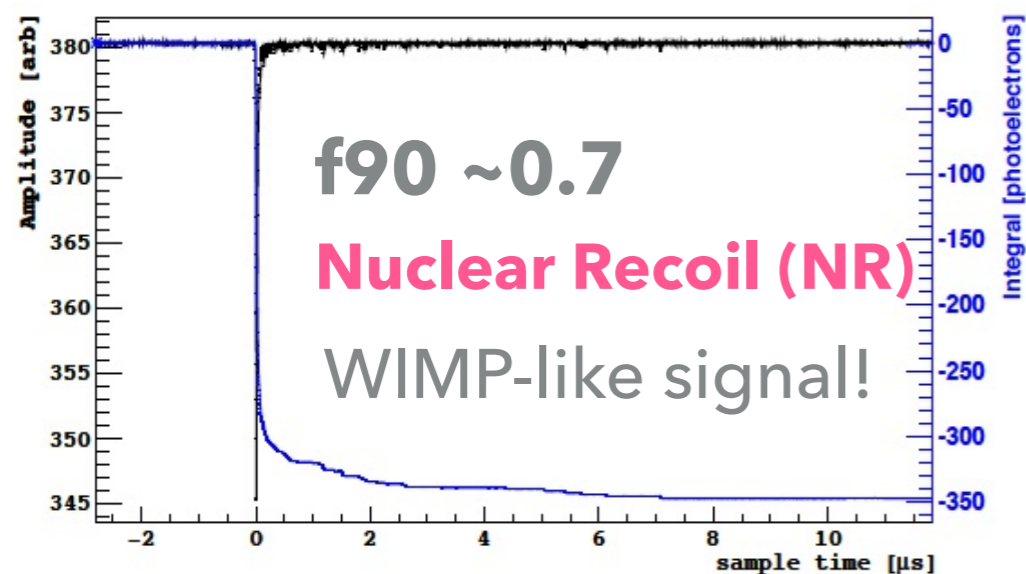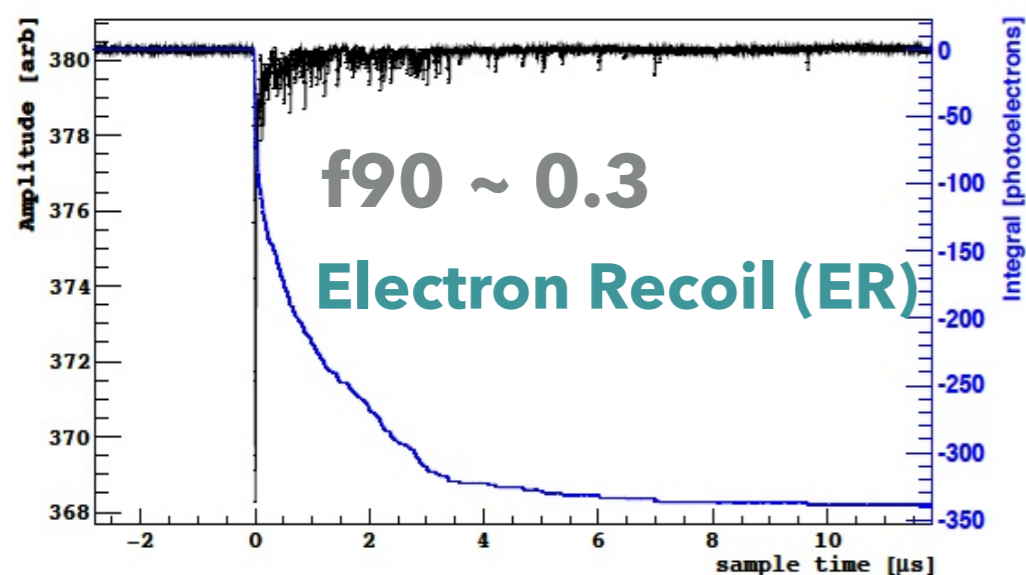


More for PSD: DEAP-3600, Eur. Phys. J. C 81, 823 (2021)

* the 90 ns is optimized value for DS50 and detector dependent parameter.

UNDERGROUND Ar

β & γ
Rejection

- ▶ Intrinsic ^{39}Ar radioactivity in **atmospheric argon** is the primary background for argon-based detectors
- ▶ ^{39}Ar activity sets the dark matter detection threshold at low energies (where pulse shape discrimination is less effective)

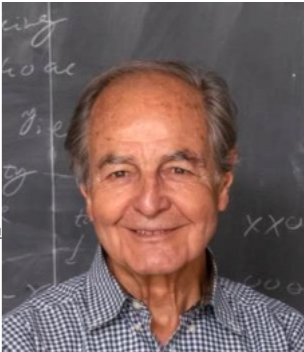


Frank Calaprice


^{39}Ar is a **cosmogenic isotope**, and the activity in argon from **underground sources** can be significantly lower compared to **atmospheric argon**

- ▶ We deployed 157kg of underground argon in 2015.

^{39}Ar reduction factor of **~1400!**

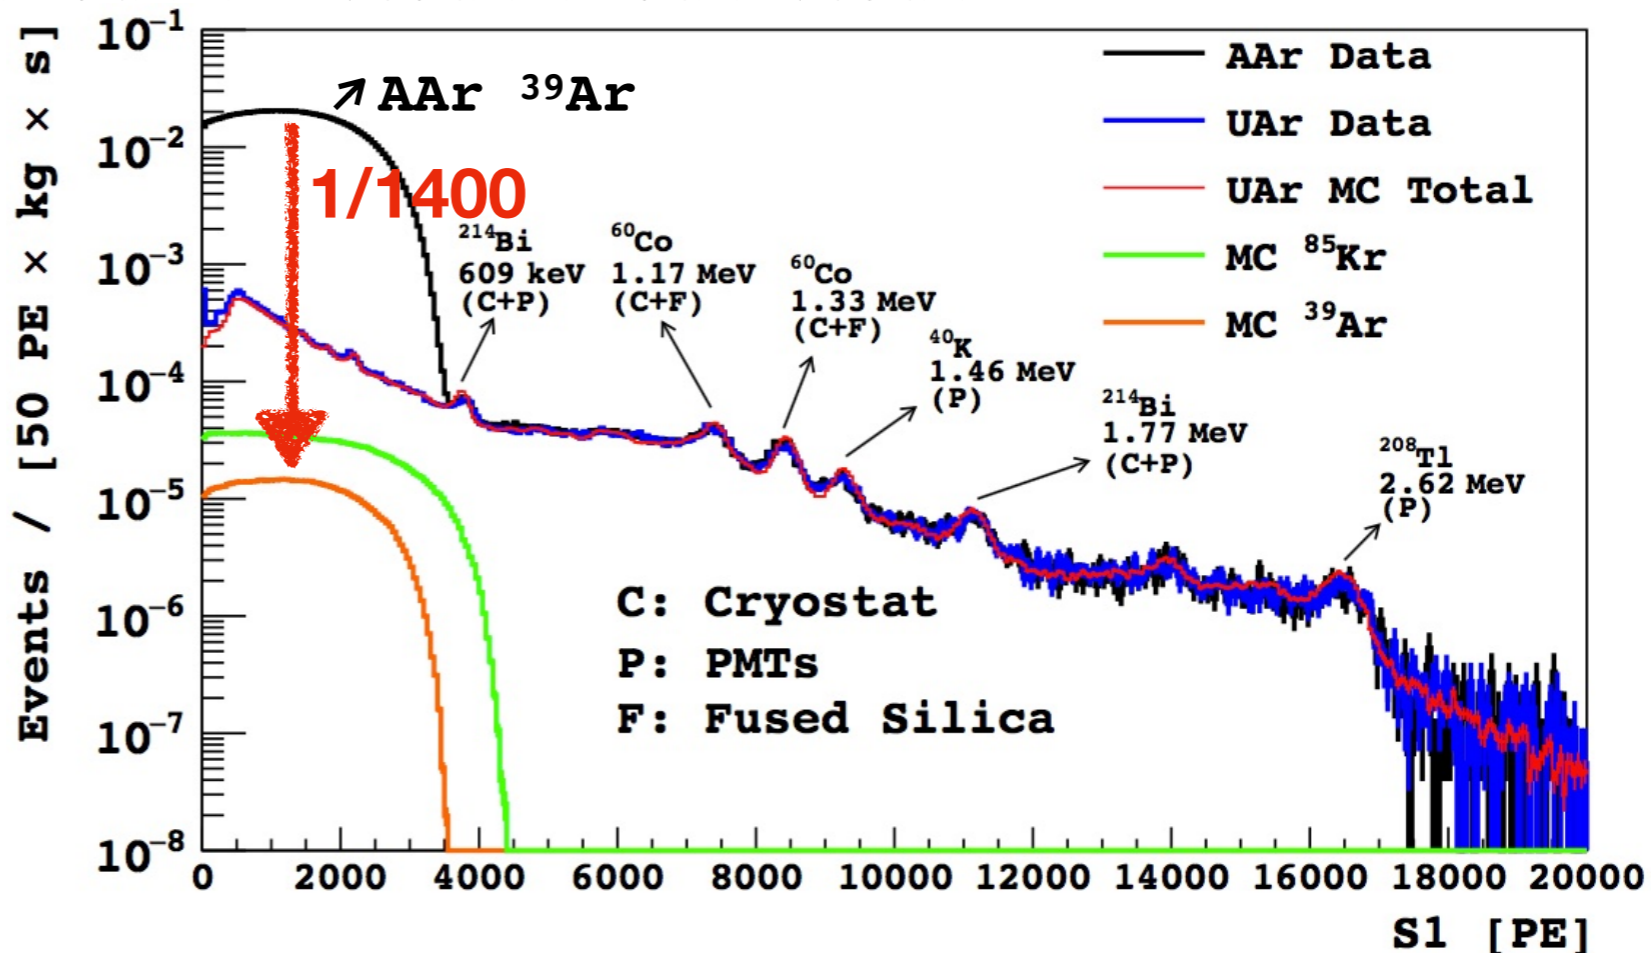

GLOBAL ARGON DARK MATTER COLLABORATION

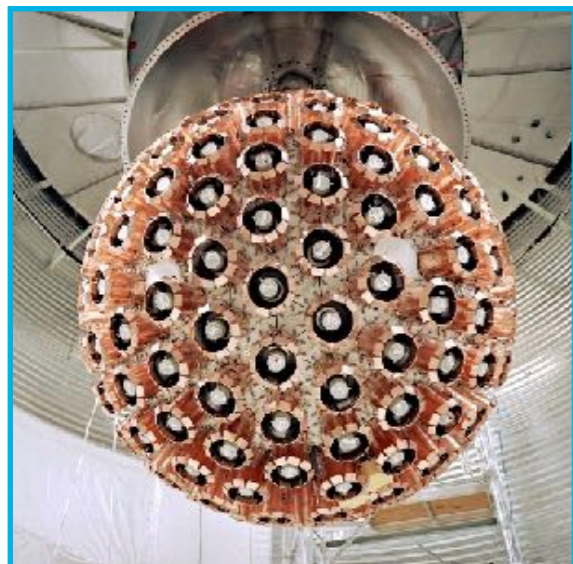


DEAP-3600

More than 400 scientists from past and present argon-based experiments in a single international argon collaboration: **GADMC**


A sequential, two-steps program:

- ▶ DarkSide-20k (200 tonne yr fiducial)

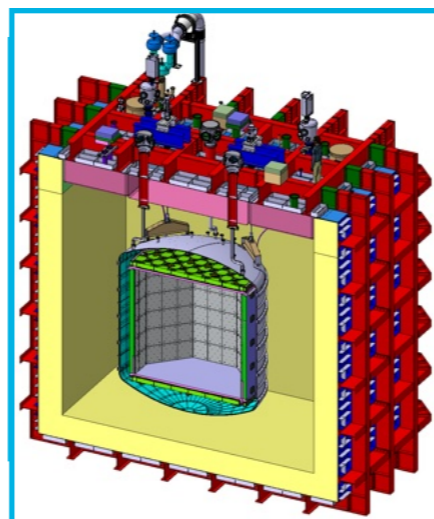


- ▶ Argo (3,000 tonne yr fiducial)


At SNOLAB
~203X

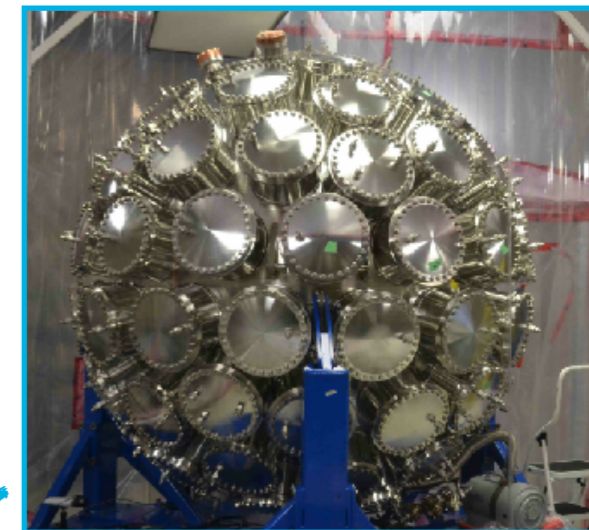

MiniCLEAN

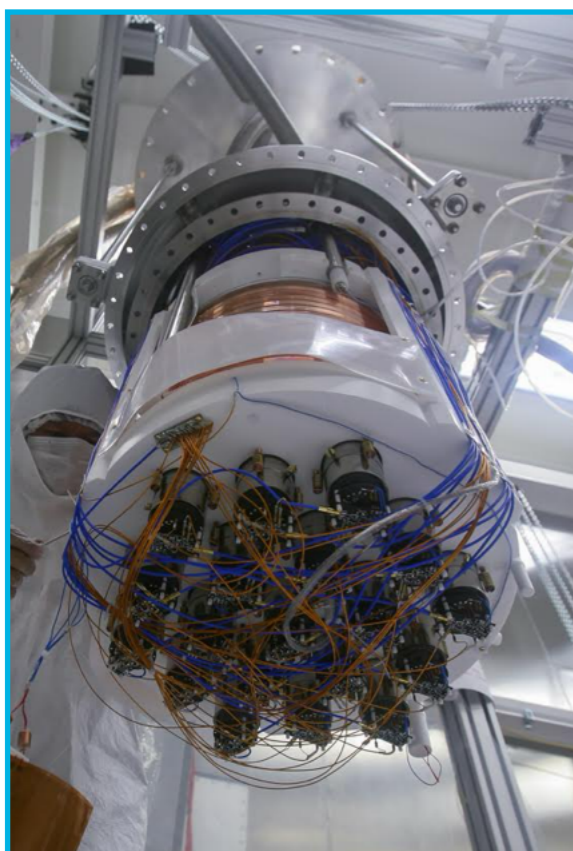

DarkSide-50

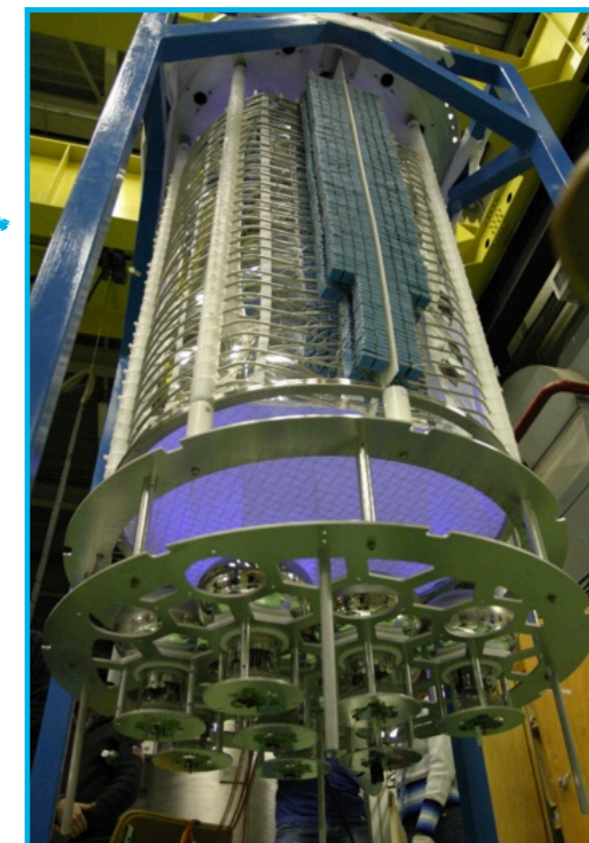


ArDM

The goal: explore heavy dark matter to the neutrino floor and beyond with extremely low instrumental background



Gran Sasso


3800 m w. e.




Deep underground location at LNGS, Italy.




DARKSIDE-20K DETECTOR

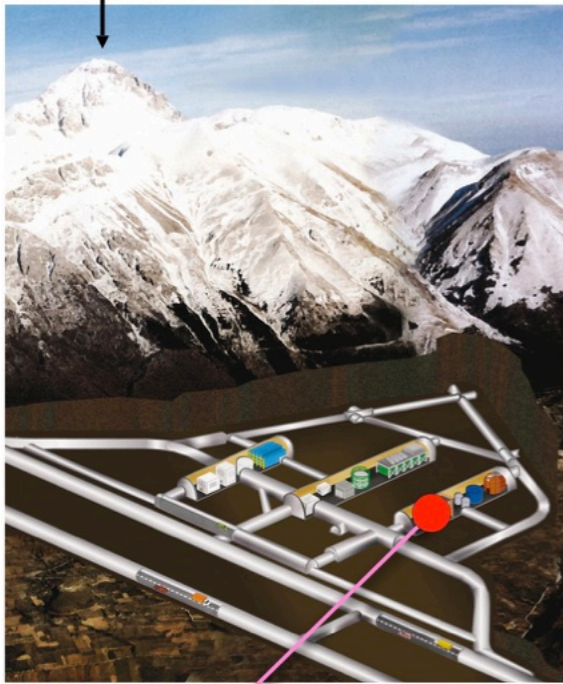Corno Grande
(2912 m)


LNGS Hall C

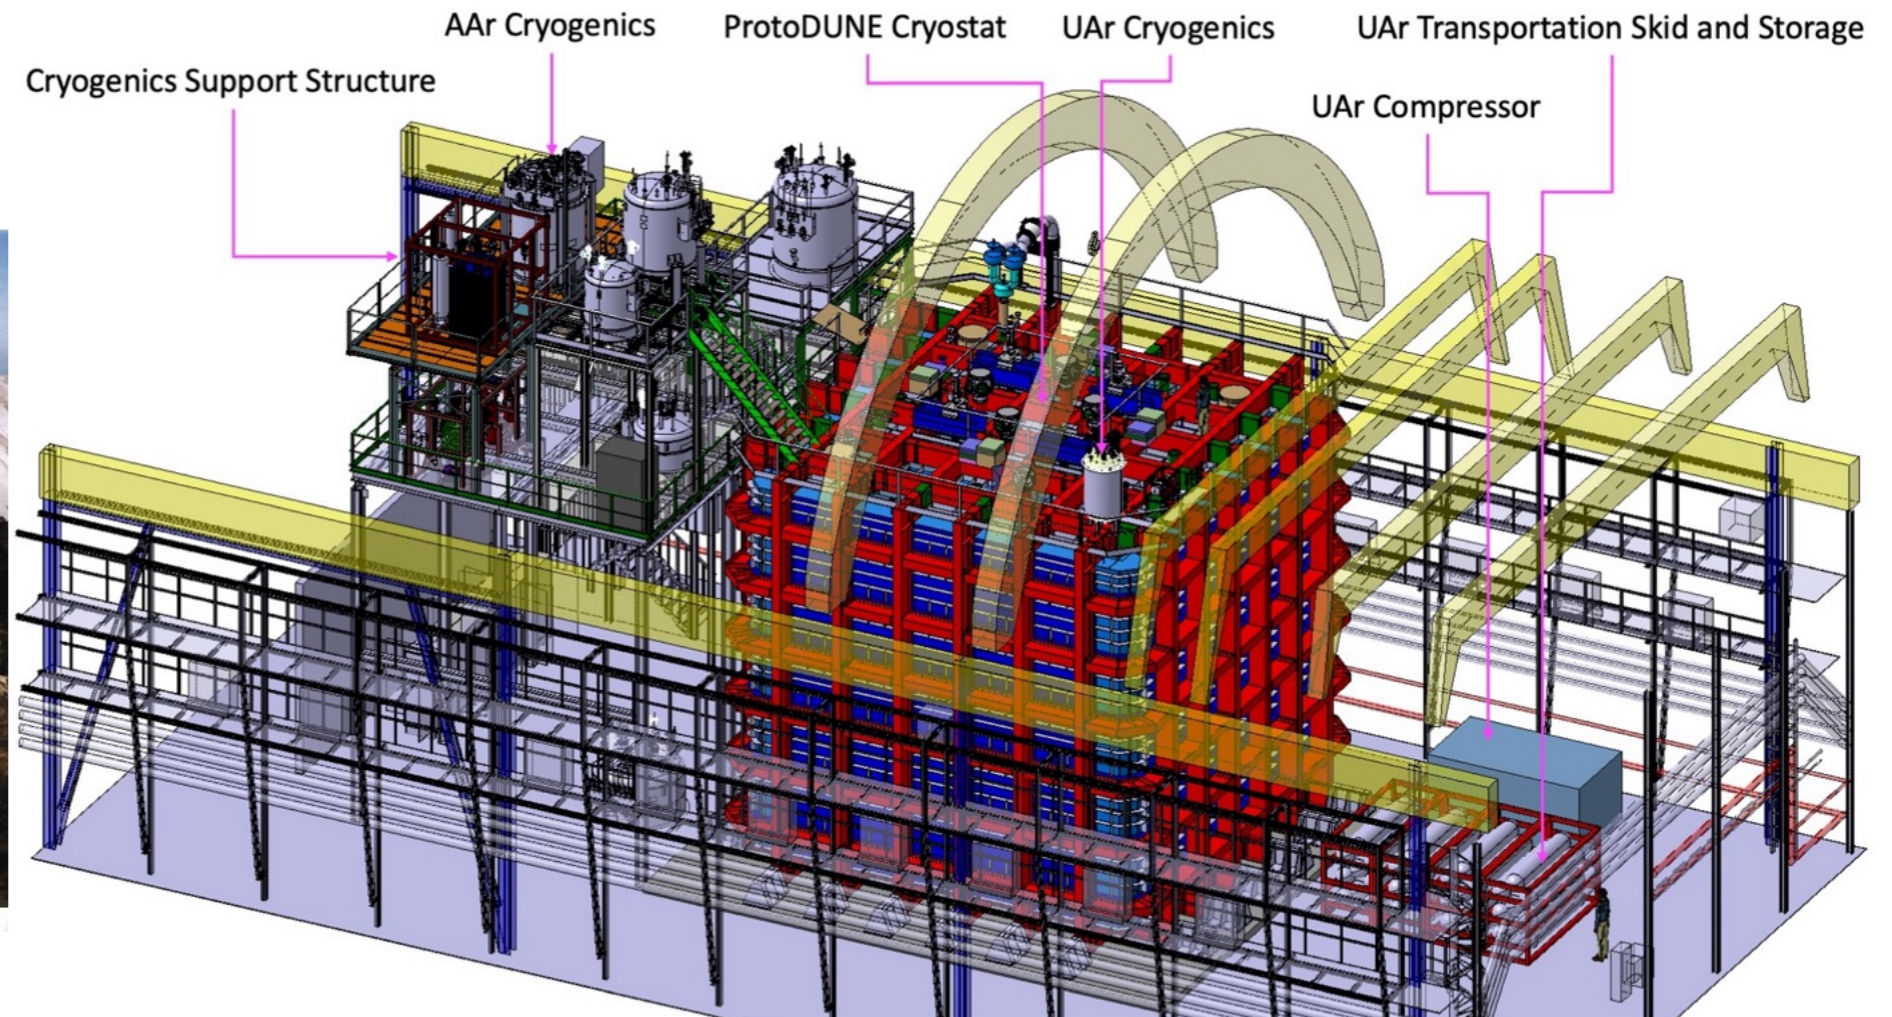


- ▶ DarkSide-20k will be installed underground at the Gran Sasso National laboratories, in Italy.
- ▶ The detector has a nested structure:
 - ▶ Titanium Vessel contain liquid underground argon (100 t)
 - ▶ Gadolinium loaded acrylic TPC filled with 50 t of UAr
 - ▶ Neutron veto buffer between TPC and Ti vessel
 - ▶ Membrane cryostat like the ProtoDune one

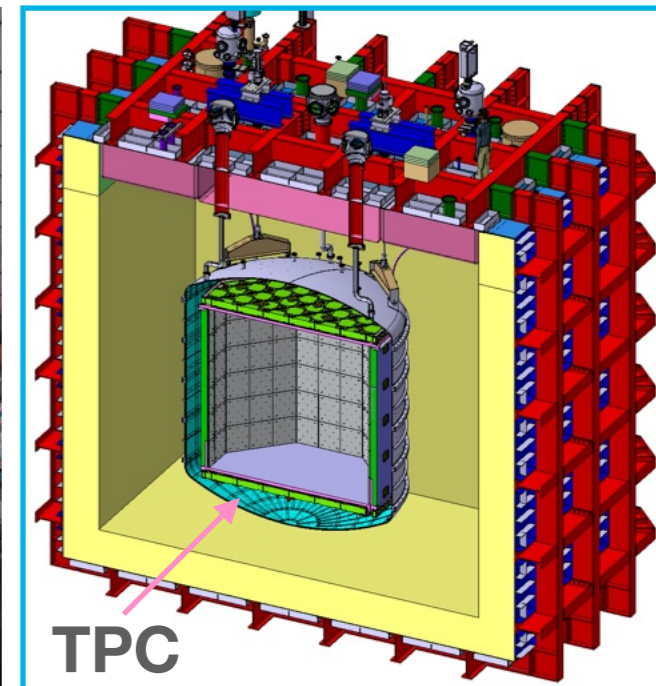

TIME PROJECTION CHAMBER

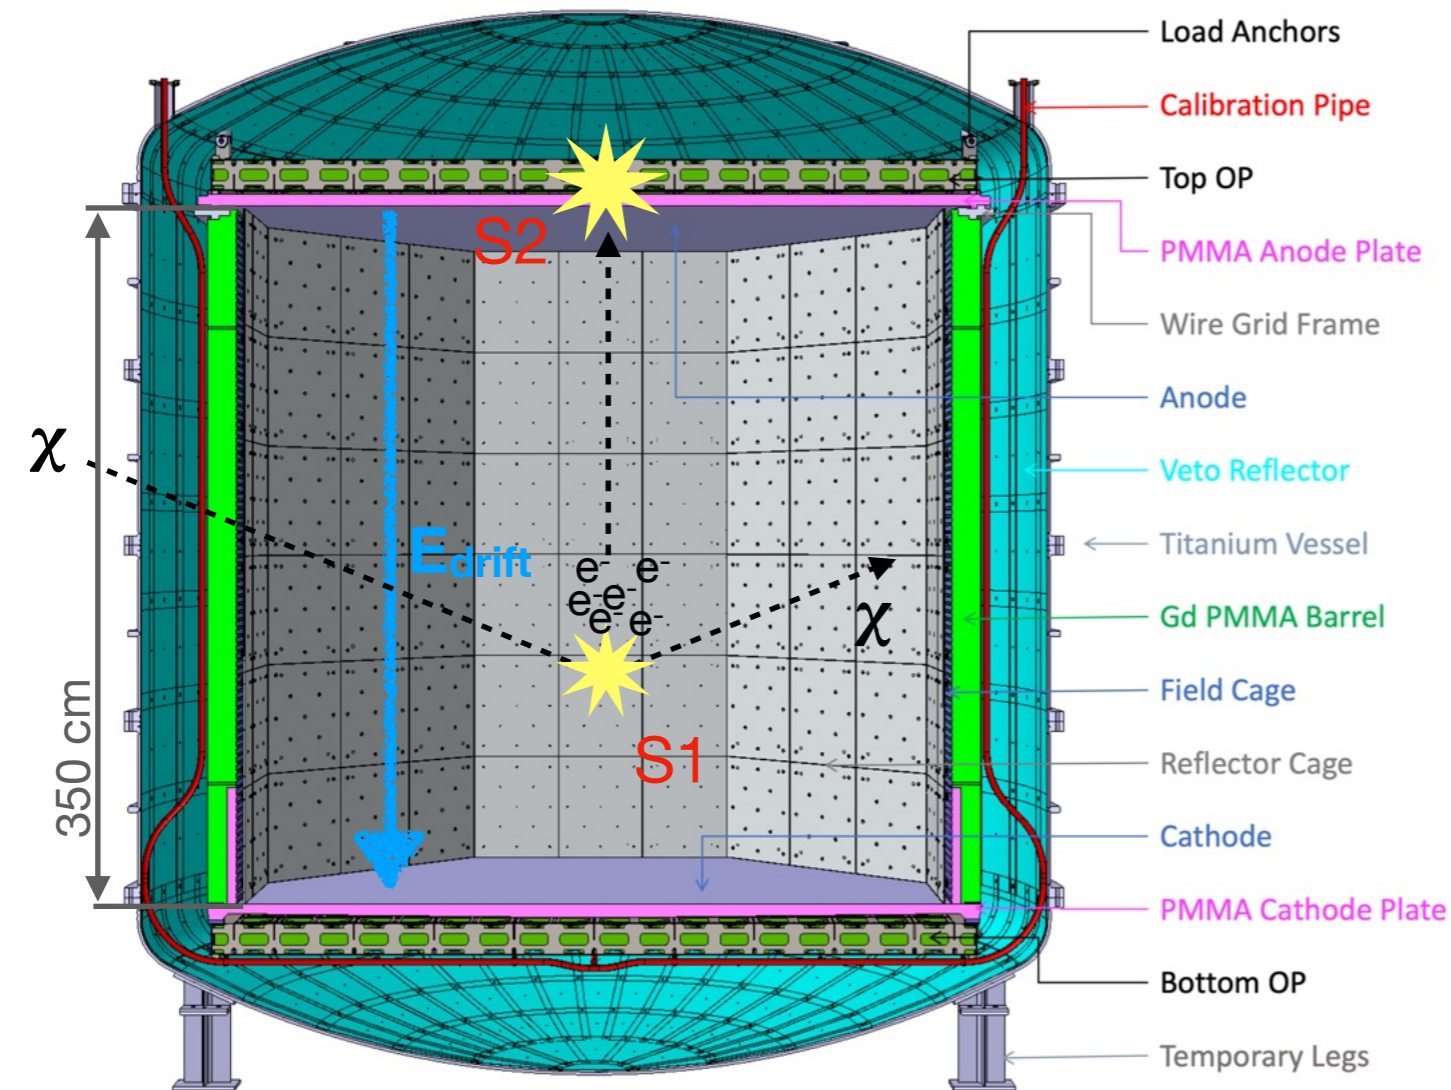

- ▶ Gd-doped acrylic, PMMA (polymethylmethacrylate), vessel to capture neutrons
- ▶ Octagonal shape
- ▶ Cathode and anode coated with new transparent conductor (Clevios) and wavelength shifter
- ▶ Grooves with Clevios for field cage (No copper rings)

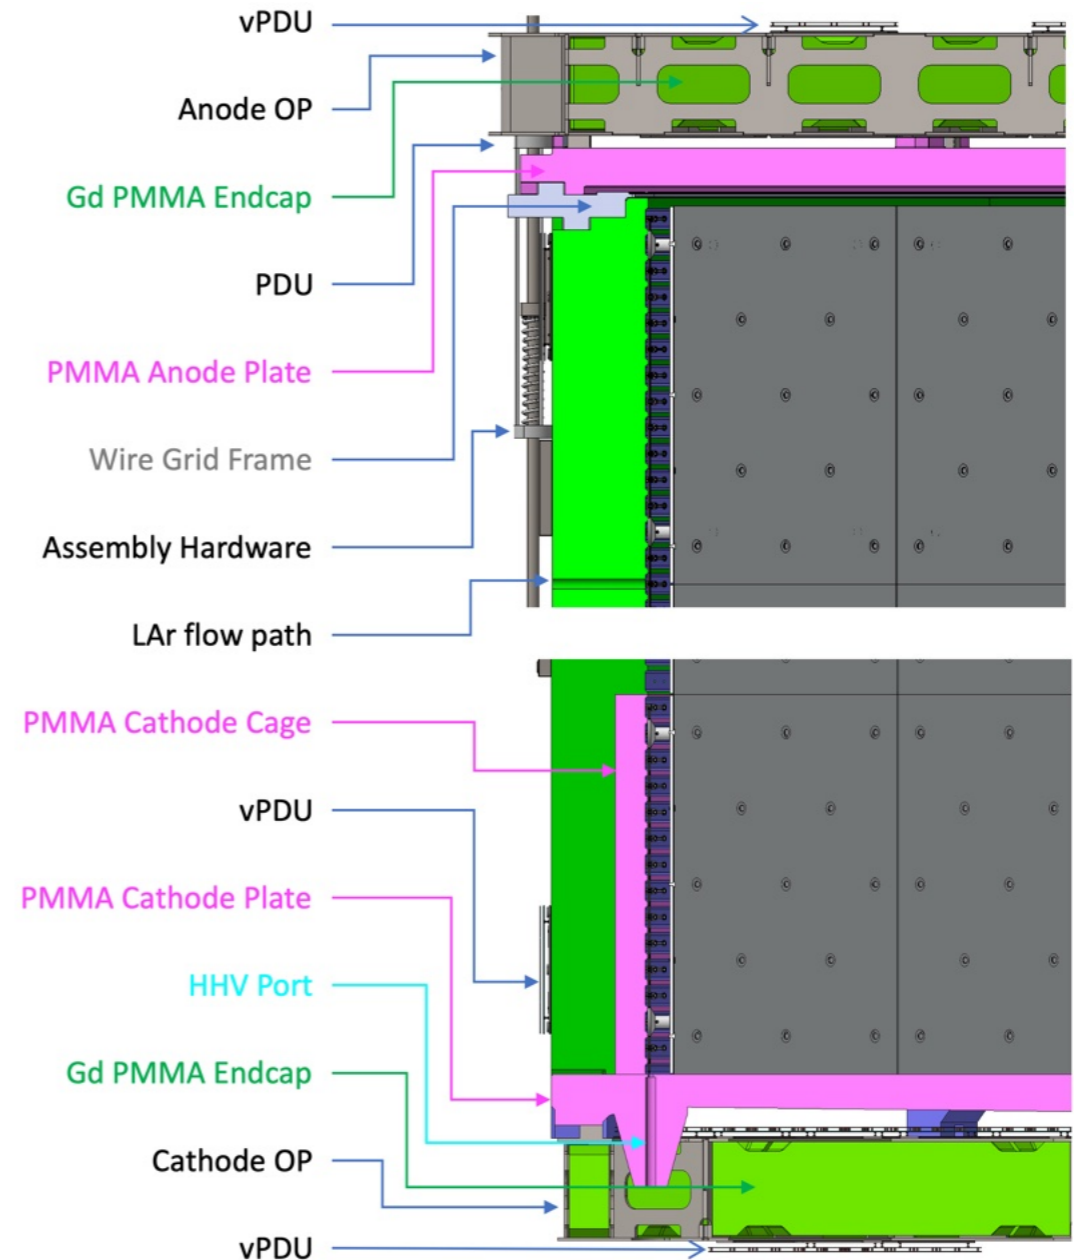

- ▶ Wire grid for extraction and electro luminescence fields
- ▶ Sides covered with multilayer polymeric reflector evaporated with wavelength shifter (TPB)
- ▶ SiPMs planes external to anode and cathode

UNDERGROUND ARGON

▶ **Urania** (Extraction):

- ▶ Expansion of the argon extraction plant in Cortez, CO, to reach capacity of **330 kg/day** of Underground Argon




▶ **Aria** (Isotope separation):

- ▶ Very tall column in the Seruci mine in Sardinia, Italy, for high-volume chemical and isotopic purification of Underground Argon. **A factor 10 reduction of ^{39}Ar** per pass is expected with ~ 10 kg/day.




▶ **DArT** (assay):

- ▶ A single phase low-background detector to measure the ^{39}Ar depletion factor of different underground argon batches.

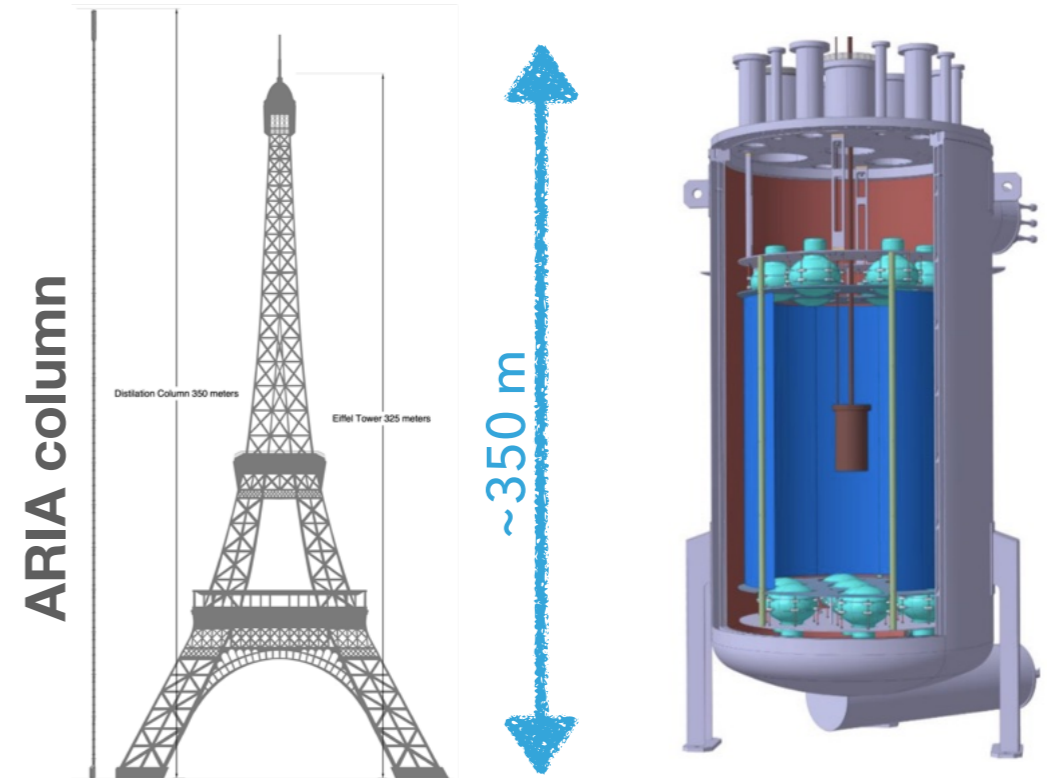

DArT in ArDM

EXTRACTION

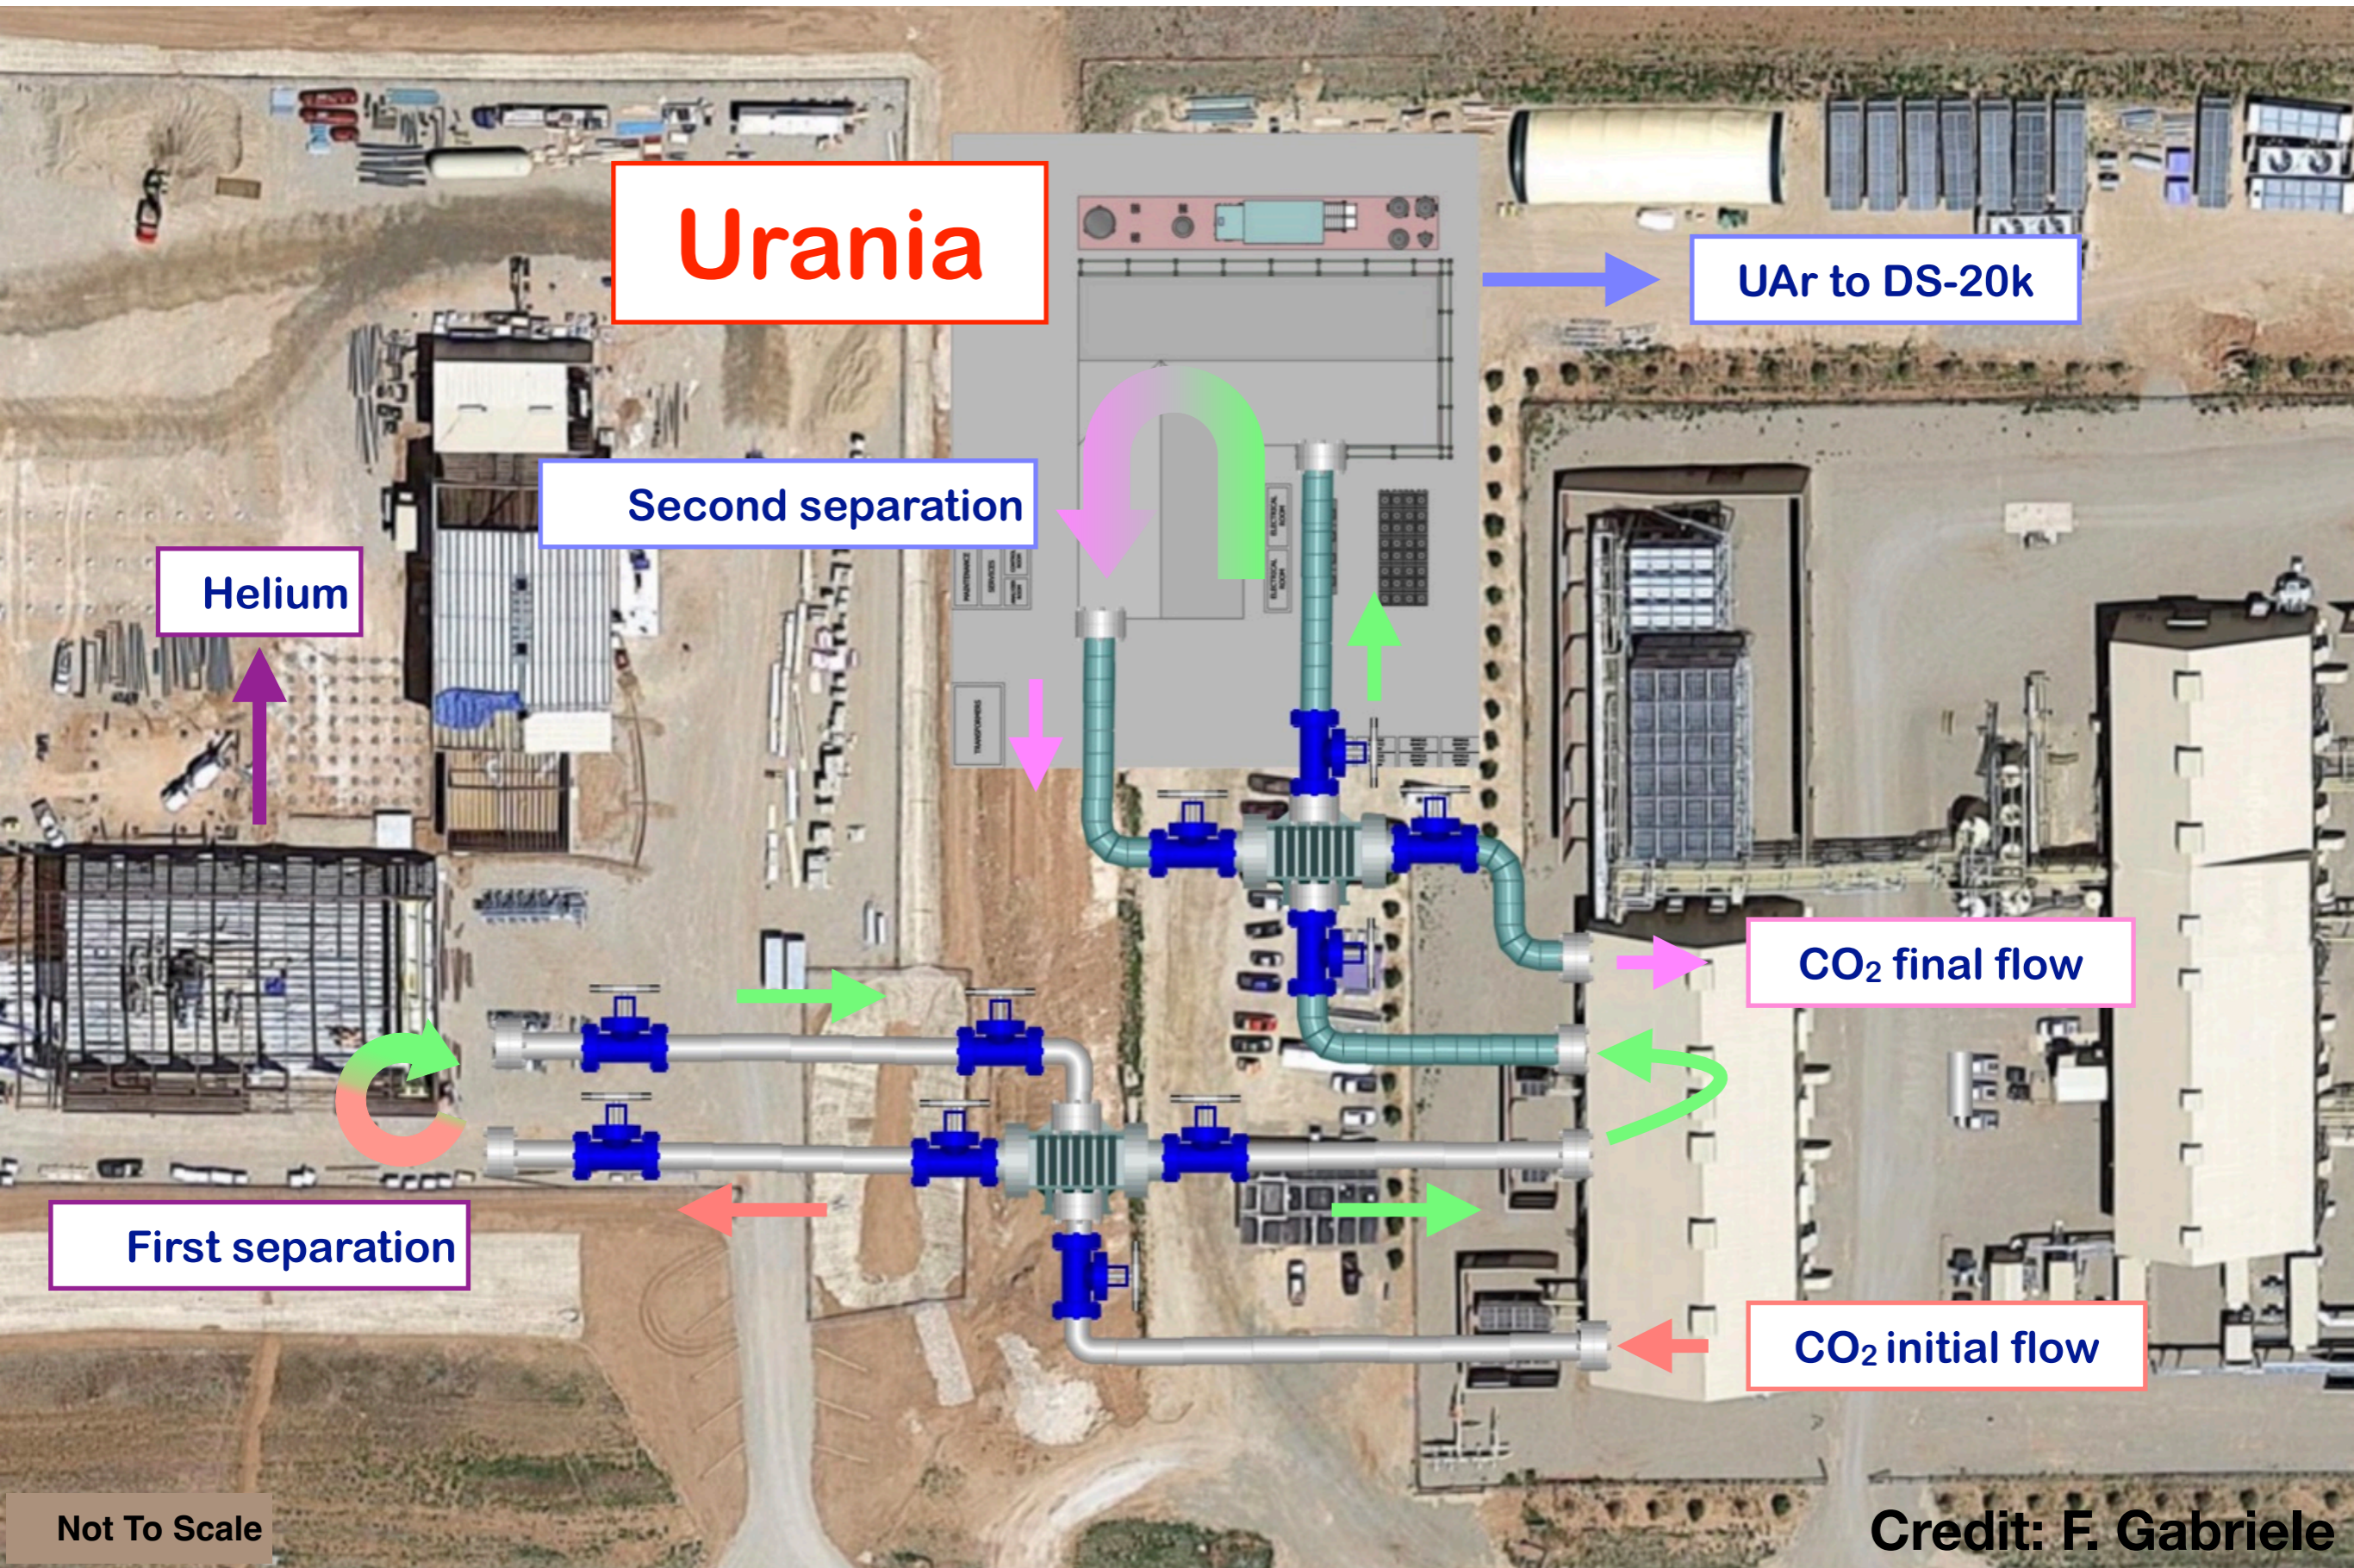

Urania

UAr to DS-20k

Second separation

Helium

CO₂ final flow

First separation

CO₂ initial flow

URANIA UPDATE



Production of components



Leak test



Shipping & Storage



Urania Site Construction


ARIA UPDATE

- ▶ The demonstrator column (26 m) that consists of three modules was **successfully tested** in 2019 with LN₂ and with argon in 2021.

Eur. Phys. J. C 81, 359 (2021)

Eur. Phys. J. C 83, 453 (2023)

- ▶ **The results are in agreement with the expectations** and validate the concept and design of the plant.
- ▶ Successful **test installation** of the first module (of 28 central ones) in the shaft at Seruci mine.
- ▶ Refurbishing of shaft and support structure is on going.

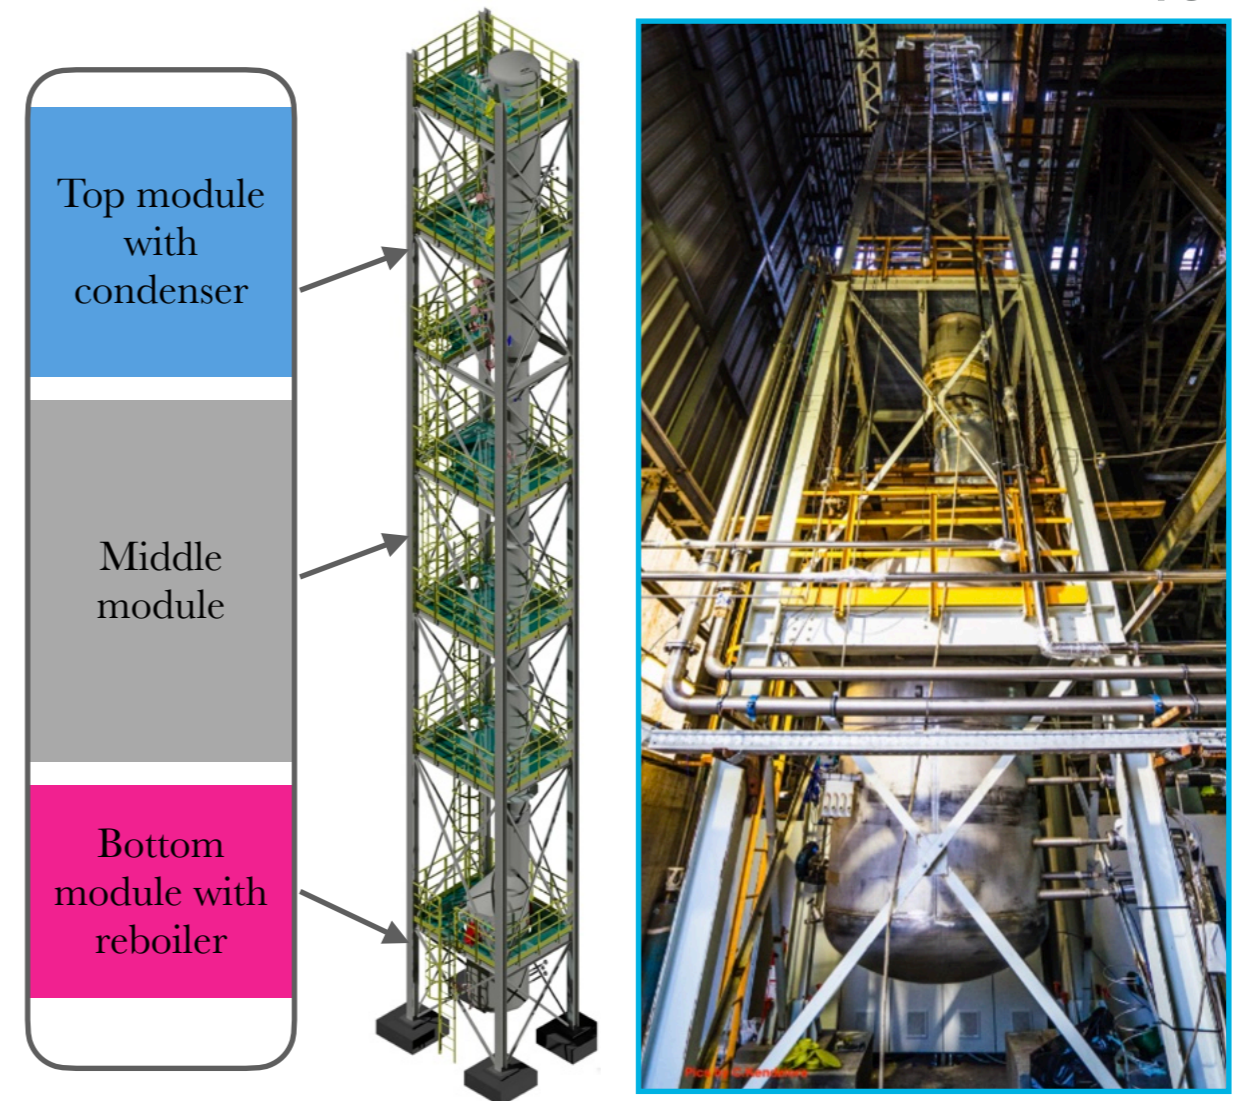

Prototype ARIA column ~26 m





Test installation of the module

ARGON RADIO-PURITY MEASUREMENT

- ▶ **DArT**: a single phase low-background detector to measure the ^{39}Ar depletion factor of different underground argon batches (URANIA+ARIA).
- ▶ Cylinder made of 99.99% OFHC Cu, 1.42 kg of LAr. PMMA support structure with TPB coating. Two 1 cm^2 SiPMs.
- ▶ To be installed inside the ArDM apparatus (Canfranc Laboratory, Spain) filled with LAr (850 kg AAr) used as active veto.
- ▶ Sensitivity to the depletion factor of 1000 with 10% precision in one week run.



DArT was installed at LSC in April 2021 and the following installation in ArDM was in 2023.

More details of DArT: [JINST 15 P02024 \(2020\)](#)

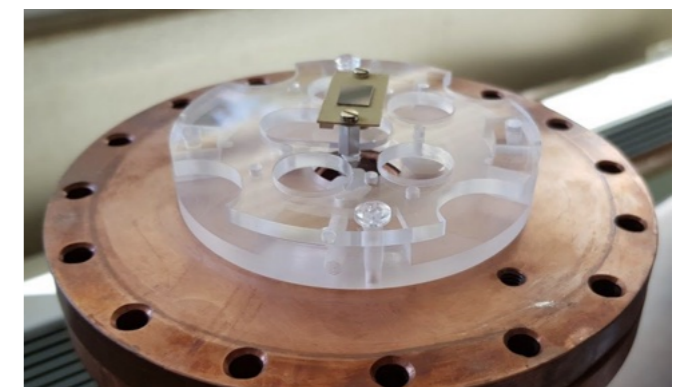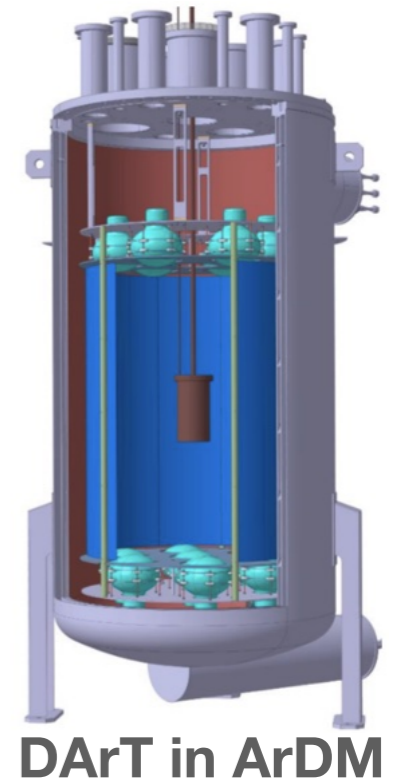

DArT SiPM

Infrastructures for cleaning and assembly procedures

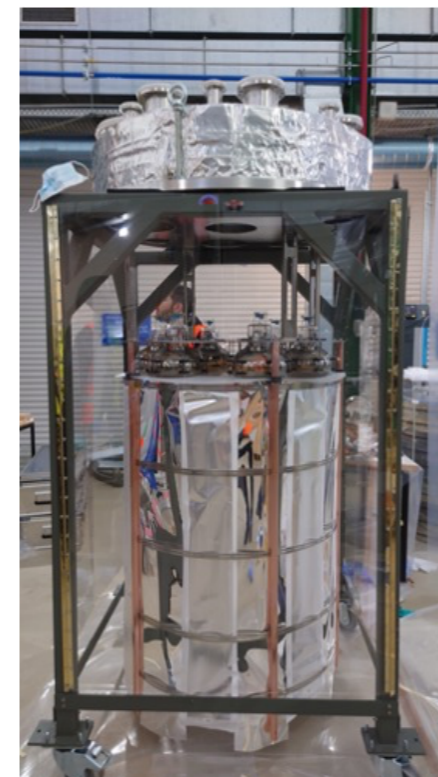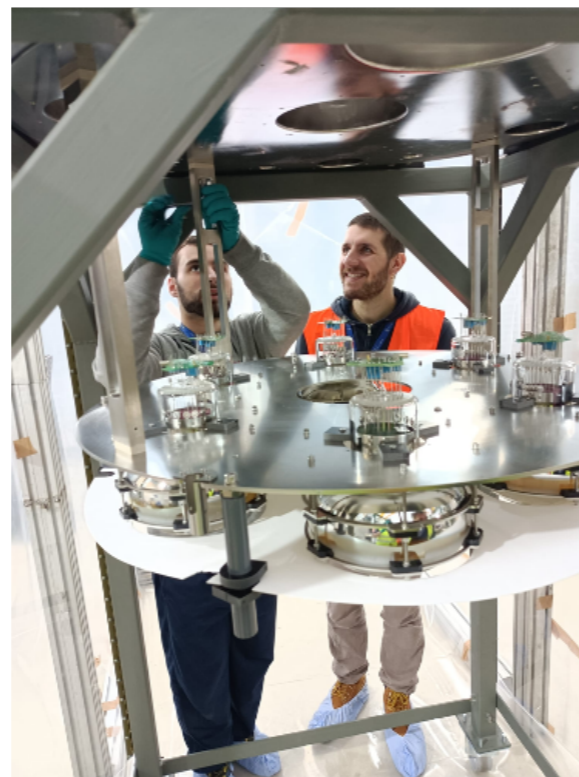

Old ArDM extracted....



Credits: L. Luzzi

Measurement of UAr from DarkSide-50 is up coming...

CRYOGENIC SYSTEM FOR TPC

- ▶ Integrated test of the UAr cryogenics is ongoing at CERN.
- ▶ Up to 10 kW (latent heat + heat exchanging) adjustable condenser box.
- ▶ 1000 SLM circulation speed with two homemade pumps in parallel.
- ▶ The first test was taken in July 2021.
- ▶ More tests are planned later this year.


DarkSide unique condenser design



Fully instrumented condenser system



In-house fabrication of the gas handling system

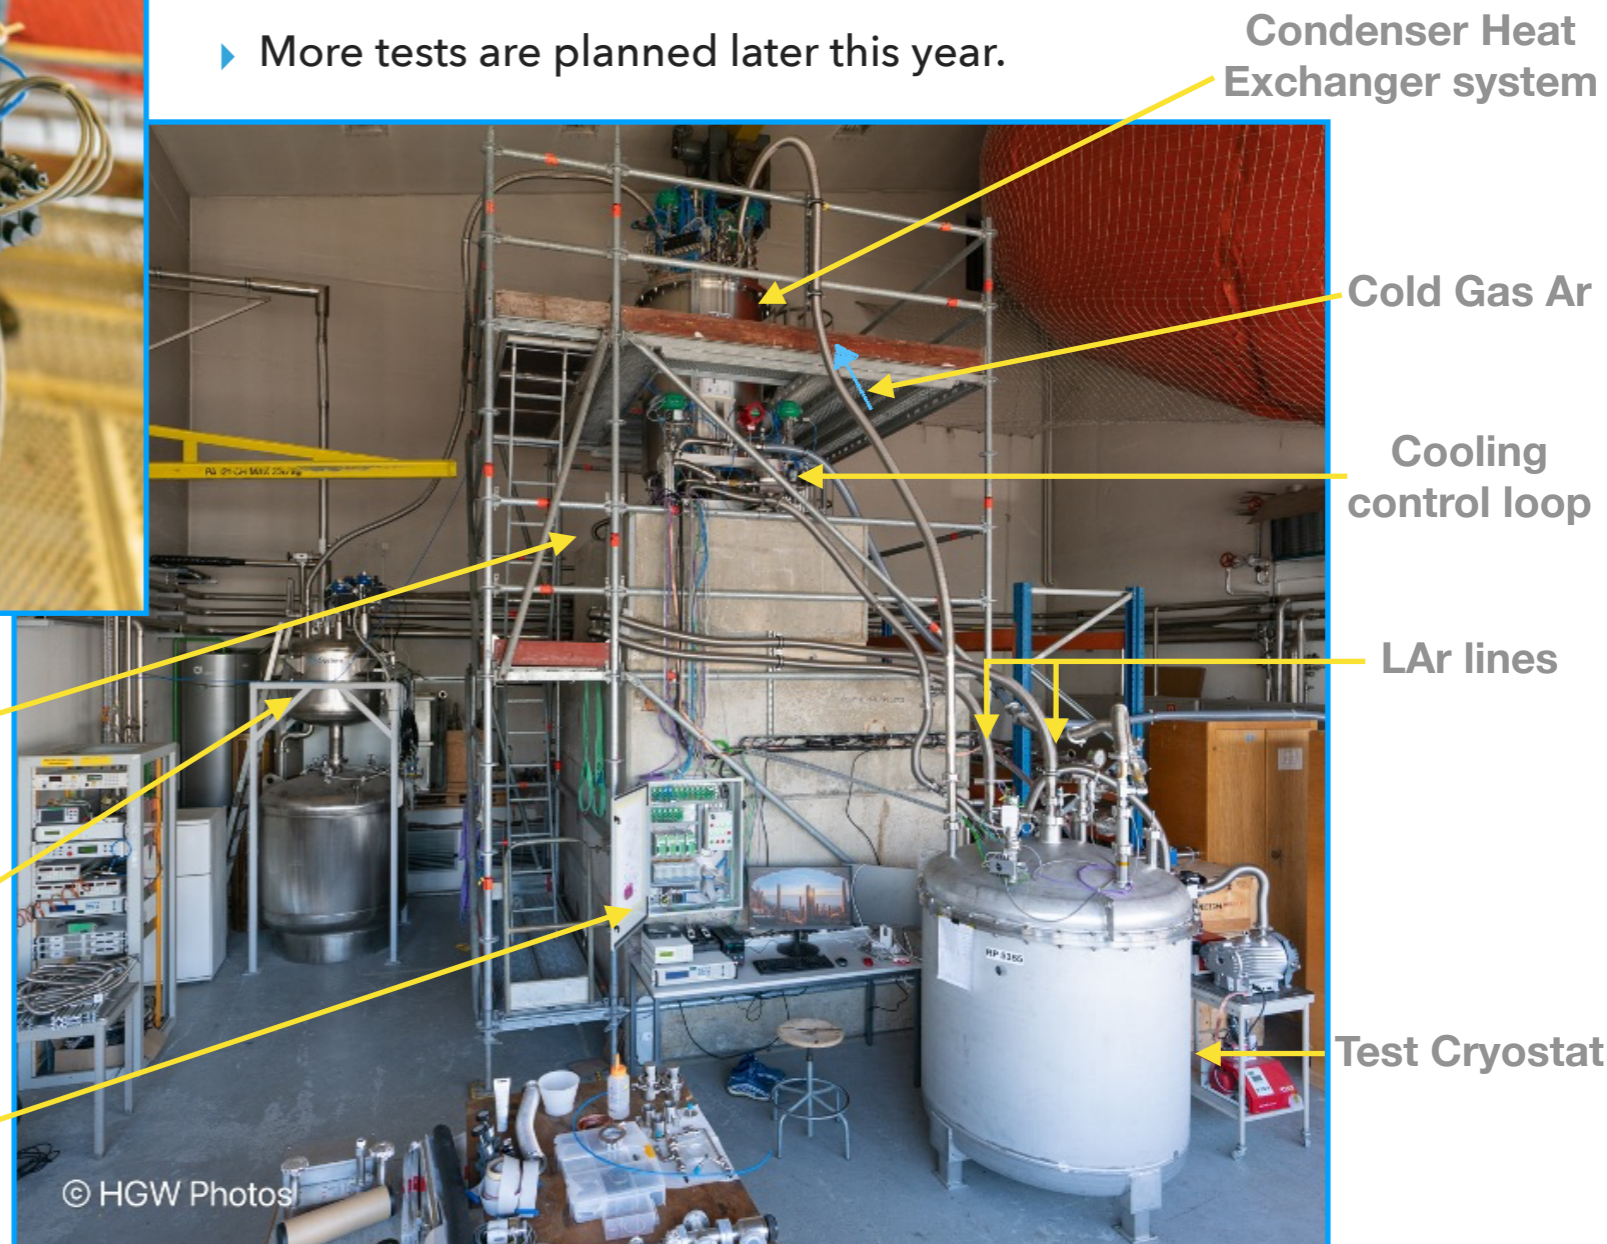

Condenser Heat Exchanger system

Cold Gas Ar

Cooling control loop

LAr lines

Test Cryostat

Circulation Pump

Nitrogen Supply & Phase Separator

Valve Control Panel & Monitor

TPC Cryogenic system (test installation) at CERN

MOCKUP @LNGS

- ▶ Mockup to check TPC mechanical assembly and characterization of the cryogenic system.
- ▶ Currently, cryogenic system characterization, such as maximum flow rate, stability, and emergency behavior, is on going.
- ▶ Mockup TPC will be installed in Summer 2024!

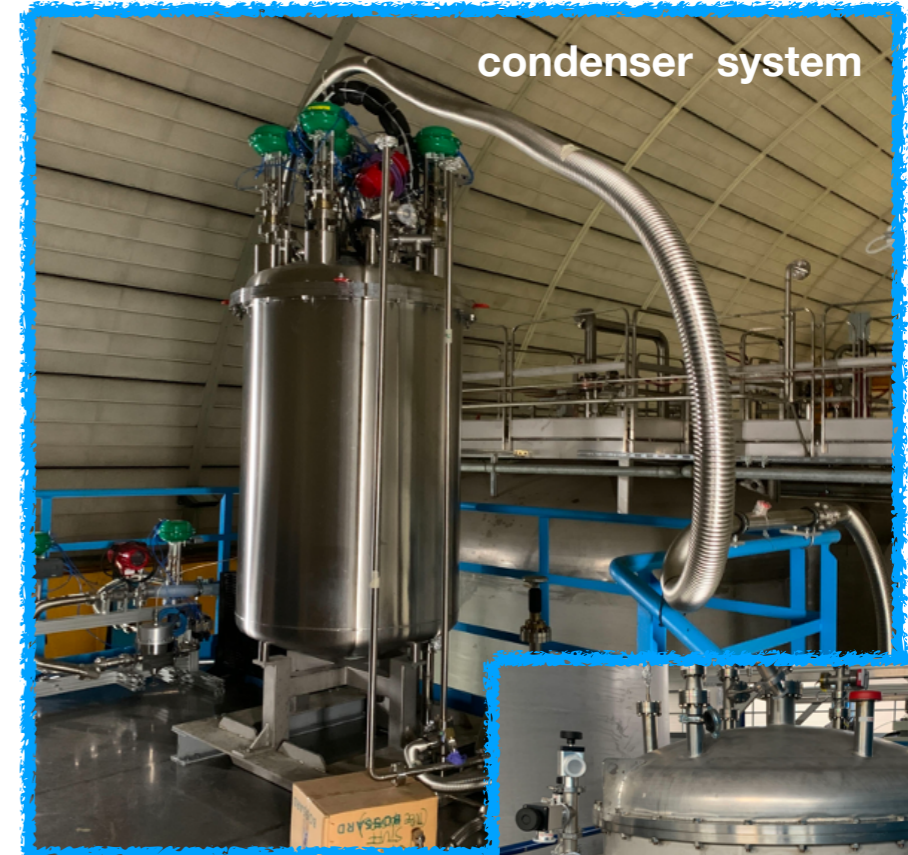


PHOTO SENSOR

- ▶ Custom cryogenic SiPMs developed in collaboration with Fondazione Bruno Kessler (FBK), in Italy.
- ▶ Key features
 - ▶ Photon detection efficiency (PDE) ~45%
 - ▶ Low dark-count rate < 0.01 Hz/mm² at 77K (7 Volts overVoltage)
 - ▶ Timing resolution ~ 10 ns
- ▶ The 21m² for the TPC (2112 channels) + 512 channel for Veto detector. Mass production of the raw wafer in LFoundry company and assembly in a dedicated facility at LNGS (NOA).




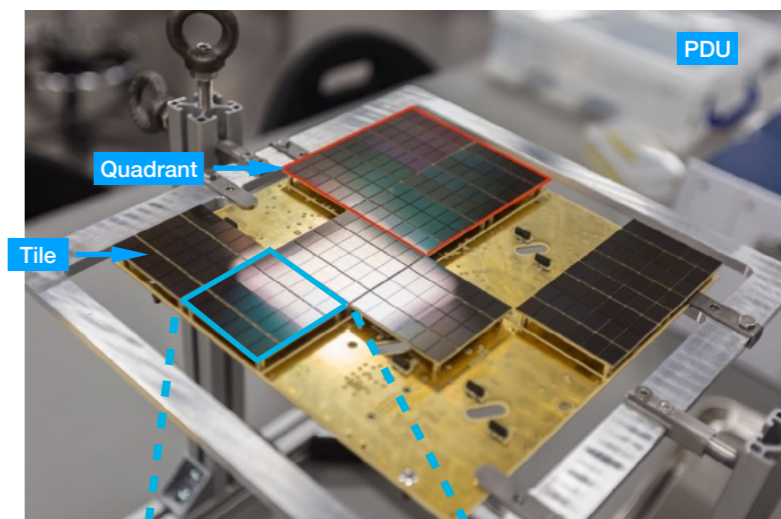


Photo Detector Unit (PDU) = matrix of 16 PDMs
20 x 20 cm²

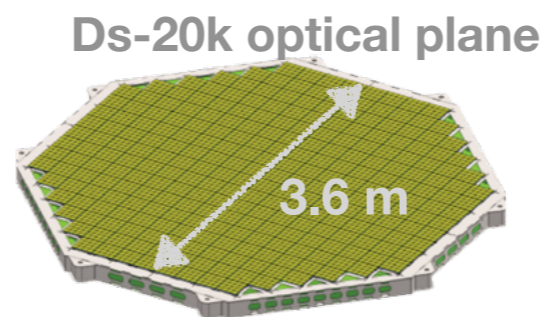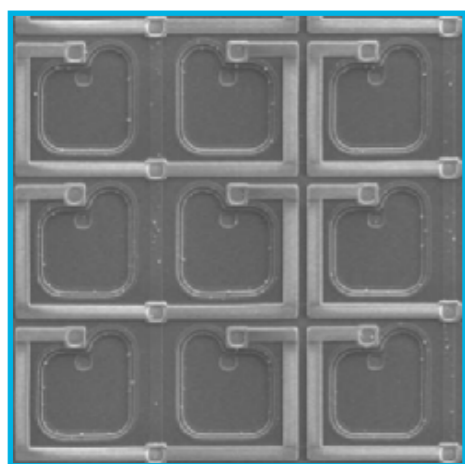

Single SPADs
~25-30 μm²

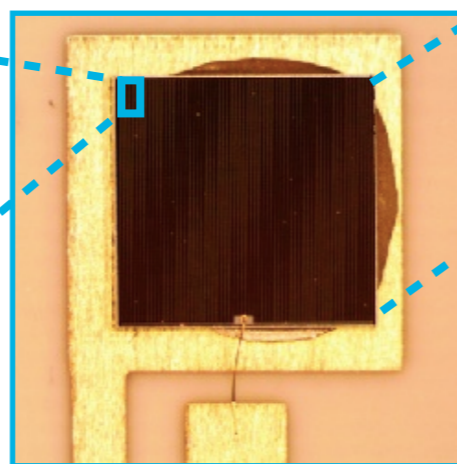

Single SiPM
~1 cm²


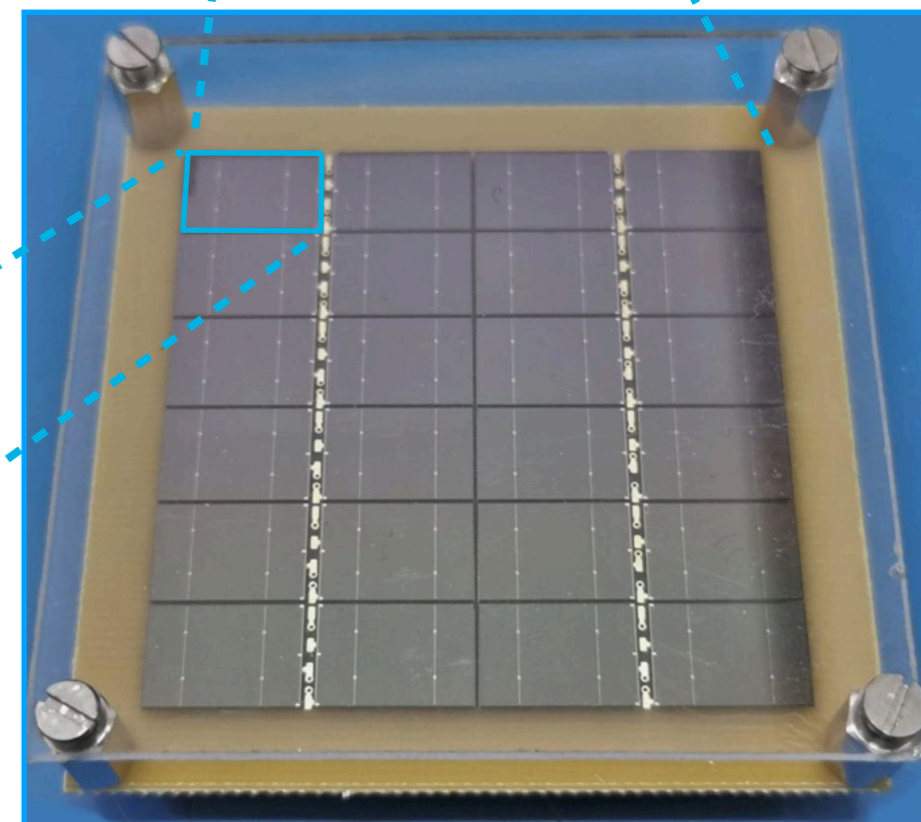


Photo Detector Module (PDM)
= matrix of 24 SiPMs, 5 x 5 cm²
4 PDUs are summed and read as a single channel
(largest single SiPM unit ever!)


NUOVA OFFICINA ASSERGI (NOA)

- ▶ INFN Facility managed by LNGS - clean room class ISO 6
- ▶ Two main rooms:
 - ▶ CR3: 3.0 m x 350 m² -> photodetector production area, equipped with highly sophisticated packaging machines for the assembly of photosensors in a dust-controlled environment
 - ▶ CR2: 5.8 m x 68 m² -> large volume detector assembly
- ▶ To be equipped with dedicated Rn-abatement system (currently, Rn level in CR3: 6-10 Bq/m³)
- ▶ Operative since Nov. 2022, completed in 2023
- ▶ Currently populated with machines needed by DarkSide for SiPM packaging, test and integration
- ▶ 2023, so far: start-up of activities, characterization of silicon wafers procured for the in-house production of the PhotoDetector Units (PDU).

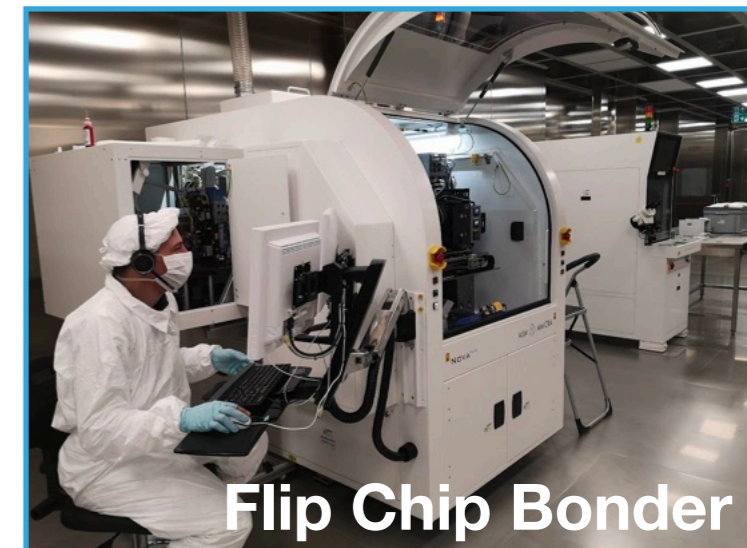

PDU TEST FACILITY IN NAPOLI

- ▶ ~800 L double wall **cryostat** with domed flange
- ▶ ~100 ps pulsed **laser for calibration**
- ▶ > 300 readout channels with 5 CAEN VX2740 ADC Boards
- ▶ Custom support structure with room for 16 PDUs inside the cryostat
- ▶ Custom illumination system with PMMA rods as diffusers
- ▶ High end local servers for DAQ and Acquisition with O(1 PB) storage
- ▶ Fully automated cold box, remotely controllable with fast FILL and DRAIN
- ▶ Two external 3000L each reservoirs
- ▶ Ready to test PDUs!

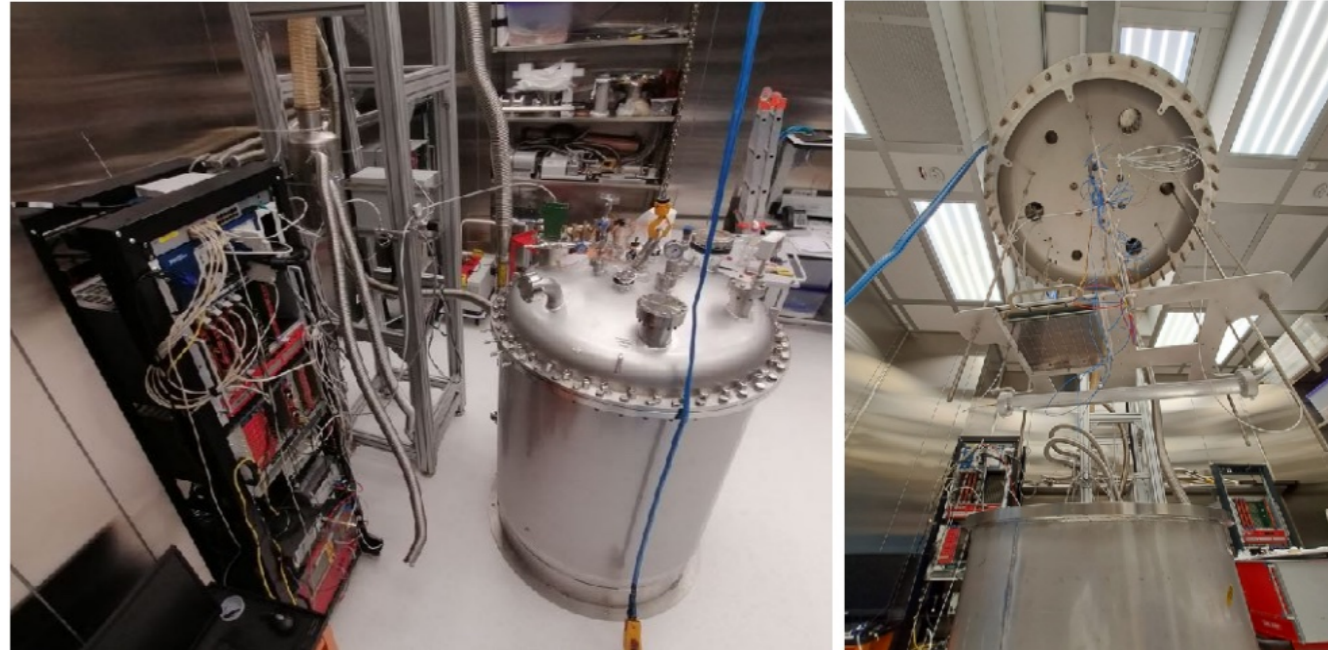

VETO DETECTOR



Neutrons elastically scattering from argon nuclei are indistinguishable from WIMPs signals. PSD is useless against neutron events.

Veto Structure

- ▶ 8 vertical panels of acrylic loaded with gadolinium (Gd-PMMA), form lateral walls of the TPC. Acrylic thickness: 15 cm.
- ▶ The UAr volume between the Ti vessel and Gd-PMMA serves as a veto volume with ~40 cm thickness.
- ▶ Reflector with WLS on all the surfaces




Veto Working Principle

1. Neutrons are moderated in the acrylic shell and then captured by gadolinium.
2. Gd emits multiple γ -rays with energy up to 8 MeV.
3. γ -rays interact in the liquid argon buffers.
4. LAr scintillation light is shifted and detected by ~1920 SiPM-based photosensors.

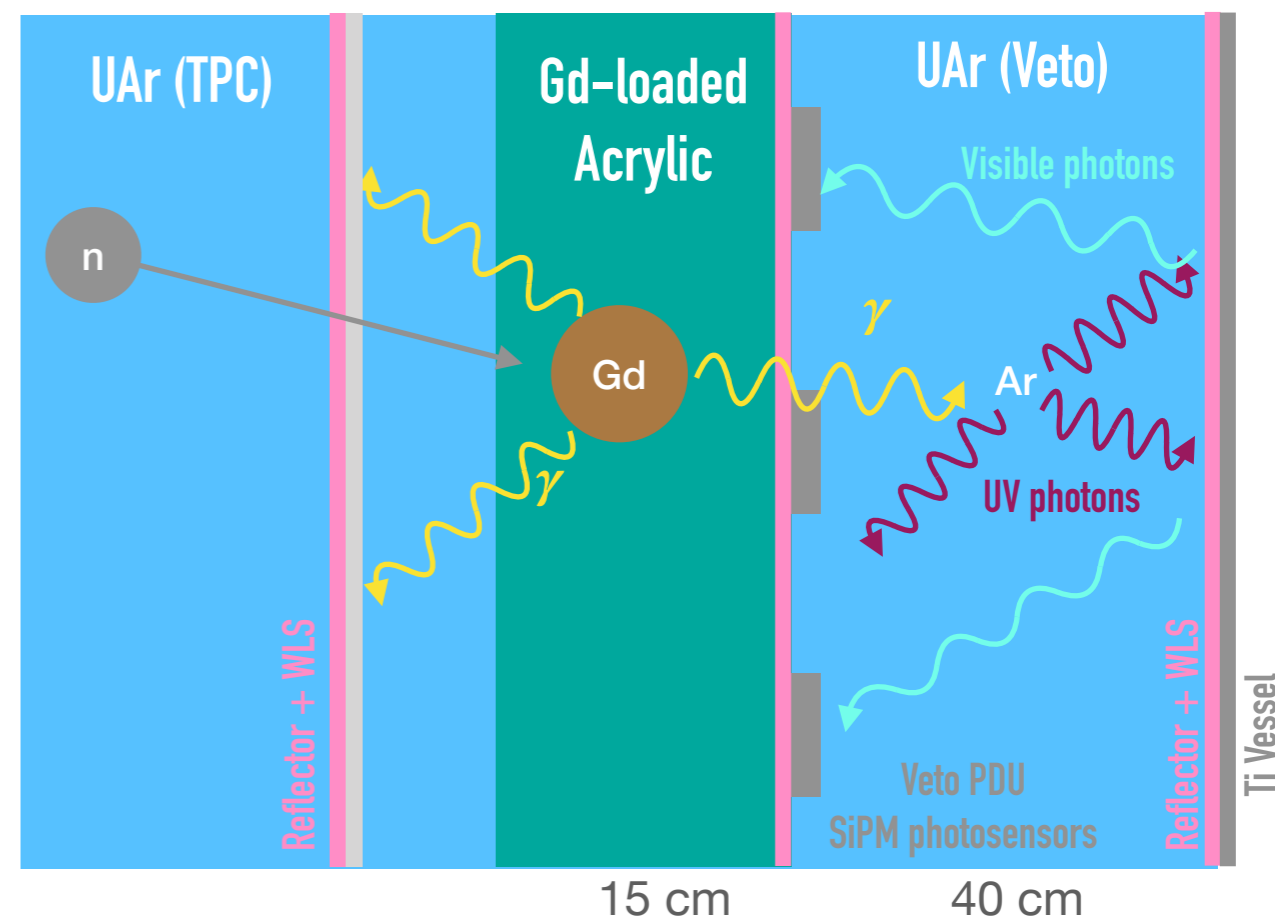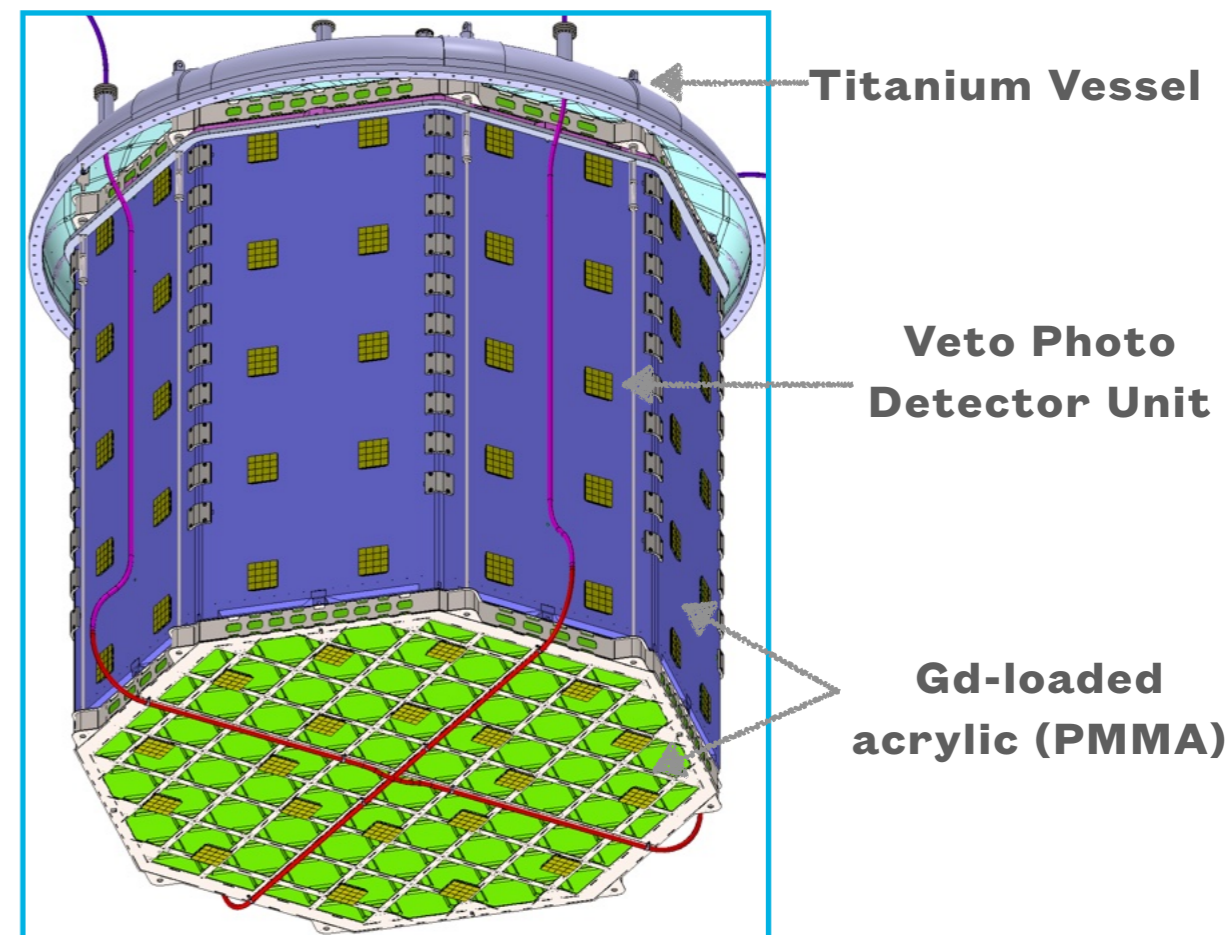


VETO PDU TESTING

- ▶ ASIC amplifier designed by INFN Torino.
- ▶ Production of vPDU is in Birmingham, STFC interconnect, Manchester, and Liverpool
- ▶ Three testing facilities: AstroCeNT, Edinburgh, and Liverpool.
- ▶ All facilities are ready for production and testing.

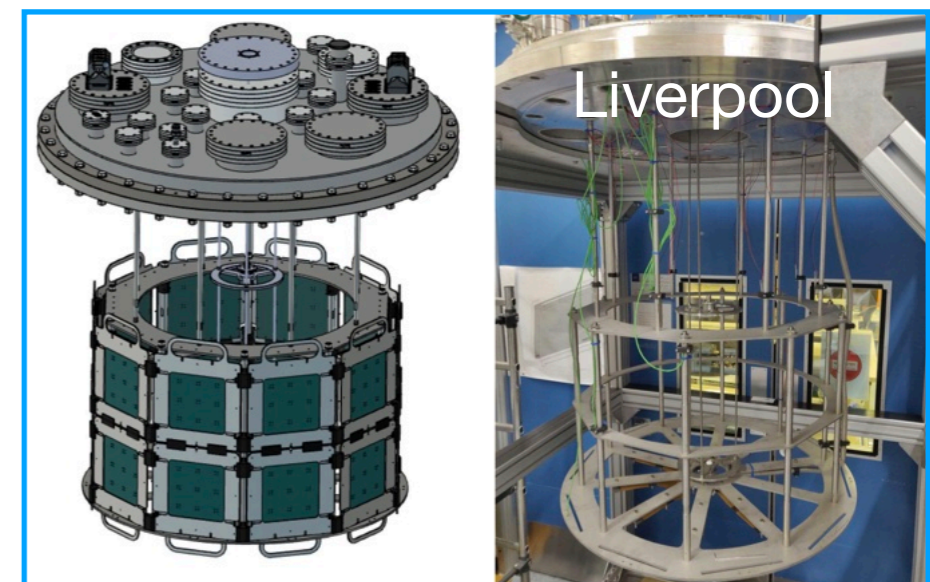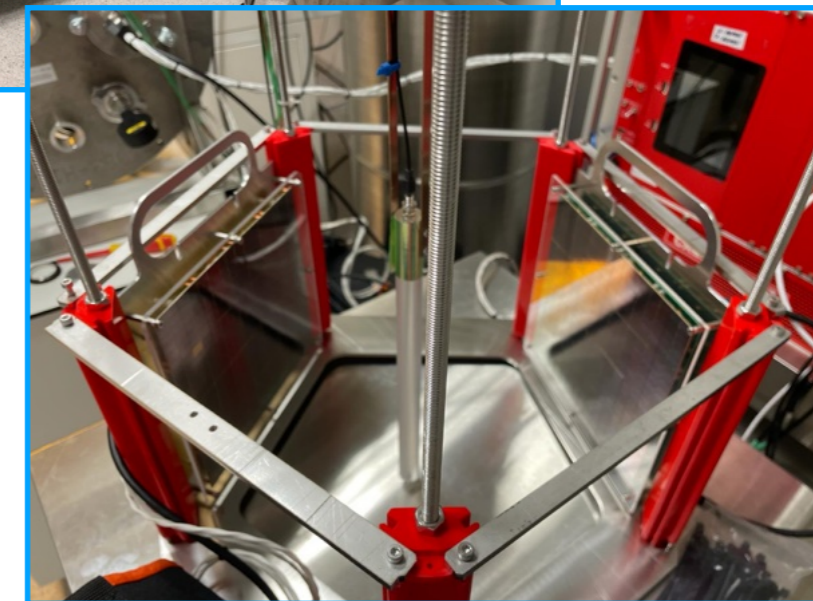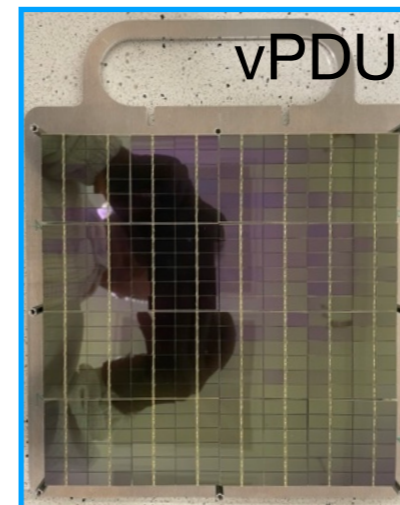

EXPECTED SENSITIVITY

- ▶ The sensitivity of DS-20k to spin independent WIMPs for different lengths of runs, with the full exposure and with the fiducial cuts applied, compared to LZ and XENONnT.

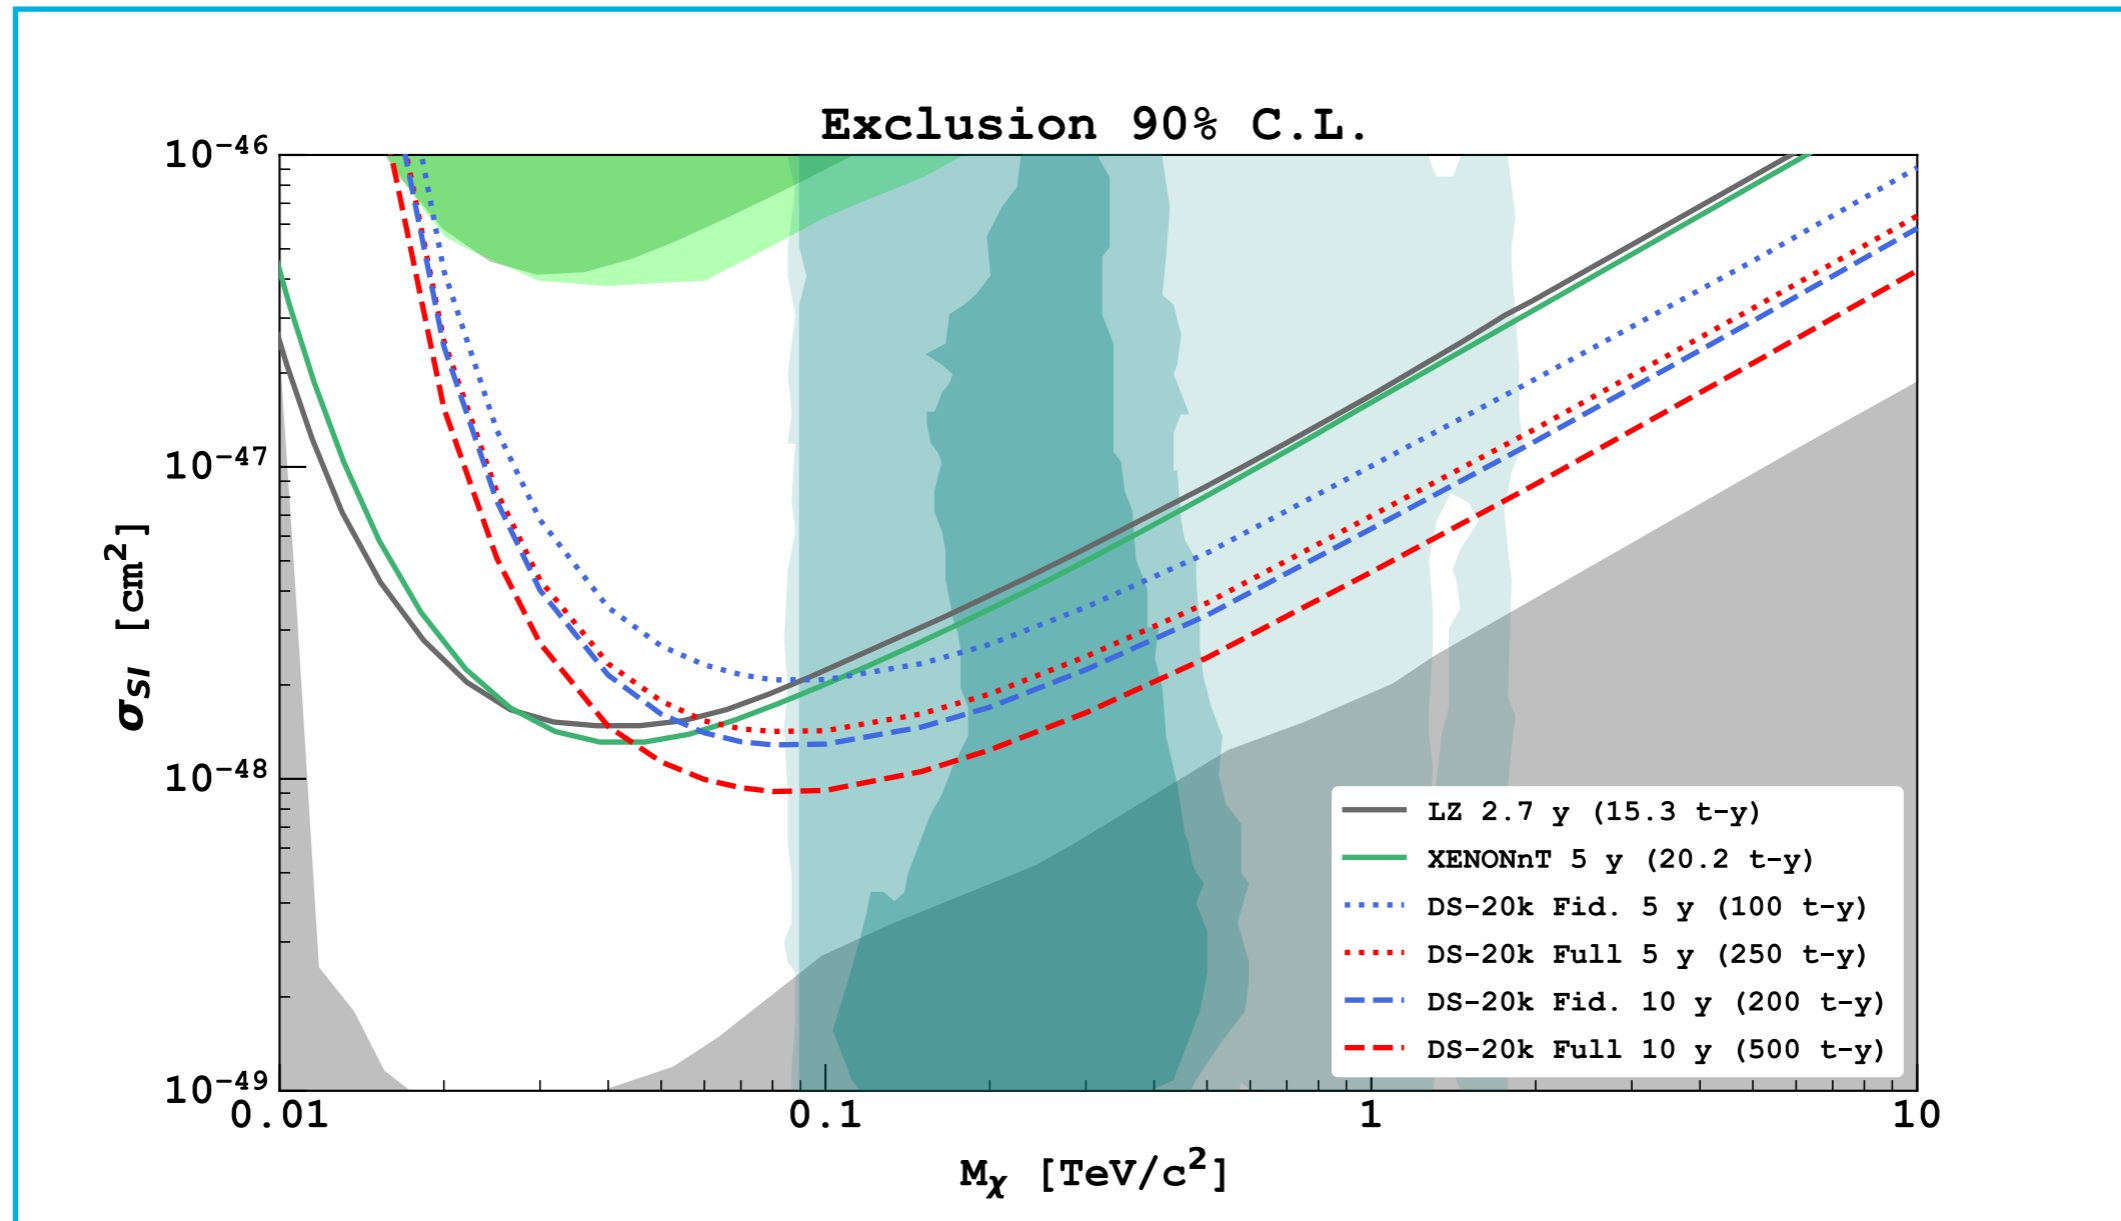

- ▶ The present projection - based on a 10 yr run, giving a fiducial volume exposure of 200 t yr - is $6.3 \times 10^{-48} \text{ cm}^2$ for 1 TeV/c^2 WIMP for the 90% C.L. exclusion.

- ▶ TPC with underground Ar has excellent properties suited to high and low mass WIMP searches.
- ▶ Large effort for DarkSide-20k is ongoing in all parts and the construction started in LNGS.
- ▶ DarkSide-20k will start data taking in the end of 2026 for 10 years.
- ▶ (Not presented) DarkSide-20k serve as a neutrino observatory with sensitivity to supernova neutrinos. [JCAP 03, 043 \(2021\)](#)

MEMBERS OF MY GROUP

One postdoc position is open!!

If you are interested, contact me
at masayuki@camk.edu.pl



▶ **Azam Zabihi**

- ▶ **PostDoc** working on Medical applications



▶ **Andre Cortez**

- ▶ **PostDoc** expert on gas and liquid noble detectors



▶ **Iftikhar Ahmad**

- ▶ 4th year **PhD student** working on SiPM development



▶ **Paul Zakhary**

- ▶ 4th year **PhD student** working on low energy calibration




▶ **Clea Sunny**

- ▶ 2nd year **PhD student** working on low energy calibration

Thank you!

EXPECTED DISCOVERY POTENTIAL

- ▶ The 5σ significance of DS-20k to spin independent WIMPs for different lengths of runs, with the full exposure and with the fiducial cuts applied, compared to LZ and XENONnT.

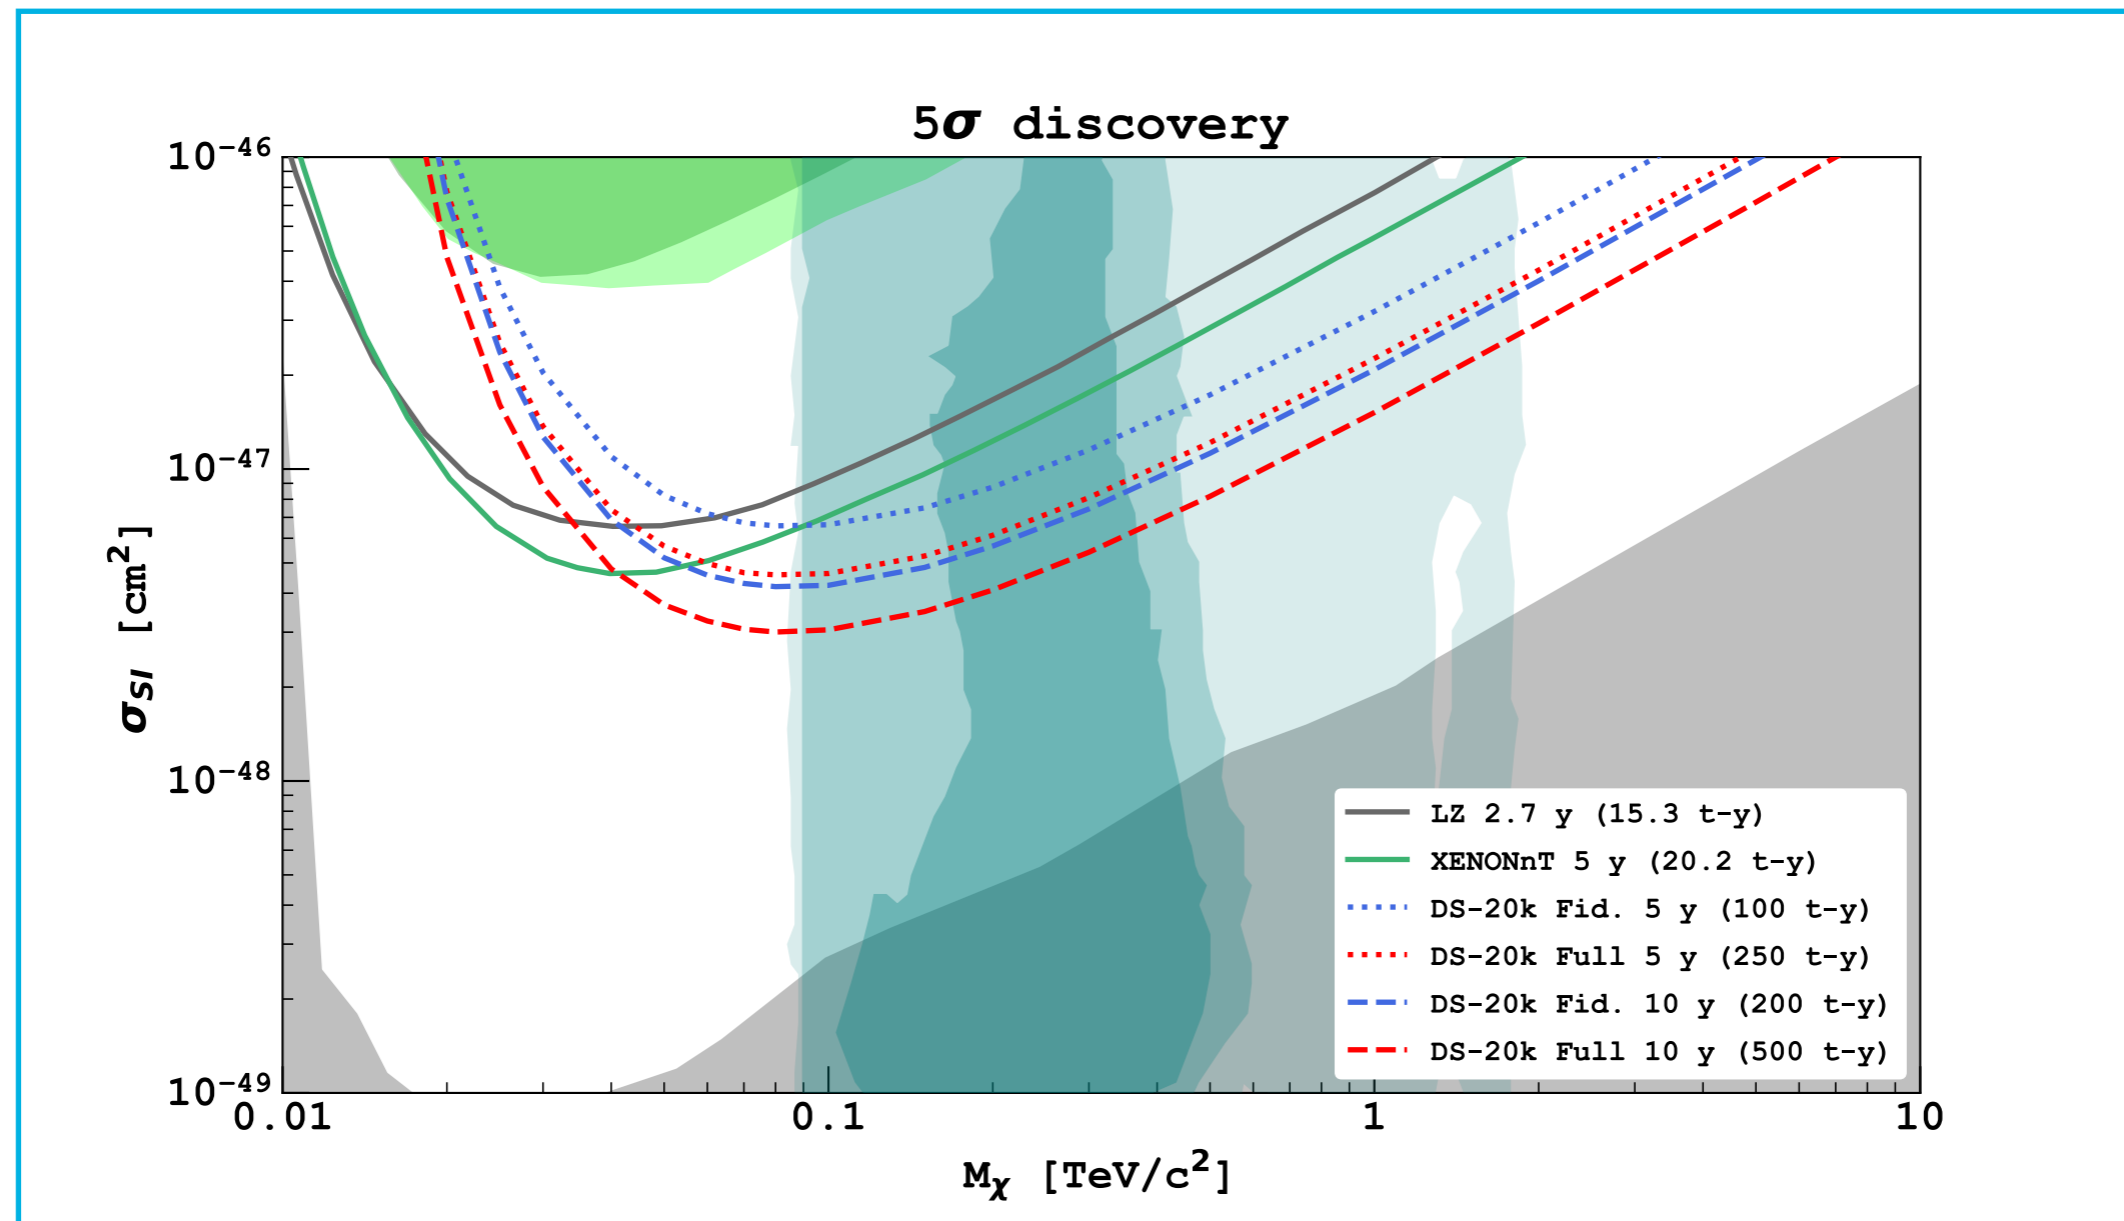

- ▶ The present projection - based on a 10 yr run, giving a fiducial volume exposure of 200 t yr - is 2.1×10^{-47} cm² for 1 TeV/c² WIMP for the 5σ discovery.