


The tracking system of SAND at the DUNE Near Detector

The DUNE experiment


- DUNE (Deep Underground Neutrino Experiment) is a next-generation neutrino physics experiment with an ambitious physics program, which includes [1]:
 - Measurements of δ_{CP} , mass ordering, unitarity of the PMNS matrix
 - Searches for Physics Beyond the Standard Model
 - Measurement of the neutrino flux from galactic supernovae
- DUNE will be located along the LBNF neutrino beamline, the most intense ever built, with a wide-band and an energy peak at 2.5 GeV.
- DUNE will feature a ~1300 km baseline between the Near Detector and the Far Detector experimental sites.

- Far Detector**
- At SURF, ~1300 km away from the ν -source
 - Four innovative 17 kton LAr-TPCs

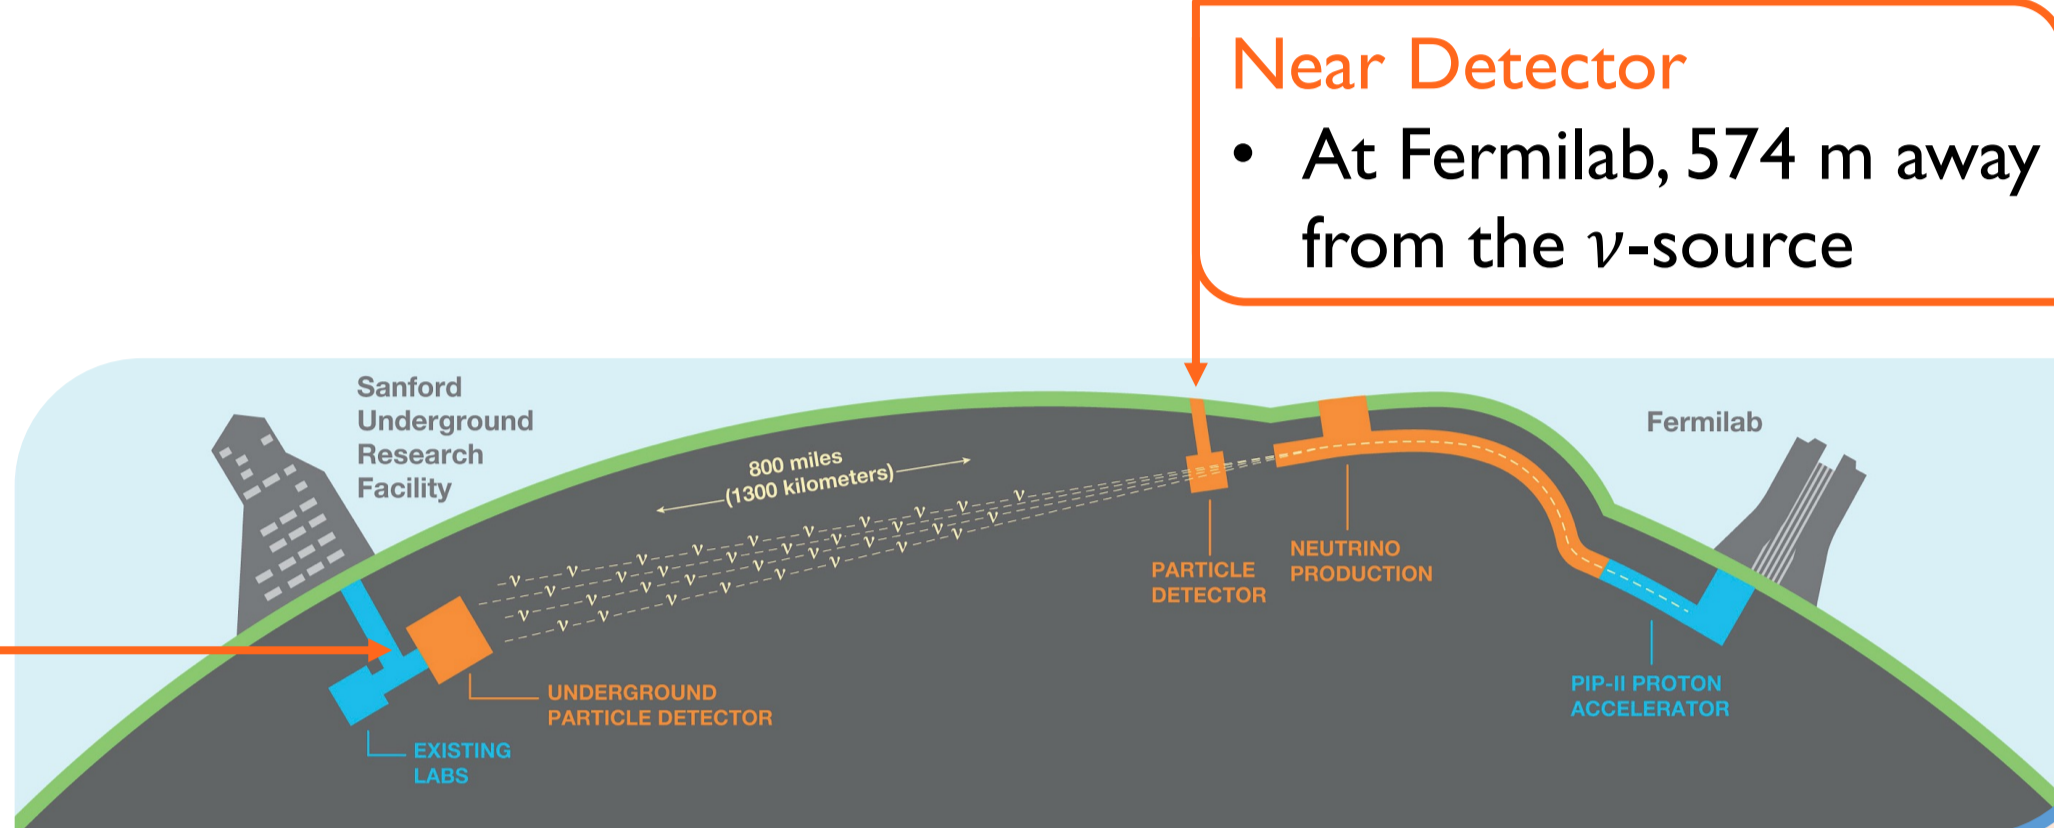


The SAND Straw Tube Tracker (STT)

- Low-density tracker based on 5 mm diameter Straw Tubes [2]
- 84 modules, each with:
 - thin layers (1 – 2% X_0) of target materials
 - Transition Radiation Detector
 - four straw tube layers in a XXYY configuration
- Base layout: one layer of C (graphite) every nine of CH_2 (polypropylene)
- Gas mixture: Xe/ CO_2 (70%/30%) at 1.9 atm
- Single-point spatial resolution < 200 μm

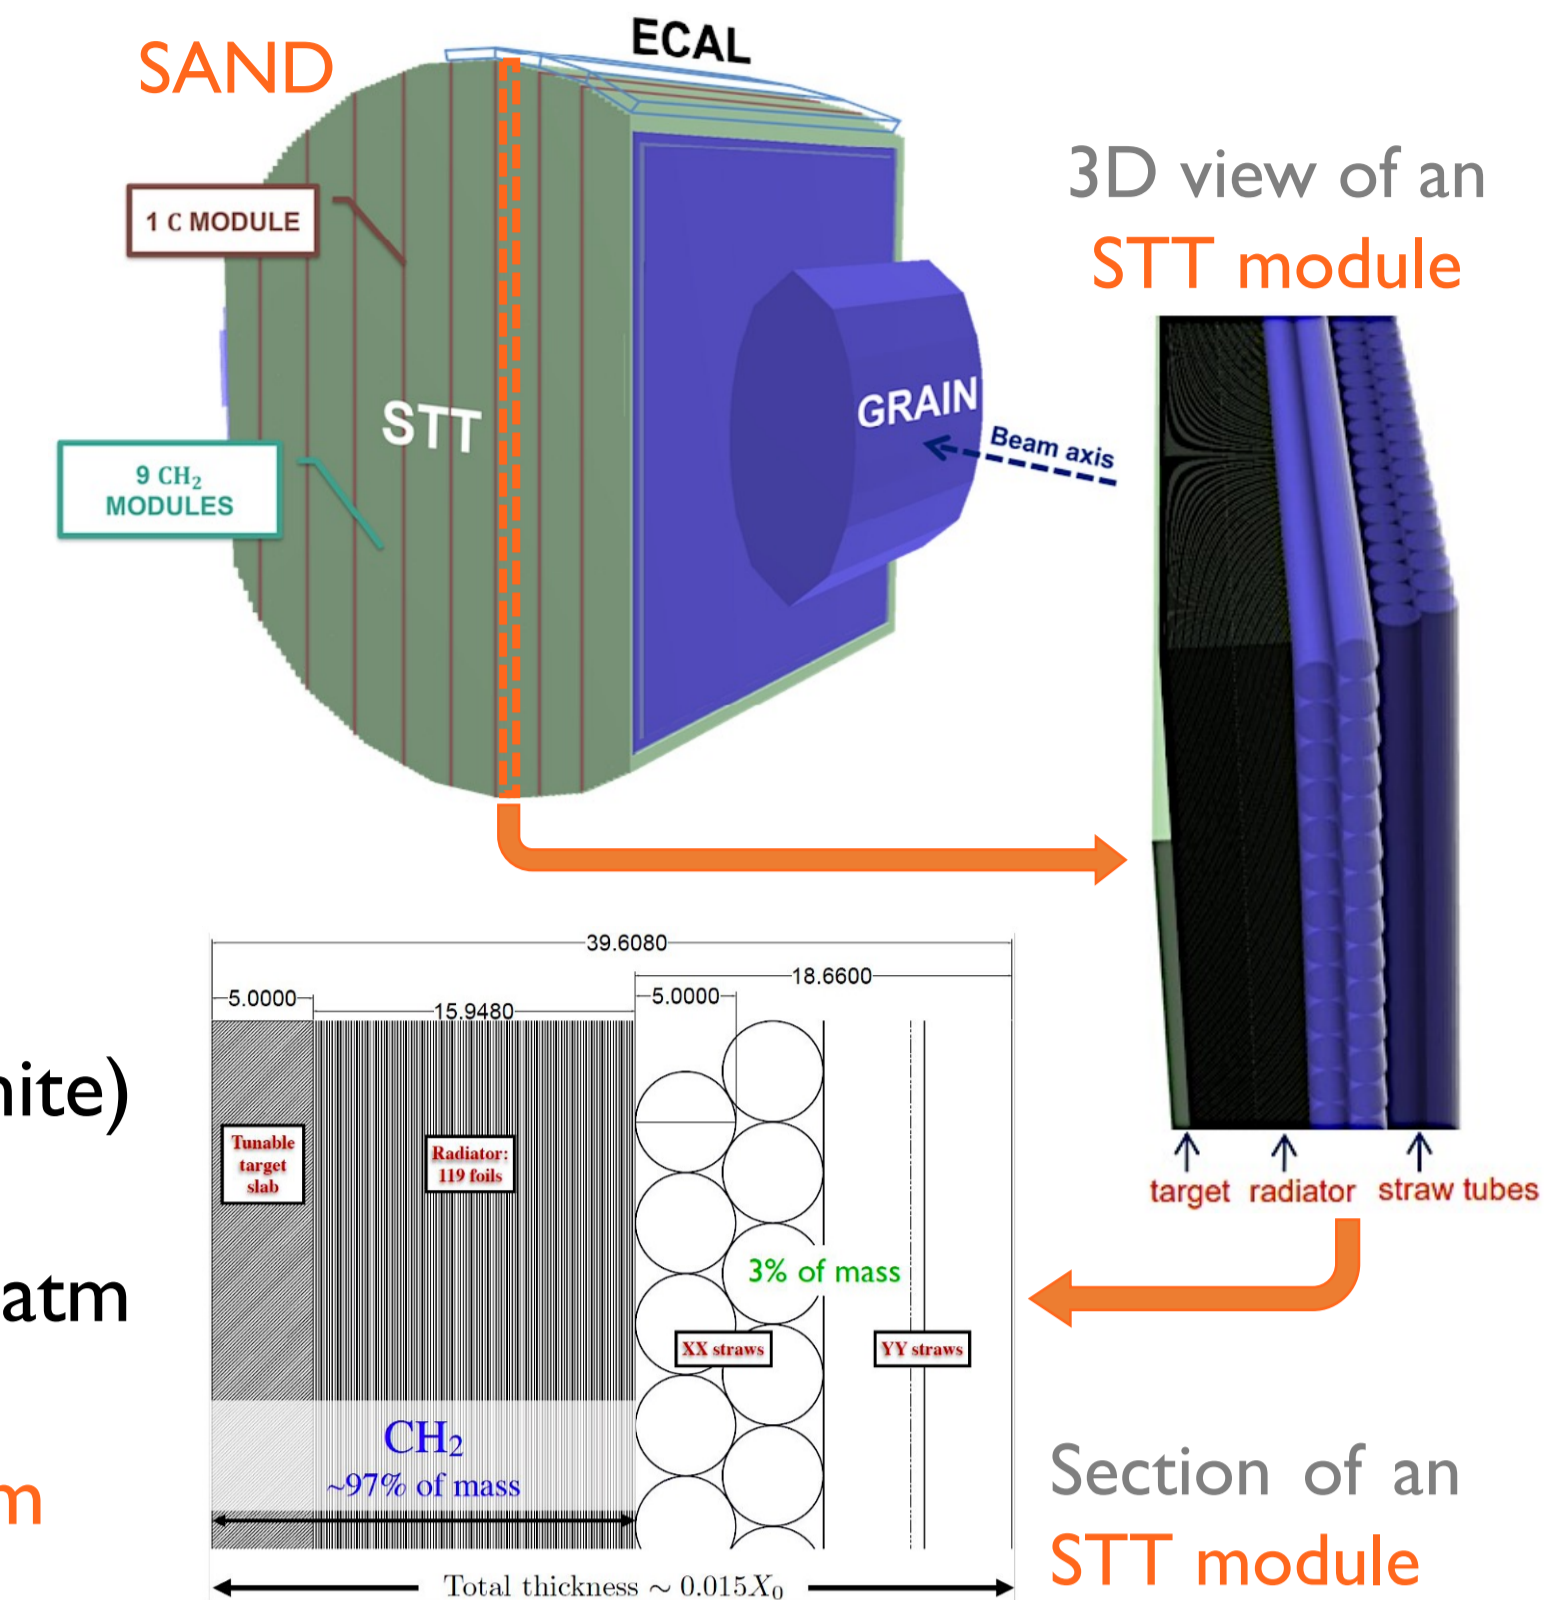

The DUNE Near Detector

- The DUNE Near Detector will carry out precision measurements to monitor the neutrino beam, limit its systematics and improve neutrino interaction models [2].
- It will have three components:
 - ND-LAr: a modular LAr-TPC with a fiducial mass of ~50 ton
 - TMS: a Muon Spectrometer
 - SAND: System for on-Axis Neutrino Detection

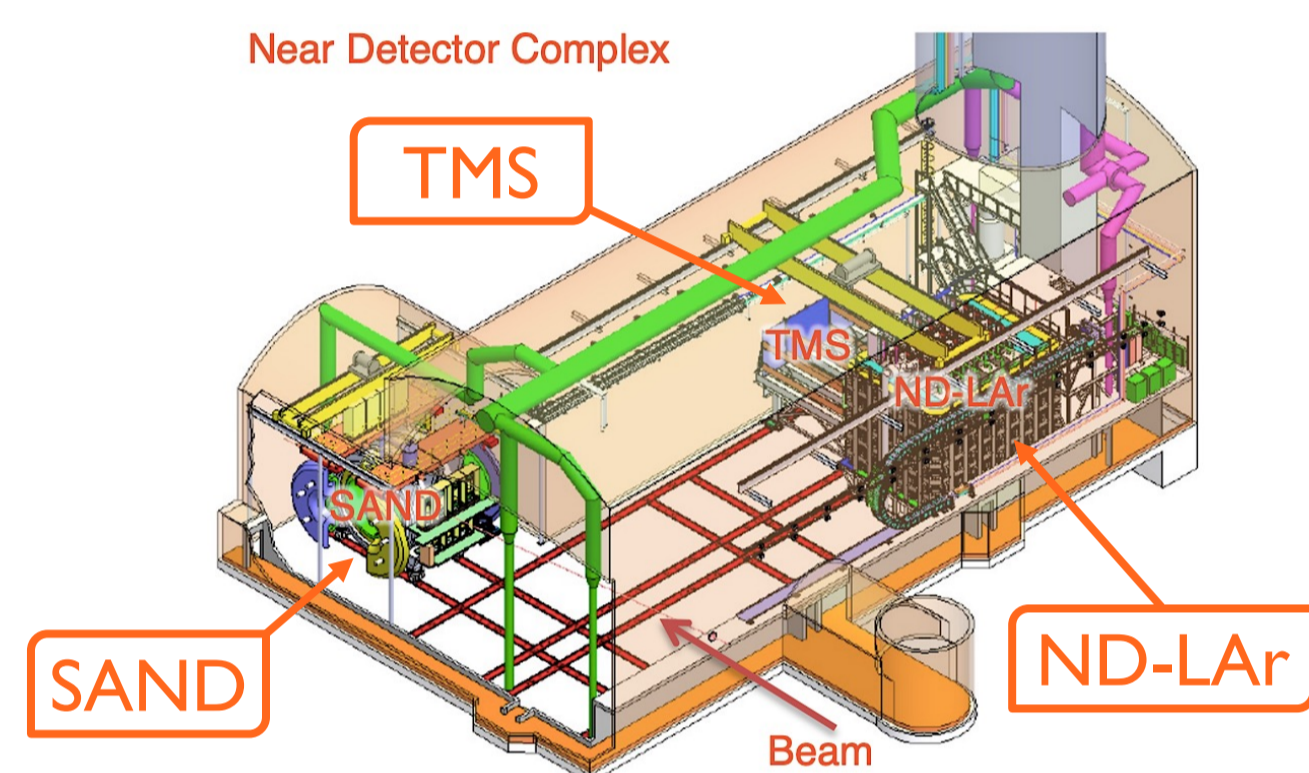


SAND will stand at a fixed position along the beam axis, while ND-LAr and TMS will be movable off-axis, for data-taking in different energy intervals.

“Solid” Hydrogen Measurements

- Critical measurements for DUNE:
 - determination of the systematic error on $\nu/\bar{\nu}$ -flux reconstruction
 - reduction of the smearing from nuclear effects on the reconstructed energy
- Studying CC $\nu(\bar{\nu})$ -hydrogen interactions [5]:

$$\nu_{\mu}p \rightarrow \mu^{-}p\pi^{+}, \bar{\nu}_{\mu}p \rightarrow \mu^{+}p\pi^{-} \text{ and } \bar{\nu}_{\mu}p \rightarrow \mu^{+}n$$
 - overall accuracies of < 1% can be reached in the DUNE beam energy range
 - model-independent constraints on nuclear effects on initial and final states can be set
- A high statistics of ν -CC interactions on H can be reached subtracting measurements on C – targets from those on CH_2 -targets (“Solid” Hydrogen) [6]


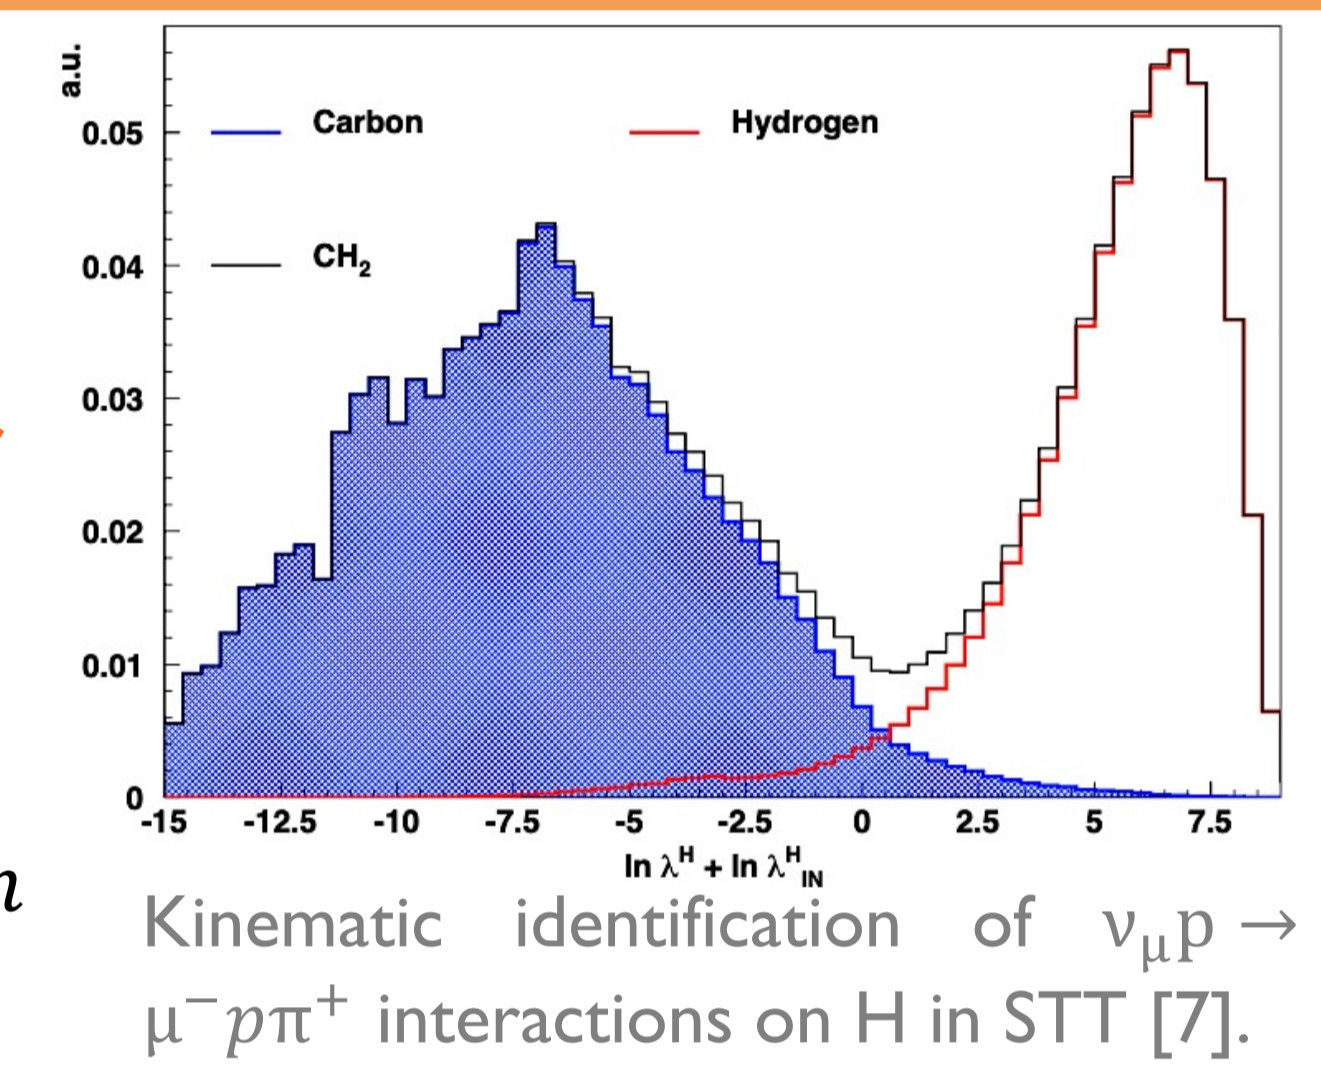


1.2 MW beam statistics		
Interaction	CH_2	H
ν_{μ} -CC (FHC, 5 yrs.)	$35 \cdot 10^6$	$3.6 \cdot 10^6$
$\bar{\nu}_{\mu}$ -CC (RHC, 5 yrs.)	$13 \cdot 10^6$	$2.9 \cdot 10^6$
2.4 MW beam statistics		
Interaction	CH_2	H
ν_{μ} -CC (FHC, 5 yrs.)	$66 \cdot 10^6$	$6.5 \cdot 10^6$
$\bar{\nu}_{\mu}$ -CC (RHC, 5 yrs.)	$24 \cdot 10^6$	$4.3 \cdot 10^6$

STT CC-event statistics for the planned beam power options and modes [6].

The SAND detector


- SAND is a multi-purpose detector, capable of precision tracking and calorimetry, featuring:
 - a 0.6 T superconducting magnet
 - an electromagnetic calorimeter (ECAL) [3]
 - GRAIN: a LAr active target (~1 ton)
 - STT: a low-density tracker based on Straw Tubes with distributed target mass [2]
- SAND will carry out key measurements for the Near Detector physics program [2]

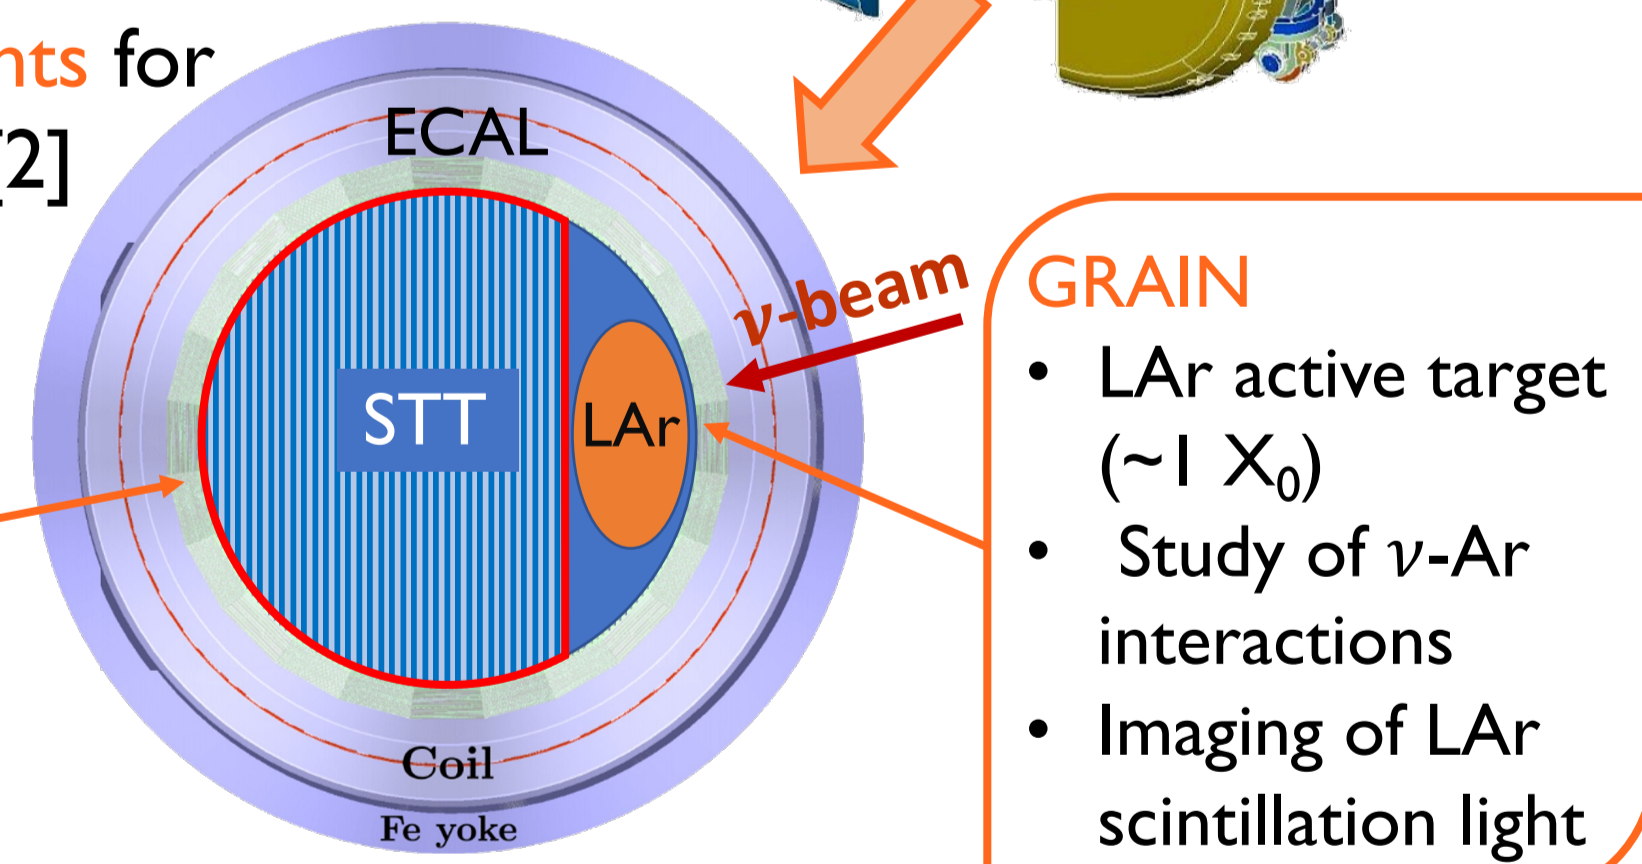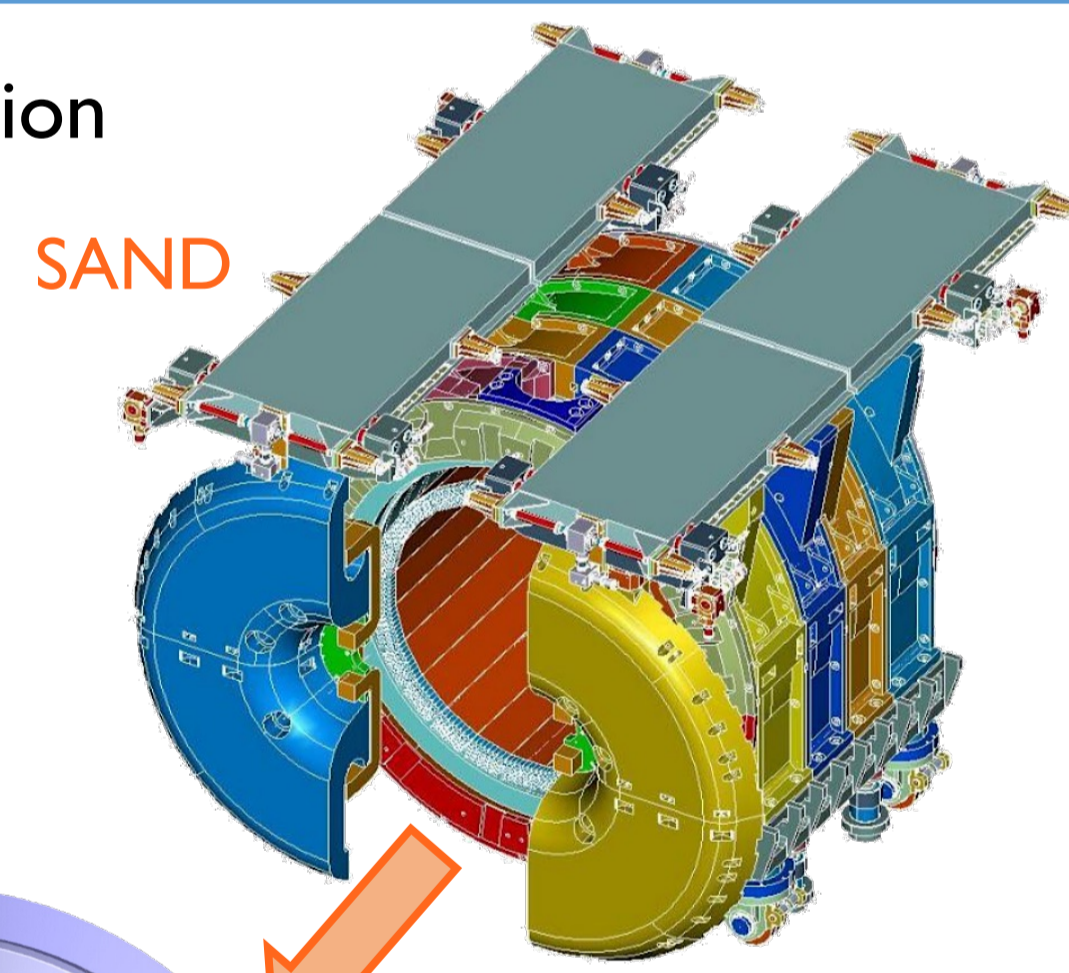

- ECAL**
- Lead-scintillator fibres, ~15 X_0
 - $\sigma_E/E = 5.7\%/\sqrt{E(\text{GeV})}$
 - $\sigma_t = 54/\sqrt{E(\text{GeV})}$ ps

STT prototype: construction and testing

- A prototype STT module (120 x 80 cm²) has been successfully built and tested at CERN
- Construction procedures and mechanical design have been validated
- Straw and readout performances were tested at a muon testbeam
- Ongoing work on the design of the final SAND modules
- Design of a back-up tracker based on Drift Chambers is ongoing

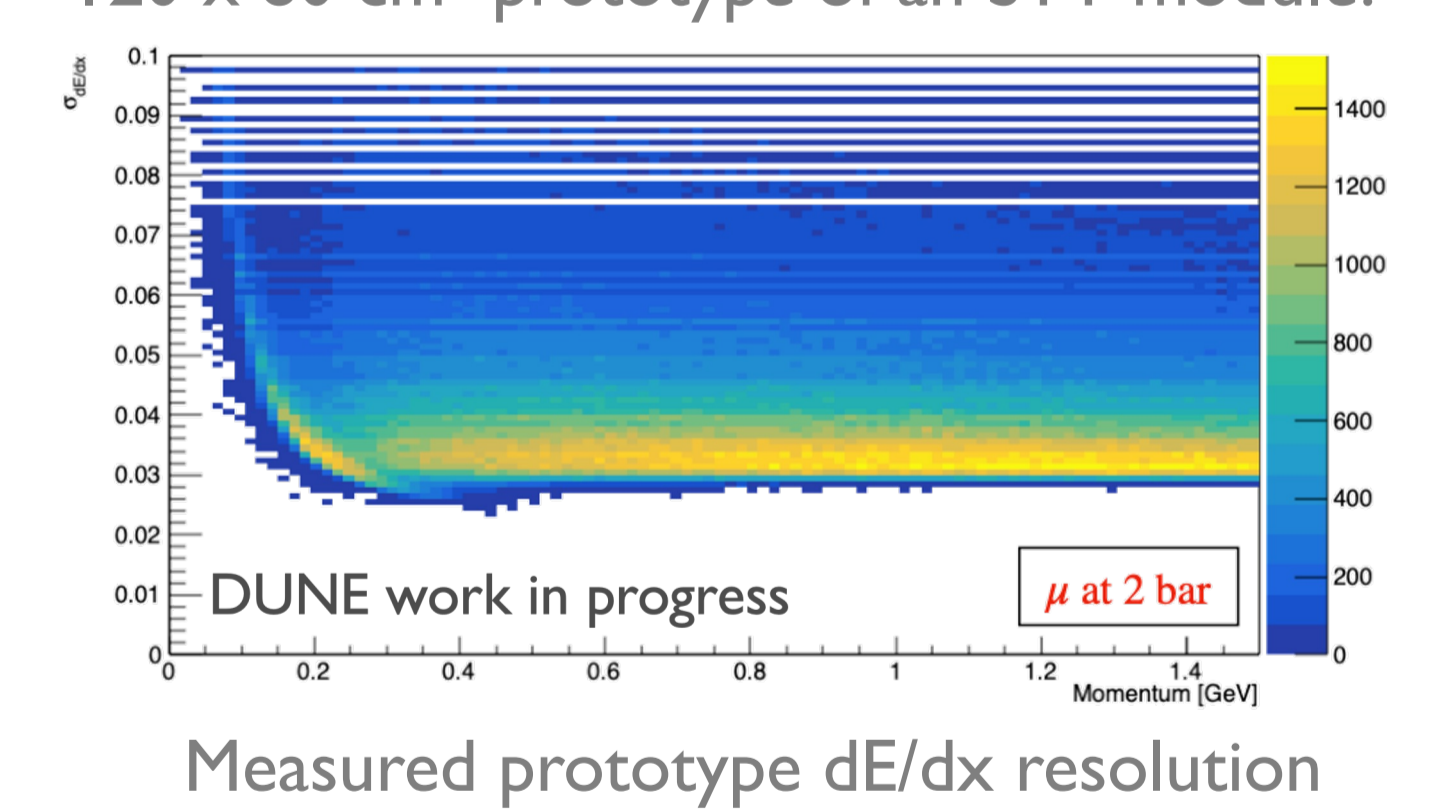

The SAND physics program

- Constant beam monitoring to detect variations in the energy spectrum and in the spatial distribution of ν_{μ} -CC events
- Most deviations will be detectable on a weekly basis with $\sqrt{\Delta\chi^2} > 3$ [4]
- Limiting the uncertainties on the $\nu/\bar{\nu}$ flux and on nuclear smearing on the reconstructed energy
- Measurements in hydrogen to unfold the number of detected events in Argon [5]
- Rejection of the background from neutrino interactions with the external material using ECAL and STT
- Multivariate analyses allow to reach 3×10^{-5} rejection factor, 92.7% efficiency and a purity of 99.6% [4]
- Contribution to the Near Detector physics program of precision measurements [4]:
 - measurements of $\sin\theta_W$ and further EW-physics
 - isospin physics tests
 - QCD and nuclear structure studies

Conclusions and prospects

- SAND will measure the variation in the LBNF neutrino beam spectrum at the DUNE Near Detector and will carry out a broad physics program
- The SAND STT tracker will enable precision measurements on the neutrino flux
- Solid Hydrogen measurements will allow a significant reduction of the systematics due to neutrino-nucleus interactions
- The prototyping phase is ongoing, with positive results
- The design of the STT modules and the setup of production sites are in progress

References

- Abi, Babak, et al. "Volume I. introduction to DUNE." *Journal of instrumentation* 15.08 (2020):T08008.
- Abud, A. Abed, et al. "Deep underground neutrino experiment (DUNE) near detector conceptual design report." *Instruments* 5.4 (2021): 31.
- Adinolfi, M., et al. "The KLOE electromagnetic calorimeter." *NIMA* 482.1-2 (2002): 364.
- G. Adamov et al., *A Proposal to Enhance the DUNE Near Detector Complex*. (<https://docs.dunescience.org>)
- Duyang, H., et al. "A precise determination of (anti) neutrino fluxes with (anti) neutrino-hydrogen interactions." *Physics Letters B* 795 (2019): 424.
- Petti, R. "Precision measurements of fundamental interactions with (anti) neutrinos." *arXiv:1910.05995* (2019).
- Duyang, H., et al. "A Novel Approach to Neutrino-Hydrogen Measurements." *arXiv:1809.08752*.