


International  
UON Collider  
Collaboration



Funded by the European Union (EU). Views and opinions expressed are however those of the author only and do not necessarily reflect those of the EU or European Research Executive Agency (REA). Neither the EU nor the REA can be held responsible for them.



# ***Muon Collider MDI - Challenges and Plan***

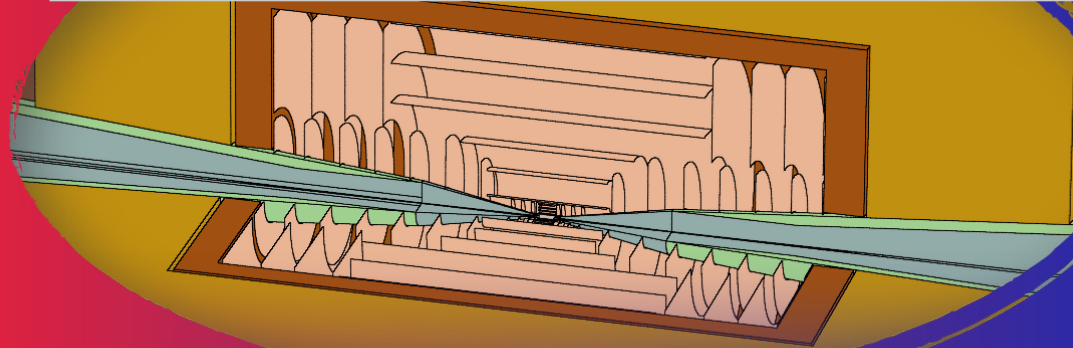

Daniele Calzolari\*  
on behalf of the IMCC & MuCol MDI WG  
6-7 May 2024


\* CERN (SY-STI-BMI)  
INFN sezione di Padova



International  
UON Collider  
Collaboration

# Introduction

- **Machine-Detector Interface (MDI) objectives:**
  - Study the **beam-induced background (BIB)** and identify mitigation strategies for the **3** and **10(+)** TeV collider options.
  - Develop a credible **interaction region (IR) design** with background levels compatible with detector operations
- Could profit from previous **US MAP** studies (N. Mokhov et al): **MAP design served as starting point.**
- **This presentation:**
  - General introduction to Muon Collider IR and MDI
  - Status and Achievements
  - Future plans in view of **ESPPU** strategy update (deadline: 31 March 2025)

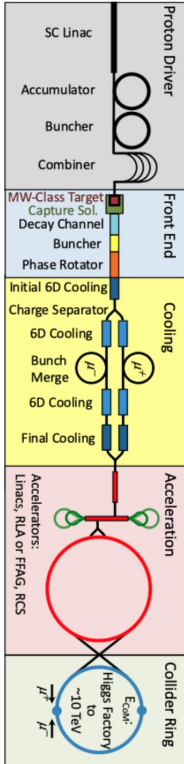

# Sources of beam-induced background

	Description	Relevance as background
<b>Muon decay</b>	Decay of stored muons around the collider ring	<b>Dominating source</b>
<b>Synchrotron radiation by stored muons</b>	Synchrotron radiation emission by the beams in magnets near the IP (including IR quads → large transverse beam tails)	<b>Small</b>
<b>Muon beam losses on the aperture</b>	Halo losses on the machine aperture, can have multiple sources, e.g.: <ul style="list-style-type: none"> <li>• Beam instabilities</li> <li>• Machine imperfections (e.g. magnet misalignment)               <ul style="list-style-type: none"> <li>• Elastic (Bhabha) <math>\mu\mu</math> scattering</li> </ul> </li> <li>• Beam-gas scattering (Coulomb scattering or Bremsstrahlung emission)               <ul style="list-style-type: none"> <li>• Beamstrahlung (deflection of muon in field of opposite bunch)</li> </ul> </li> </ul>	<b>Can be significant</b> (although some of the listed source terms are expected to yield a small contribution like elastic $\mu\mu$ scattering, beam-gas, Beamstrahlung)
<b>Coherent <math>e^-e^+</math> pair production</b>	Pair creation by real* or virtual photons of the field of the counter-rotating bunch	<b>Expected to be small</b> (but should nevertheless be quantified)
<b>Incoherent <math>e^-e^+</math> pair production</b>	Pair creation through the collision of two real* or virtual photons emitted by muons of counter-rotating bunches	<b>Significant</b>

\*There are hardly any real photons produced through beamstrahlung

# How to deal with the beam-induced background?

Many  
concepts  
from MAP!

## Conical absorber inside detector (nozzle)

Shield the detector from high-energy decay products and halo losses (requires also an optimization of the beam aperture)

## Detector

Handle background by suitable choice of detector technologies and reconstruction techniques (time gates, directional suppression, etc.)

## Interaction region (IR) lattice

Customized IR lattice to reduce the loss of decay products near the IP

## IR masks/liners and shielding

Shield the detector from particles lost in final focus region (requires also an optimization of the beam aperture)

## Solenoid


Capture secondaries produced near the IP (e.g. incoherent e-e+ pairs)

## Transverse halo cleaning

Clean the transverse beam halo far from the IP to avoid halo losses on the aperture near the detector (IR is an aperture bottleneck)

Conical liners inside FF magnets

Follow  $5\sigma$  beam envelope

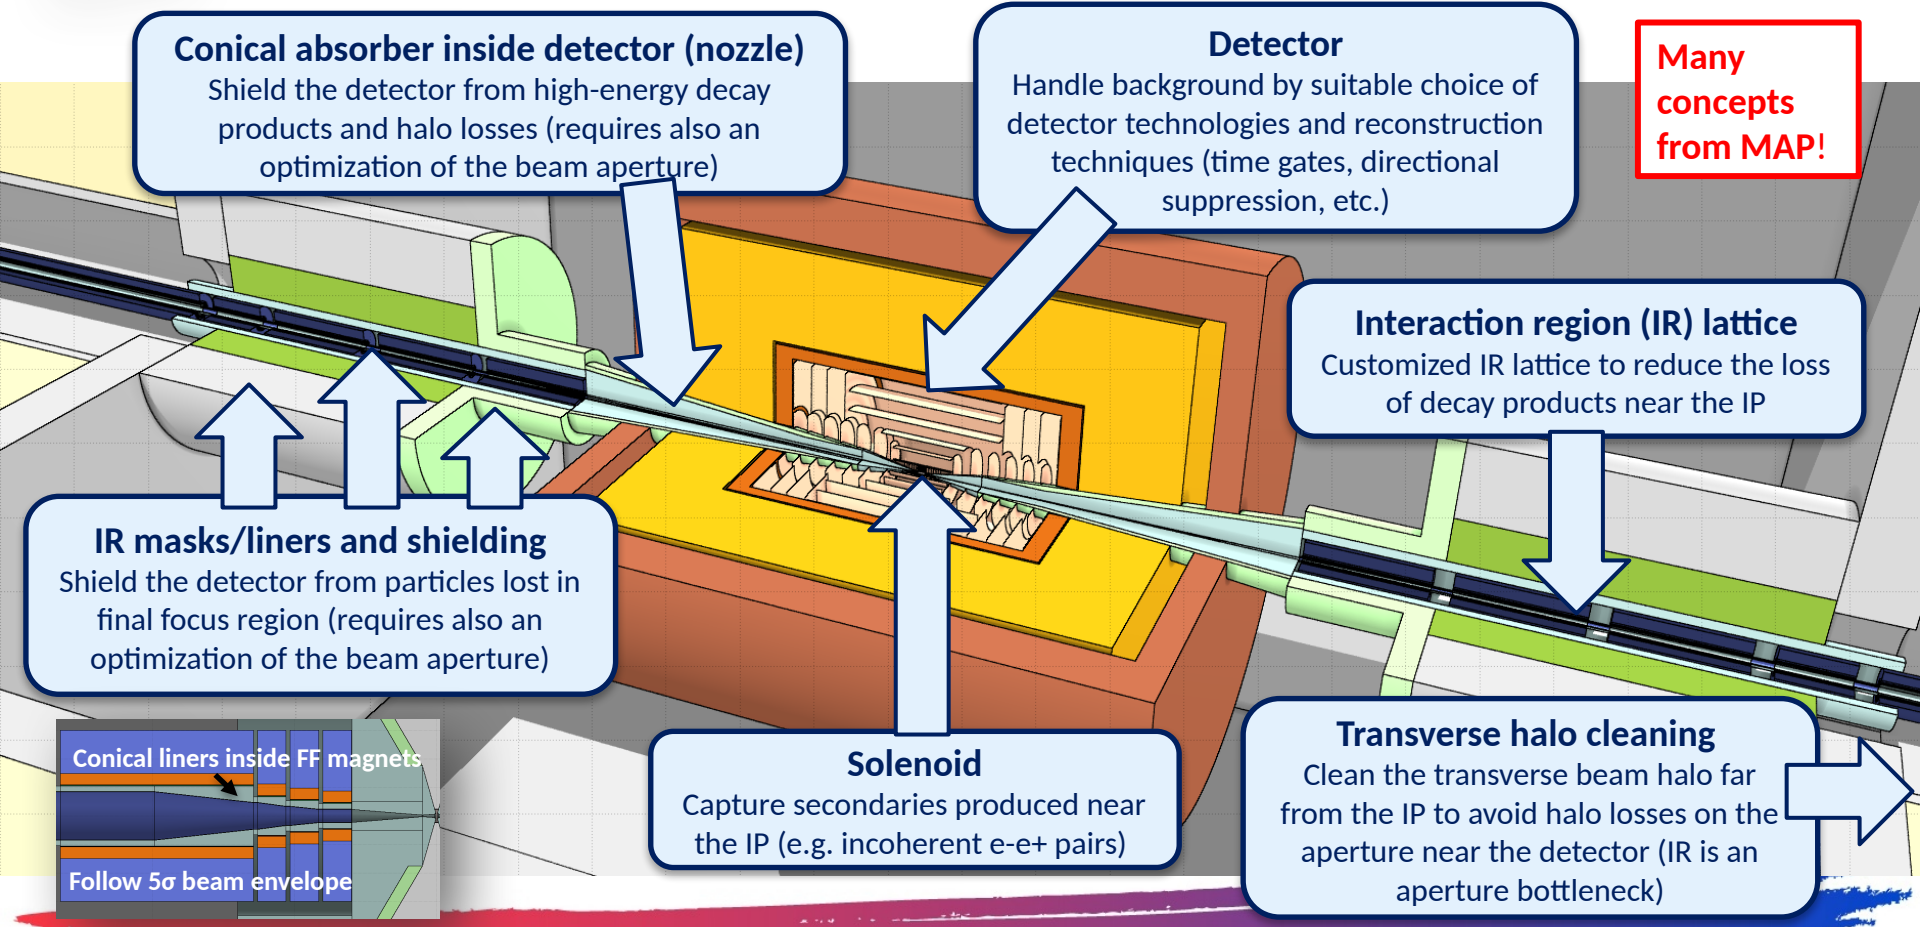

# Lattices presently used for IMCC & MuCol MDI design studies


	=3 TeV	=10 TeV
Version	US MAP [1]	IMCC (present vers 0.7) [2]
FF scheme	Quadruplet (with dipolar component)	Triplet (with dipolar component)
$\beta^*$	5 mm	1.5 mm
$L^*$	6 m	6 m
Max. field at inner bore	12 T	20 T

[1] Y. Alexahin, E. Gianfelice-Wendt, V. Kapin (Fermilab), [Y. Alexahin et al 2018 JINST 13 P11002](#)  
 [2] K. Skoufaris, C. Carli (CERN)


## Some of the challenges:

- Large  $\beta$ s in FF magnets, hence large aperture
- High-fields and strong chromatic effects  $\rightarrow$  local chromatic correction scheme

=3 TeV MAP lattice (quadruplet version):

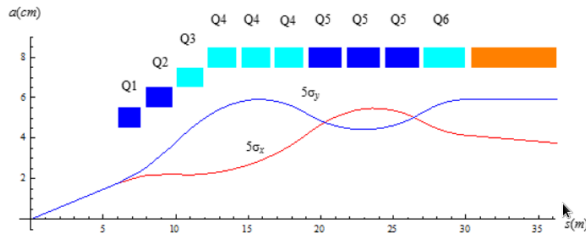


=10 TeV IMCC lattice v 0.7:

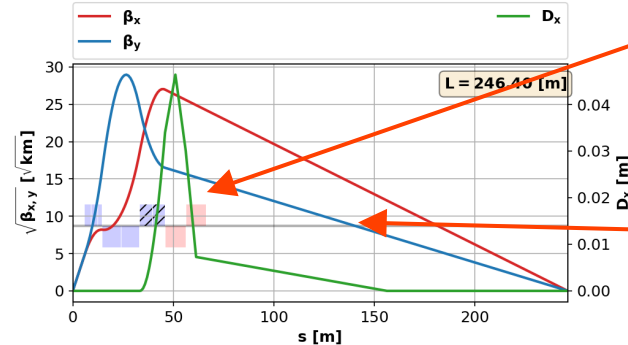

Strong dipoles for background reduction

Long drift section for a smoother reduction of the beta values at the end of the FF scheme.

# Anatomy of decay-induced background

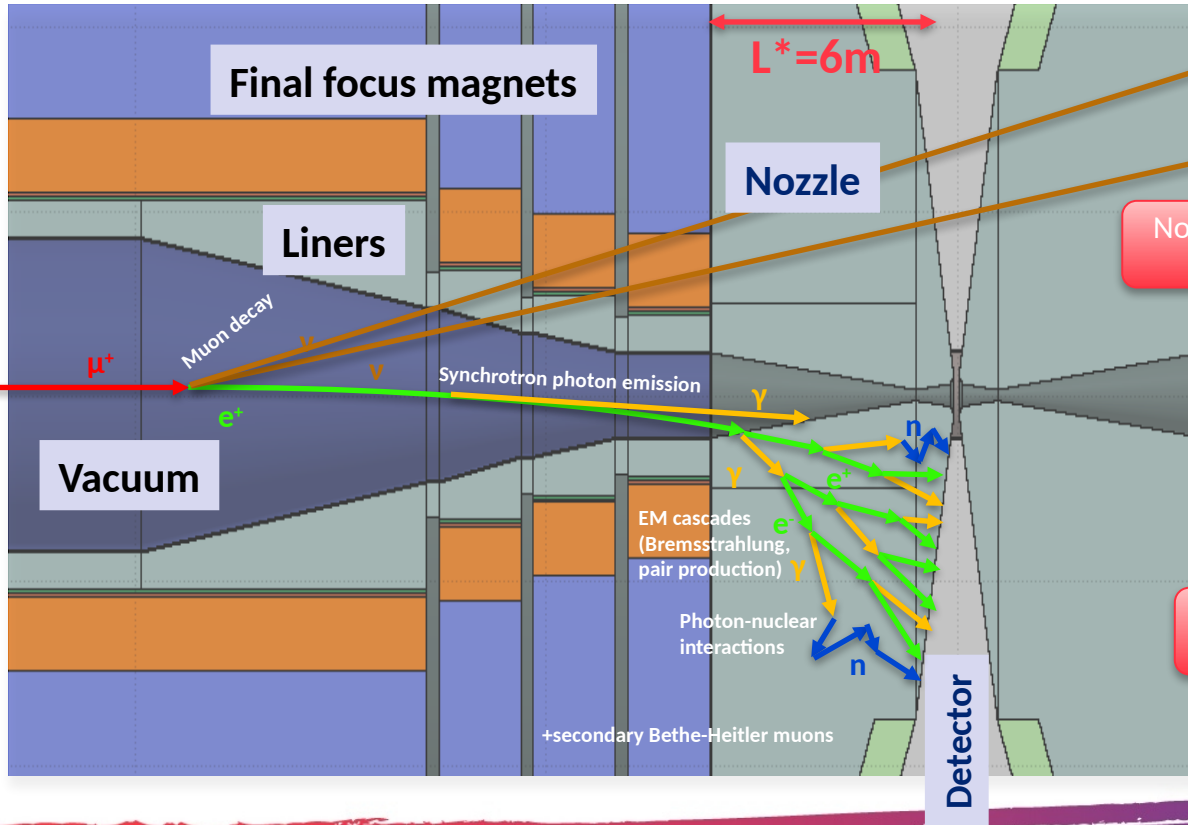

**Nozzle shape and material:**  
Determines spectra, entry positions and directions of secondaries entering detector

Nozzle  $\rightarrow$  Background reduction by orders of magnitude

**Lattice and beam aperture:**  
Determine how many decay products are lost near the IP\*, but little influence on secondary spectra and entry positions in detector


Lattice  $\rightarrow$  Background reduction by a factor of a few

\* Decay products lost on the inside of nozzle are the most relevant for background


# Anatomy of decay-induced background

Background particles (from decay)  
entering detector per bunch crossing  
(with time cut [-1:15]ns):

- $O(10^8)$   $\gamma$  ( $>100$  keV),
- $O(10^7)$   $n$  ( $>10^{-5}$  eV)
- $O(10^6)$   $e^+$  &  $e^-$  ( $>100$  keV)

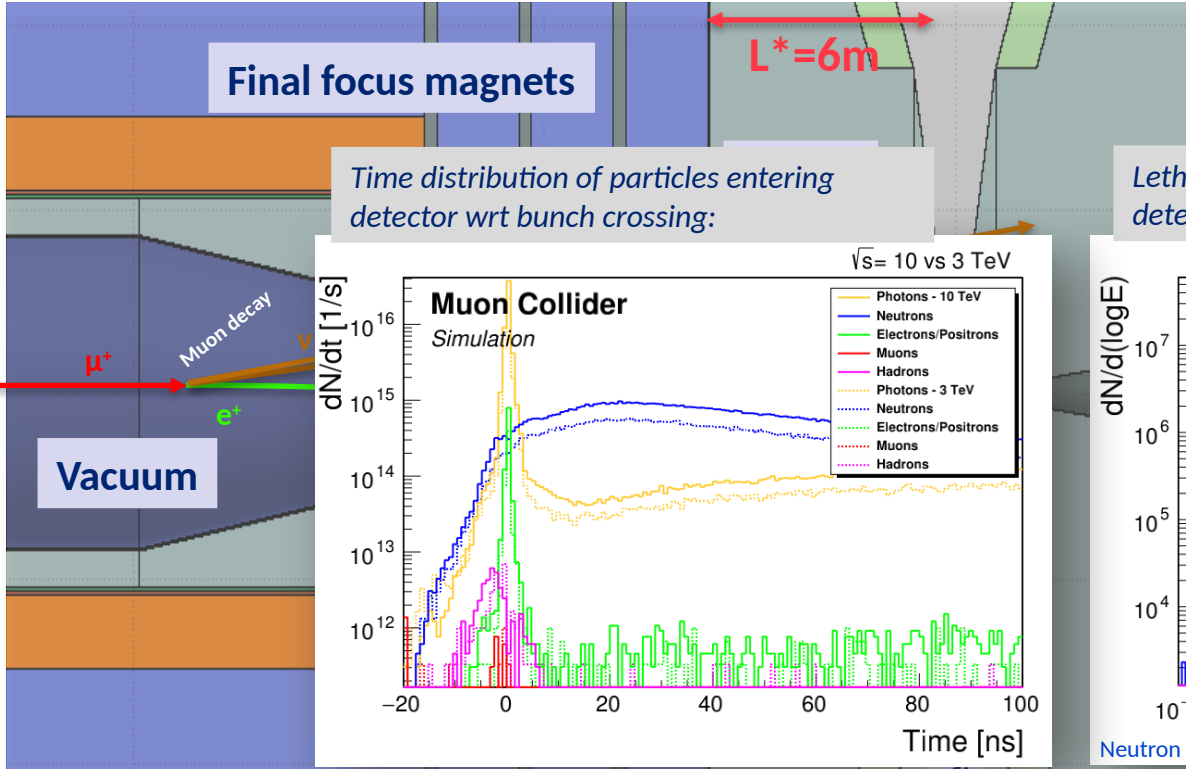

**Lethargy distribution of particles entering detector (within -1:15 ns time window):**

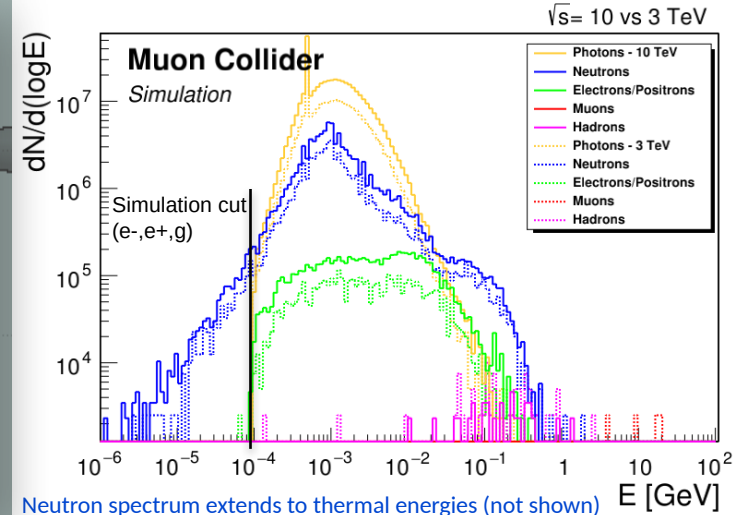

Neutron spectrum extends to thermal energies (not shown)

Still need to study Bethe-Heitler muon background with high statistics samples!

# Decay background: impact of lattice choices


Combined function dipole-quadrupole (8T)

Pure quads

Dipole chicane (18.1T and 9.7T)

Number of background particles entering the detector as a function of the *muon decay position*:

Latest **10 TeV** lattice version (v0.7)

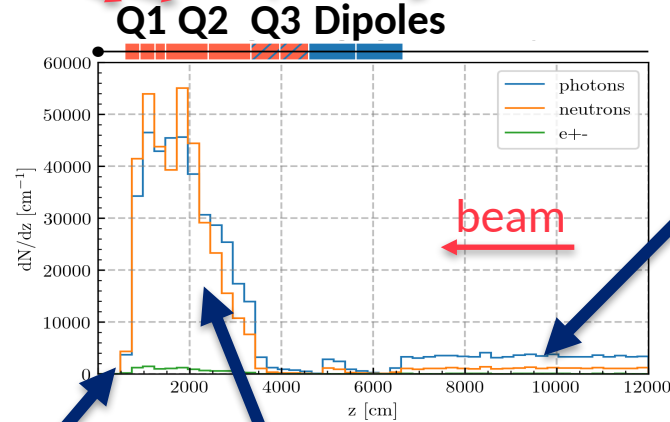

Decays in drift upstream of FF would yield a non-negligible contribution but can be strongly reduced by a dipole chicane  
Nevertheless, the contribution remains non-zero

Decays inside nozzle (between IP and L\*) contribute very little to the background  
But: increasing L\* from 6m to 10m yields only small improvement - O(few 10%) - at the expense of a more complex lattice design


Decays inside triplet dominate background  
Can only be partially mitigate by lattice choice (e.g. dipolar component)

IMCC plans for ESPPU report:



- Further optimization of the nozzle and the lattice for the BIB mitigation



# Decay background: towards an optimized nozzle for 3 TeV and 10 TeV

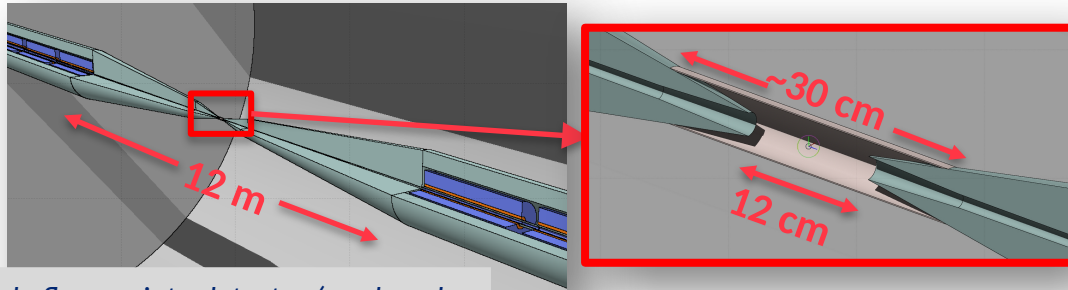

Particle fluence into detector (per bunch crossing) vs longitudinal coordinate:

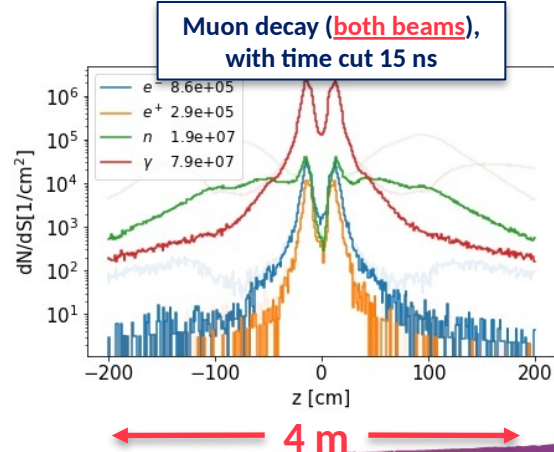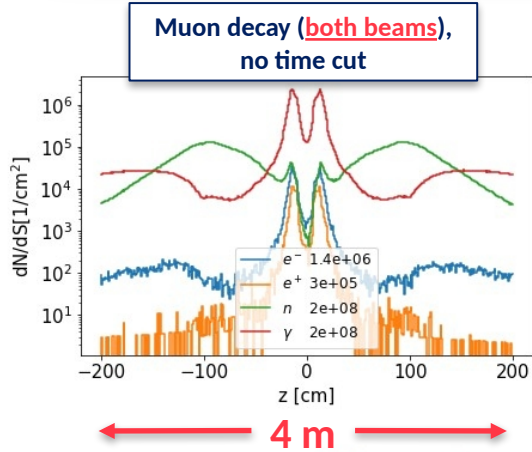

## ■ Nozzle design



- Most results obtained so far were with 1.5 TeV MAP nozzle
- Preliminary studies show potential to improve nozzle for 3/10 TeV

## ■ IMCC plans for final ESPPU report:


- Optimization of the conceptual nozzle design (shape, material, beam aperture) for 3 TeV and 10 TeV is one of the **key priorities**
- Refine the required solenoid field strength

# Incoherent e-/e+ pair production


- Performed a first-order evaluation of incoherent pair production at 10 TeV
  - Within +/-40 cm from IP, the pair production background contributes a few 10% of the background multiplicity (compared to decay), but the pairs are on average more energetic
- IMCC plans for final ESPPU report:
  - Improve description of pair production by muon beams in the GUINEA-PIG event generator

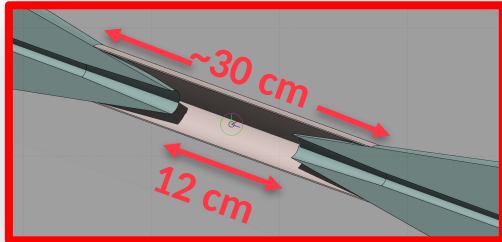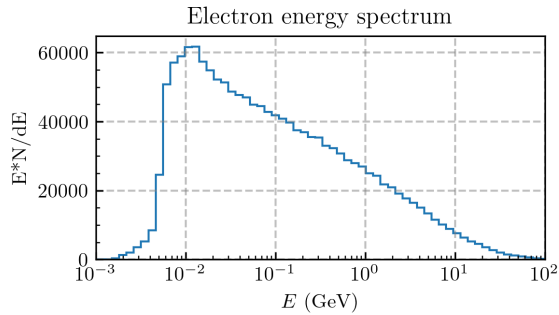

Particle fluence into detector (per bunch crossing) vs longitudinal coordinate:

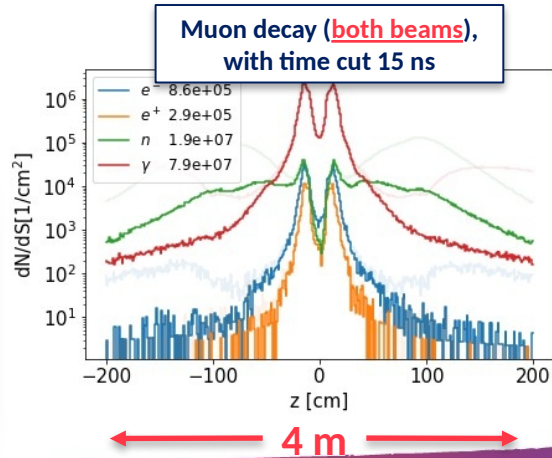

Pair production:  
source distribution  
from GUINEA-PIG

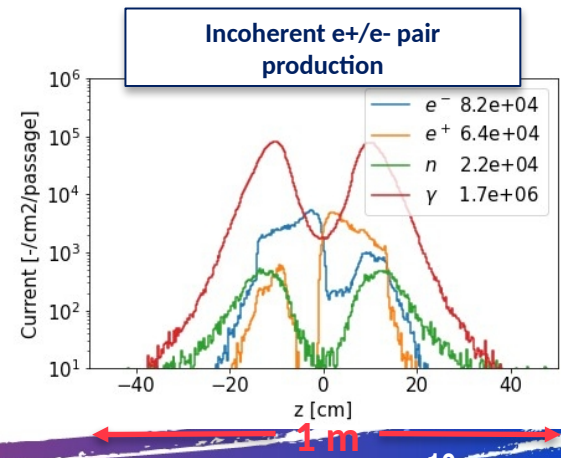

# Muon halo losses on the aperture

## Muon losses on the aperture are unavoidable


- Many processes can contribute to muon losses
- Liners in final focus and nozzle follow  $5\sigma$  envelope  $\rightarrow$  aperture bottleneck
- Transverse beam cleaning system will be fundamental** to reduce halo-induced background in detector (like in all other high-energy circular colliders)
- Muon beam halo cleaning is a challenge  $\rightarrow$  need novel ideas (halo extraction instead of collimation)

## IMCC plans for final ESPPU report:

- Refine shower simulations for (generic) halo losses in IR
- Derive the max. allowed halo loss rate in IR (should stay below decay-background)  $\rightarrow$  **provide specs for halo cleaning system**



*But: studying a halo removal system until report is not feasibly with the present resources*

Previous concepts of halo extraction developed at Fermilab:

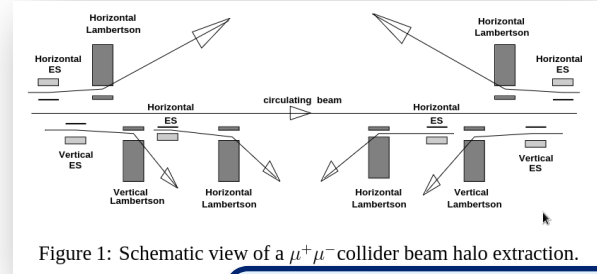

A. Drozhdin et al., "Scraping beam halo in  $\mu^+\mu^-$  colliders", AIP Conf. Proc. 441, 242-248 (1998) [link](#)

First IMCC halo-induced background studies for 10 TeV:

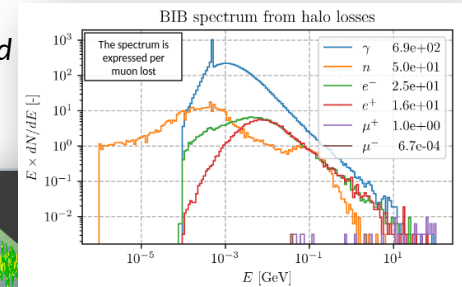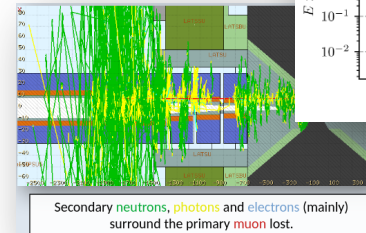


# Radiation damage in detector (10 TeV)


For IMCC lattice version v0.4

Radiation damage estimates for 10 TeV (MAP nozzle, CLIC-like detector)  
Includes only contribution of decay-induced background!

Total ionizing dose

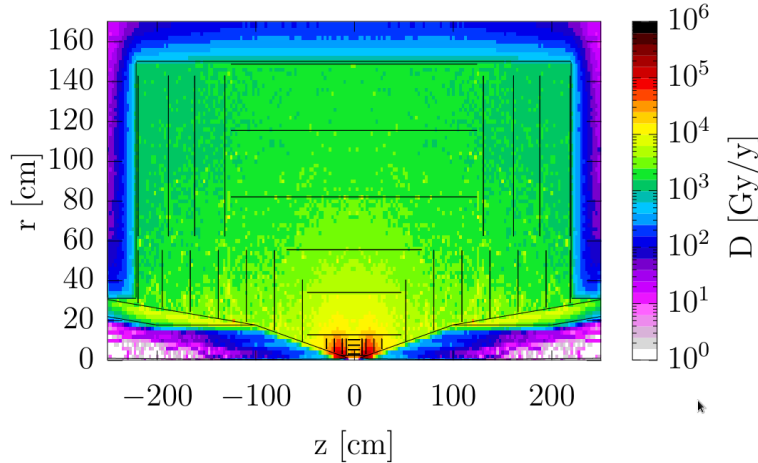


1 MeV neutron equivalent in Silicon [ $\text{n cm}^{-2} \text{y}^{-1}$ ]

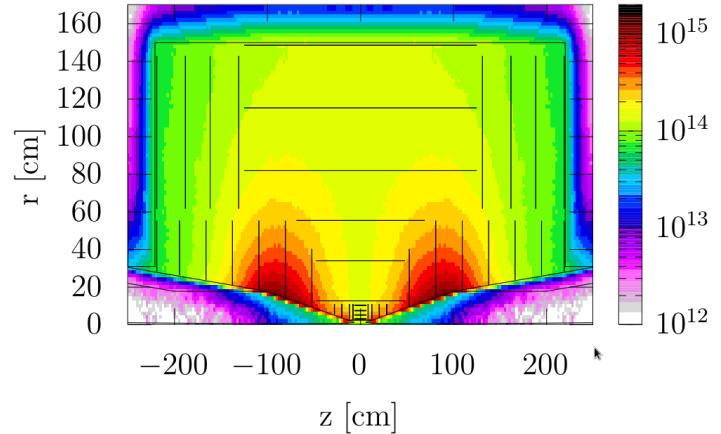


Per year of operation (140d)	Ionizing dose	Si 1 MeV neutron-equiv. fluence
Vertex detector	200 kGy	$3 \times 10^{14} \text{ n/cm}^2$
Inner tracker	10 kGy	$1 \times 10^{15} \text{ n/cm}^2$
ECAL	2 kGy	$1 \times 10^{14} \text{ n/cm}^2$

- **IMCC plans for final ESPPU report:**
  - Redo radiation damage calculations with optimized 10 TeV nozzle and lattice (and new detector design)
  - Calculate contribution of other source terms (e.g. incoherent pairs, halo losses)

# Summary of MDI studies and plans for ESPPU

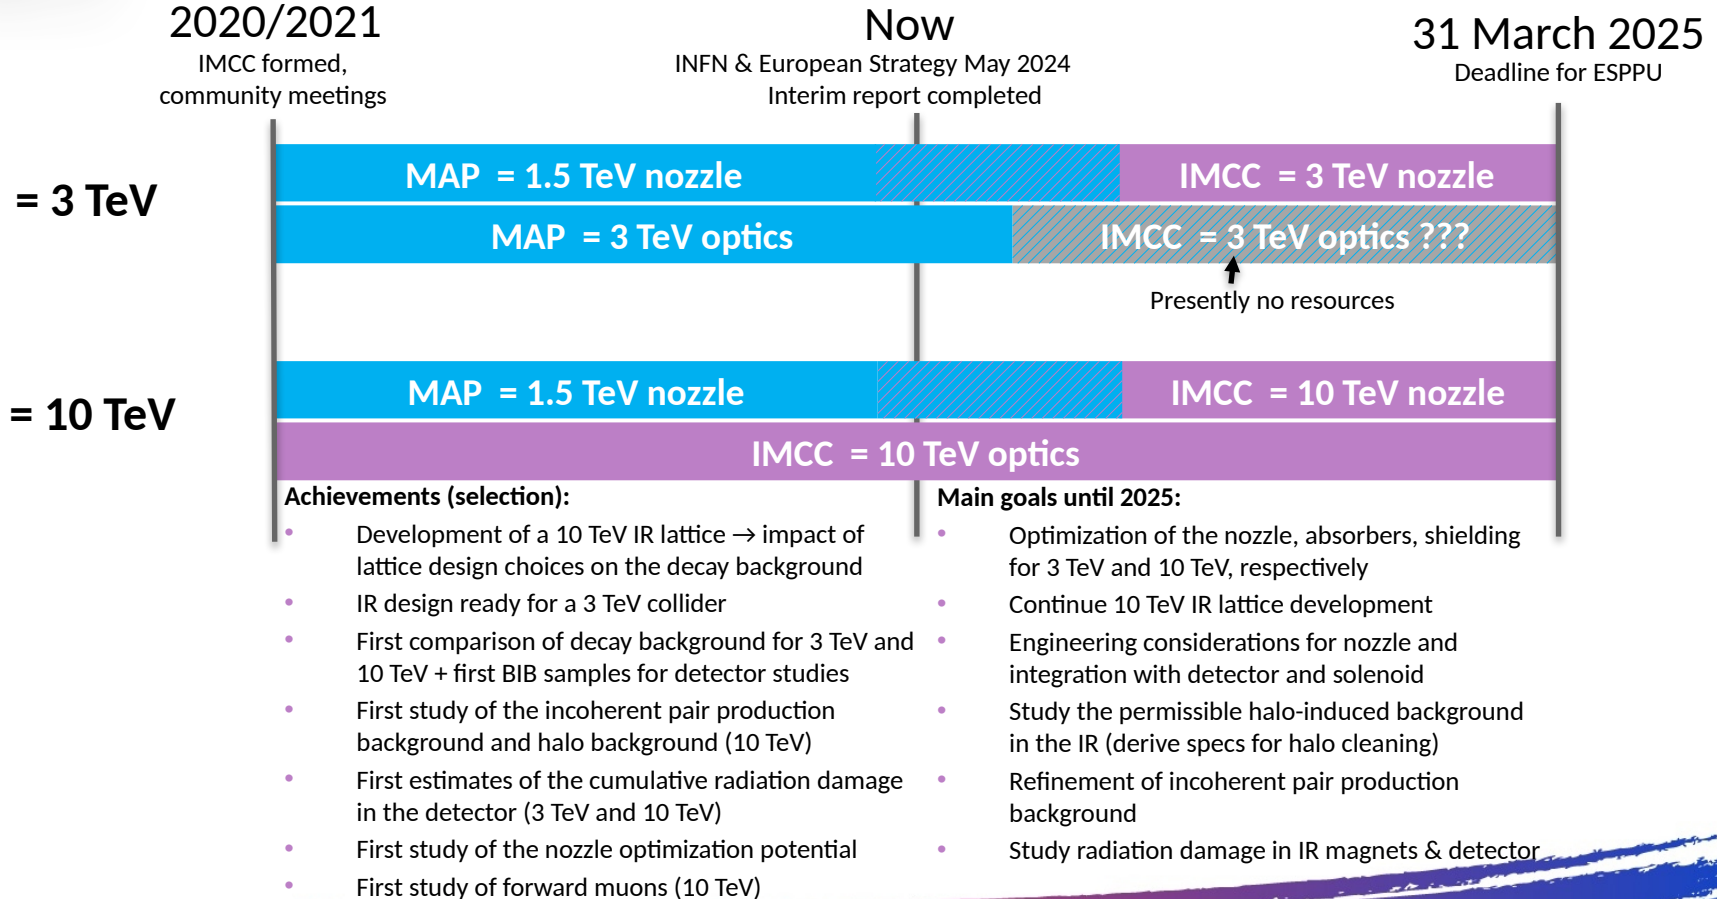



International  
UON Collider  
Collaboration




***Thank you  
for your attention!***

# Recap of collider parameters

	=3 TeV	=10 TeV
<b>Beam parameters</b>		
Muon energy	1.5 TeV	5 TeV
Bunches/beam	1	
Bunch intensity (at injection)	$2.2 \times 10^{12}$	$1.8 \times 10^{12}$
Norm. transverse emittance	25 $\mu\text{m}$	
Repetition rate (inj. rate)	5 Hz	
<b>Collider ring specs</b>		
Circumference	4.5 km	10 km
Revolution time	15.0 $\mu\text{s}$	33.4 $\mu\text{s}$
<b>Luminosity</b>		
Target integrated luminosity	1 $\text{ab}^{-1}$	10 $\text{ab}^{-1}$
Average instantaneous luminosity (5/10 yrs of op.)	$2 \times 10^{34} \text{ cm}^{-2}\text{s}^{-1}$ / $1 \times 10^{34} \text{ cm}^{-2}\text{s}^{-1}$	$2 \times 10^{35} \text{ cm}^{-2}\text{s}^{-1}$ / $1 \times 10^{35} \text{ cm}^{-2}\text{s}^{-1}$

$$\tau = 2.2 \times 10^{-6} \text{ s}$$

Muon decay	=3 TeV	=10 TeV
Mean muon lifetime in lab system ( $\gamma\tau$ )	0.031 s	0.104 s
Luminosity lifetime	1039 turns	1558 turns

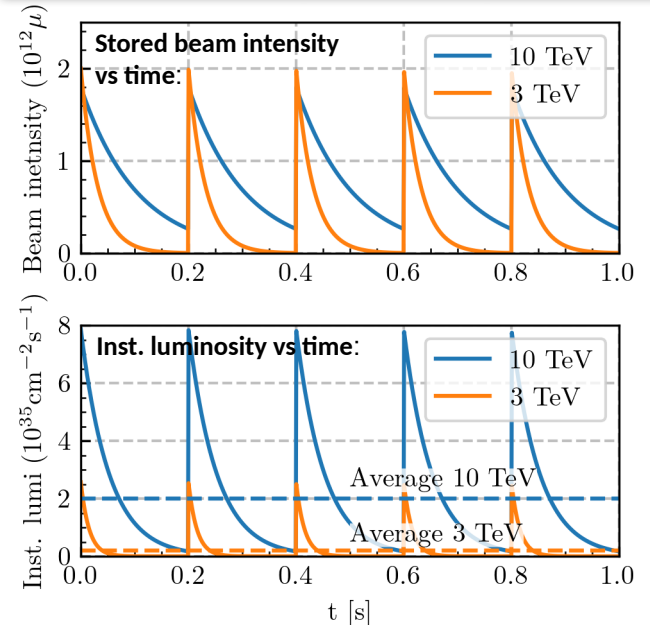

See also parameter doc: <https://cernbox.cern.ch/s/NraNbczzBSXctQ9>

# Workflow in the IMCC

Machine-Detector  
Interface: MDI


## 1. Lattice design

The magnet optics is computed via dedicated codes (e.g. MAD-X).

The output is a twiss file, containing the machine elements in a sequence

## 2. FLUKA geometry model

Via LineBuilder (LB), complex geometries are assembled in a FLUKA input file

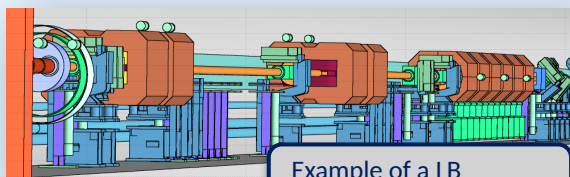

Example of a LB  
application: LHC IR7

## 3. BIB simulation

With the built geometry, a FLUKA simulation is run.

The position and momentum of the decay muons are sampled from the matched phase-space

Iteration with lattice design  
experts to mitigate the BIB


BIB data to detector experts

CERN STI/BMI is currently responsible for the geometry built at  $\sqrt{s} = 3$  and 10 TeV




# MDI in the IMCC and MuCol (EU study) structure

IMCC:

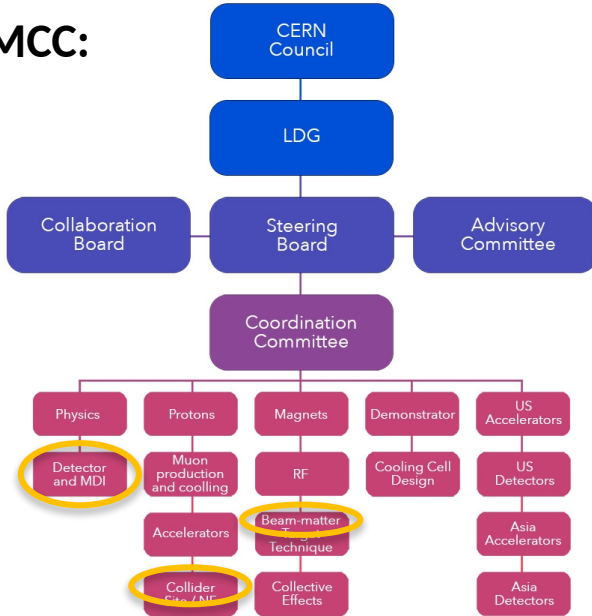

Detector, MDI and collider design are represented in IMCC coord. committee

MuCol:

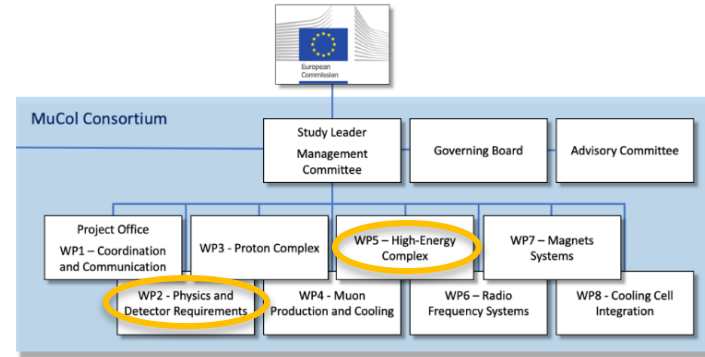

- **WP2 (Physics and Detector Requirements)**
    - **MDI - detector studies**
  - **WP5 (High-energy complex), Task 5.1 “Collider design” and Task 5.4 “MDI design & background to experiments”**
    - **MDI - machine studies, IR lattice design, background simulations as input for WP2**
- Close collaboration with other WPs (e.g. WP7 magnets)*

# WG meetings for IMCC and MuCol MDI studies

- **MDI WG (since Nov 2021) – *machine studies for MDI***
  - Shall bring together expertise from different areas (interaction region design, particle-matter interactions, detector etc.)
  - Meetings every few weeks, usually on Fridays (17h00 CET), see [Indico category](#)
  - CERN e-group: [muoncollider-mdi@cern.ch](mailto:muoncollider-mdi@cern.ch)
- **Physics & Detector WG (since Nov 2020) – *detector studies for MDI***
  - Meetings on Physics and Detector simulation & Detector performance and MDI
  - Meetings usually on Tuesdays (16h00 CET), see [Indico category](#)
  - CERN e-group: [muoncollider-detector-physics@cern.ch](mailto:muoncollider-detector-physics@cern.ch)


These meetings are open to everyone who is interested to join!

## Muon Collider MDI Studies #15

Friday Feb 9, 2024, 4:00 PM → 5:30 PM Europe/Zurich

---


### 10TeV Muon Collider - Final Focusing Scheme

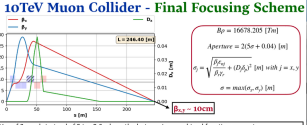

$\beta_y = 10676.205 [m]$   
 $\text{Aperture} = 25\sigma = 0.043 [m]$   
 $\sigma_x = \sqrt{\frac{D_x^2}{\beta_x} + D_x^2}$  with  $L = 5.5$   
 $\sigma = \text{muon}_{\text{max}} [m]$   
 $D_{x,y} = 100 [mm]$

- Use of 3 quadrupoles instead of 5 in V0.6 where the last one is a combined function magnet.
- Addition of two dipoles for BIB reduction.
- Each dipole component (1-100Tm) generate 5mrad (600m muonino spread @ 100km from collider)
- The dipoles have opposite polarity so to cancel out the dispersion bump.
- Entering the CC with small (to parallel aperture, smaller  $\beta_0$ ), less impact from unwanted multipolar components, easier control of  $\beta_0$ .

### Workflow in the IMCC

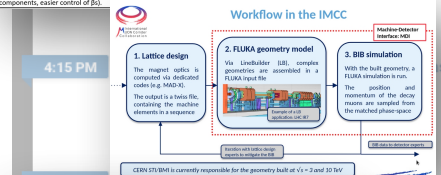

4:15 PM

1. Lattice design: The magnet optics is described via dedicated codes (e.g. MAD-X). The output is a text file containing the machine elements in a sequence.

2. FLUKA geometry model: Via Conductor Bill, complex geometries are assembled in a CAD-like structure.


3. BIB simulation: With the built geometry + FLUKA simulation code, the position and momentum of the decay muons are sampled from the matched phase-space.

4:45 PM

CERN ST/BOH is currently responsible for the geometry built at  $\sqrt{s} = 2 \text{ and } 10 \text{ TeV}$ .


---

### No dipole component: v6

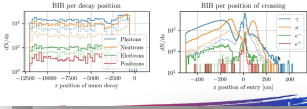

- The contribution of decay far away from the IP are not negligible. They arrive in time with the bunch crossing and they are difficult to mitigate.

### Forward Muons at $\sqrt{s} = 3 \text{ TeV}$

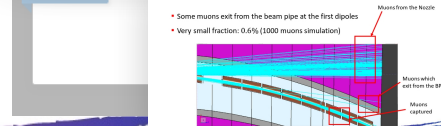

- Some muons exit from the beam pipe at the first dipoles.
- Very small fraction: 0.6% (1000 muons simulation)




# From a conceptual to a technical nozzle design

- Many questions to be addressed for technical nozzle design, for example:
  - Integration and support inside detector
  - Shielding segmentation and assembly
  - Selection of specific material (tungsten heavy alloy) → machining is an important aspect
  - Heat extraction (cooling)
  - Alignment, vibrations, tolerances, etc.
  - Dedicated vacuum chamber inside nozzle
- IMCC for final ESPPU report:
  - First considerations about the nozzle integration inside detector and general technical aspects


***But: do not have resources for detailed technical design studies***

\*Pictures/info from <https://atlas-shielding.web.cern.ch>

Can learn from existing shielding projects, for example ATLAS shielding\*:

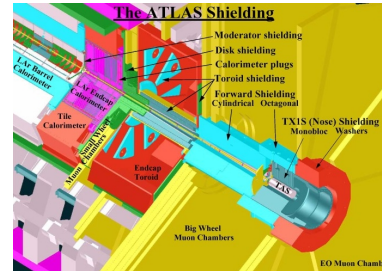

**ATLAS toroid shielding:**  
110 tonnes of cast iron,  
2.6 tonnes of borated  
polyethylene

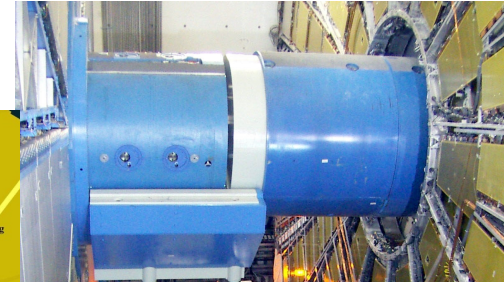

**ATLAS forward shielding:**  
775 tonnes of cast iron,  
50 tonnes of steel plates  
11 tonnes of borated polyethylene

