

2ND International Workshop on
Detection Systems and Techniques
For Fundamental and Applied Physics - DeSyt-2025

LOW-PRESSURE TPC WITH GEM READOUT FOR EXPERIMENTS WITH LOW ENERGY ION BEAMS

A. Bondar, A. Buzulutskov, V. Parkhomchuk,
A. Petroghitsky, T. Shakirova, A. Sokolov

*Budker Institute of Nuclear Physics,
Novosibirsk State University*

N * Novosibirsk
State
University
*THE REAL SCIENCE

February 25, 2025



1. Accelerator mass spectrometry
2. New concept of ion identification. Proof of Concept.
3. Experimental setup
4. Measurements of energy spectra and track ranges
5. Recent results with AMS

Isotopes used for dating

Analyzed isotopes	Half life	Stable isotopes	Stable isobars
^{10}Be	1,39 million years	^9Be	^{10}B
^{14}C	5730 years	$^{12,13}\text{C}$	$^{14}\text{N}^*$
^{26}Al	717 thousand years	^{27}Al	$^{26}\text{Mg}^*$
^{36}Cl	301 thousand years	$^{35,37}\text{Cl}$	$^{36}\text{Ar}^*$, ^{36}S
^{41}Ca	102 thousand years	$^{40,42,43,44}\text{Ca}$	^{41}K
^{129}I	15,7 million years	^{127}I	$^{129}\text{Xe}^*$

* - isobars that do not form stable negative ions.

In the current AMS BINP setup the time-of-flight technique is used for the carbon isotopes separation. But that technique has a serious problem of separating the isobars - different chemical elements having the same atomic mass. The typical example are radioactive isotopes ^{10}Be and ^{10}B .


Accelerator mass spectrometry



Accelerator mass spectrometry (AMS) is an ultra-sensitive method of counting individual atoms. Usually it is the rare radioactive atoms with a long half-life. The archetypal example is ^{14}C which has a half-life of 5730 years and an abundance in living organisms of 10^{-12} relative to stable ^{12}C isotope.

AMS facilities operate in more than 100 physical laboratories worldwide, two of them are located in Novosibirsk at Geochronology of the Cenozoic Era Center for Collective Use and Novosibirsk State University.

BINP AMS

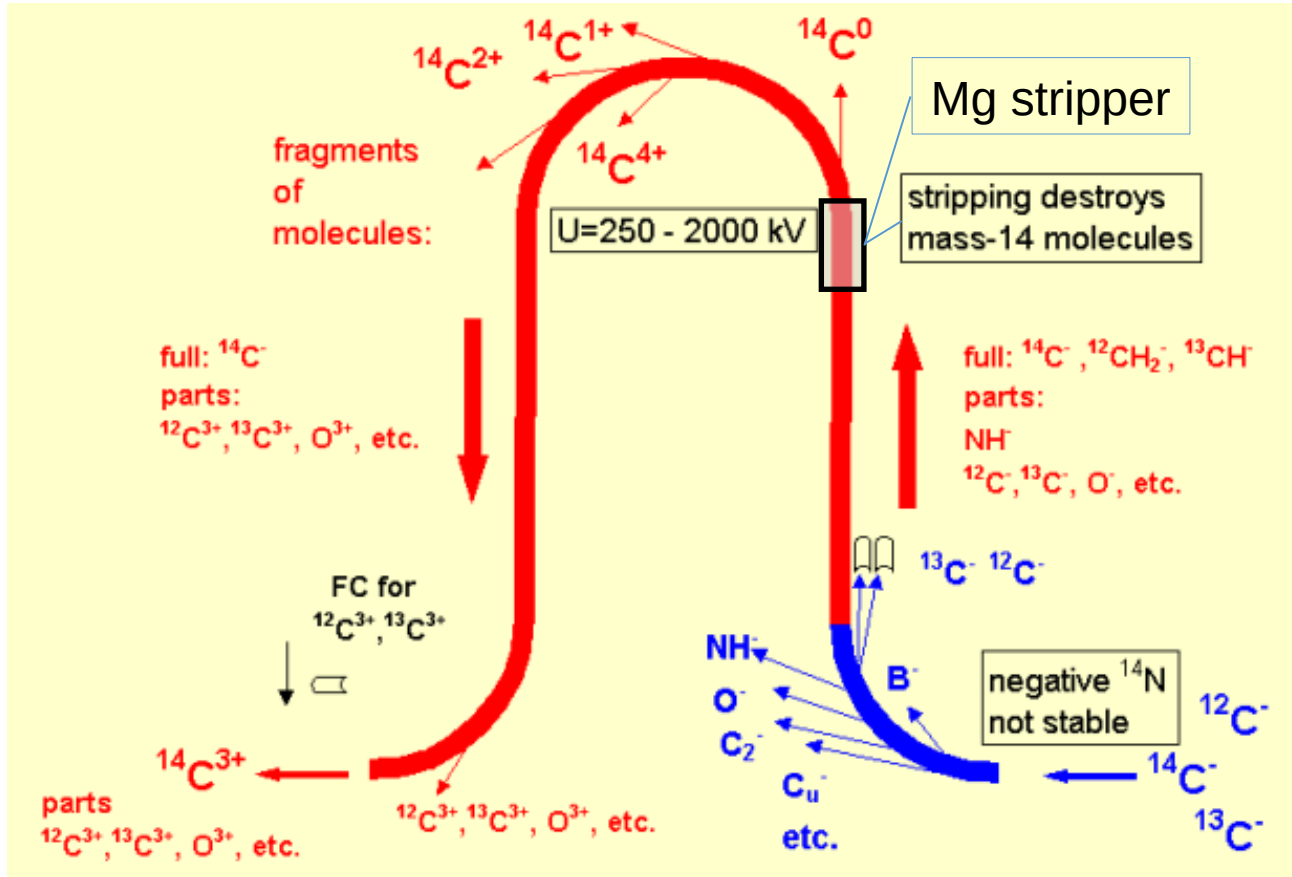


BINP AMS provides reliable separation of a pure beam of radiocarbon ions from the accompanying ion background.

1. Formation of an ion beam from atoms of the test sample
2. Ion selection at low energy
3. Ion acceleration
4. Recharging of atomic ions and destruction of molecular ions in magnesium target
5. Ion selection in a high voltage terminal
6. Ion acceleration
7. Ion selection at high energy
8. Identification and counting of ions

Traditional concept of ion identification at AMS


Detectors used to count the AMS isotope:

- silicon detectors;
- time-of-flight systems (*BINP AMS*);
- ionization chambers.

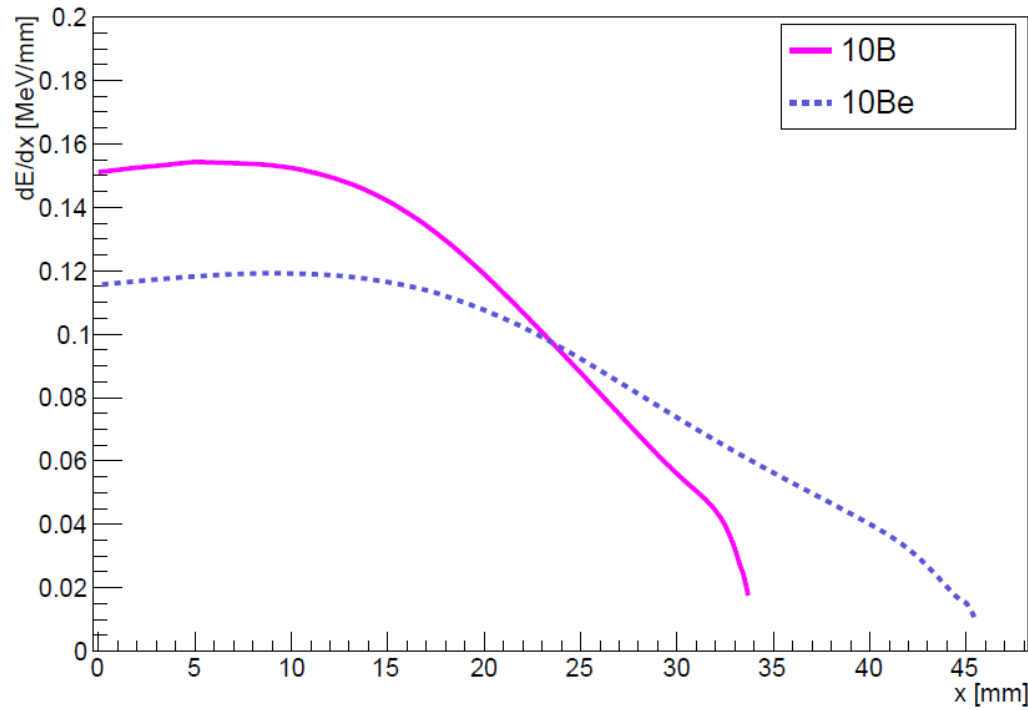

Ions track lengths at 50 Torr of $i\text{-C}_4\text{H}_{10}$


ΔE -E detectors

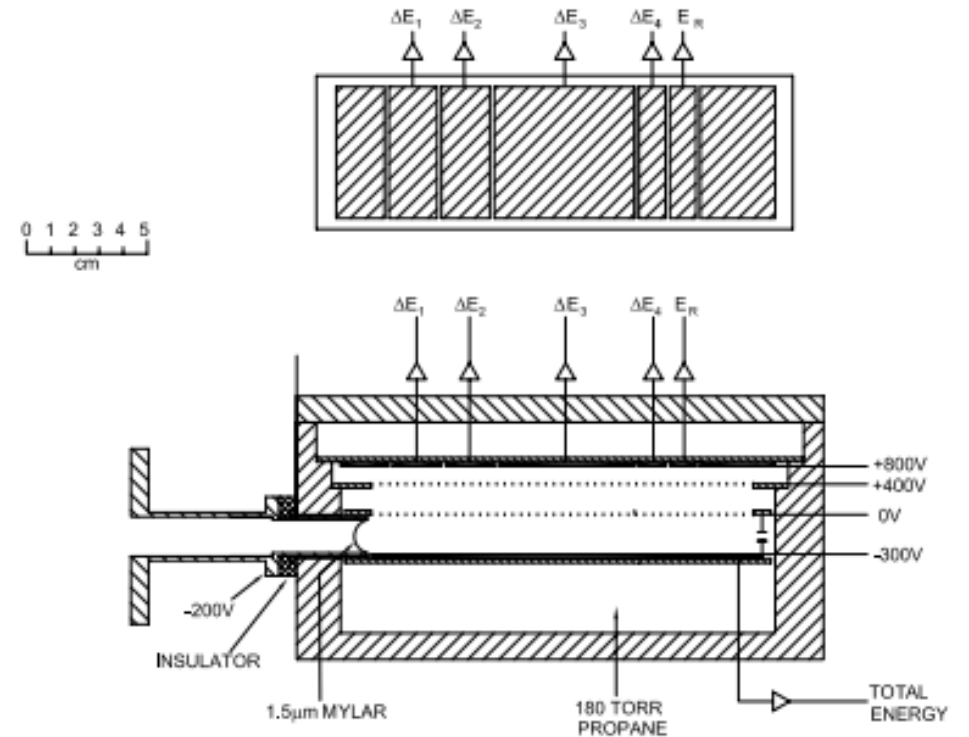


A cross section through the multi-element ionization chamber. The upper panel shows a plan view of the anode electrode.

Proof of concept: measuring track ranges

SRIM (The **S**topping and **R**ange of **I**ons in **M**atter Software) – is a collection of software packages which calculate many features of the transport of ions in matter.

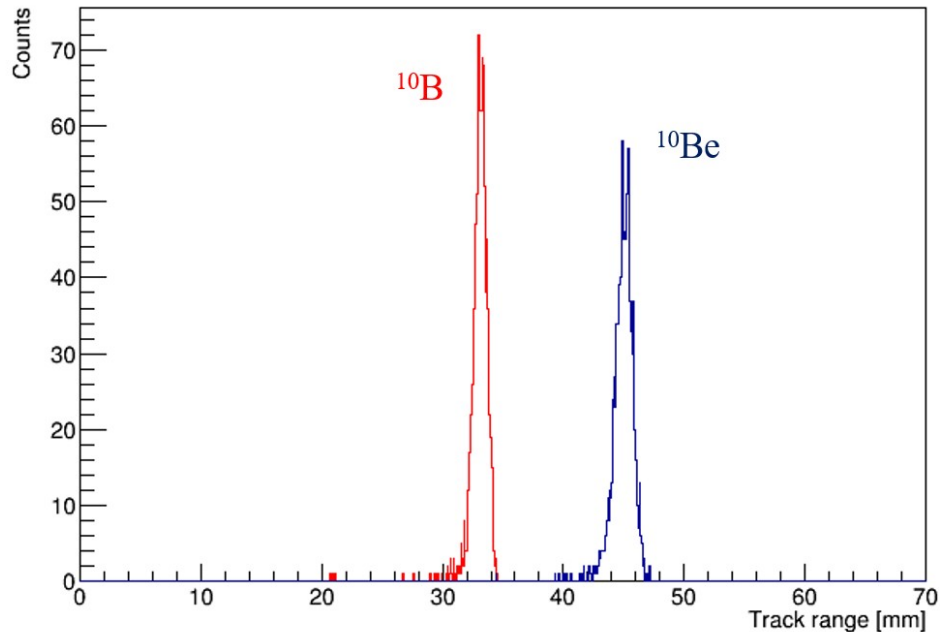


Track ranges distributions in the low-pressure TPC for 4.025 MeV ^{10}B and ^{10}Be ions for 200 nm silicon nitride window and 50 torr isobutane, obtained using SRIM simulation.

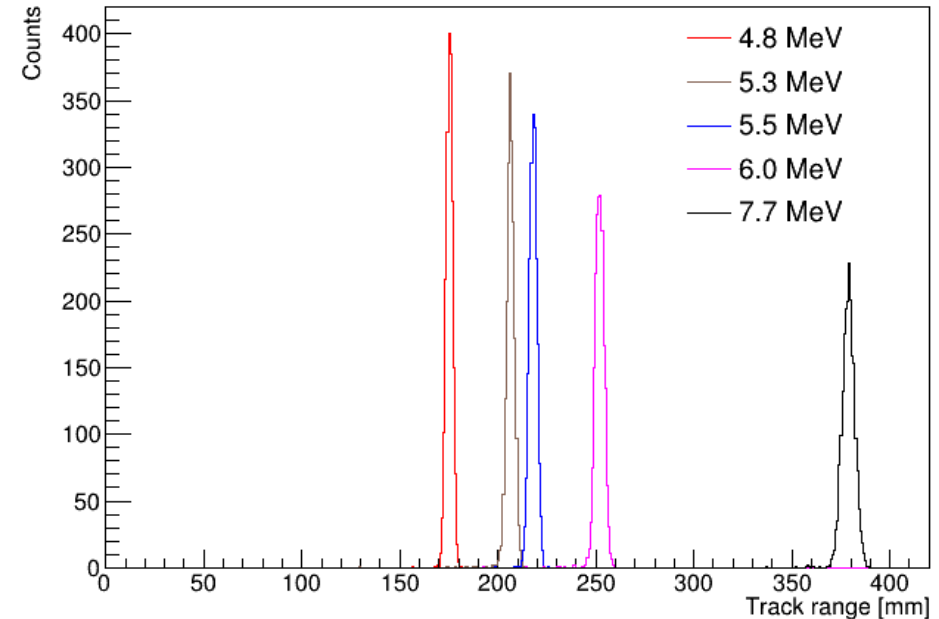

Ion ranges distributions in the low-pressure TPC for alpha particles with different energies for 200 nm silicon nitride window and 50 torr isobutane, obtained using SRIM simulation.


New concept of ion identification: low-pressure TPC

Schematic layout


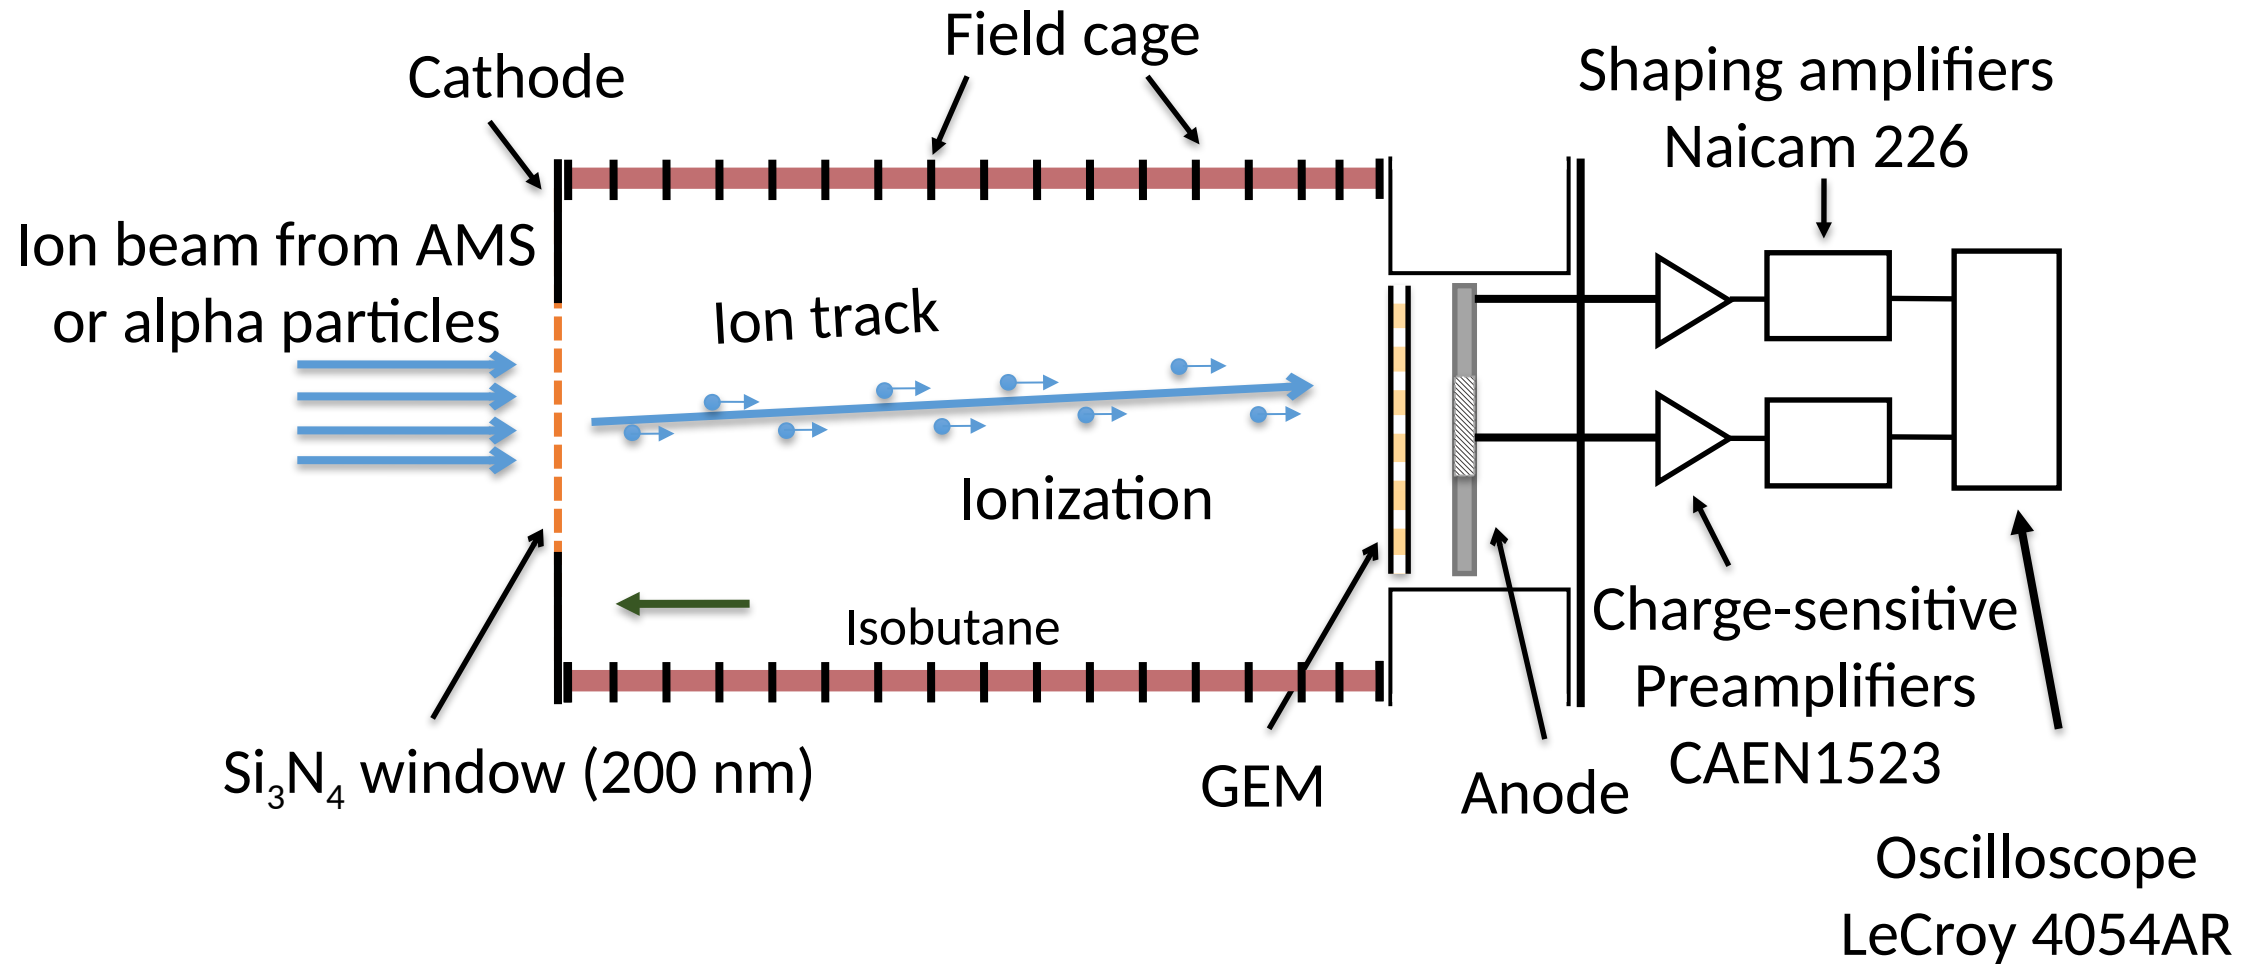


New concept of ion identification: low-pressure TPC


Schematic layout

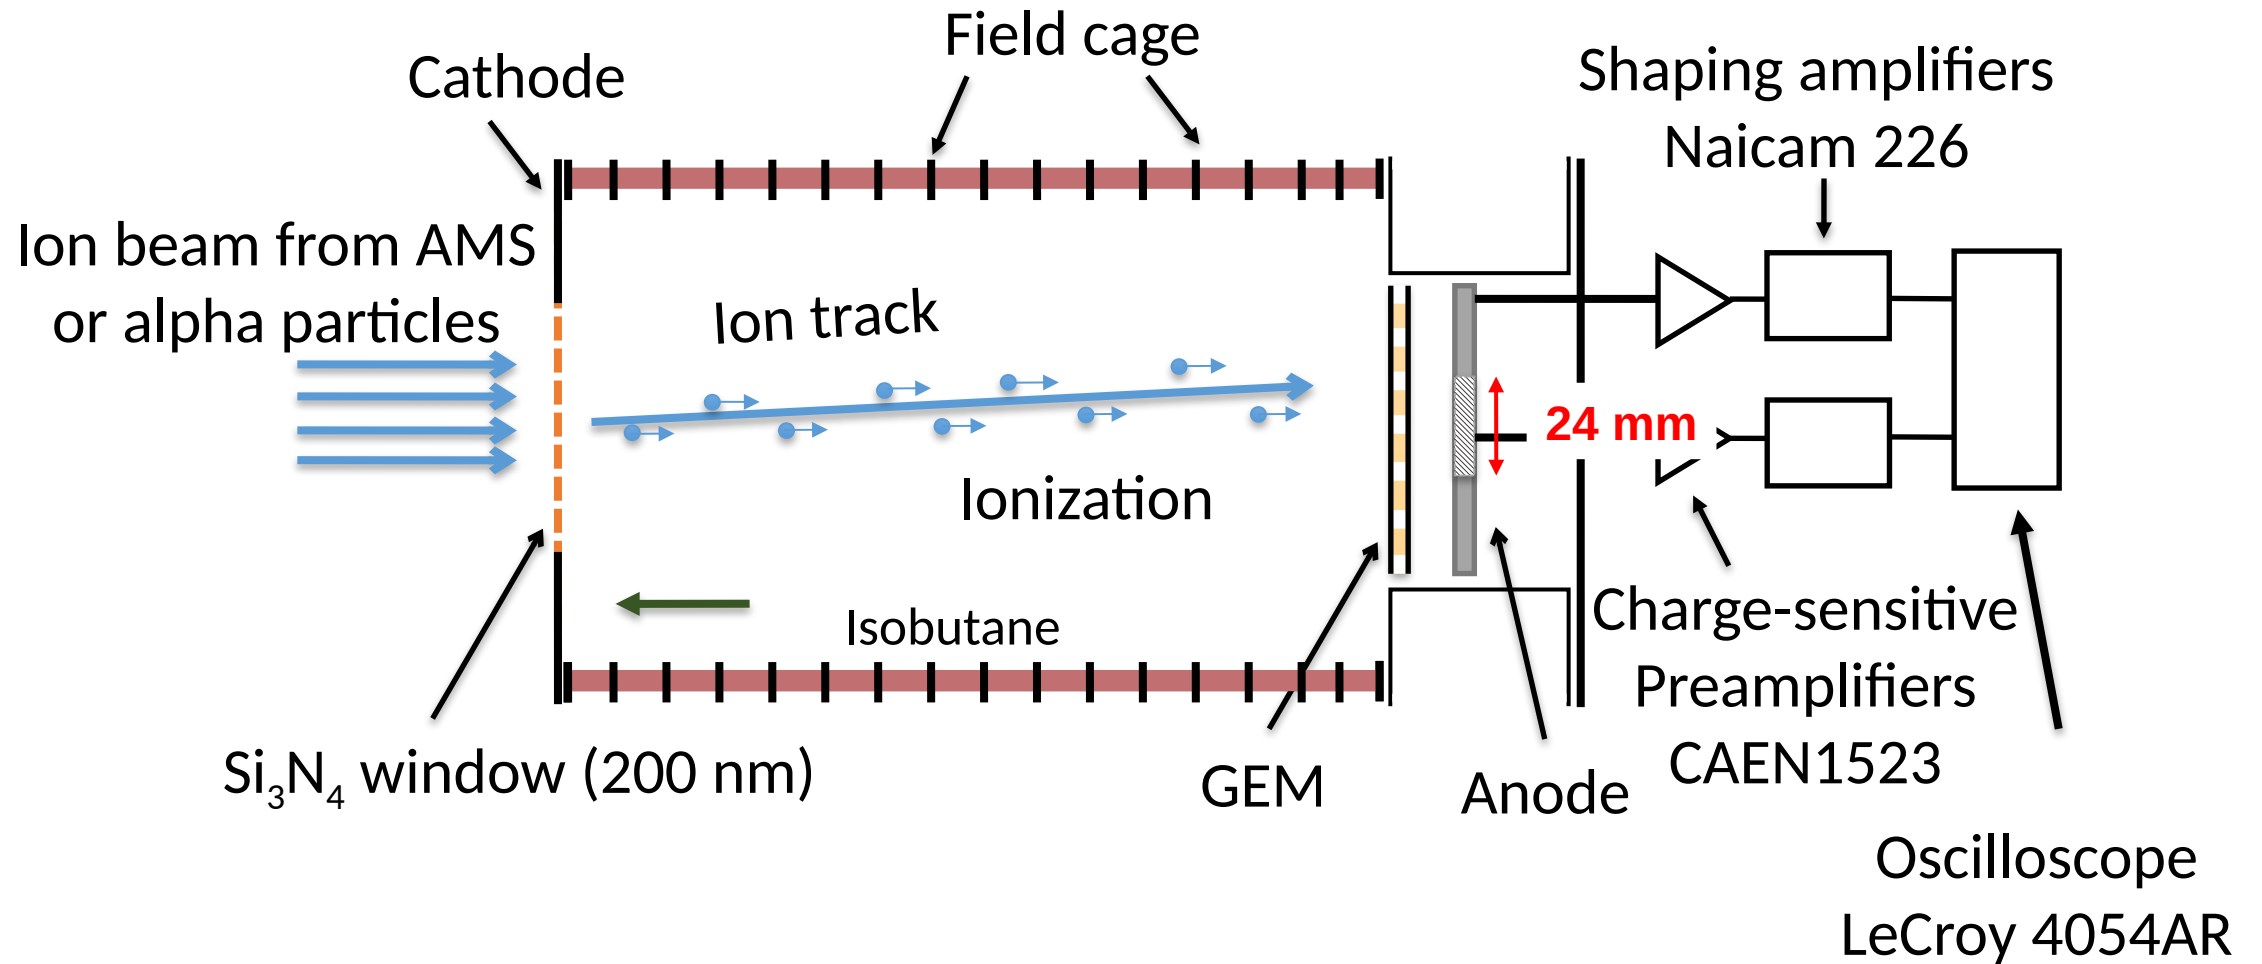

Effective gain of GEM

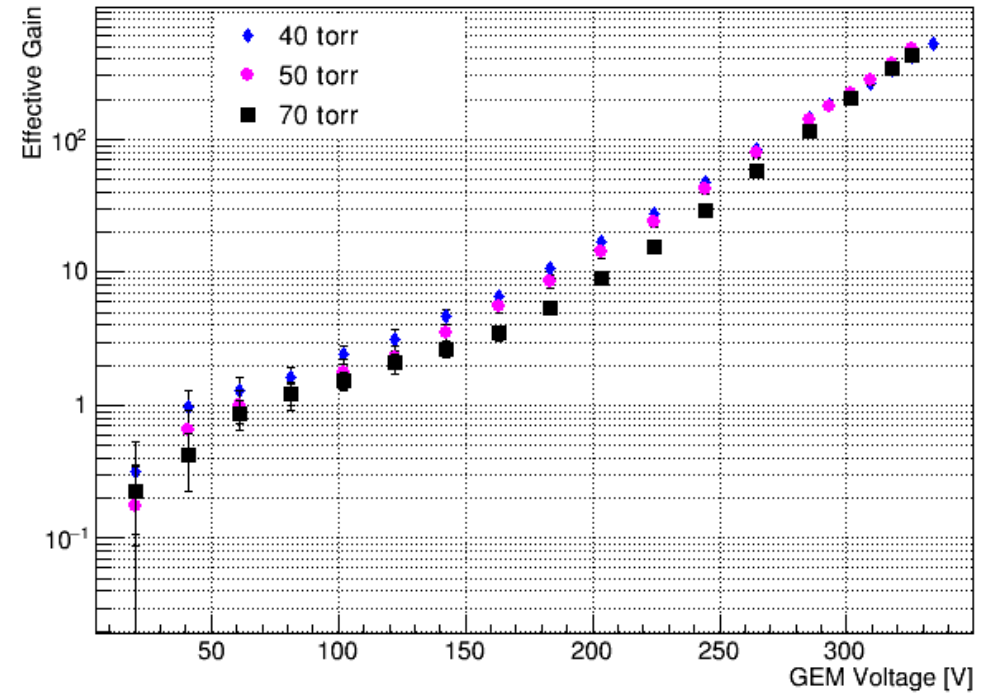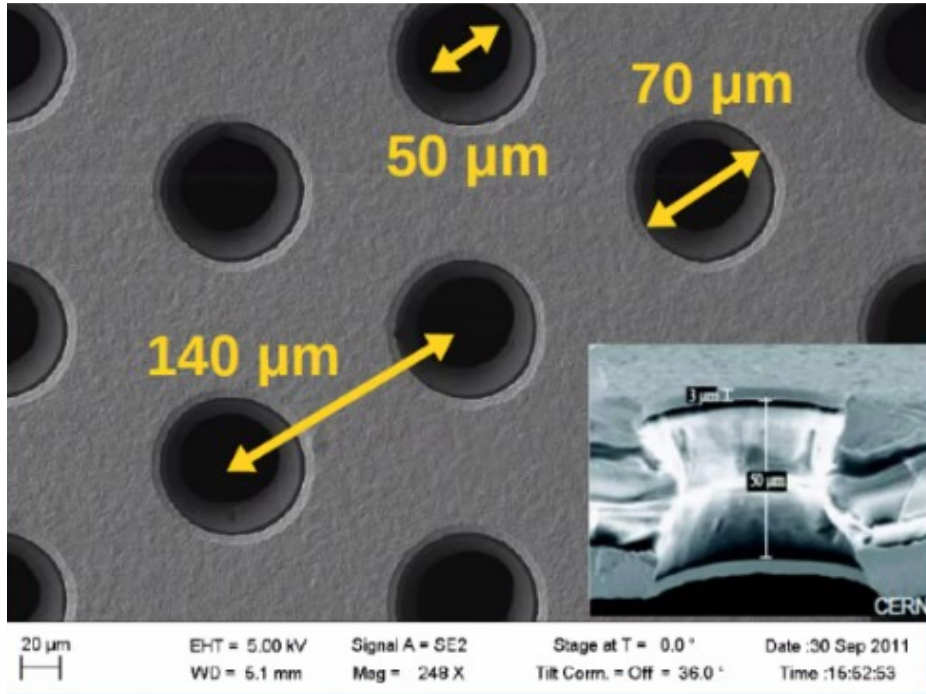


Electric field inside the holes.

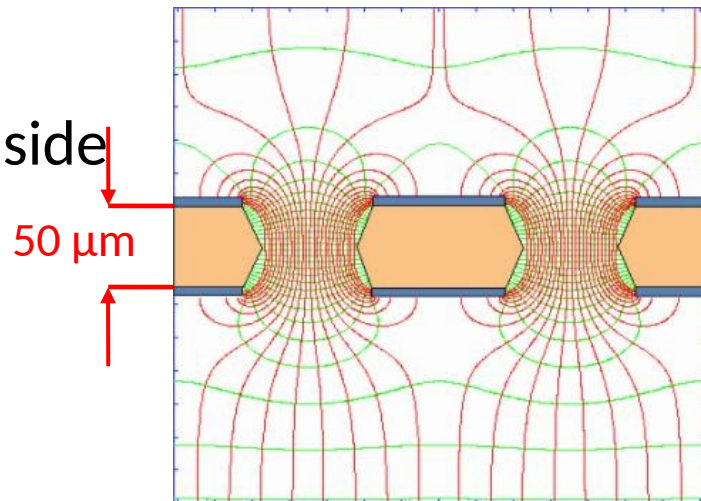


GEM effective gain as a function of the voltage in isobutane at pressures varying from 40 to 70 torr in the low-pressure TPC.

TPC Prototype: Principle of operation

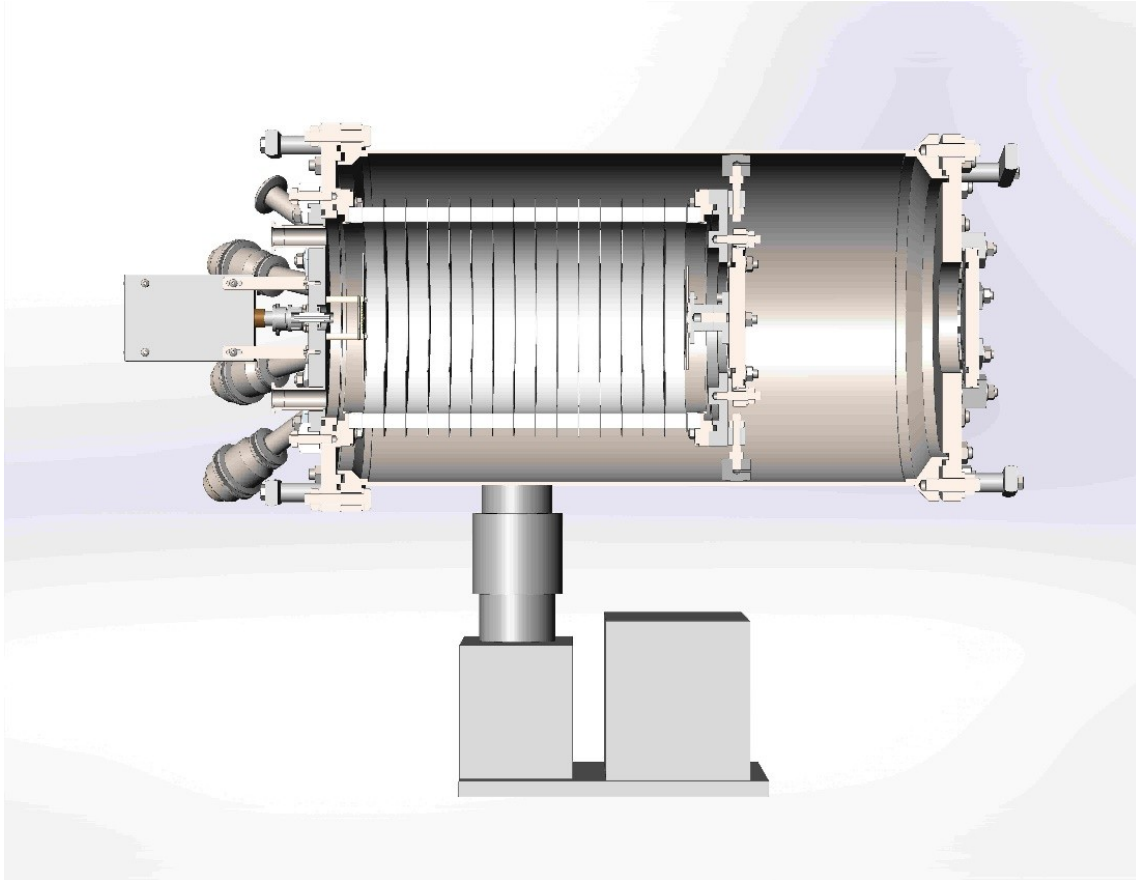


Diameter – 178 mm
Length – 300 mm

Typical waveform shape of the signal from the alpha particle in low-pressure TPC

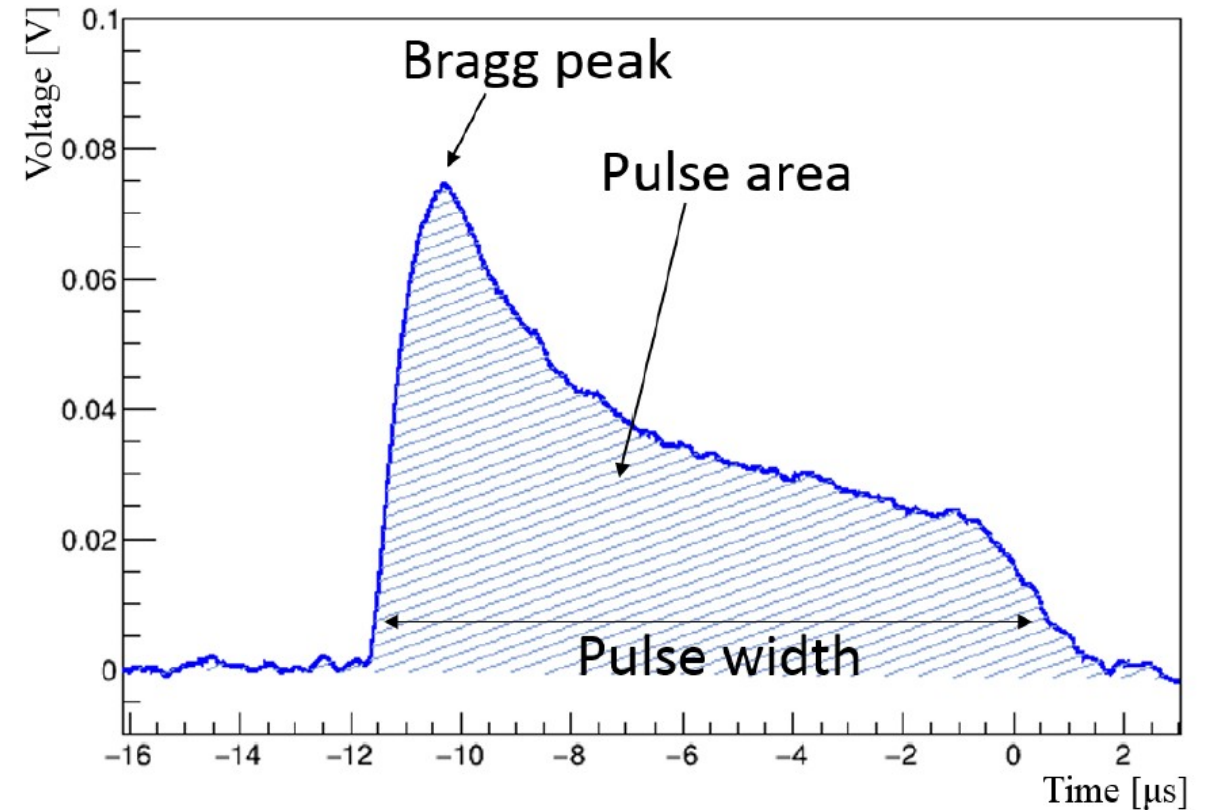


pulse width -> track range
pulse area -> energy

TPC Prototype: Principle of operation

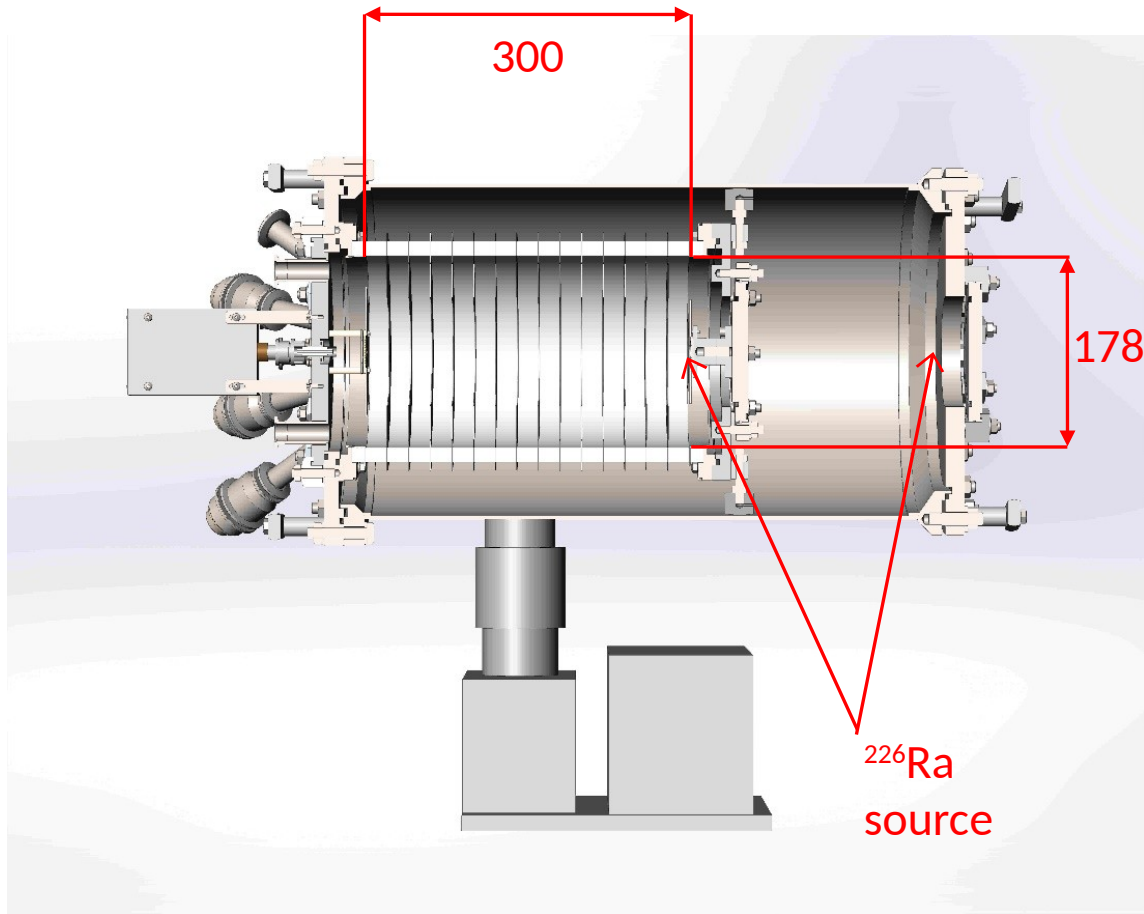

Diameter – 178 mm
Length – 300 mm

Typical waveform shape of the signal from the alpha particle in low-pressure TPC

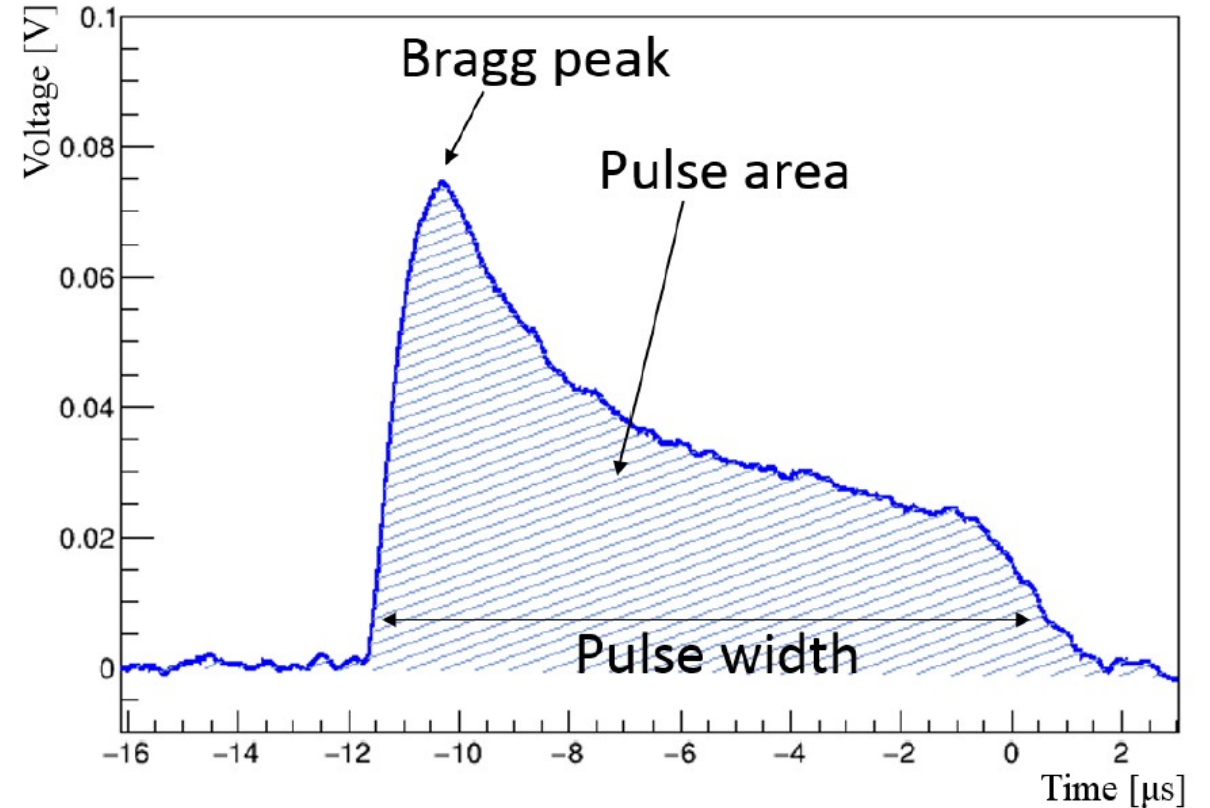

pulse width -> track range
pulse area -> energy

Test installation



The measurement of track ranges



The alpha-particle source

^{226}Ra


Pressure = 50 Torr

Gain = 225

Shaping time = 200 ns

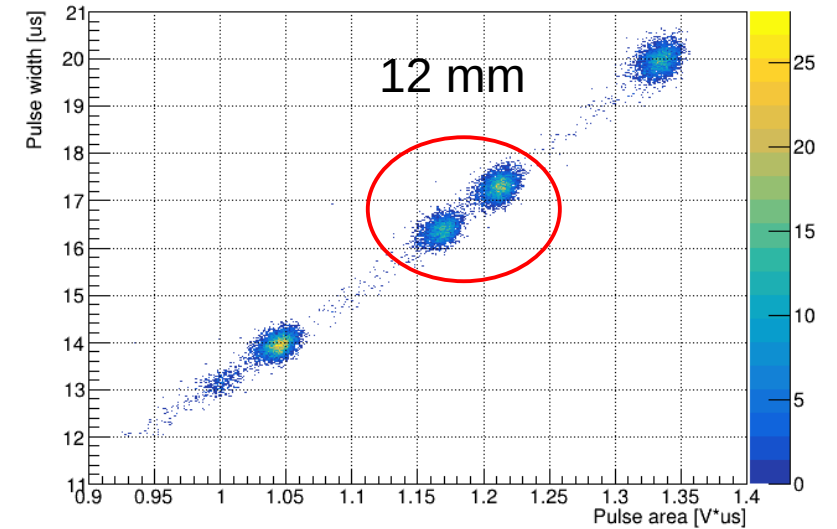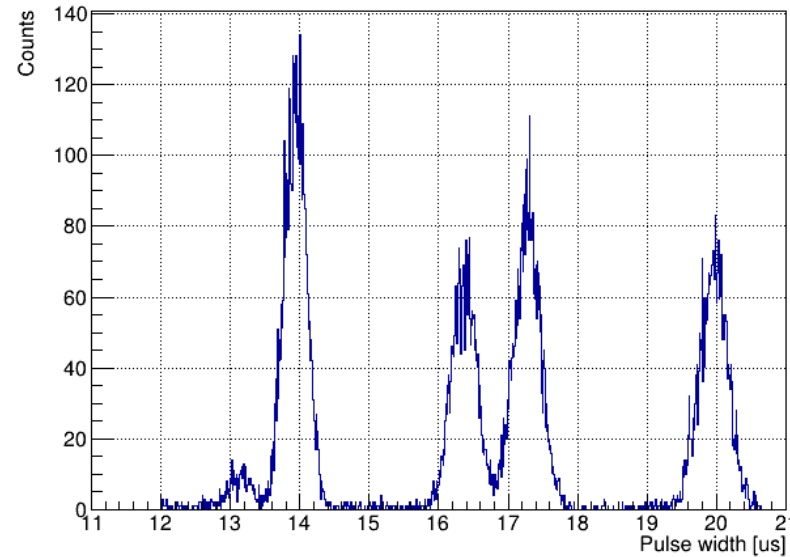


2D plot of pulse width versus pulse area and their axis projection spectra for alpha particles from ^{226}Ra (4.8, 5.3, 5.6, 6.0 and 7.7 MeV) source, measured in low-pressure TPC in Isobutane at 50 Torr and GEM gain of 320. The peaks of 5.3 and 5.6 MeV had the same track length's difference as the ^{10}B and ^{10}Be ions. FWHM of this peaks is 6 mm, which corresponds sigma of 2.5 mm.

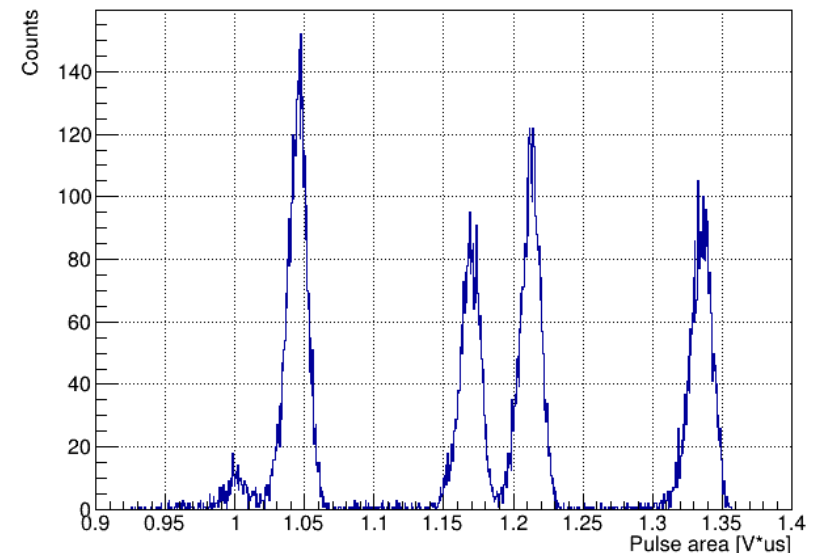

Results


Source	Shaping time	Gain	Pressure	Sigma/Range, %	Separation in sigma between two peaks
^{226}Ra	200 ns	320	50 Torr	7	5.5

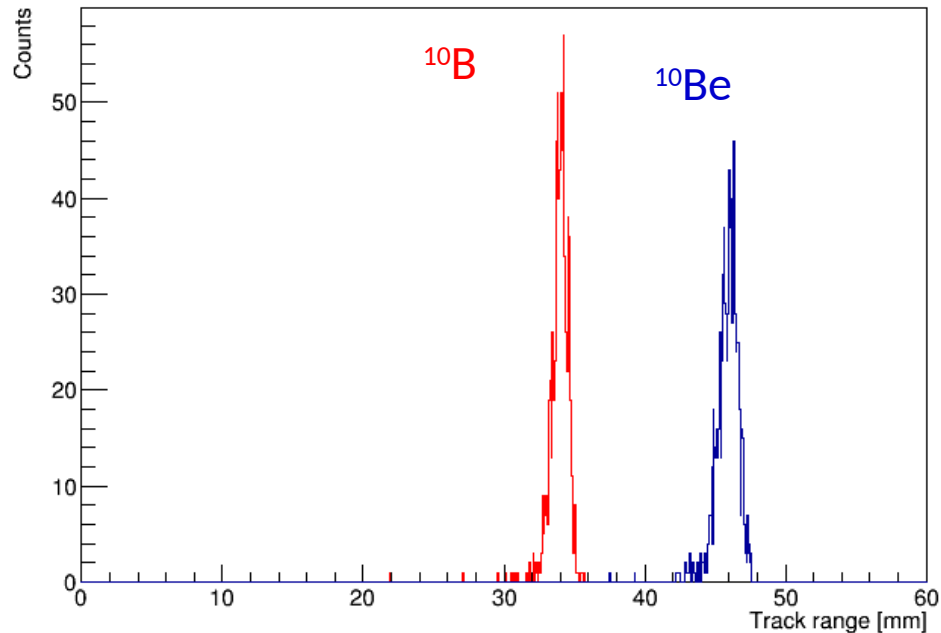


Spectra of ion ranges for ^{10}B and ^{10}Be with energy 4.025 MeV in Isobutane at 50 Torr simulated with SRIM.

Using these results and SRIM code simulations, it is shown that isobaric boron and beryllium ions can be effectively separated at AMS, providing efficient dating at a 10 million years scale. This technique will be applied in the AMS facility in Novosibirsk.

TPC for BINP AMS

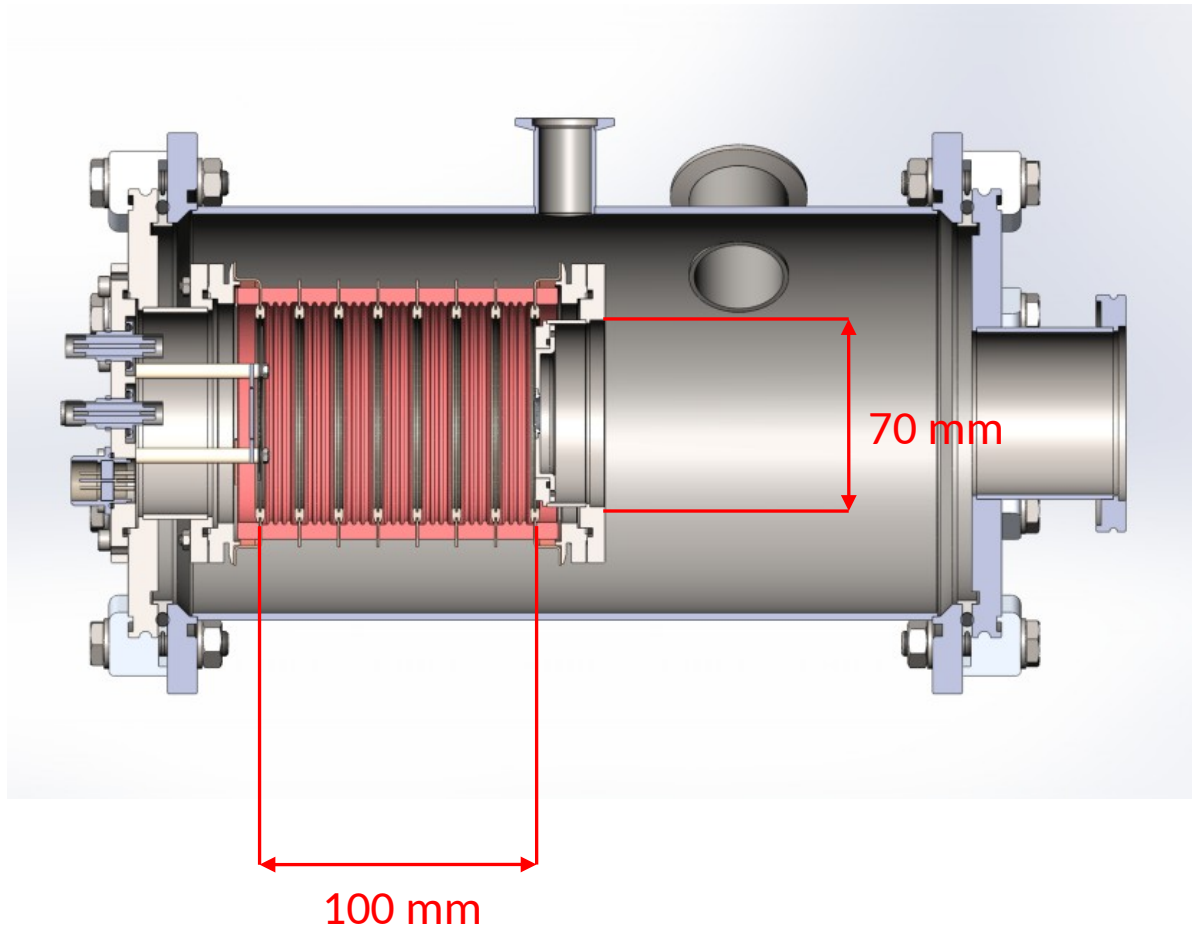

TPC for BINP AMS

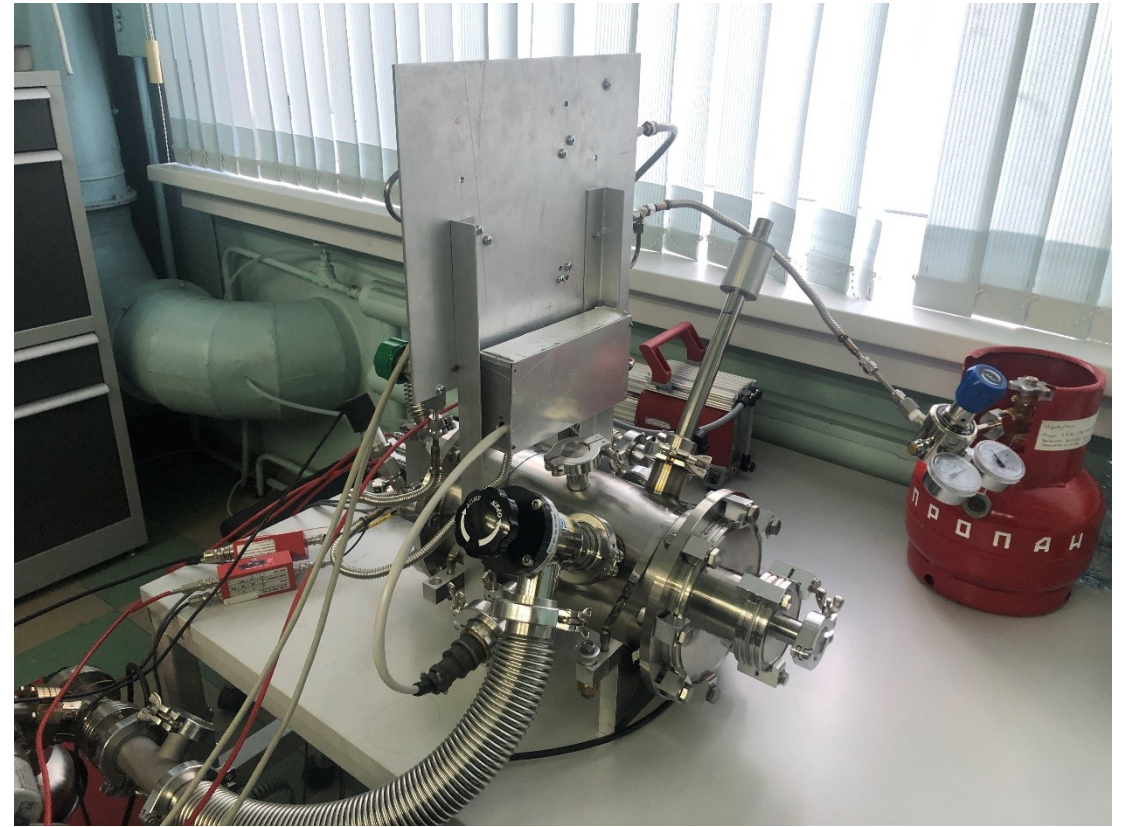

Test of the low-pressure TPC in laboratory, before installation.


Installation of TPC on BINP AMS

TOF detectors




TPC

Signal from ^{14}C and ^4He

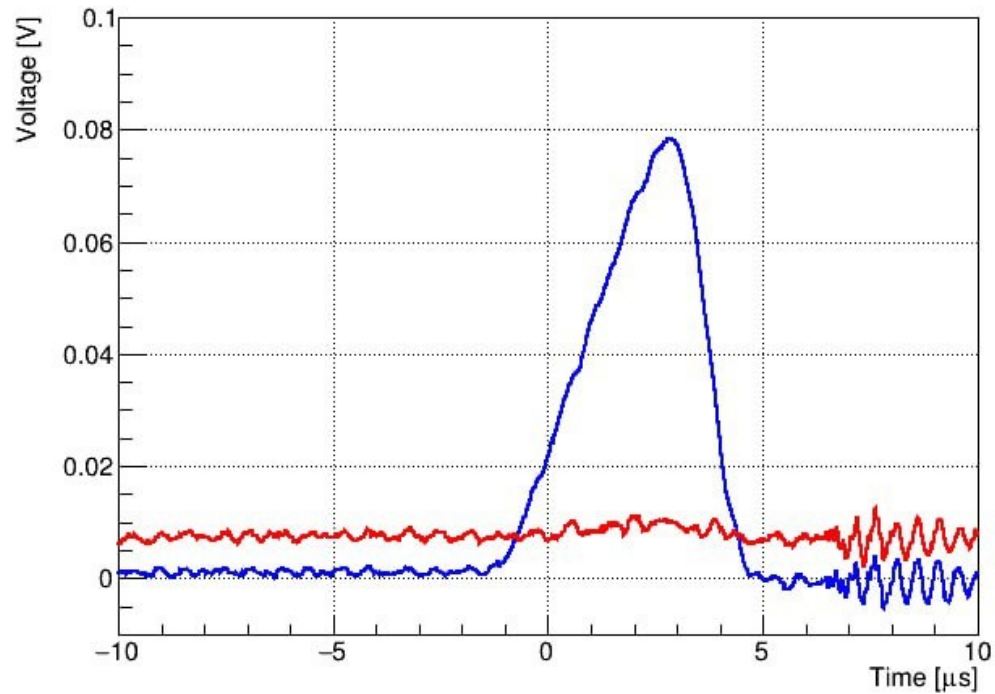


Signal from 4MeV ^{14}C ion

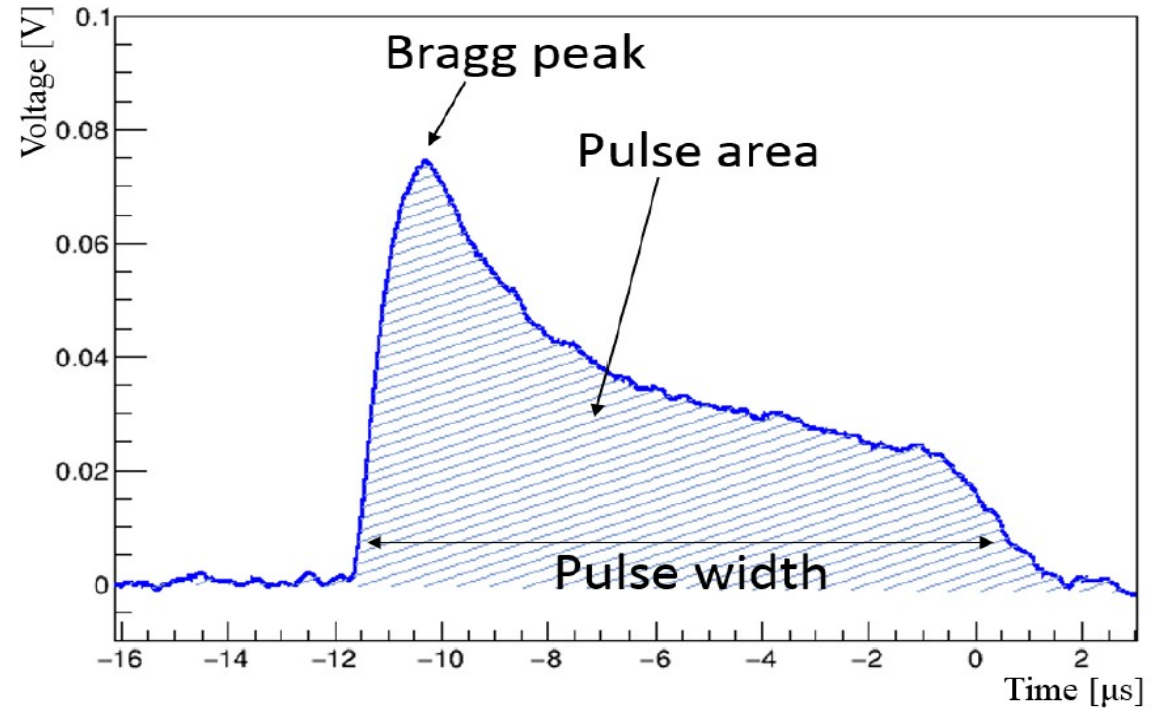


Signal from 5.1 MeV alpha particle

Results on carbon beam

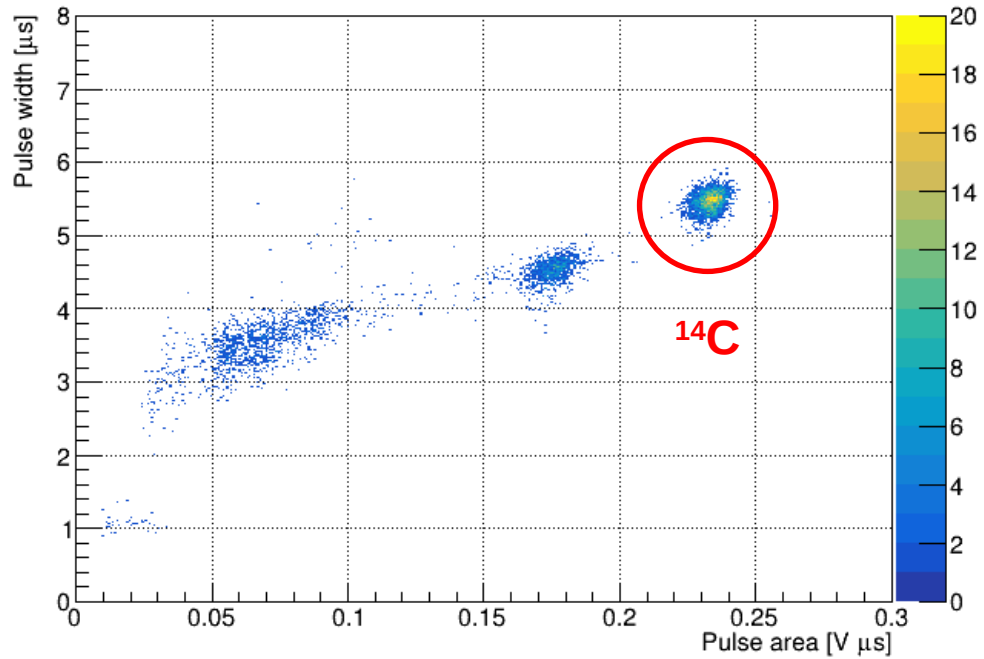

Sample with "alive" carbon sample

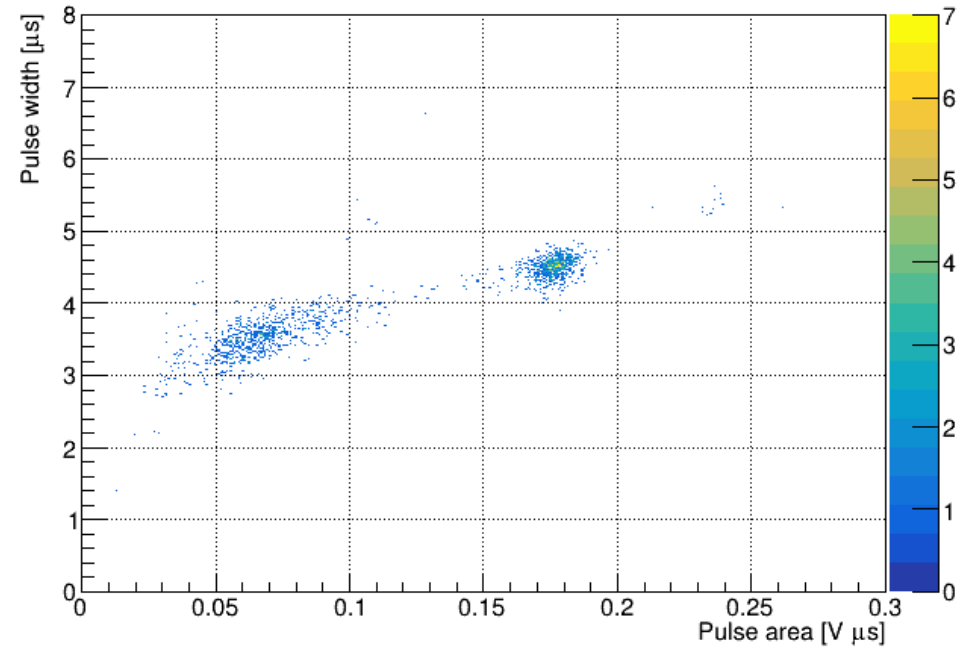


Sample with "dead" carbon sample

Conclusion

- A new concept of the detector for the accelerator-based mass spectrometer was proposed for identifying ions by their stopping range in gas;
- A low-pressure TPC prototype, based on this concept, have been made and successfully tested;
- The TPC have been installed on AMS;
- First results on ^{14}C beam are promising;
- We are preparing to the tests with ^{10}Be samples.





Thank you for your attention!

Installation of TPC on MICADAS

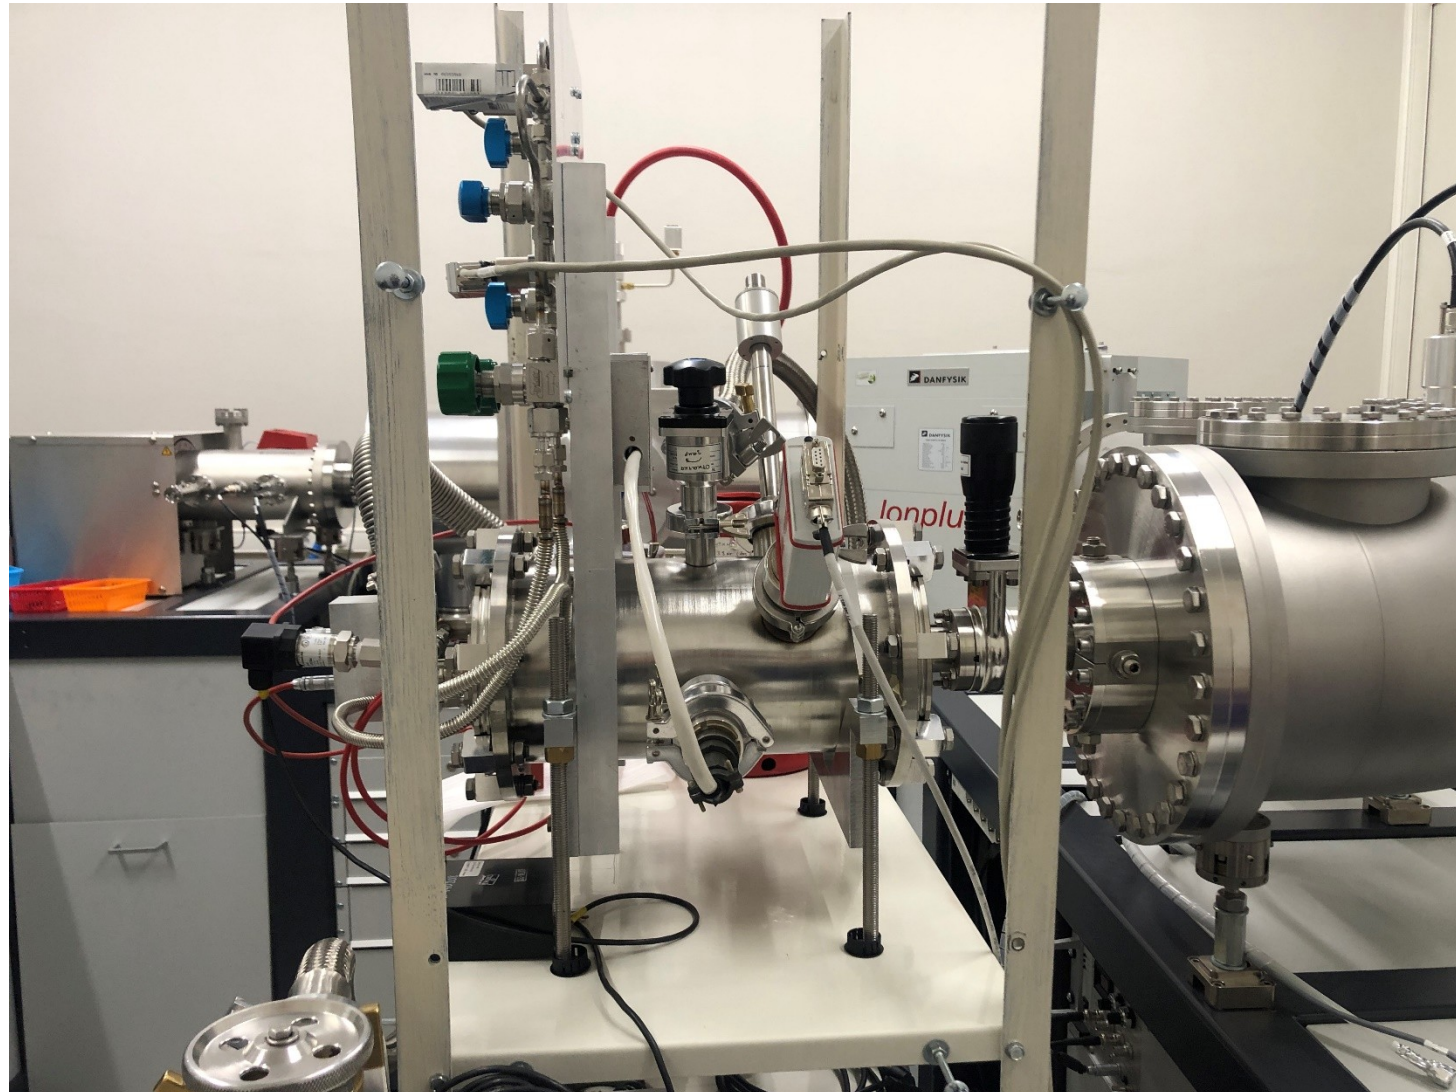


Backup slides

Results on carbon beam

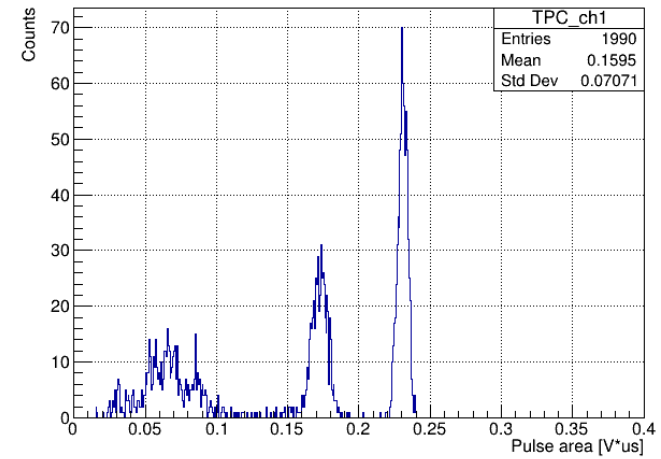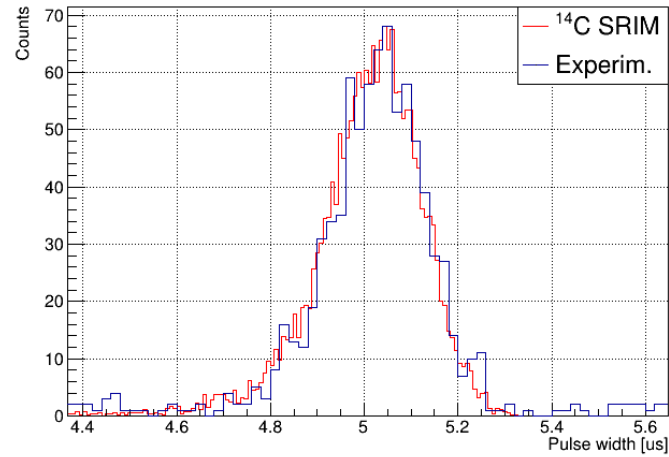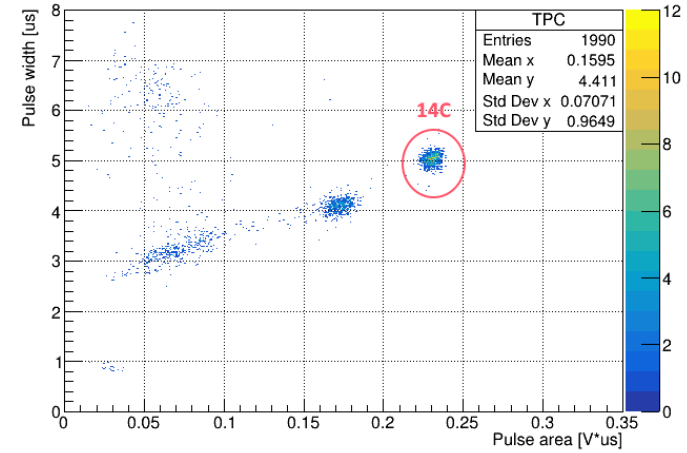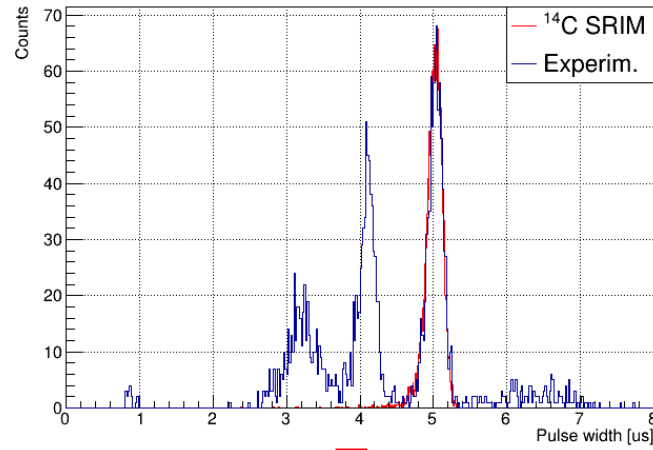

Formation and application ^{10}Be

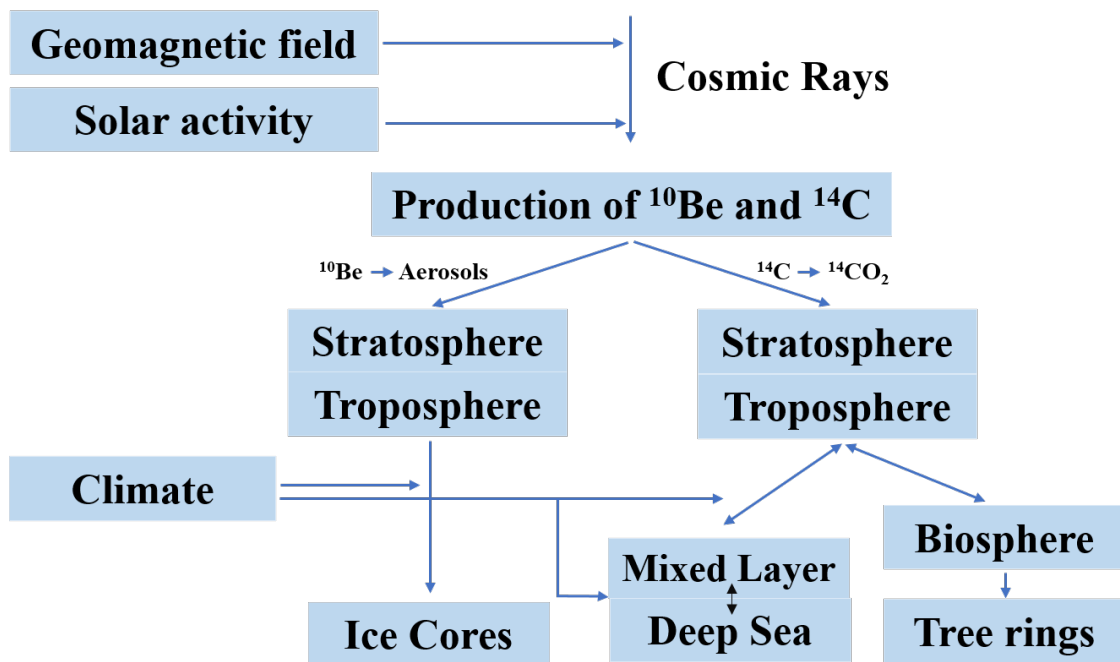

Time intervals of dating:

- ^{14}C from 50 years to 40-60 thousand years
- ^{10}Be from 1 thousand years to 10 million years

Application in-situ and meteoric ^{10}Be :


- exposure dating to identified the growths and decays of the Antarctic ice sheet;
- understanding ice shelf collapse history;
- paleomagnetic excursions history reconstructions using ice cores;
- understanding the erosion rates using depth profiles of mid latitudes outcrops;
- identifying the timing of formation of the impact crater and so forth.

Measurements of energy spectra using semiconductor detector

Alpha particle source— ^{233}U , ^{239}Pu , ^{238}Pu



Si Charged Particle Radiation Detectors for Alpha Spectroscopy

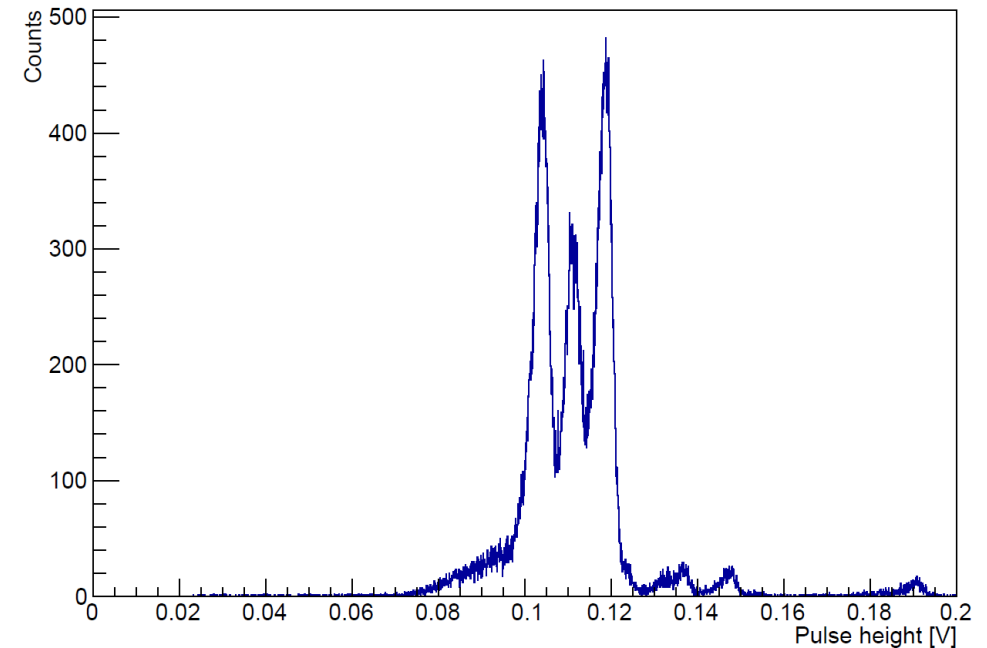

Energy spectrum of alpha particles from ^{233}U (4.8 MeV), ^{239}Pu (5.2 MeV) and ^{238}Pu (5.5 MeV) sources, measured using semiconductor detector

The measurement of track ranges



The alpha-particle source

^{233}U , ^{239}Pu , ^{238}Pu

Pressure = 50 Torr


THGEM Gain = 67

Shaping time = 200 ns

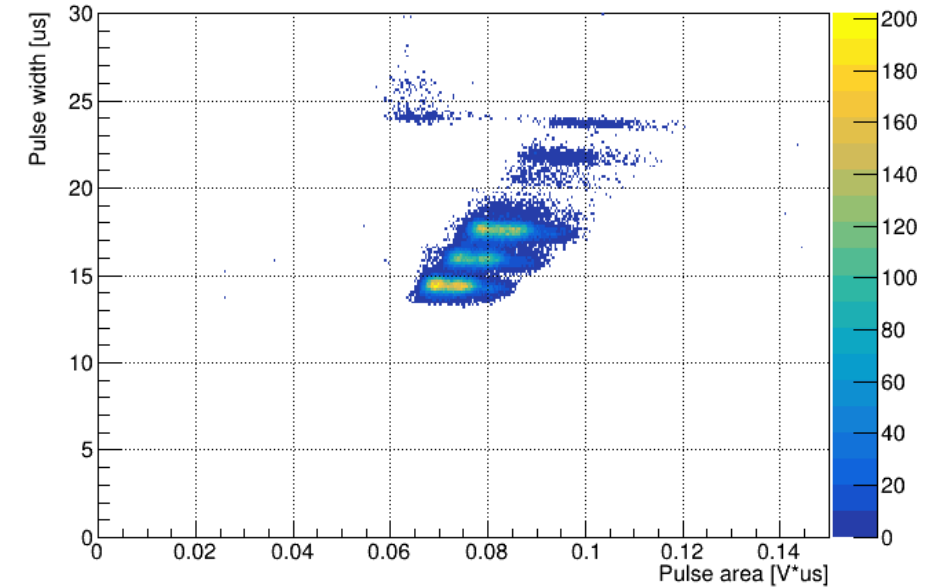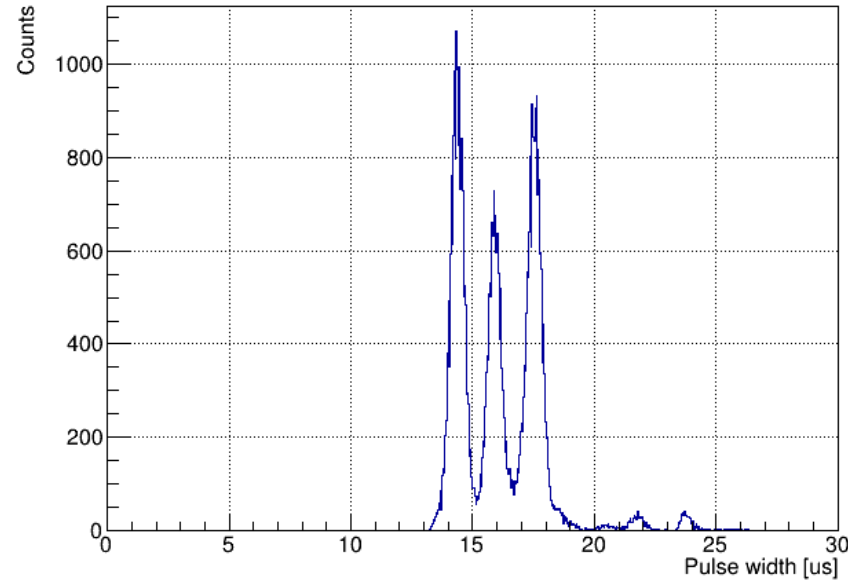

2D plot of pulse width versus pulse area and their axis projection spectra for alpha particles from ^{233}U (4.8 MeV), ^{239}Pu (5.2 MeV) and ^{238}Pu (5.5 MeV) source, measured in low-pressure TPC in Isobutane at 50 Torr and THGEM gain of 67.

The pulse width and pulse area spectra reflect those of the track range and energy.

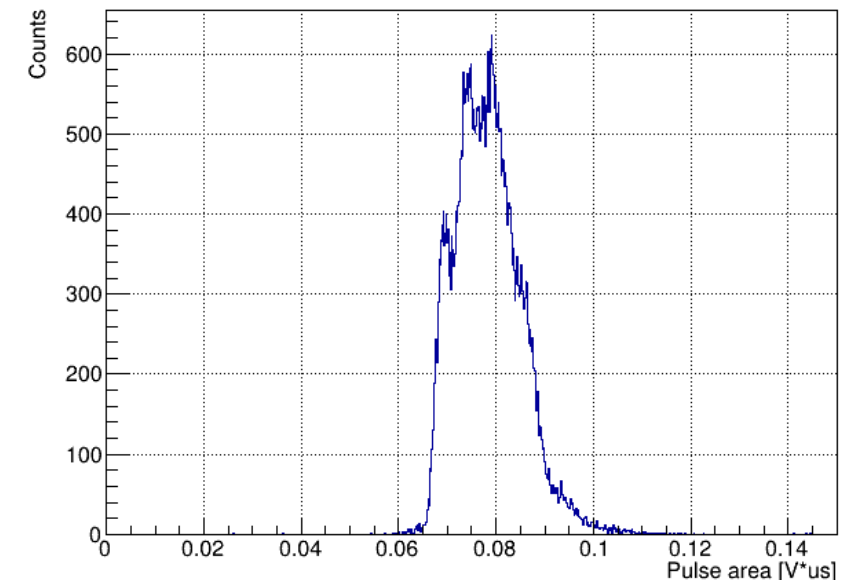

Silicon nitride membrane windows




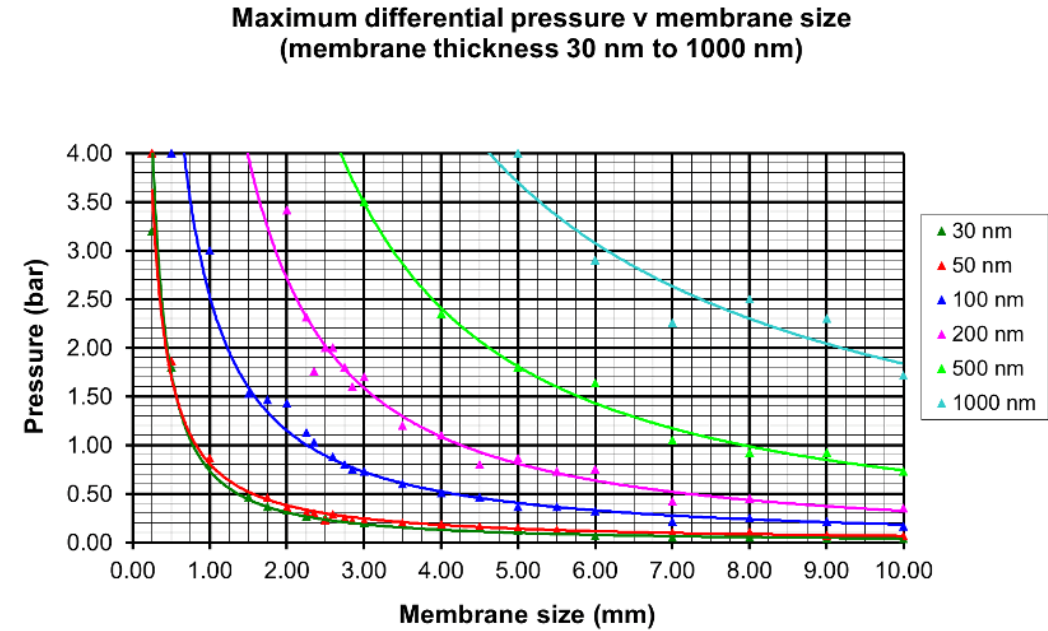


Fig. 1. Remaining energy after passage of 1 MeV ions through a 50 nm silicon nitride and a 500 nm mylar window. TRIM calculation [2].

Figure of silicon nitride membrane windows

BINP AMS

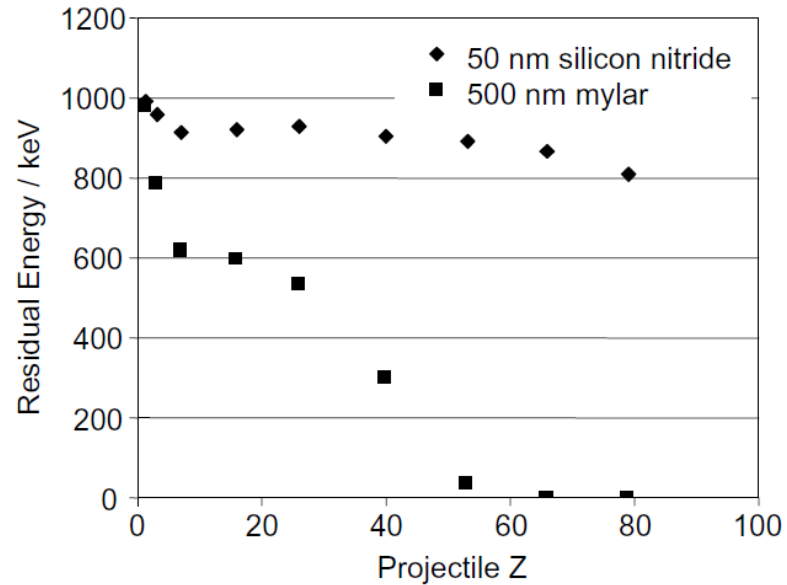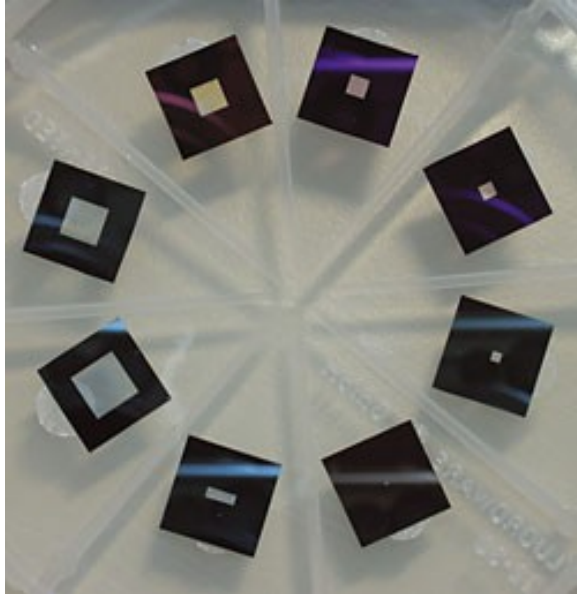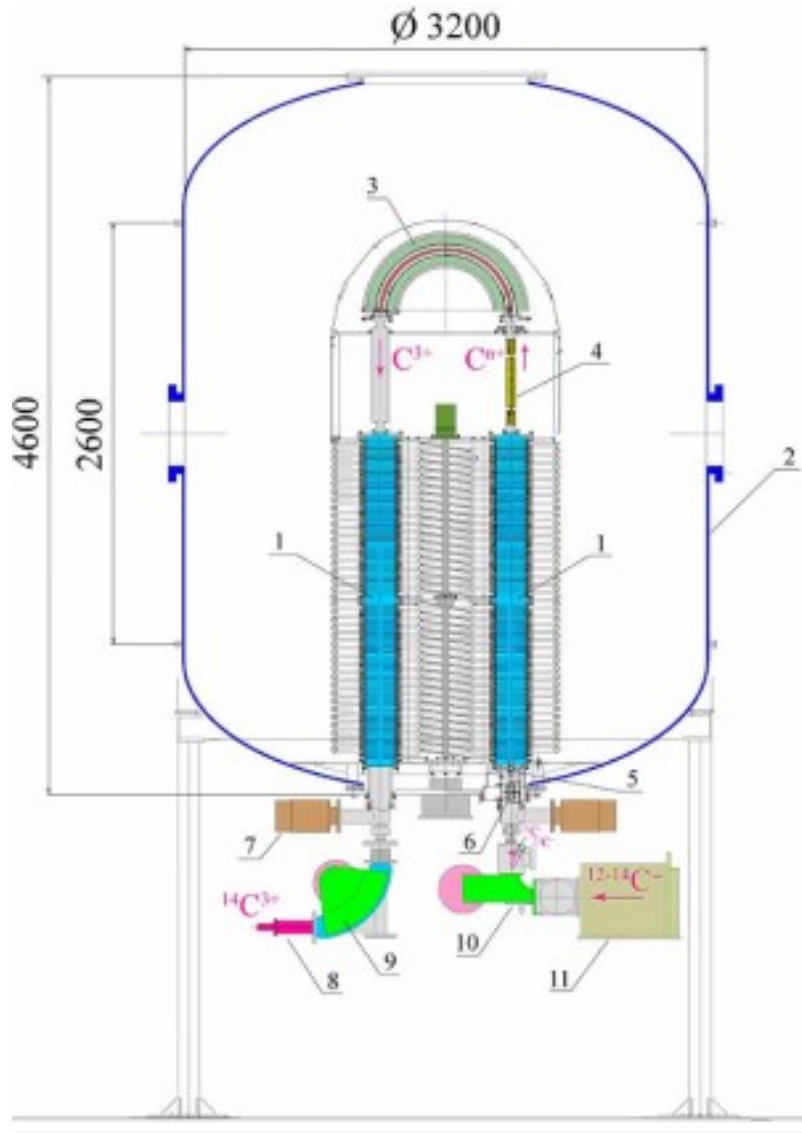

BINP AMS characteristics:

- magnesium vapor target for molecular destruction localized site of molecular breakdown;
- sorting of ions by energy immediately after the destruction of molecular ions; effective screening of fragments of molecules; the energy of the pieces of the molecule is always less than the energy of the molecule;
- time-of-flight detector for registering the moment of ions arrival.

BINP AMS scheme:

- 1 - accelerator tube, 2 - accelerator body, 3 - electrostatic turn on 180°, 4 - magnesium vapor target, 5 - corrector, 6 - electrostatic lens, 7 - vacuum pump, 8 - ion detector, 9 - high energy dipole magnetic spectrometer, 10 - low energy dipole magnetic spectrometer, 11 - ion source.