

# Impact of high QED background on time-dependent measurements

Nicola Neri  
INFN - Sezione di Milano  
*Svt meeting - 22 July 2011*

# Outline




- Introduction
- FastSim setup
- First results
- Summary

# Introduction

- According to our FullSim studies, QED bkg (aka Pairs) is the dominant bkg in the inner layer of the SVT. For details see R. Cenci and E. Paoloni talks at recent SuperB workshops.

*From E. Paoloni talk*

Track rate: Geant4 sim.  $\sim 6.5 \text{ MHz/cm}^2$

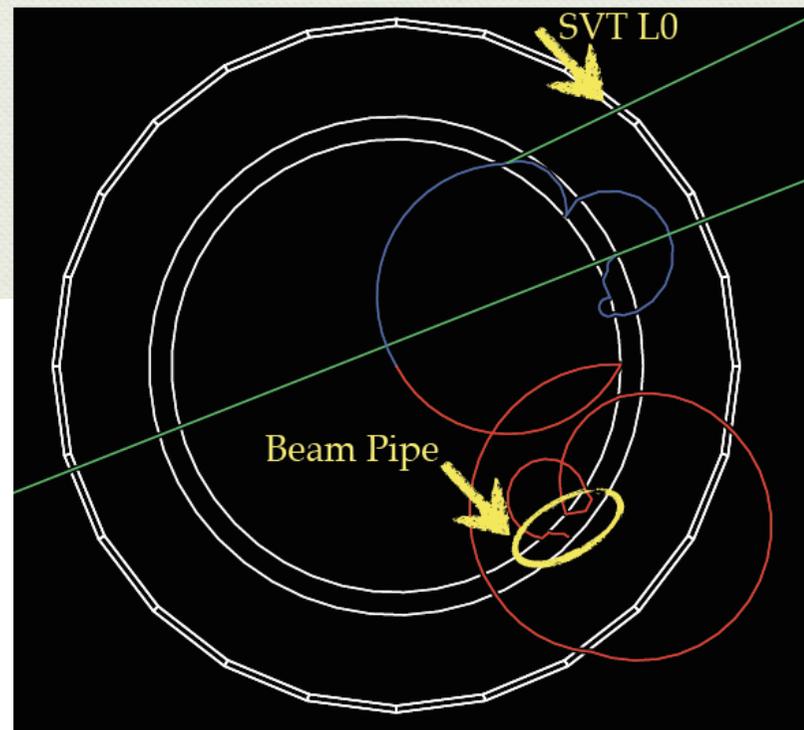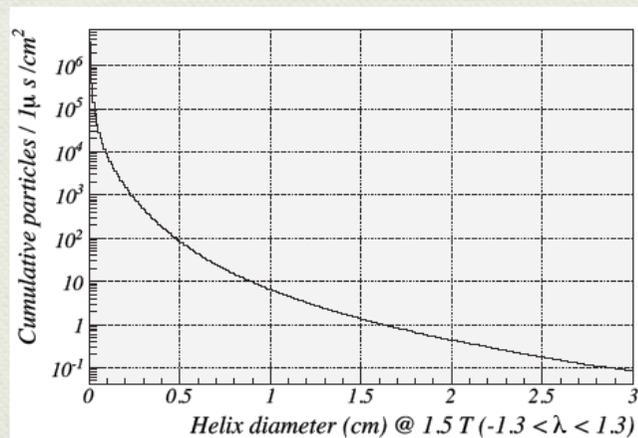

# Belle II studies disagree

- According to Belle II studies QED bkg is about a factor 15 smaller.
  - BUT: there is also a prediction from SUPERB which deviates strongly

[from Elena Nedelkovska talk at 6th DEPFET workshop \(Feb 2011\)](#)

MC generator	SuperB (BDK)	BDK	KoralW
Tracks	13800	~ 710	~ 800
Occupancy	1.3%	0.07%	0.1%

a factor of 15 difference

- Belle II performed “QED experiments” directly on data, using latest Belle runs. Idea: vary luminosity, look at change in #hits in SVT, extrapolate to L0 and estimate luminosity driven (QED) bkg.

*From Elena Nedelkovska talk:*

**The expectation from SuperB is completely excluded**

# There is an MDI ongoing effort to understand the disagreement

- As far as I know, Cecile Rimbault (LAL, Orsay) volunteered to understand the discrepancy at simulation level. She is an expert of machine related background.
- I am not sure if it is possible to extract some information on QED bkg using BaBar data.

# FastSim setup


- FastSim is able to deal with simulated bkg hits and estimate their impact on Hit reconstruction and track pattern recognition. D. Roberts and D. Brown have implemented those functionalities. See [D. Roberts talk at Paris SuperB workshop \(2009\)](#) for details.
- I applied few trivial changes to the code in order to make it work with Silicon Striplets detectors in FastSim V0.2.7\_test. Changes not available on svn yet.
- I generated  $10^6$  QED pair events and then merged to  $2 \cdot 10^3$  signal  $B^0 \rightarrow J/\Psi K_S$  events.
- I realized severe memory leaks in the PacMCApp executable when running the reconstruction of signal+bkg events. Needed to run several small jobs of 200 events each to prevent crashes or hanging the system. Also very slow the reconstruction. Need to be fixed.

# Bkg parameters

- Bunch crossing frequency: 200 MHz
- Instantaneous Luminosity:  $10^{36}\text{cm}^{-2}\text{s}^{-1}$
- Use Diag36 generator with QED pairs cross section 7.3 mbarn
- For Diag36 generators parameters use the default

# Hit Merging


- It works for DCH wires and Si strip/striplets detectors. Not working for Si pixel detector at present.
- Hit merging based on hit timing (sensitive time window 400 ns L1-L5 and 100 ns for L0) and for spatial informations (hit distance vs pitch and wafer size) on a chi2 basis.
- If a pair of hit passes the chi2 cut a new average hit position is determined.
- Several tunable parameters: chi2 value, sensor separation (1mm L1-L5, 0.5 mm L0) , sensor size (5 cm), sensitive time window.

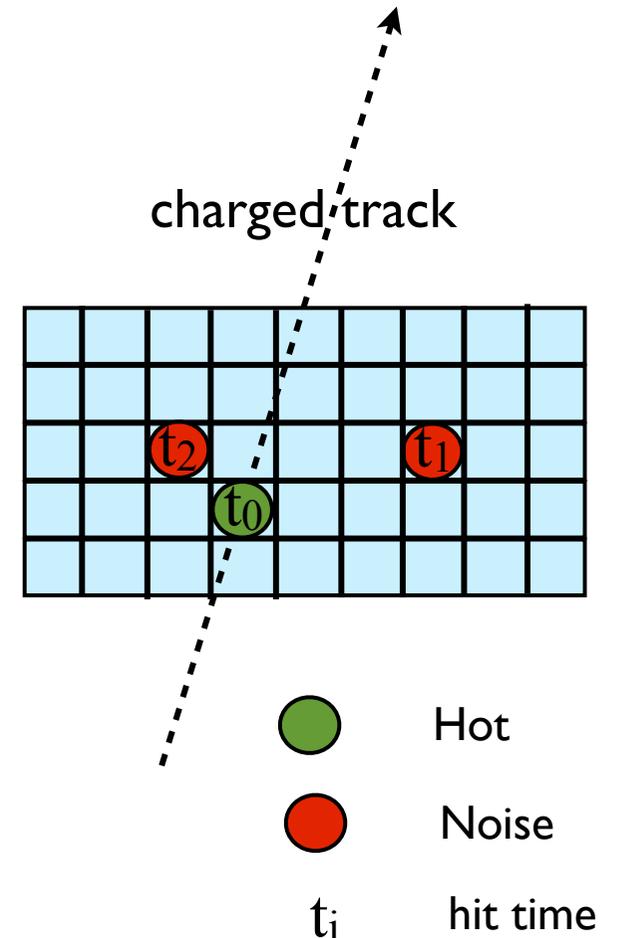

```
double _sensorSeparation; // rough measure of how far apart active elements are in the measurement direction
double _sensorSize; // rough measure of sensor size perpendicular to measurement direction;
```

# PatRec confusion





- The effect is driven more by the track resolution.
- This is probably a bigger effect than HitMerging in presence of bkg. It is included in the simulation but not evaluated yet the relative contribution.
- The effect might be not negligible also for L0 pixel since it is driven more from track resolution. To be studied also for L0 pixel.

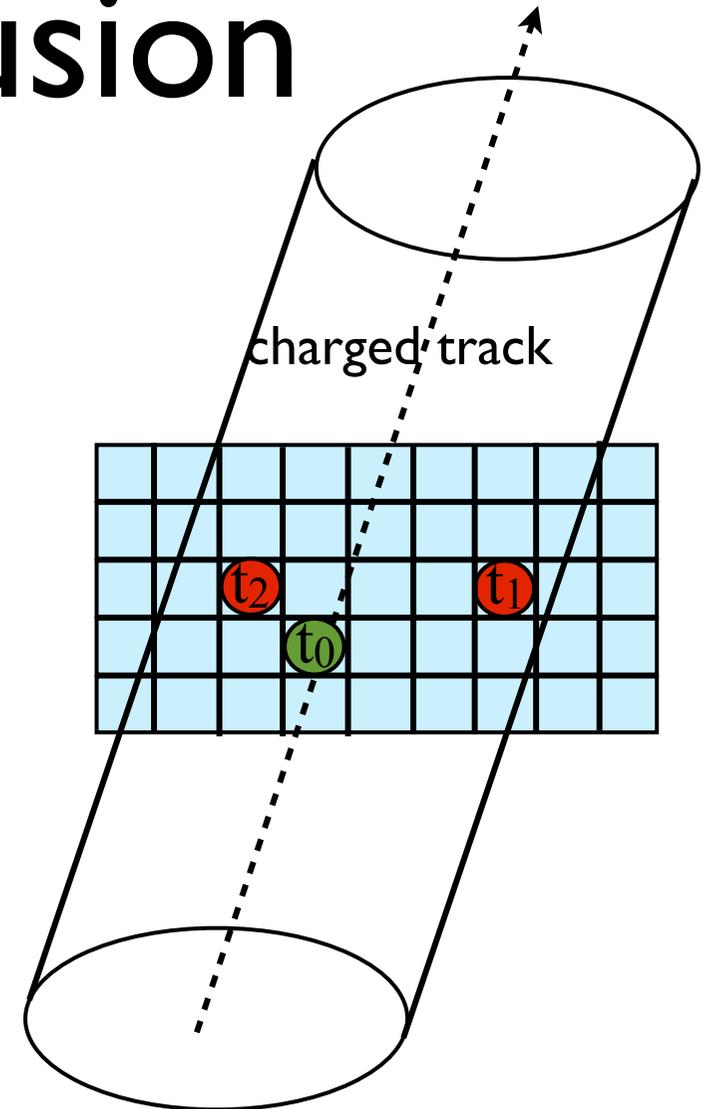





# Some caveats

- The results that follow have to be considered as preliminary results.
- To be reviewed after some fixes to the executable that process signal+bkg events in order to allow the necessary flexibility for performing systematic studies. In particular: fix memory leak, improve cpu time, additional configurations.
- No estimate of QED bkg for L0 pixel results in the following.





# Decay vertex resolution

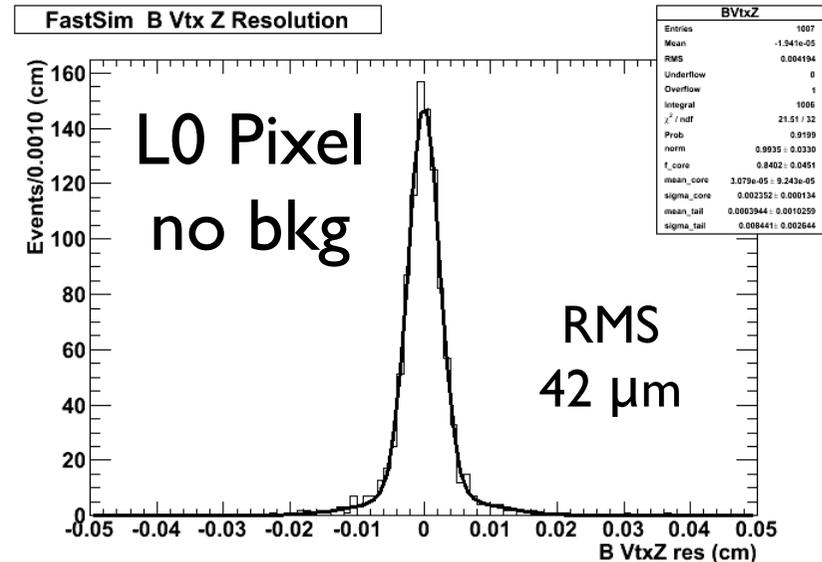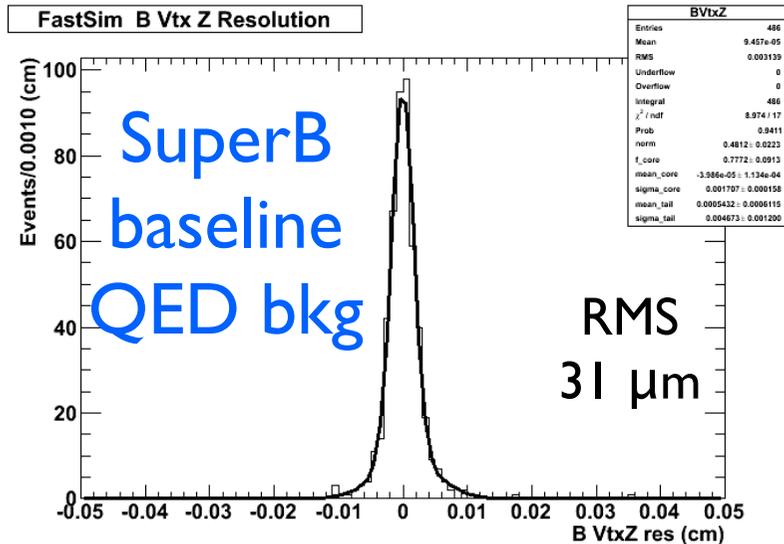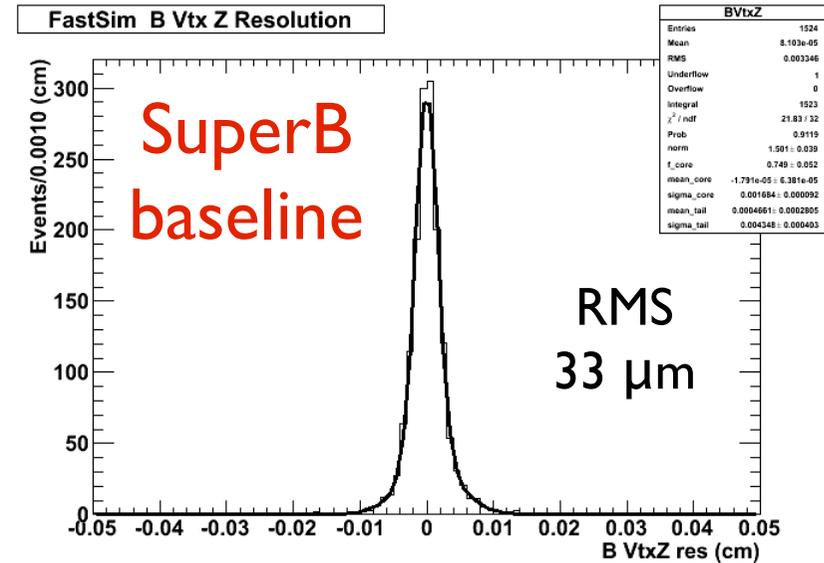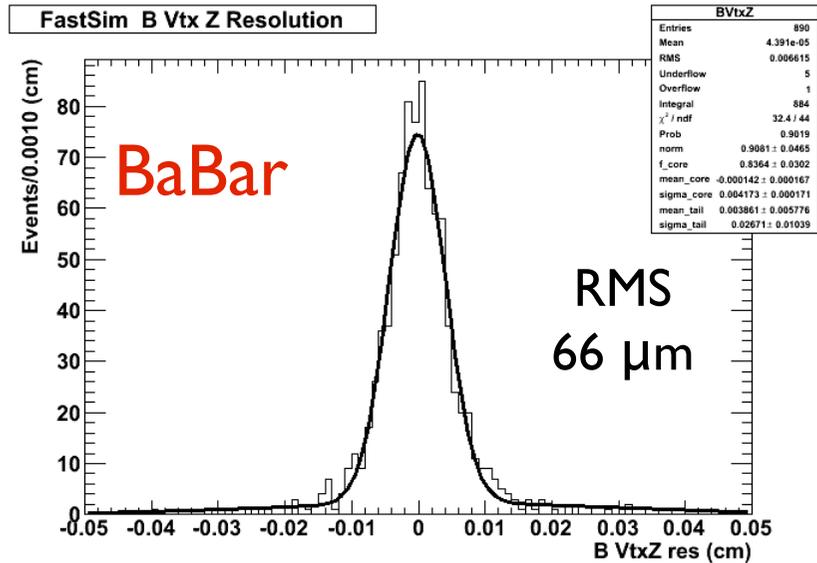





# Tag side vertex resolution

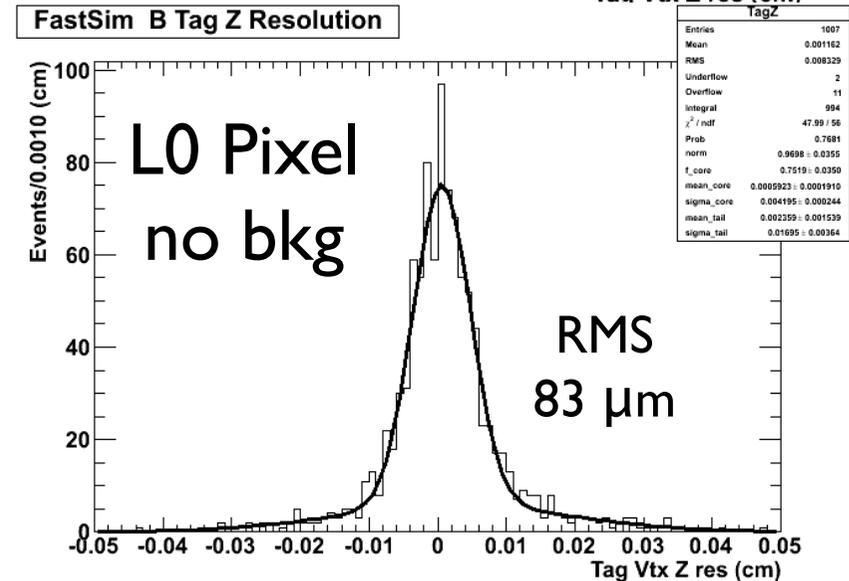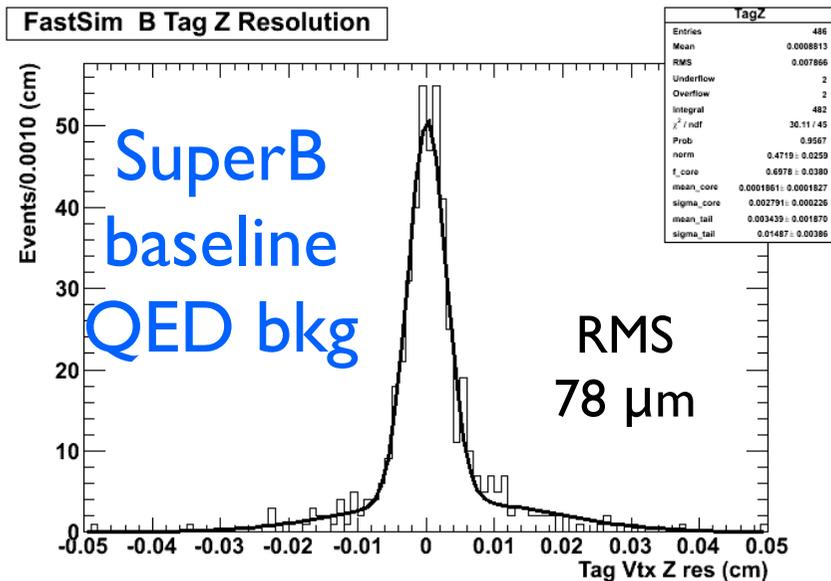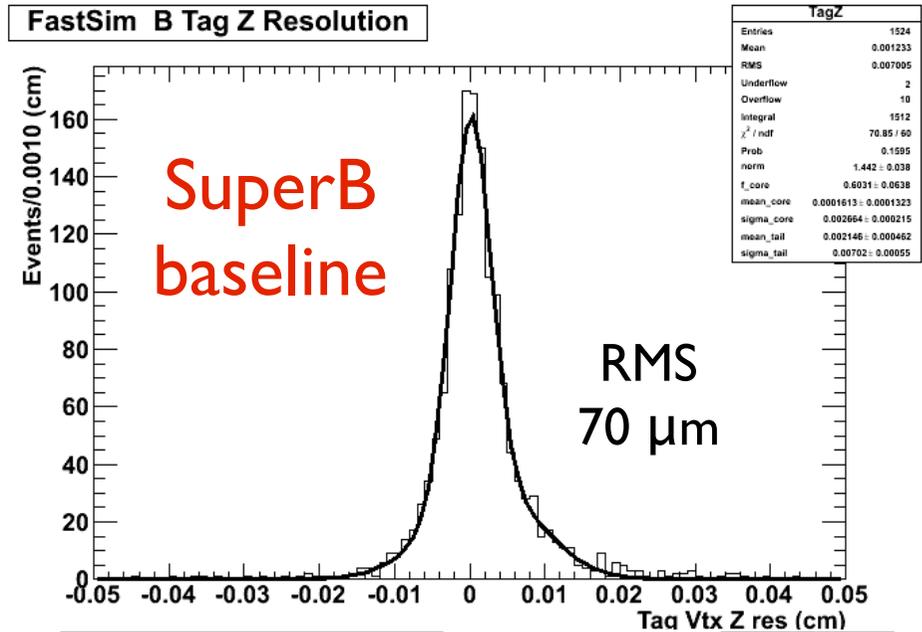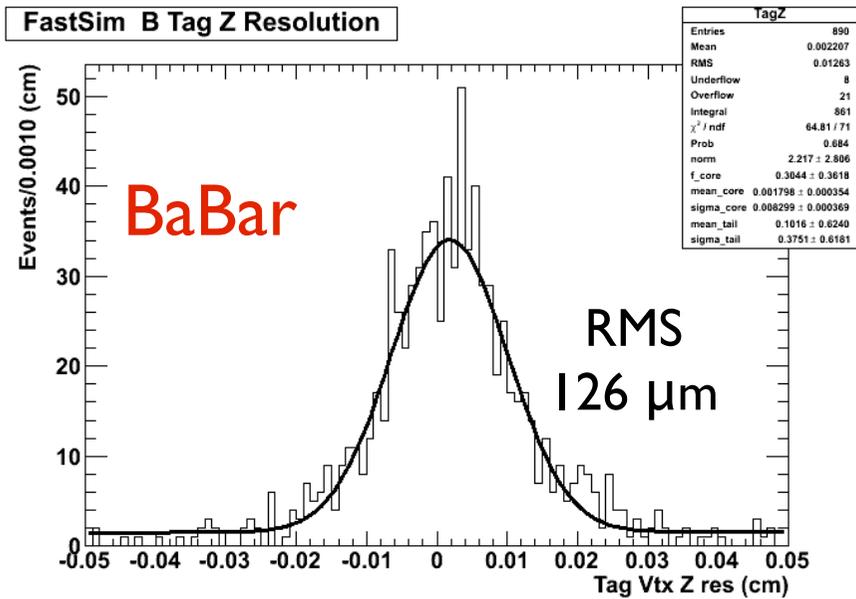

# $\Delta t$ resolution

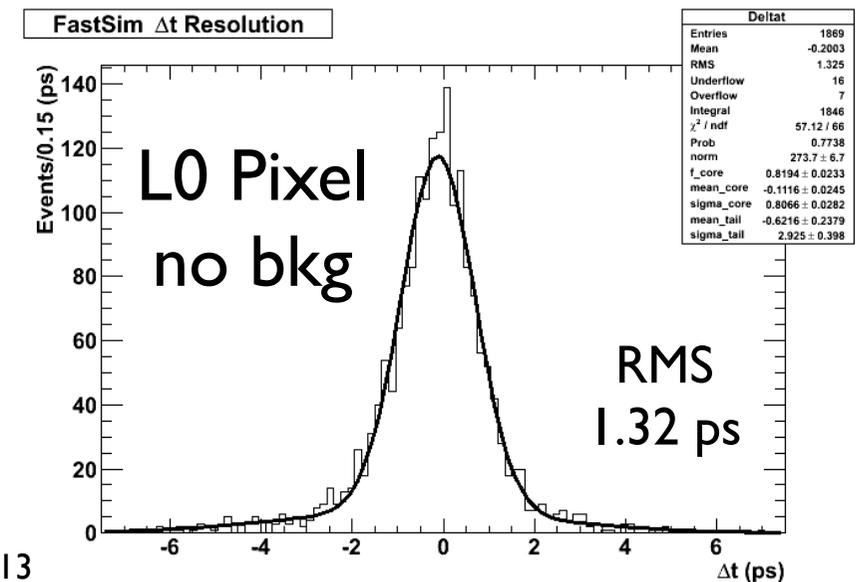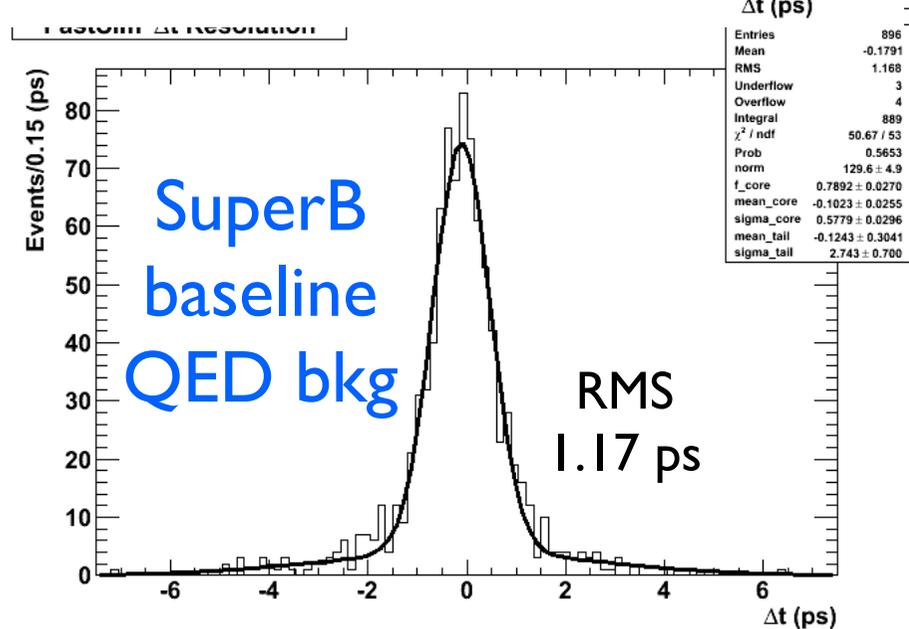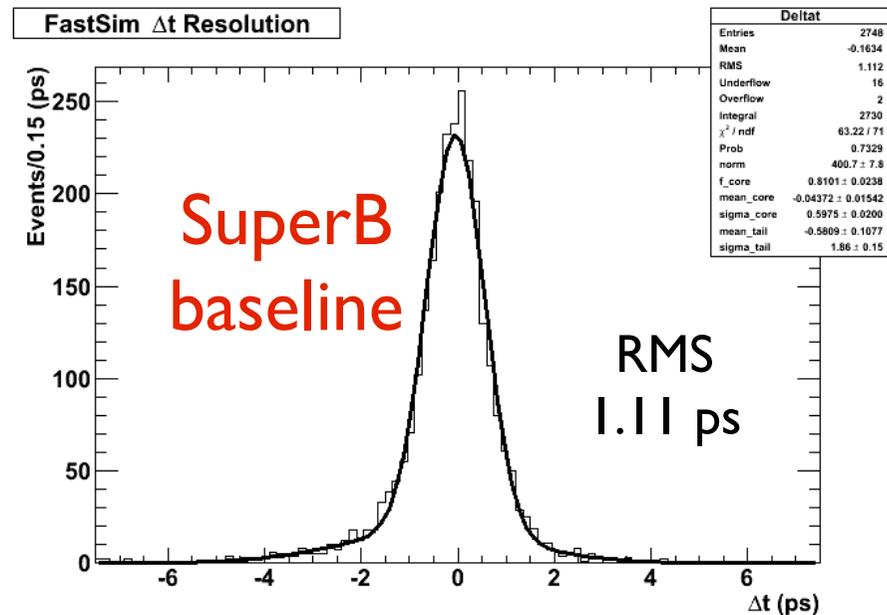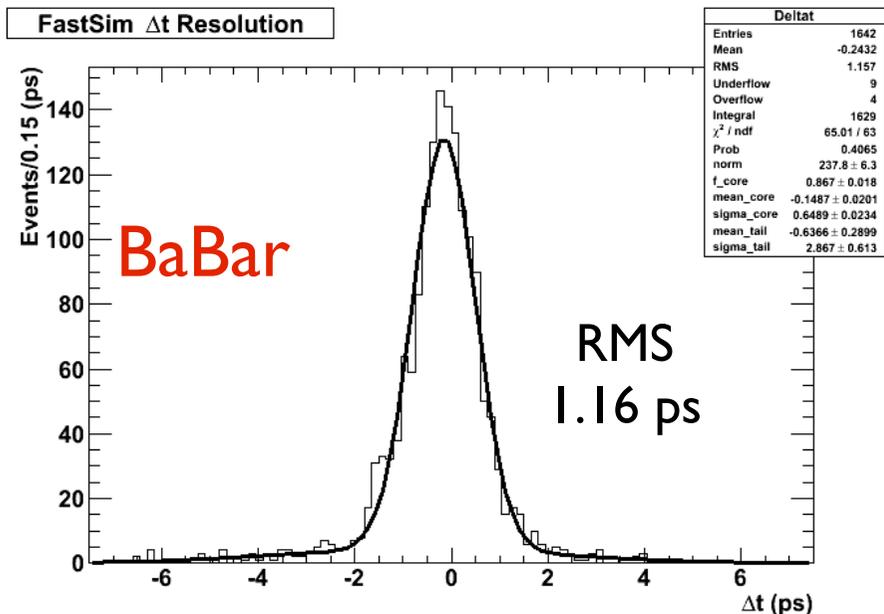


# $\Delta t$ error distribution

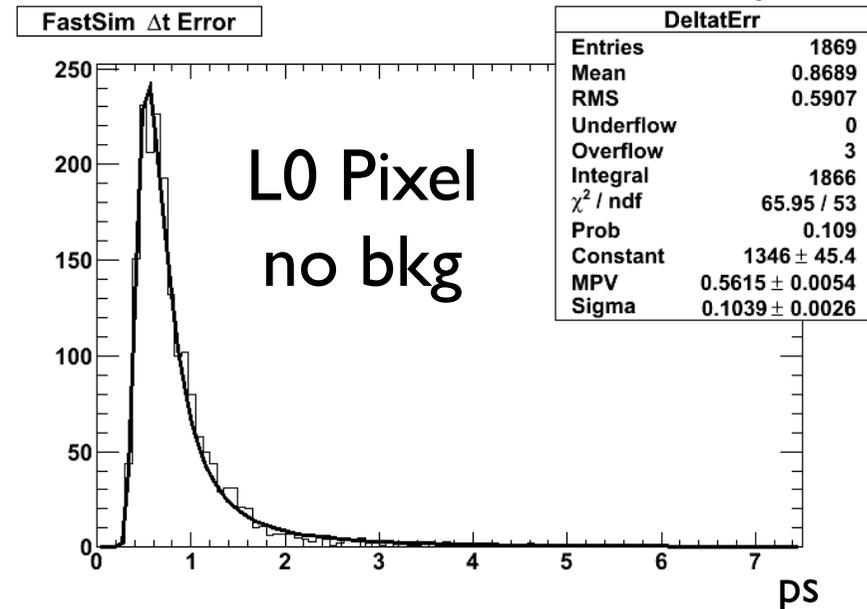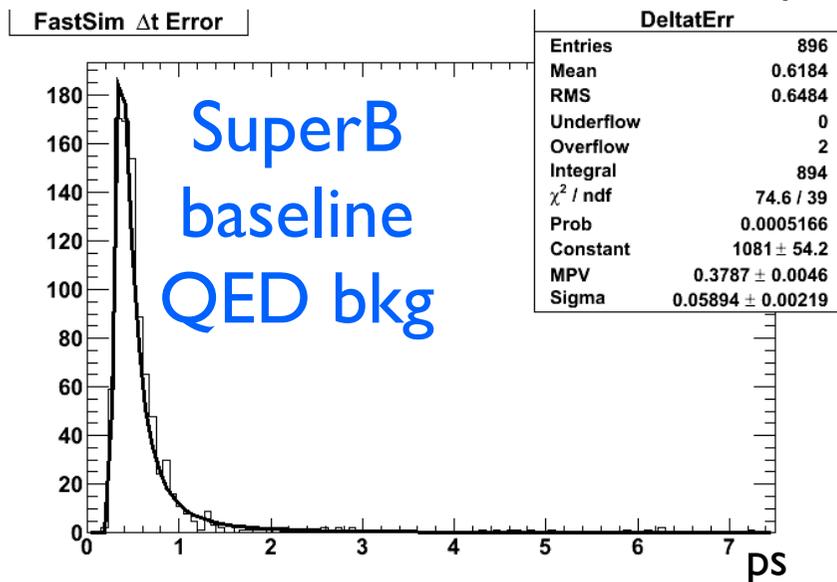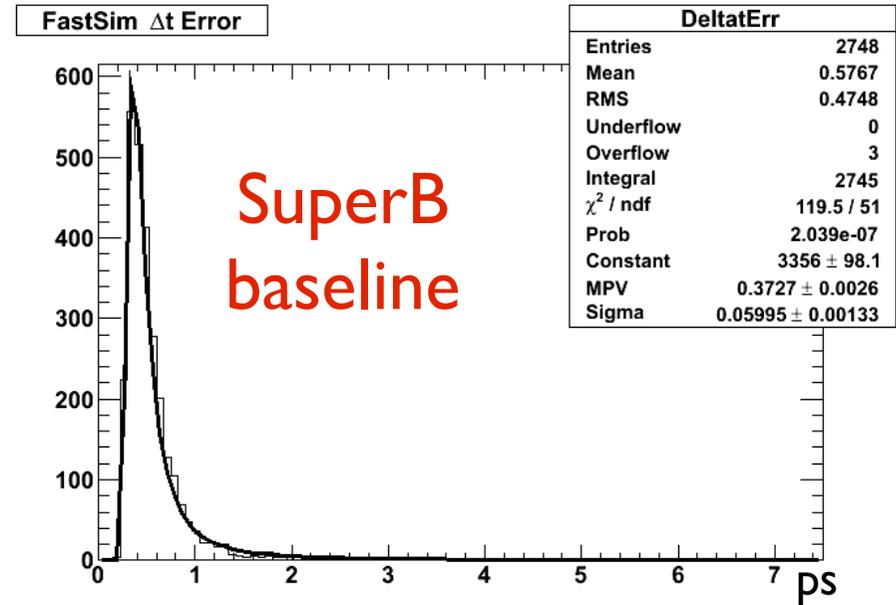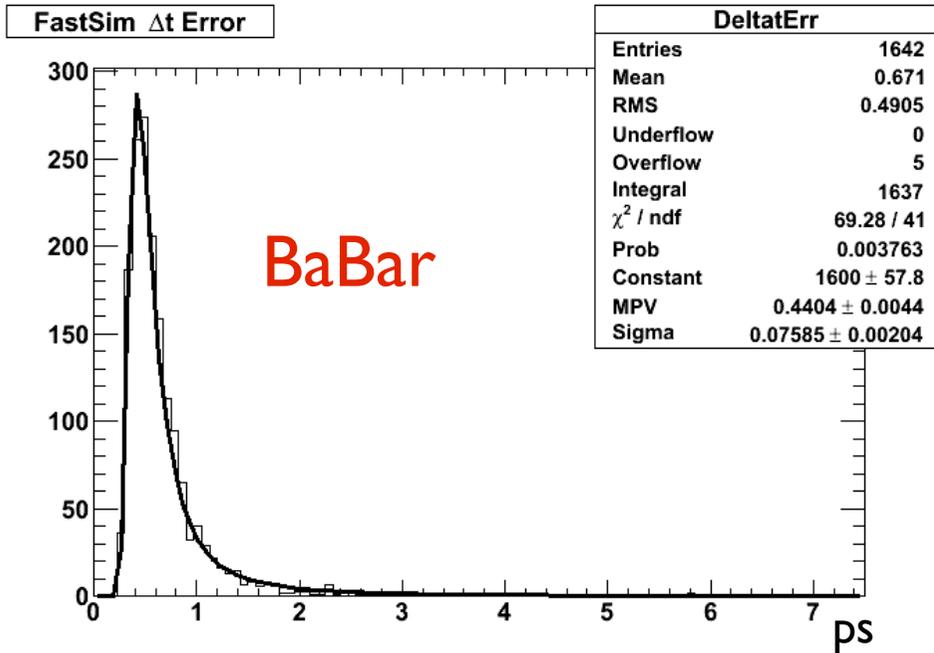

# Impact on S per event error

Time-dependent analysis results for  $B^0 \rightarrow J/\Psi K_S^0$

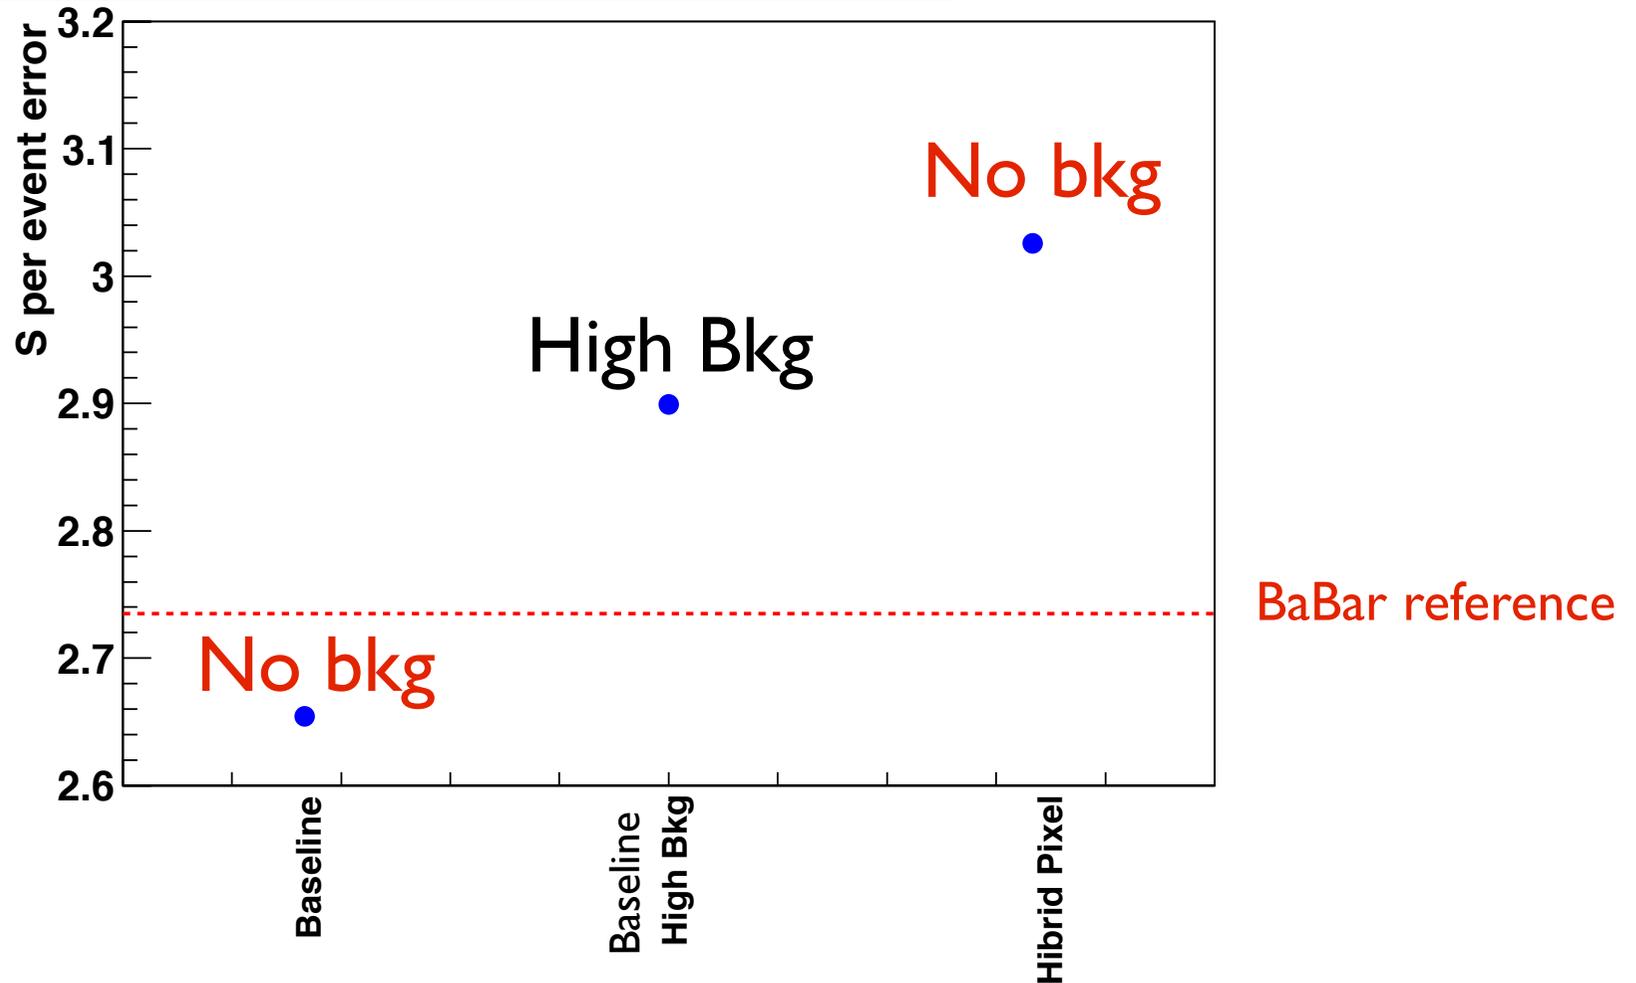

# Summary

- According to SuperB studies bkg in L0 is dominated by QED pairs bkg. Belle II studies are in disagreement with SuperB ones by a factor 15 less.
- Simulated with FastSim the impact of QED pairs bkg on vertex resolution, proper time error and S sensitivity for the L0 baseline: triplets solution.
- Preliminary results show that there is a sizable impact but moderate on S per event error. Further studies are needed for a better understanding.
- Still better sensitivity wrt pixel solution with no background. Not evaluated yet the impact of QED bkg for L0 pixel solution.


# Backup slides

# Introduction

- The baseline in FastSim for the Silicon Vertex Tracker (SVT) of SuperB consists in a 6 layer silicon detector;
- an additional Layer0 ( $L_0$ ), at smaller radius, was introduced in order to maintain adequate proper-time resolution for B decays, in presence of a reduced center-of-mass boost: in BaBar was  $\beta\gamma=0.56$ , in SuperB will be  $\beta\gamma=0.24$ ;
- the angular coverage of the SVT will reach  $\pm 300$  mrad in the FW-BW direction;
- the outer layers ( $L_4$ - $L_5$ ) will have similar arch shape as in BaBar, and  $L_1$ - $L_5$  layers will be placed at almost identical radial position as in BaBar;
- the layer  $L_0$  solution for the SVT baseline in FastSim (*as today*) is triplets:  $200\mu\text{m}$  silicon,  $0.4\%$   $X_0$ ,  $8\mu\text{m}$  hit resolution.

# I. SuperB baseline in Fast Sim:


- SVT baseline: L0 + L1-L5 strip detectors,  $\pm 300$  mrad angular coverage;
- DCH baseline: 10 SuperLayers (4 cell layers per SL); inner radius 23.6 cm, spatial resolution 125  $\mu\text{m}$ ;

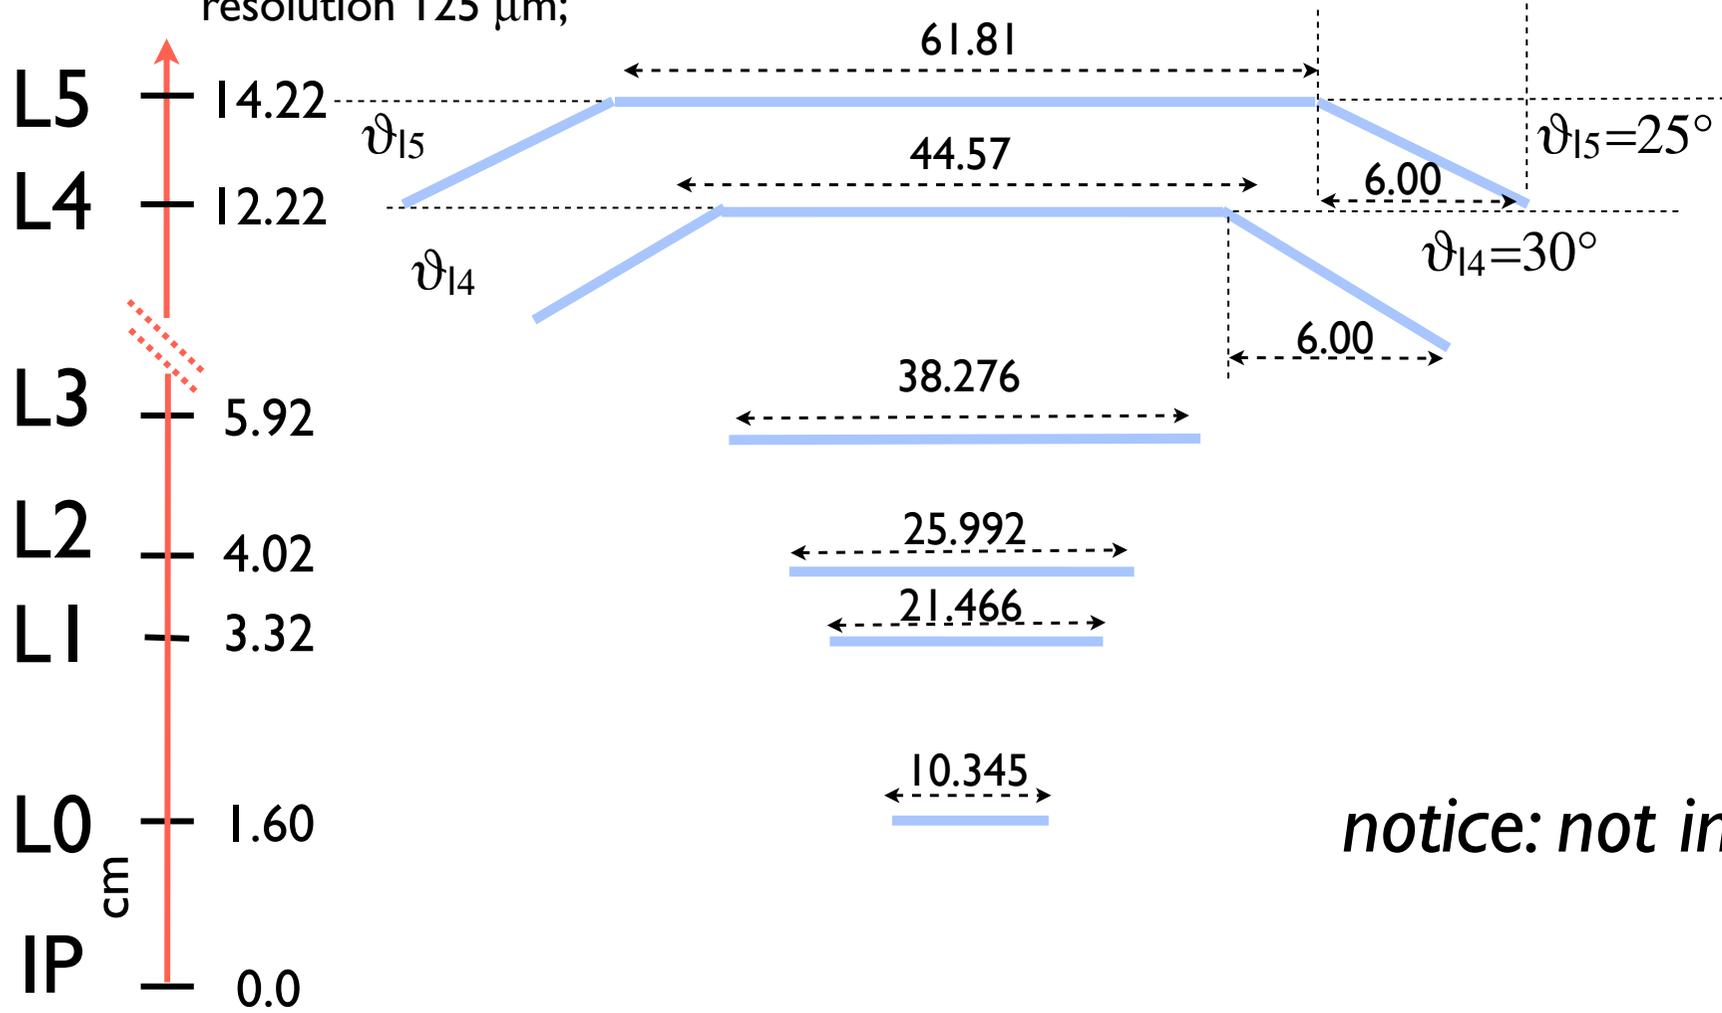

*notice: not in scale*


Coverage down to 300 mrad FW and BW

# Triplet vs Hybrid Pixel: S per event error


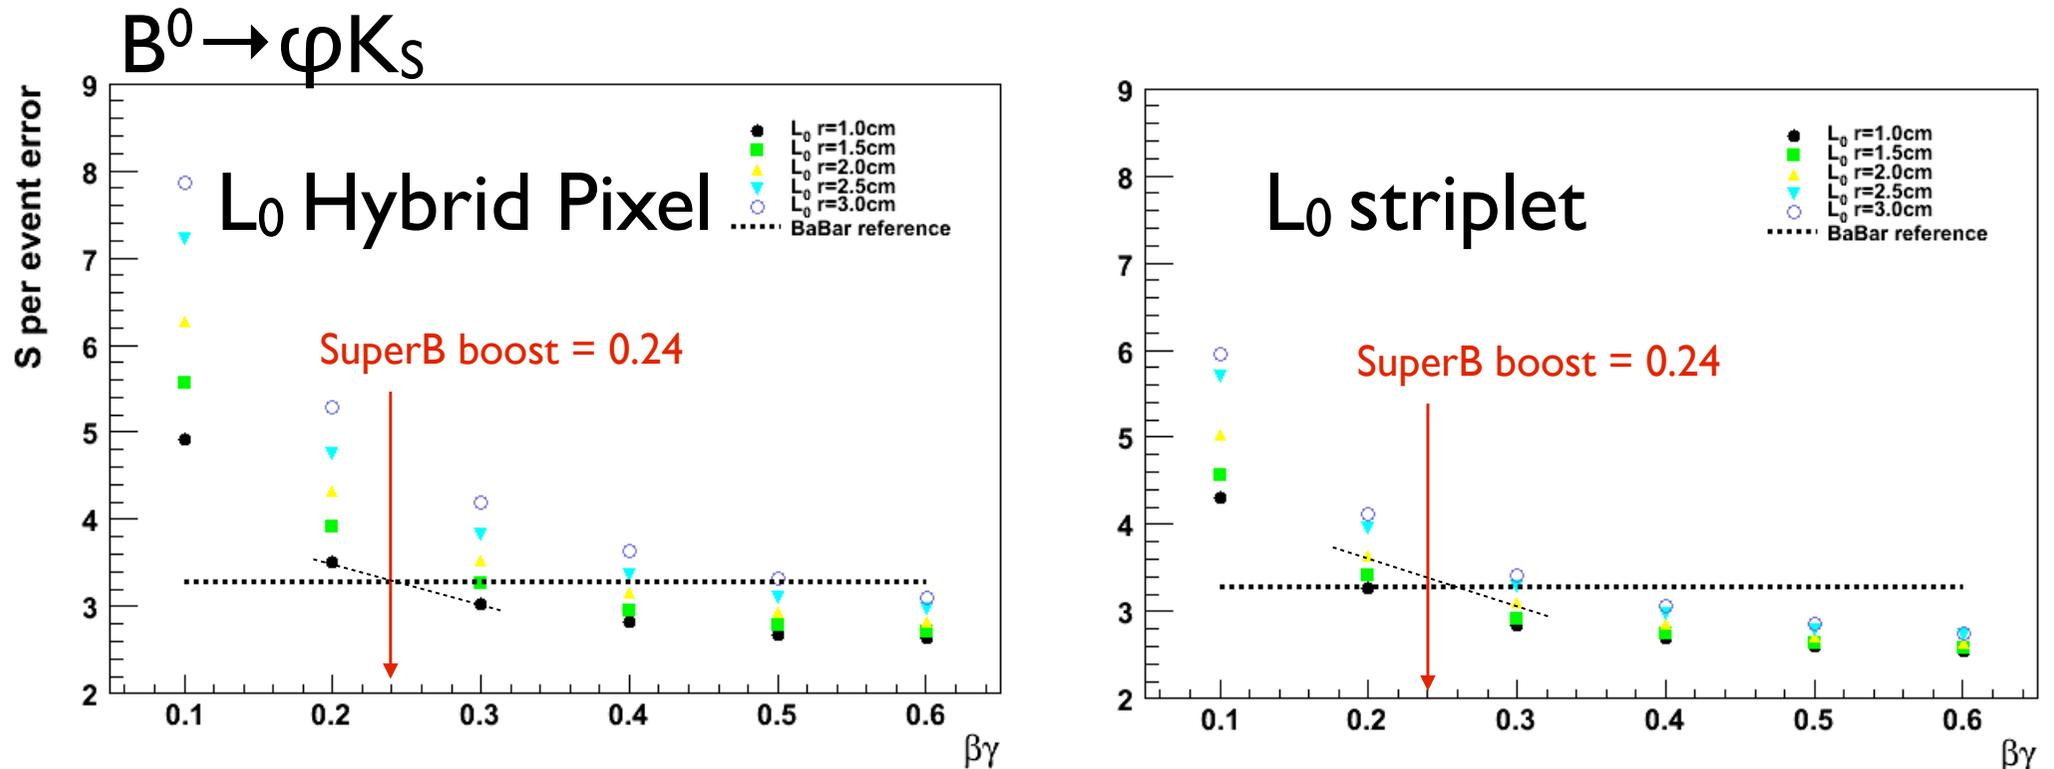


*Hybrid Pixel solution is reaching BaBar reference for  $S$  ( $\sin(2\beta)$ ) per event sensitivity with  $L_0$  radius  $\sim 1.0$  cm. Triplet solution can afford a larger  $L_0$  radius  $\sim 2.0$  cm where bkg is lower.*

# Striplet vs Hybrid Pixels vs degraded hit efficiency

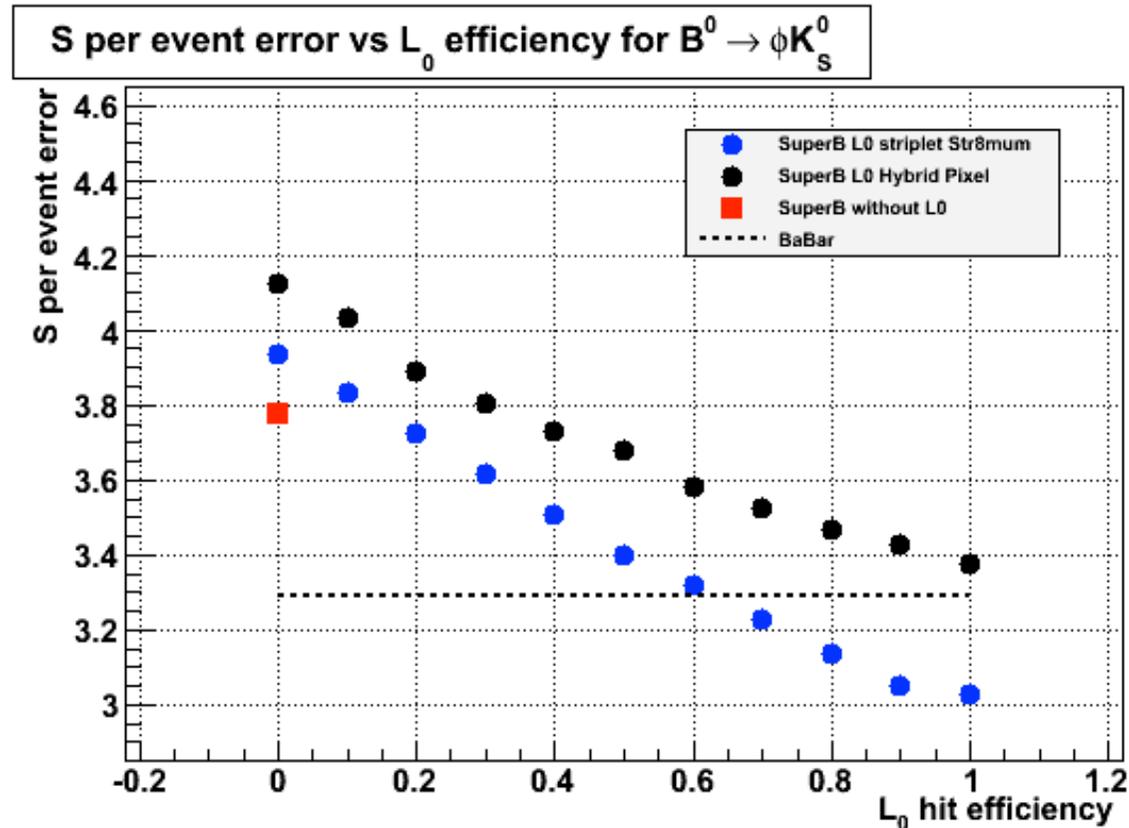

# Triplet performance vs degraded hit resolution

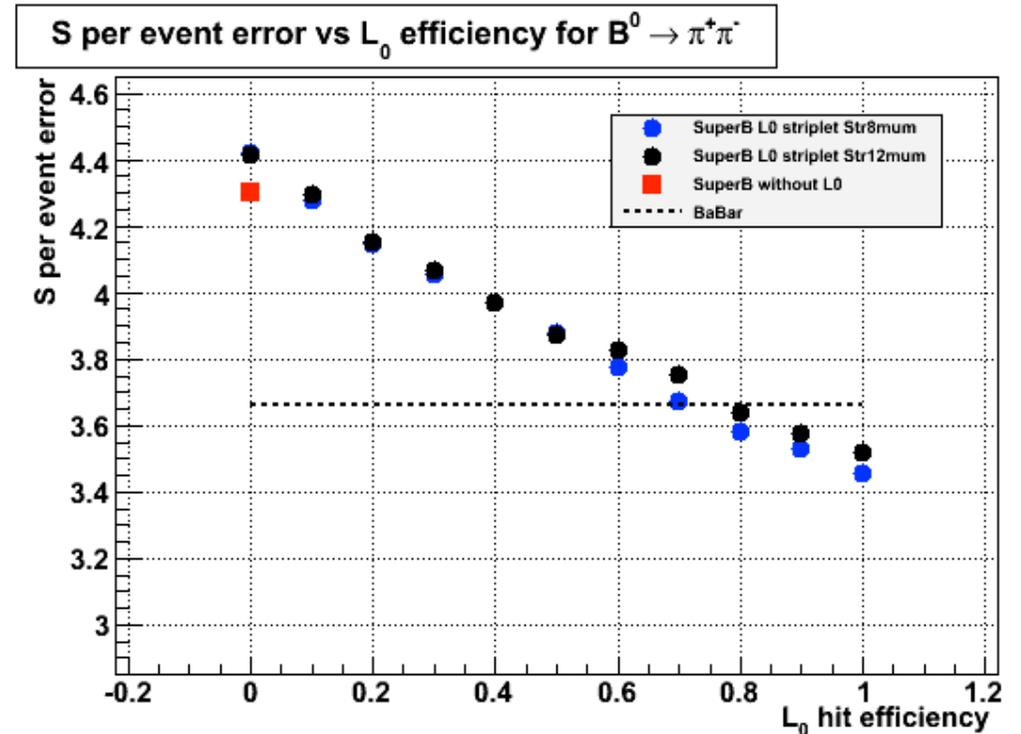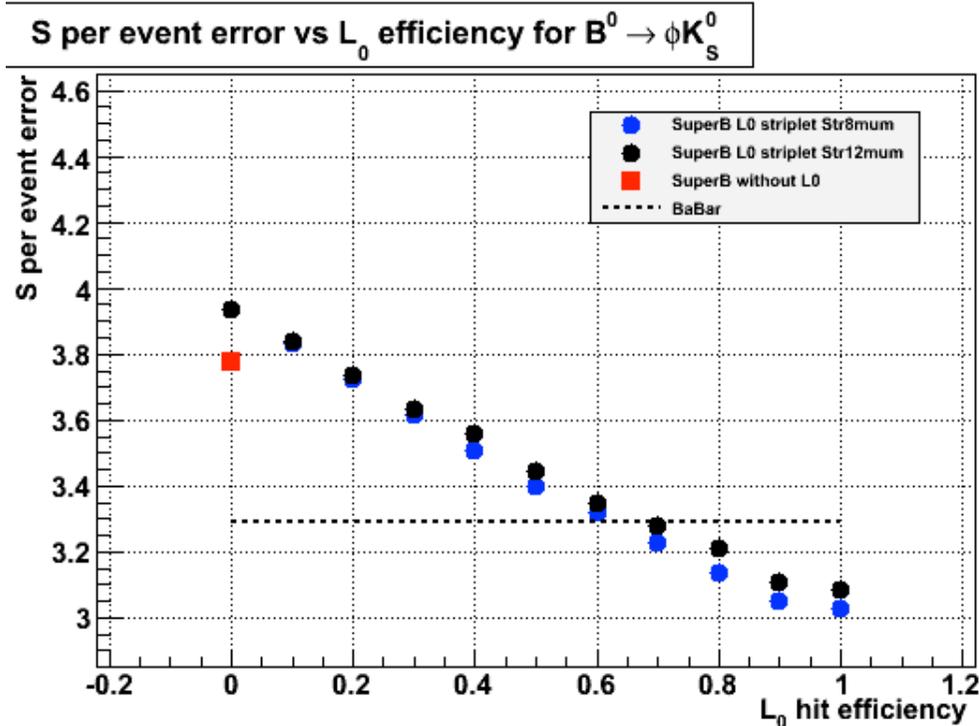

*Nominal resolution  $8 \mu\text{m}$ .*


*Considering 50% worsening ( $12 \mu\text{m}$ ) from high occupancy in  $L_0$ . Rough estimate (to be studied in detail) but seems to be a second order effect.*

# Background rate in L<sub>0</sub>

**Max rate: 20 MHz/cm<sup>2</sup>**  
**50um @ <13mm**  
**200um @ ~19mm**

In pinwheel geometry average radius  $\langle r \rangle$  is about  $1.12 \times \min(\text{radius})$ .  
Riccardo found with L<sub>0</sub>  $\min(\text{radius}) = 1.3$  cm ( $\langle r \rangle \sim 1.45$ ) a bkg rate of  $\sim 56$  MHz/cm<sup>2</sup> in his latest bkg study presented at Caltech meeting, Dec 2010).

PixelFreq Svt Layer 0

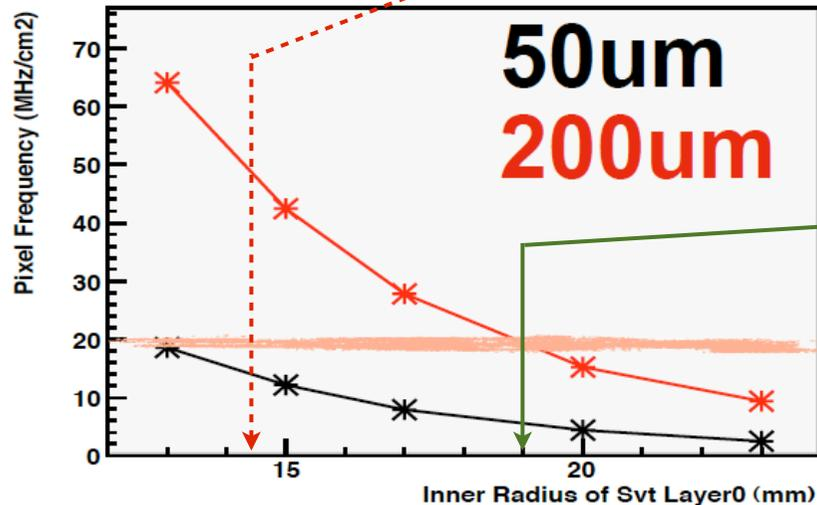

*Triplet solution with  $\langle r \rangle = 1.9$  cm ( $\min(\text{radius}) = 1.7$  cm) seems to satisfy both proper-time resolution and bkg rate requirements.*

R. Cenci

# Plans for further studies


- Update of FastSim configuration:
  - modeling of material budget for  $L_0$  solutions for triplets and pixels according to recent developments;
  - possible changes in detector geometry (e.g. radius of layers);
- Implement a more realistic model for triplets in FastSim, with strips tilted at 45 degrees wrt detector.
- Evaluate impact of bkg hits on hit resolution and pattern recognition using FastSim.
- Should we consider time-dependent measurements at  $DD\bar{b}$  threshold? With  $E_{cm} \sim 4$  GeV the average momentum of particles is reduced and material budget in SVT is more relevant.

# Hit Merging and PatRec Confusion in FastSim

- Reference: Doug Roberts talk at Orsay 2009, "Hit Confusion".
- In FastSim there is the possibility of evaluating the impact of bkg on hit resolution and on pattern recognition quality.
  - Hit Merging depends on resolution of the detector;
  - Pattern Recognition quality depends on the resolution of the track;
- Work To Do: PatRec Confusion code is currently broken (Dave Brown will fix it) and triplet model is not currently modeled correctly in FastSim (I will work on that). That requires changes in PacDet, PacEnv, PacTrk packages.

# Display of SVT modules

modules are symmetric wrt the IP.

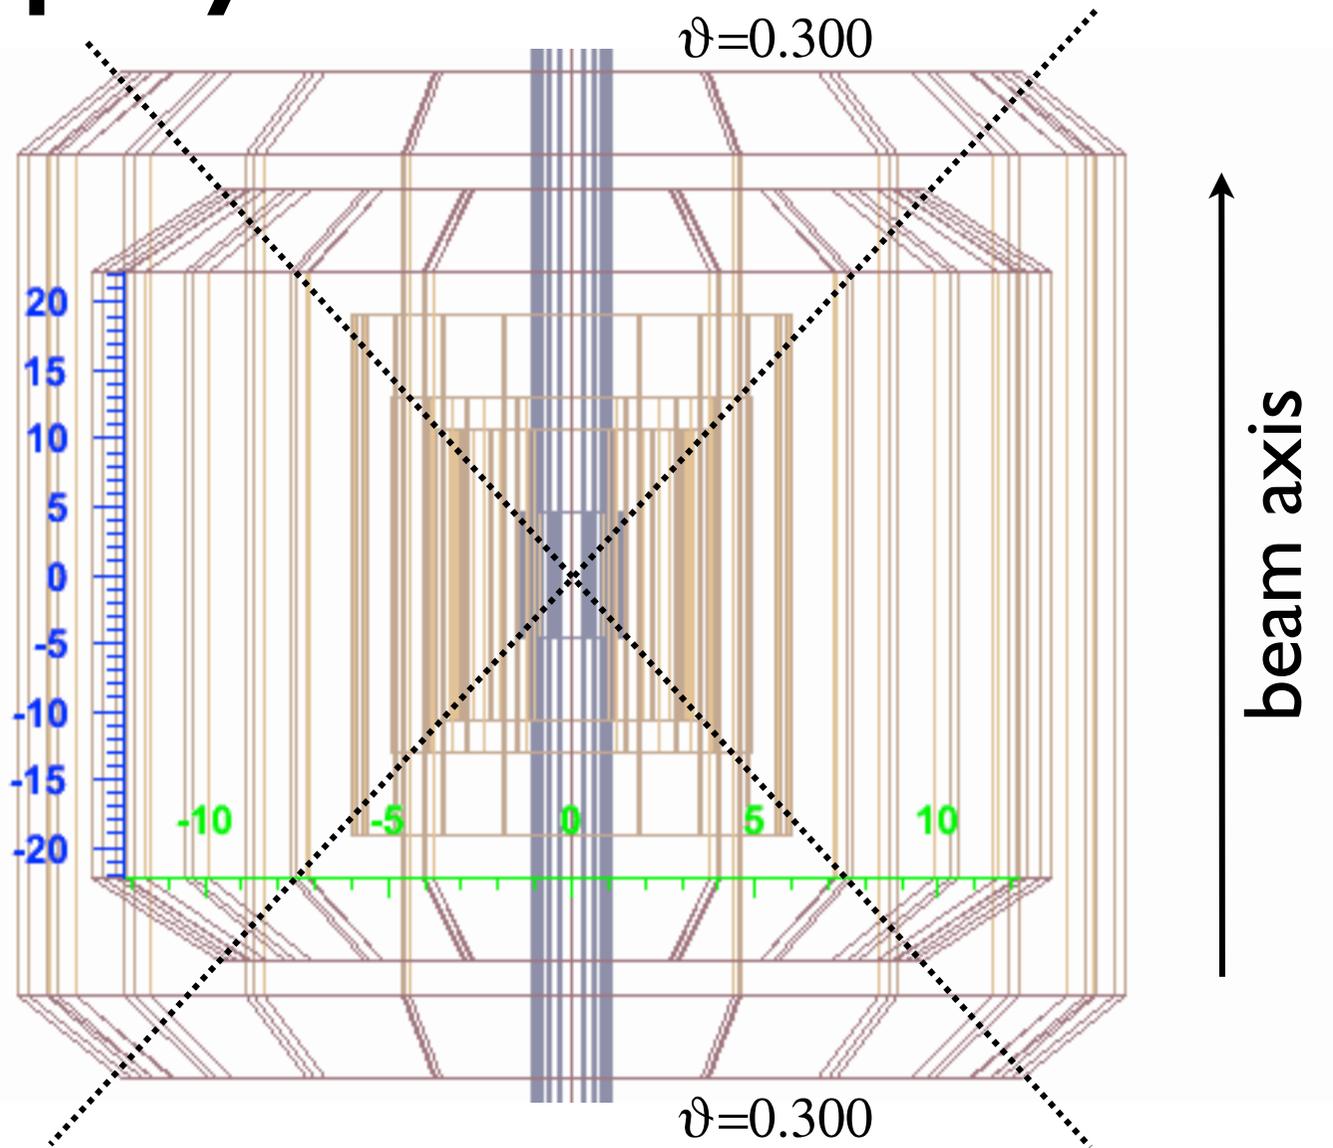

angular coverage in  $CM_{26} \sim 95\%$  (BaBar SVT  $\sim 89\%$ )


# L<sub>0</sub> solutions: striplets vs Hybrid pixels

## Hybrid Pixel

- material = 1.08% X<sub>0</sub>
- digital readout
- average radius = 1.60 cm
- hit res ~ <14 μm> (ad hoc model)


## Striplets

- material = 0.4% X<sub>0</sub>
- analog readout
- average radius = 1.60 cm
- hit res ~ 8 μm (core gaussian)

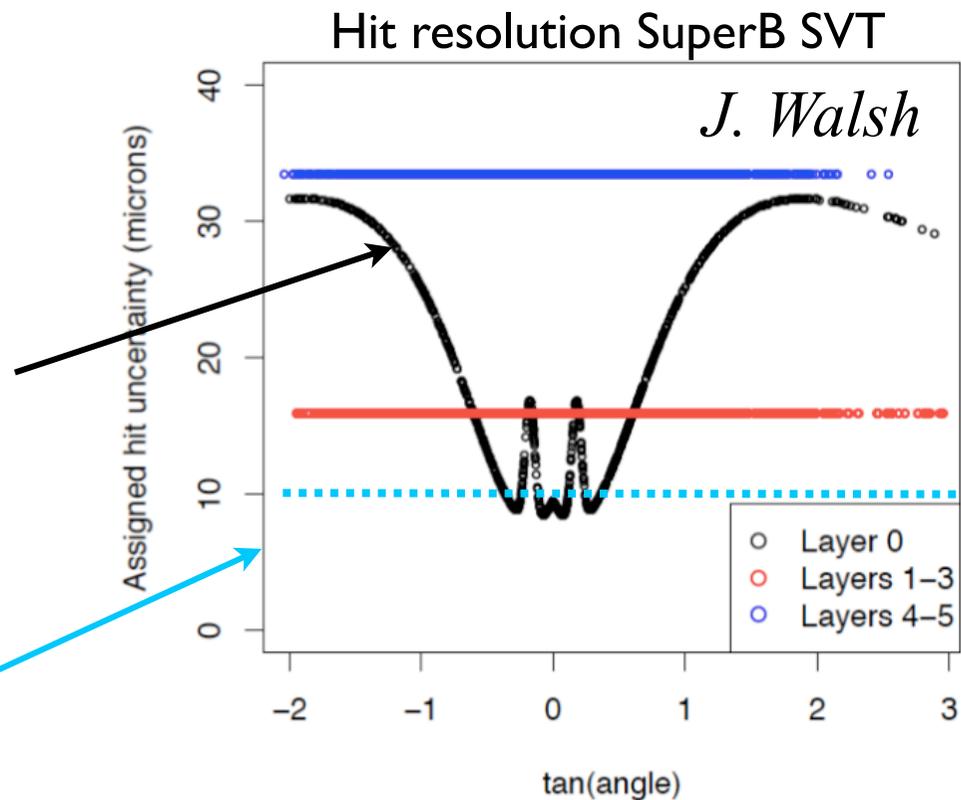

# Hybrid pixel solution


- Module cross section

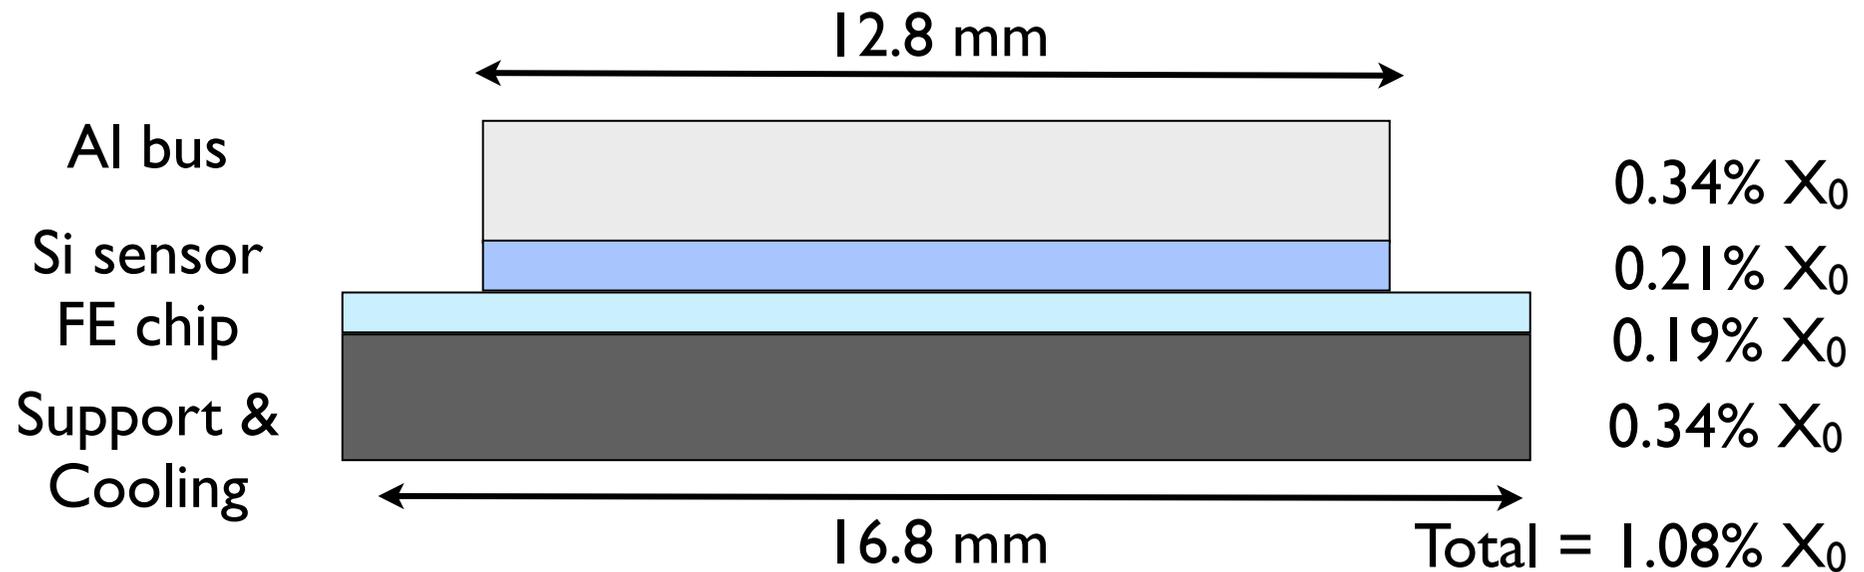

# Triplet solution

- Module cross section

Fan out  
Si sensor  
Support



Si sensor overlap 3.4%

0.14%  $X_0$


0.21%  $X_0$

0.05%  $X_0$

Total = 0.40%  $X_0$

# Pinwheel layout for L<sub>0</sub>

*courtesy of F. Bosi*

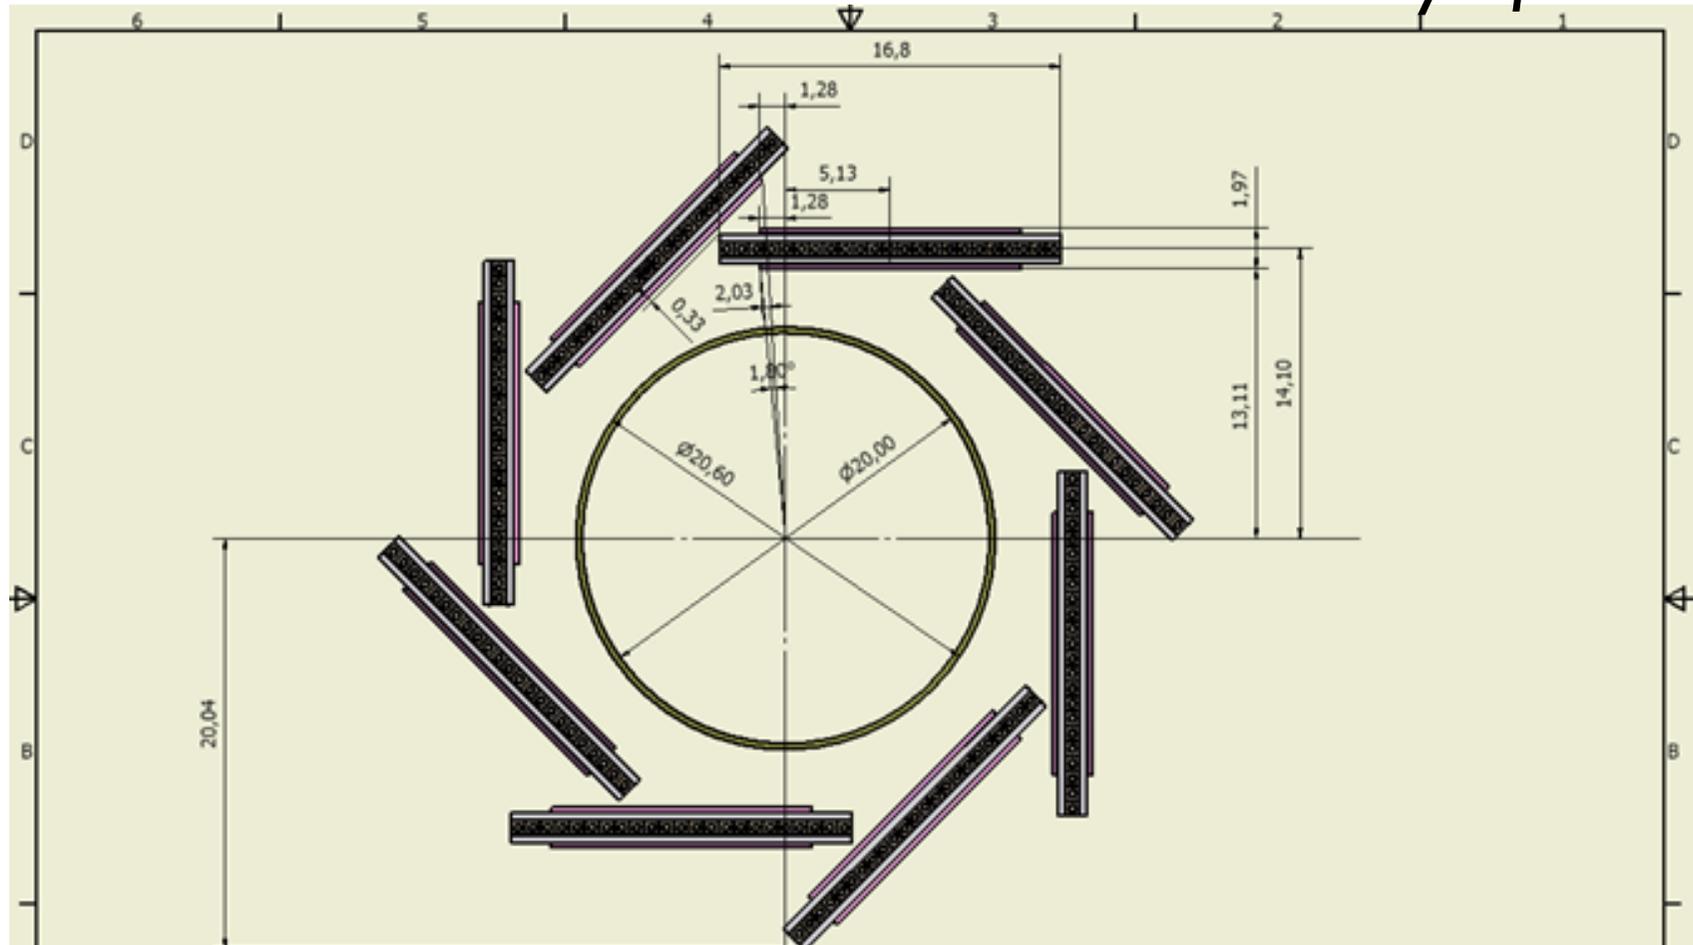


Design for MAPS solution


Mechanical design can be considered valid also for Hybrid Pixel solution though small changes could be applied when finalized design will be ready.

# $L_0$ solutions and SVT material

$X_0$  vs  $\cos(\theta)$ :  $L_0$  Striplet

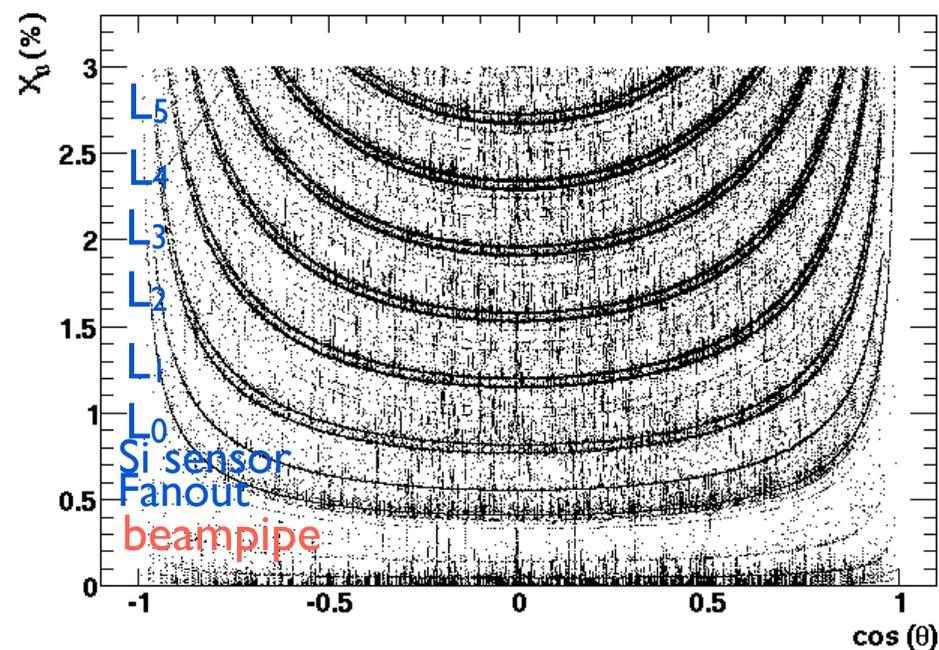

$X_0$  vs  $\cos(\theta)$ :  $L_0$  Hybrid Pixel

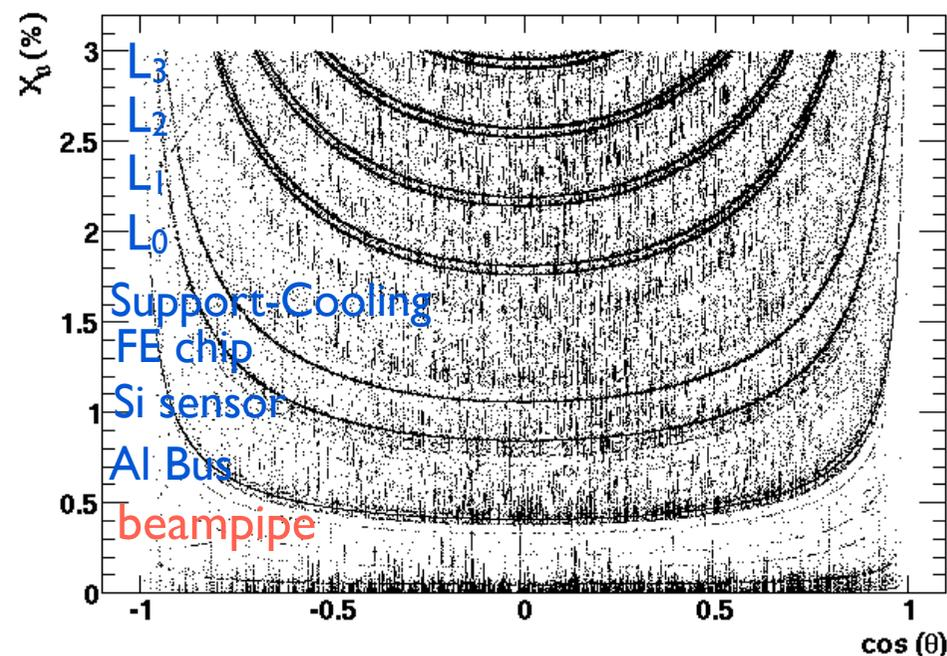

*Total SVT material is about 3.3% (2.4%)  $X_0$  for  $L_0$  Hybrid pixel (Striplets) solution.*