

K8s Load balancing

Alessandro Costantini

alessandro.costantini@cnae.infn.it

This work is licensed under a Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International license



Managing network connectivity

- Kubernetes provides several mechanisms to manage network connectivity, both internal and external, to handle different scenarios and requirements.
- The most used are:
 - Internal connectivity
 - **ClusterIP**
 - External connectivity
 - **NodePort**
 - **Ingress**
 - **LoadBalancer**

Internal connectivity


- Refers to distributing traffic within the Kubernetes cluster, typically among pods of the same application or service.
 - Distributing traffic across pods to improve performance and reliability.
 - High availability ensures traffic can still be routed to pods even if some are unavailable.
 - Isolating traffic between different applications or services.

ClusterIP

- **ClusterIP** service type creates an **internal load balancer** that exposes the service to pods within the same cluster.
- **ClusterIP** services do not have a public IP, it has a virtual IP and can only be accessed by pods within the cluster.
- **This IP address** is stable and doesn't change even if the pods behind the service are rescheduled or replaced.


Cluster IP

- Using the **Kubernetes Proxy** we can access the service via the Kubernetes API
- Usage:
 - **Debugging** your services, or connecting to them directly from your laptop for some reason
 - Allowing internal traffic, displaying internal dashboards, etc.

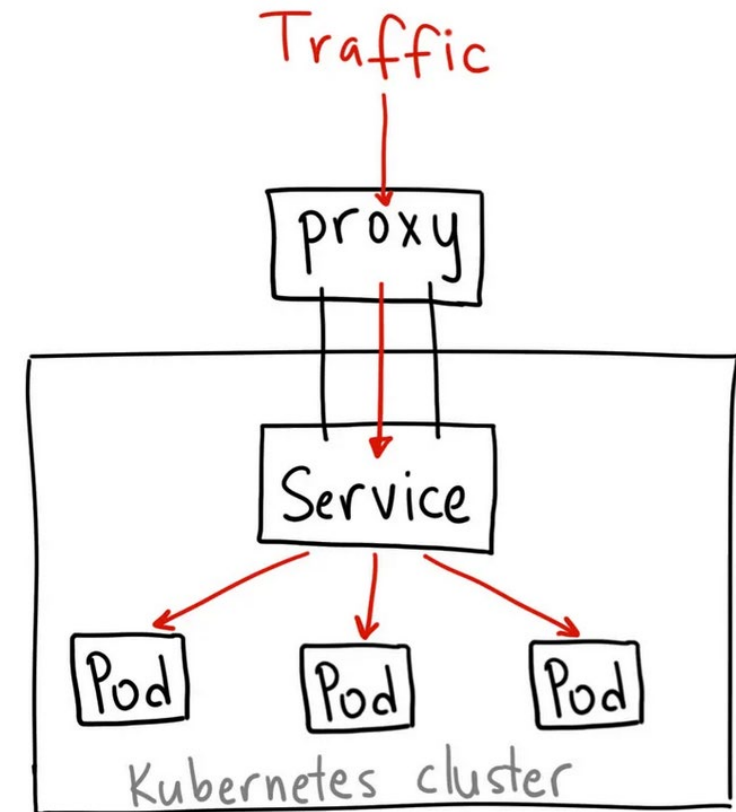

External Connectivity

- Refers to distributing traffic from outside the Kubernetes cluster to appropriate pods within the cluster.

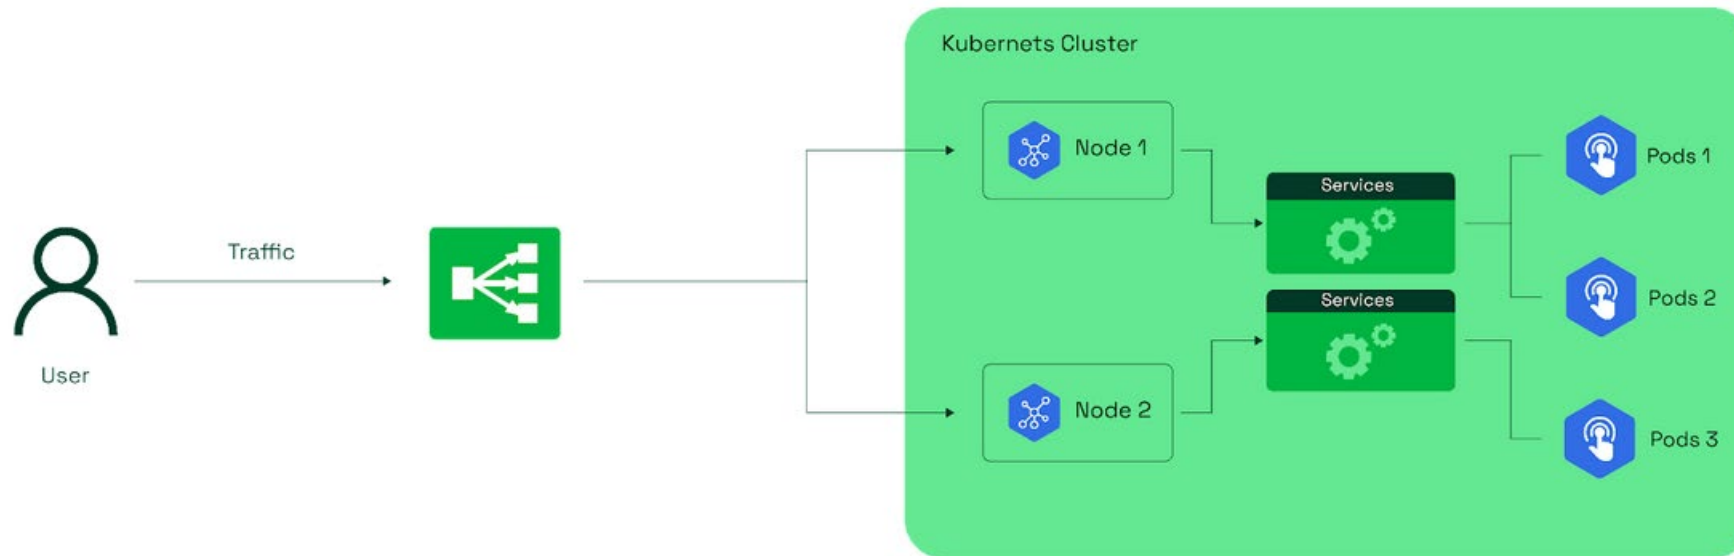


External connectivity

- **NodePort**
- **LoadBalancer**
- **Ingress**

NodePort

- Exposes a specific port on each node in the cluster, allowing access to your service through that port.
- The Kubernetes control plane assigns a port within a specified range (typically 30000-32767).
- Each node then acts as a proxy for the same port number, ensuring consistent service access.

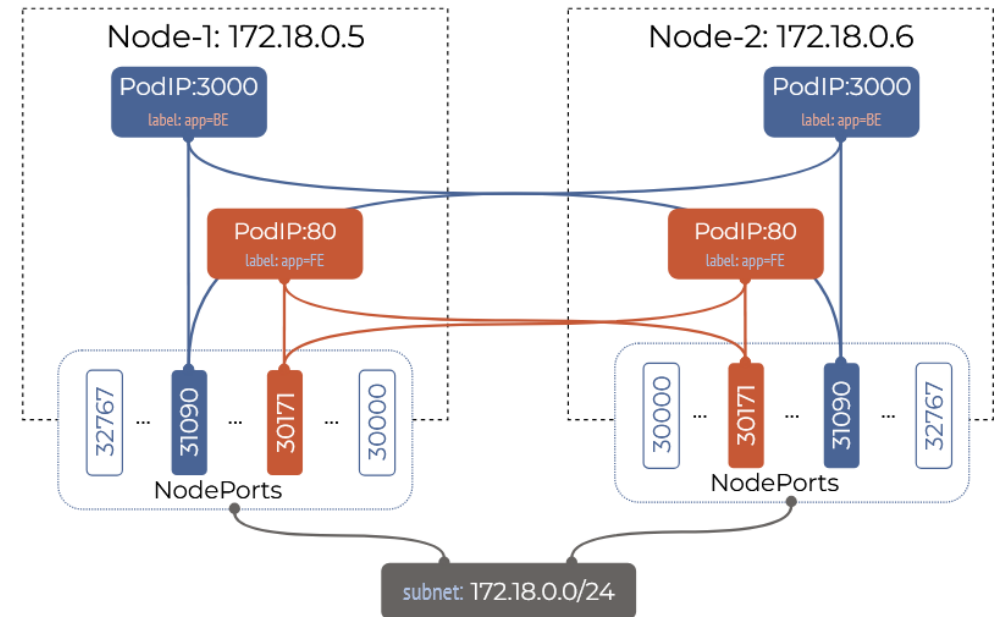


NodePort

- You can only have one service per port
- You can only use ports 30000–32767
- it doesn't do any kind of load balancing, it simply directs traffic

```
apiVersion: v1
kind: Service
metadata:
  name: my-nodeport-service
spec:
  selector:
    app: my-app
  type: NodePort
  ports:
  - name: http
    port: 80
    targetPort: 80
    nodePort: 30036
    protocol: TCP
```

External load balancer

- Provisions an external load balancer, **typically supplied by cloud providers**, to distribute incoming traffic uniformly to the service.
- These services serve as traffic controllers, efficiently directing client requests to the appropriate nodes hosting your pods.

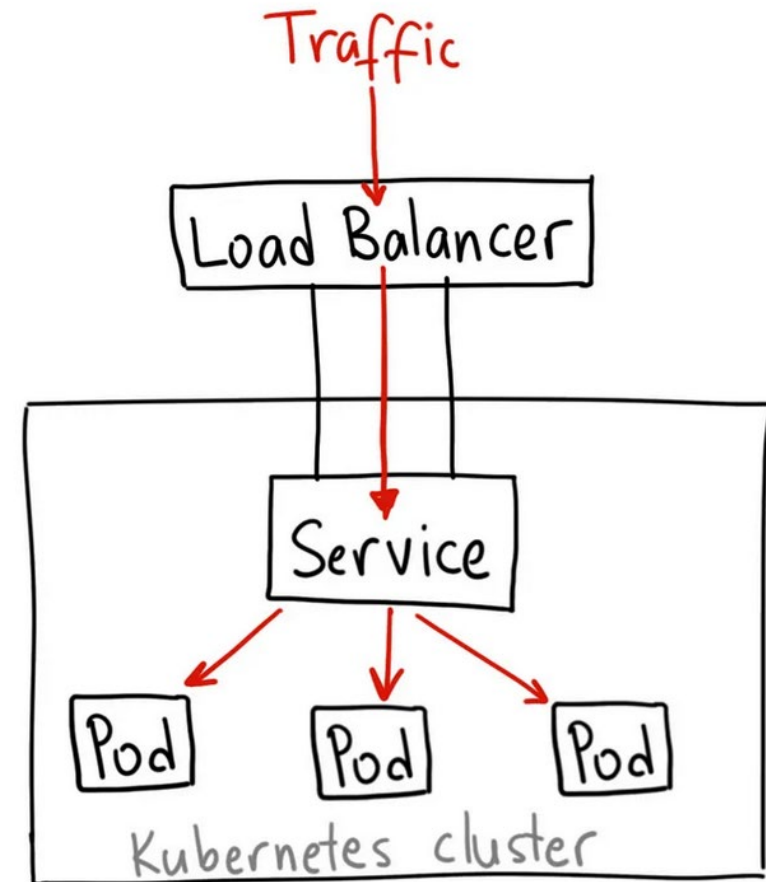

External load balancer

- Used to directly expose a service.
- All traffic on the port you specify will be forwarded to the service.
- There is no filtering, no routing, etc. This means you can send almost any kind of traffic to it, like HTTP, TCP, UDP, Websockets, gRPC, or whatever.

apiVersion: v1

kind: Service

metadata:

name: api-service

spec:

selector:

app: api-app

ports:

- protocol: TCP

port: 80

targetPort: 8080

type: LoadBalancer

External load balancer

- External load balancers **exist outside of the Kubernetes cluster**


So...

- **the cluster must be running on a provider that supports external load balancers**
- different load balancer providers have their own settings
- are defined per *service*, **they can only route to a single *service***

Ingress

- Ingress is a native Kubernetes resource that exposes HTTP and HTTPS routes from outside the cluster to services within the cluster.
- It relies on rules set in the Ingress resource to control traffic routing.
- Helps on DNS routing.
- Can provide SSL termination and name-based virtual hosting.

Ingress

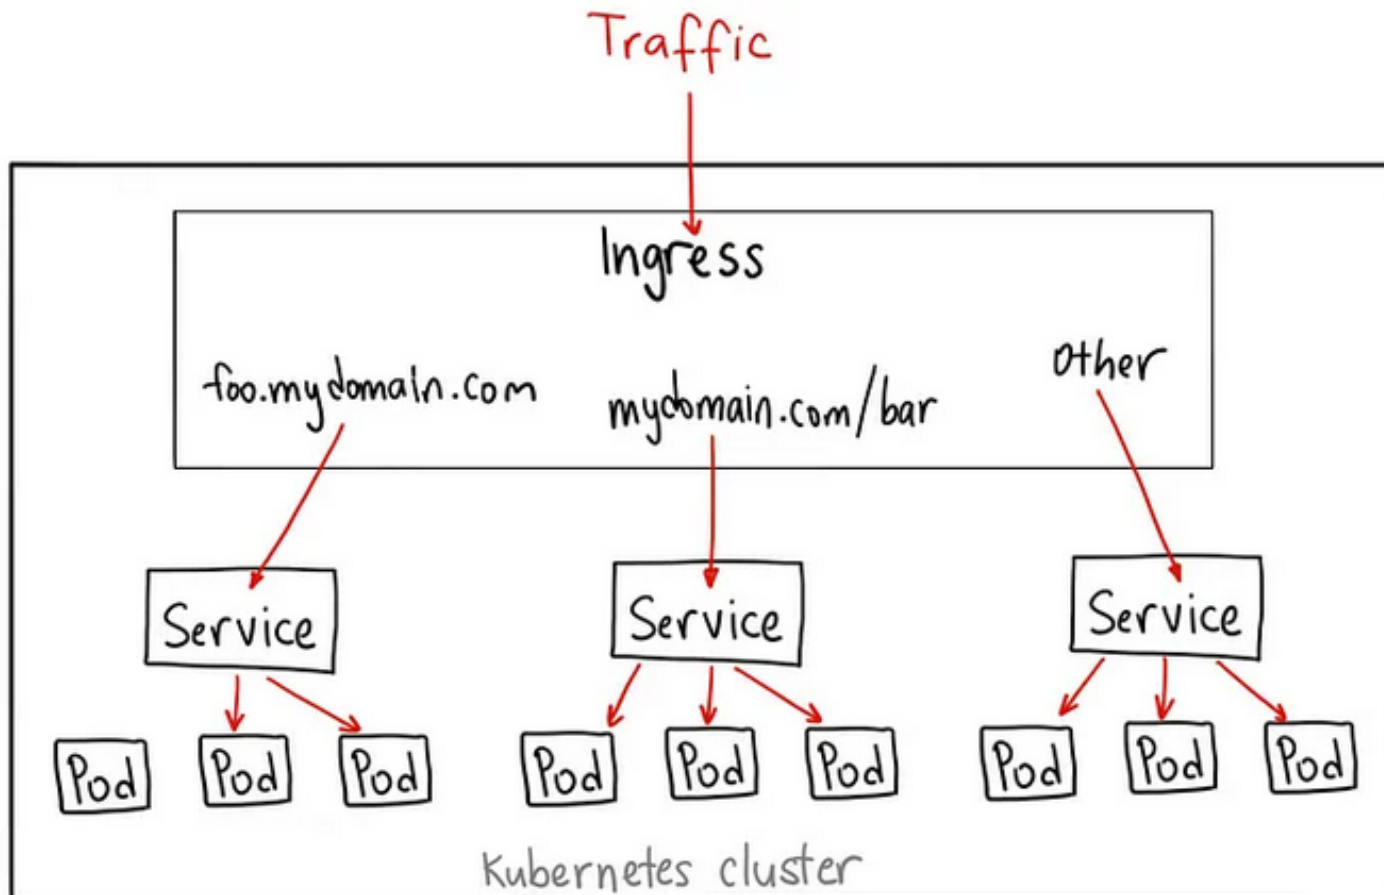

apiVersion: extensions/v1beta1

kind: Ingress

metadata:

name: my-ingress

spec:

backend:

serviceName: other

servicePort: 8080

rules:

- **host: foo.mydomain.com**

http:

paths:

- backend:

serviceName: foo

servicePort: 8080

- **host: mydomain.com**

http:

paths:

- **path: /bar/***

backend:

serviceName: bar

servicePort: 8080

Ingress

- Ingress is actually NOT a **type** of service
- act as a “smart router” or entrypoint into the cluster.

```
apiVersion: extensions/v1beta1
kind: Ingress
metadata:
  name: my-ingress
spec:
  backend:
    serviceName: other
    servicePort: 8080
  rules:
  - host: foo.mydomain.com
    http:
      paths:
      - backend:
          serviceName: foo
          servicePort: 8080
  - host: mydomain.com
    http:
      paths:
      - path: /bar/*
        backend:
          serviceName: bar
          servicePort: 8080
```

Ingress

- An **Ingress** requires an associated controller to manage it.
- Kubernetes provides controllers for most objects like *deployments* and *services*, **it does not include an *ingress controller* by default.**
- The most popular is the **nginx ingress controller** (AWS, GCE also supported and maintained).
- Annotations field used to pass specific configurations into the *ingress controller*.

apiVersion: networking.k8s.io/v1

kind: Ingress

metadata:

name: ingress-example

annotations:

nginx.ingress.kubernetes.io/rewrite-target: /

<https://kubernetes.io/docs/concepts/services-networking/ingress-controllers/>

Kubernetes services comparison

CLUSTERIP VS NODEPORT VS LOADBALANCER VS INGRESS



More details at tinyurl.com/k8s-service

	ClusterIP Service	NodePort Service	LoadBalancer Service	Ingress + Service
Native K8s Resource	Yes	Yes	Yes, but needs cloud provider load balancer	Yes, but needs ingress controller deployed in cluster
Protocol (OSI Layer)	layer 4	layer 4	layer 4 and below*	layer 7 - http and https only
Allows multiple services per IP	No	No	Yes, but not same port**	Yes
Can expose outside the cluster	No	Yes	Yes (1 service)	Yes (multiple services)

* LoadBalancers are often used in layer 4, but some LoadBalancers support layers 2-3 as well.
For example, <https://metallb.universe.tf/concepts/layer2/>

** For example, <https://kube-vip.io/docs/usage/kubernetes-services/#multiple-services-on-the-same-ip>


Ingress vs Load balancer

	Ingress	LoadBalancer
Layer	Application layer (L7, HTTP/HTTPS)	Network layer (L4, TCP/UDP)
Use case	Centralized routing for multiple services	Direct exposure for individual services
External IPs	Shares a single external IP	Allocates a unique external IP per service
Features	Advanced routing, SSL termination	Basic load balancing
Cost	More cost-effective (shared IP)	Can be expensive for many services

<https://spacelift.io/blog/kubernetes-load-balancer>

Ingress + LB

- External load balancers alone aren't a practical solution for providing the networking capabilities necessary for a K8s environment.
- Kubernetes architecture allows to combine load balancers with an Ingress Controller:
 - Instead of provisioning an external load balancer for every application service that needs external connectivity, we can deploy and configure a single load balancer that targets an Ingress Controller.
 - The Ingress Controller serves as a single entrypoint and can then route traffic to multiple applications in the cluster.

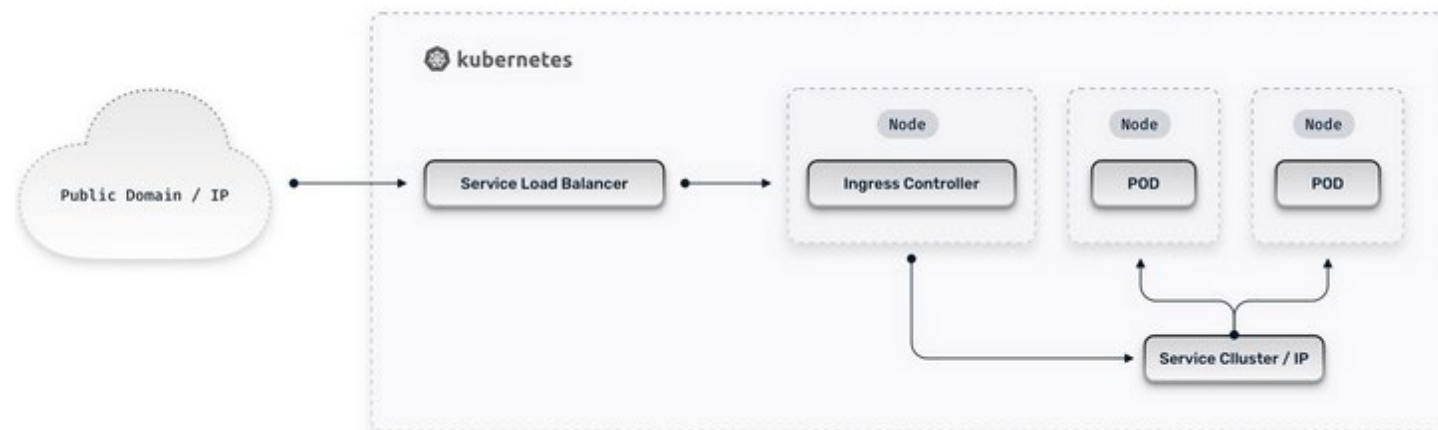

Best practices

- Carefully **consider your requirements**. Is a layer 4 load balancer sufficient for your needs, or do you require the option for application layer 7 routing or more advanced features such as SSL termination?
- **Different implementation, different features**. Consult the documentation of the solution you are using (Ingress controller, Cloud load balancer).
- Implement **readiness** and **liveness probes** to check the health of your pods, enabling the load balancer to distribute traffic only to healthy instances.
- **Enable connection draining** where supported. Connection draining ensures that existing connections are gracefully handled when a pod or instance is being terminated or scaled.
- **Properly configure Pod autoscaling** to automatically scale the number of pods based on resource utilization or custom metric.
- **Regularly monitor** your system and analyze metrics.

Best practices

- **Apply security best practices**, such as enabling SSL/TLS termination on the load balancer and ensure proper access controls (IAM) are in place to prevent unauthorized access.
- **Simulating failure scenarios** to test your configuration.

