

# FUEL

## introduzione e primi test

Giovanni Zizzi, Diego Michelotto  
INFN-CNAF  
17 Dicembre 2014

# Indice

- Introduzione
- Descrizione
- Infrastruttura di test
- Test effettuati
- Considerazioni/problemi riscontrati
- «Demo»

# Introduzione

- Fuel è un tool per l'installazione e la gestione di OpenStack
- Si tratta di un progetto open-source, prodotto da Mirantis (OpenStack gold member)
- Permette di lavorare tramite web-GUI (anche se dà la possibilità di usare dei client cli)
- È possibile creare uno o più OpenStack environment
- Disponibile per:
  - Icehouse su Centos 6.5
  - Icehouse su Ubuntu 12.04.4
- Usa un suo repository dei pacchetti di Openstack

# Introduzione

- Occorrono due interfacce di rete perché servono due reti/vlan untagged una per admin di Fuel e una per la rete pubblica di Openstack
- Fuel va installato su un nodo (Fuel master) tramite cd
- Trova automaticamente ogni host (fisico o virtuale) configurato per effettuare il boot da rete e presente nella VLAN (Admin)
- Si sceglie il sistema operativo che viene installato via Cobbler
- Installazione di Openstack via Puppet
- Assegnazione dei (controller, storage et similia) e configurazione



# FUEL

for OpenStack®



Copyright © 2013-2014 Mirantis. All rights reserved.

Version: 5.1

**FUEL** for OpenStack

Environments Releases Support

admin Change password Logout

10 TOTAL NODES 1 UNALLOCATED NODE

Home / Environments

MIRANTIS Master node installation completed successfully.  
If you want to register your installation and sign up for trial support, please click [here](#). Otherwise you can close this panel.

### My OpenStack Environments

<b>OCP</b>	
Nodes:	9
CPU (cores):	132
HDD:	2.3 TB
RAM:	212.0 GB
Operational	



New OpenStack Environment

MIRANTIS Copyright © 2013-2014 Mirantis. All rights reserved. EN Version: 5.7

La release di OpenStack utilizzata è Icehouse

## Releases

OpenStack Release	Version	Status
Icehouse on CentOS 6.5	2014.1-5.1	Active
Icehouse on Ubuntu 12.04.4	2014.1-5.1	Active

## Support



### Register product

Registering will ensure that you receive important notifications about issues and new versions of Mirantis products. In addition, you will receive complementary access to our basic support services for the next 30 days!

Register product



### Contact Support

If you need to report a problem or just suggest an improvement, click the button below. We will get back to you as soon as possible.

If you have any questions, you can also reach out to developers on the IRC channel [#fuel](#) on [freenode.net](#).

Contact Support



### Download Diagnostic Snapshot

If you have encountered some bugs or errors, you may need to provide the support team with deployment and operational logs. You can download them all at once by clicking the button below.

Generate diagnostic snapshot



### Capacity Audit

To better manage your resources, you can run this report to find out what OpenStack roles have been deployed across all of your environments.

View Capacity Audit

# Creazione dell'environment

Si può scegliere e configurare:

- sistema operativo e release di OpenStack
- Deployment mode (HA o meno)
- hypervisor (vCenter oltre a KVM e QEMU)
- Network (nova network, neutron with GRE, neutron con VLAN)
- Backend storage
  - Cinder (block storage o LVM volume shared over ISCSI o Ceph con due o più Ceph-OSD and KVM)
  - Glance
    - in HA: default usa Swift ma può usare anche Ceph
    - Non in HA: di default usa lo storage locale del controller, ma può usare anche Ceph
- Servizi addizionali: sahara (hadoop-aaS), murano (application catalog), ceilometer

Fuel permette successivi cambiamenti e deployment (cambiare i servizi addizionali ed aggiungere o levare nodi), ma non si può cambiare la configurazione iniziale.

# Create a new OpenStack environment ✕

✓ Name and Release

## Deployment Mode

Compute

Network

Storage Backends

Additional Services

Finish

**Multi-node**

**Multi-node with HA**

This configuration requires multiple OpenStack controllers (3+) and provides high availability for all OpenStack components, including MySQL/Galera, RabbitMQ, and Cinder, as well as OpenStack API services. Select this configuration if you want to build a production-grade OpenStack cloud with 6 nodes or more.

Cancel

< Prev

Next >

# Assegnazione dei ruoli ad un nodo

Assign Roles

- Controller**  
*The controller initiates orchestration activities and provides an external API. Other components like Glance (OpenStack dashboard) and Nova-Scheduler are installed on the controller as well.*
- Compute** *This role cannot be combined with the other roles already selected.*  
*A compute node creates, manages and terminates virtual machine instances.*
- Cinder**  
*Cinder provides an infrastructure for managing block storage volumes in OpenStack. Block storage can be providing a server with access to raw block level storage.*
- Ceph OSD**  
*Ceph OSD is the object storage daemon for the Ceph distributed file system. It is responsible for storing obj network, for example to Glance.*

## Unallocated Nodes (3 nodes)

HDD: 112.0 GB RAM: 742.6 MB (2)

<input checked="" type="checkbox"/>	 <b>Untitled (C5:16)</b> CONTROLLER · CEPH-OSD		 DISCOVERED
<input type="checkbox"/>	 <b>Untitled (98:84)</b> UNALLOCATED		 DISCOVERED

# Configurazione di rete (1/2)

Nodes Networks Settings Logs Health Check Actions Deploy Changes

## Network Settings

Neutron with GRE segmentation

Public

	<b>Start</b>	<b>End</b>	
IP Range	<input type="text" value="131.154.98.3"/>	<input type="text" value="131.154.98.20"/>	<input type="button" value="⊕"/>
CIDR	<input type="text" value="131.154.98.0/24"/>		
Use VLAN tagging	<input type="checkbox"/>		
Gateway	<input type="text" value="131.154.98.1"/>		

Management

CIDR	<input type="text" value="10.20.98.0/24"/>
Use VLAN tagging	<input checked="" type="checkbox"/> <input type="text" value="2098"/>

I range di ip, gli ip dei gateway, l'uso o meno di VLAN taggate va indicato manualmente

# Configurazione di rete (2/2)

## Storage

CIDR

Use VLAN tagging

## Neutron L2 Configuration


	Start	End
Tunnel ID range	<input type="text" value="2"/>	<input type="text" value="65535"/>
Base MAC address	<input type="text" value="fa:16:3e:00:00:00"/>	

## Neutron L3 Configuration

Internal network CIDR	<input type="text" value="192.168.111.0/24"/>	
Internal network gateway	<input type="text" value="192.168.111.1"/>	
Floating IP ranges	<input type="text" value="131.154.98.100"/>	<input type="text" value="131.154.98.254"/>
DNS Servers	<input type="text" value="131.154.1.3"/>	<input type="text" value="131.154.3.1"/>

Finito tutto rimane da fare il controllo della rete

# Verifica dei settings di rete

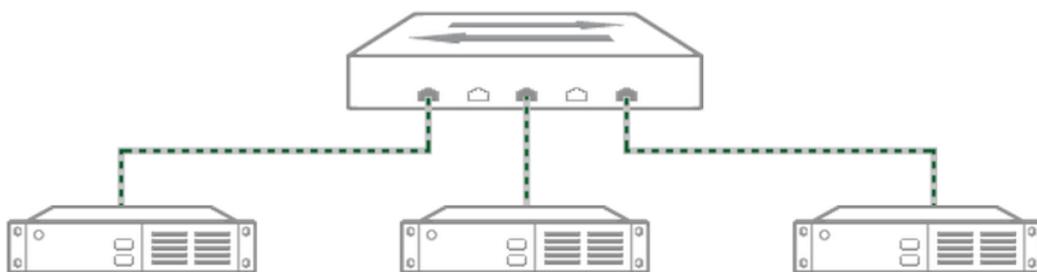

## Network Verification is done in 4 steps:

1. Every node starts listening for test frames
2. Every node sends out 802.1Q tagged UDP frames
3. Nodes listeners register test frames from other nodes
4. Send DHCP discover messages on all available ports.

Verify Networks

Cancel Changes

Save Settings

# Settings (1/4)



## OpenStack Settings

### Access

<b>username</b>	<input type="text" value="admin"/>	Username for Administrator
<b>password</b>	<input type="password" value="•••••"/> <input type="checkbox"/>	Password for Administrator
<b>tenant</b>	<input type="text" value="admin"/>	Tenant (project) name for Administrator
<b>email</b>	<input type="text" value="admin@example.org"/>	Email address for Administrator

### Additional Components

- Install Sahara**  
If selected, Sahara component will be installed
- Install Murano**  
If selected, Murano component will be installed
- Install Ceilometer**  
If selected, Ceilometer component will be installed

# Settings (2/4)

## Common

- OpenStack debug logging**  
Debug logging mode provides more information, but requires more disk space.
- Nova quotas**  
Quotas are used to limit CPU and memory usage for tenants. Enabling quotas will increase load on the Nova database.

## Hypervisor type

- KVM**  
Choose this type of hypervisor if you run OpenStack on hardware.
- QEMU**  
Choose this type of hypervisor if you run OpenStack on virtual hosts.
- vCenter**  
Choose this type of hypervisor if you run OpenStack in a vCenter environment.
- Auto assign floating IP**  
If selected, OpenStack will automatically assign a floating IP to a new instance.

## Scheduler driver

- Filter scheduler**  
Currently the most advanced OpenStack scheduler. See the OpenStack documentation for details.
- Simple scheduler**  
This is 'naive' scheduler which tries to find the least loaded host.
- Use qcow format for images**  
For most cases you will want qcow format. If it's disabled, raw image format will be used to run VMs. OpenStack with raw format currently does not support snapshotting.
- Start guests on host boot**  
Whether to (re-)start guests when the host reboots. If enabled, this option causes guests assigned to the host to be unconditionally restarted when nova-compute starts. If the guest is found to be stopped, it starts. If it is found to be running, it reboots.

Public Key

Public key(s) to include in authorized\_keys on deployed nodes

# Settings (3/4)

## Syslog

Hostname

Remote syslog hostname

Port

Remote syslog port

Syslog transport protocol

UDP

TCP

# Settings (4/4)

## Storage

- Cinder LVM over iSCSI for volumes**  
Requires at least one Storage - Cinder LVM node.
  - iSER protocol for volumes (Cinder)**  
High performance block storage: Cinder volumes over iSER protocol (iSCSI over RDMA). This feature requires SR-IOV capabilities in the NIC, and will use a dedicated virtual function for the storage network.
  - VMware vCenter for volumes (Cinder)**  
Configures Cinder to store volumes via VMware vCenter.
  - Ceph RBD for volumes (Cinder)**  
Configures Cinder to store volumes in Ceph RBD images.
  - Ceph RBD for images (Glance)**  
Configures Glance to use the Ceph RBD backend to store images. If enabled, this option will prevent Swift from installing.
  - Ceph RBD for ephemeral volumes (Nova)**  
Configures Nova to store ephemeral volumes in RBD. This works best if Ceph is enabled for volumes and images, too. Enables live migration of all types of Ceph backed VMs (without this option, live migration will only work with VMs launched from Cinder volumes).
  - Ceph RadosGW for objects (Swift API)**  
Configures RadosGW front end for Ceph RBD. This exposes S3 and Swift API interfaces. If enabled, this option will prevent Swift from installing.
- Ceph object replication factor**  Configures the default number of object replicas in Ceph. This number must be equal to or lower than the number of deployed 'Storage - Ceph OSD' nodes.

## Zabbix Access

**username**  Username for Zabbix Administrator

**password**  Password for Zabbix Administrator

Load Defaults

Cancel Changes

Save Settings

## Actions

### Rename Environment

Rename

### Reset Environment

Reset Environment is not available for an environment still being deployed.

Reset

### Delete Environment

*Clean up each node and return it to the pool of unallocated nodes.*

Delete

### Update Environment

The current environment is already being updated.

Update

# Dettagli HV dei singoli nodi

node-8



**Manufacturer:** ASUSTeK Computer INC.

**MAC Address:** 9e:32:ec:7b:0f:45

**FQDN:** node-8

**System** ASUSTeK Computer INC. RS700D-E6-RS8



**CPU** 16 x 2.40 GHz



**Memory** 6 x 4.0 GB, 24.0 GB total



**Disks** 1 drive, 0.3 TB total



**Interfaces** 2 x 1.0 Gbps



Configure Interfaces

Configure Disks

Close


# Dettagli sulla configurazione di rete

È stato necessario definire 4 VLAN

Eth0: rete admin di Fuel VLAN untagged

Eth1: rete pubblica VLAN untagged, rete management VLAN tagged e rete data VLAN tagged

Usata durante l'installazione

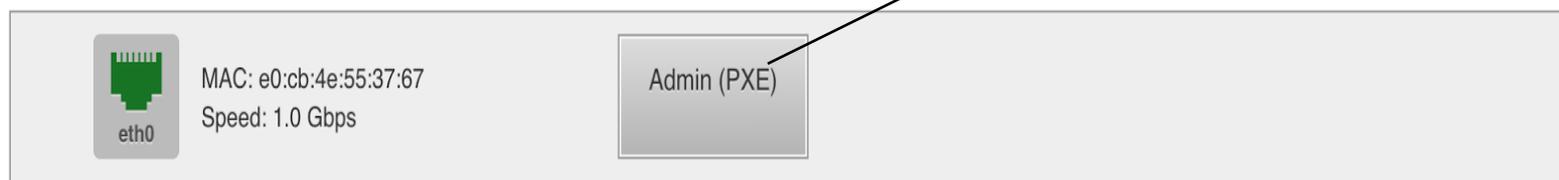

Usata per l'accesso ai nodi e alle VM

Traffico storage

Traffico interno all'environment (e.g. le query MySQL)

Nodes Networks Settings Logs Health Check Actions Deploy Changes

### Configure disks on node-8

sda (disk/by-path/pci-0000:08:00.0-scsi-0:0:0:0) Total Space: 0.3 TB

Base System 62.0 GB	MongoDB 216.8 GB
------------------------	---------------------

Back To Node List Load Defaults Cancel Changes Apply

# Installazione sistema operativo

OpenStack Release: Icehouse on CentOS 6.5 (2014.1.1-5.1) Deployment Mode: Multi-node with HA Status: Deployment

Nodes Networks Settings Logs Health Check Actions

23%

Group By: Roles Filter By: Node name/mac Configure Disks Configure Interfaces + Add Nodes

Select All

## Controller, Telemetry - MongoDB (3)

Select All

<input type="checkbox"/>	<b>Untitled (c4:41)</b> CONTROLLER · MONGO		INSTALLING CENTOS	CPU: 16	HDD: 0.3 TB	RAM: 24.0 GB	
<input type="checkbox"/>	<b>207-01-06-b</b> CONTROLLER · MONGO		INSTALLING CENTOS	CPU: 16	HDD: 0.3 TB	RAM: 24.0 GB	
<input type="checkbox"/>	<b>Untitled (08:ca)</b> CONTROLLER · MONGO		INSTALLING CENTOS	CPU: 16	HDD: 0.3 TB	RAM: 24.0 GB	

## Compute (2)

Select All

<input type="checkbox"/>	<b>Untitled (c4:cc)</b> COMPUTE		INSTALLING CENTOS	CPU: 16	HDD: 0.3 TB	RAM: 36.0 GB	
--------------------------	------------------------------------	--	-------------------	---------	-------------	--------------	--

# Installazione Openstack

OpenStack Release: Icehouse on CentOS 6.5 (2014.1.1-5.1) Deployment Mode: Multi-node with HA Status: Deployment

Nodes Networks Settings Logs Health Check Actions

44%

Group By: Roles Filter By: Node name/mac

Configure Disks Configure Interfaces + Add Nodes

Select All

### Controller, Telemetry - MongoDB (3)

Select All

<input type="checkbox"/>	<b>Untitled (c4:41)</b> CONTROLLER - MONGO		✓ READY	CPU: 16	HDD: 0.3 TB	RAM: 24.0 GB	
<input type="checkbox"/>	<b>207-01-06-b</b> CONTROLLER - MONGO		INSTALLING OPENSTACK	CPU: 16	HDD: 0.3 TB	RAM: 24.0 GB	
<input type="checkbox"/>	<b>Untitled (08:ca)</b> CONTROLLER - MONGO		INSTALLING OPENSTACK	CPU: 16	HDD: 0.3 TB	RAM: 24.0 GB	

### Compute (2)

Select All

<input type="checkbox"/>	<b>Untitled (c4:cc)</b> COMPUTE		CENTOS IS INSTALLED	CPU: 16	HDD: 0.3 TB	RAM: 36.0 GB	
<input type="checkbox"/>	<b>Untitled (f9:94)</b> COMPUTE		CENTOS IS INSTALLED	CPU: 16	HDD: 0.3 TB	RAM: 24.0 GB	

# Multi-node con HA vs. multi node

- Con HA vengono installati un cluster MySQL/Galera(master- master), RabbitMQ e HAProxy ed è necessario avere almeno tre controller
- Senza HA si installa solo UN controller ed uno o più compute/cinder node
- Nota: non si possono avere installazioni “all in one”

# Verifica dei servizi (1/2)

- Nodes
- Networks
- Settings
- Logs
- Health Check
- Actions

Deploy Changes

## OpenStack Health Check

Select All

Stop Tests

<input checked="" type="checkbox"/> HA tests. Duration 30 sec - 8 min	Expected Duration	Actual Duration	Status
Check data replication over mysql	1-40 s.	20.4 s.	
Check amount of tables in os databases is the same on each node	1-40 s.	19.3 s.	
RabbitMQ availability	100 s.	—	
RabbitMQ queues availability	100 s.	—	
RabbitMQ messages availability	100 s.	—	

<input checked="" type="checkbox"/> Sanity tests. Duration 30 sec - 2 min	Expected Duration	Actual Duration	Status
Flavor list availability	20 s.	0.4 s.	
Images list availability	20 s.	0.3 s.	
Instance list availability	20 s.	0.4 s.	

# Verifica dei servizi (1/2)

✓	<b>Functional tests. Duration 3 min - 14 min</b>	Expected Duration	Actual Duration	Status
✓	Create instance flavor	30 s.	0.2 s.	
✓	Create volume and boot instance from it	350 s.	—	
✓	Create volume and attach it to instance	350 s.	—	
✓	Create keypair	25 s.	—	
✓	Create security group	25 s.	—	
✓	Check network parameters	50 s.	—	
✓	Launch instance	200 s.	—	

# File di log consultabili tramite GUI

admin Change password Logout  
10 TOTAL NODES 1 UNALLOCATED NODE

Home / Environments / OCP

OCP (9 nodes)  
OpenStack Release: Icehouse on CentOS 6.5 (2014.1.1-5.1) Deployment Mode: Multi-node with HA Status: Operational

**Success**  
Deployment of environment 'OCP' is done. Access the OpenStack dashboard (Horizon) at <http://131.154.98.3/> Access Zabbix dashboard at <http://131.154.98.7/zabbix>

Nodes Networks Settings Logs Health Check Actions Deploy Changes

Logs  
Logs Fuel Master Source Web backend Min. level INFO Show

- Web backend
- REST API
- RPC consumer
- Astute
- HealthCheck

Nodes Networks Settings Logs Health Check Actions Deploy Changes

Logs  
Logs Other servers Node node-8 Source puppet Min. level INFO Show

Date level Message

Nodes Networks Settings Logs Health Check Actions Deploy Changes

## Logs

Logs Other servers Node node-8 Source puppet Min. level INFO Show

Date	Level	Message
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) node id='18' already has an IP address inside 'storage' network. [pid: 487 app: 0 req: 64202/88820] 172.17.42.1 ( ) {44 vars in 856 bytes} [wed Nov 19 15:23:52 2014] GET /api/nodes/allocation/stats?_=-1416400501678 -> generated 31 bytes in 24 msec (HTTP/1.1 200) 5 headers in 217 bytes (2 switches on core 0) [pid: 487 app: 0 req: 64203/88821] 172.17.42.1 ( ) {44 vars in 838 bytes} [wed Nov 19 15:23:52 2014] GET /api/notifications?_=-1416400501679 -> generated 13008 bytes in 20 msec (HTTP/1.1 200) 5 headers in 217 bytes (2 switches on core 0)

- DEBUG
- INFO
- NOTICE
- WARNING
- ERR
- CRIT
- ALERT
- EMERG

Nodes Networks Settings Logs Health Check Actions Deploy Changes

## Logs

Logs Other servers Node node-8 Source puppet Min. level INFO Show

Date	Level	Message
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) node id='18' already has an IP address inside 'storage' network. [pid: 487 app: 0 req: 64202/88820] 172.17.42.1 ( ) {44 vars in 856 bytes} [wed Nov 19 15:23:52 2014] GET /api/nodes/allocation/stats?_=-1416400501678 -> generated 31 bytes in 24 msec (HTTP/1.1 200) 5 headers in 217 bytes (2 switches on core 0) [pid: 487 app: 0 req: 64203/88821] 172.17.42.1 ( ) {44 vars in 838 bytes} [wed Nov 19 15:23:52 2014] GET /api/notifications?_=-1416400501679 -> generated 13008 bytes in 20 msec (HTTP/1.1 200) 5 headers in 217 bytes (2 switches on core 0)

- node-8
- node-10
- node-12
- node-13
- node-14
- node-15
- node-16
- node-17
- Untitled (e6:c7)

## Logs

Logs Other servers Node node-8 Source puppet Min. level INFO Show

Date	Level	Message
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='1' [pid: 487 app: 0 req: 64202/88820] 2014] GET /api/nodes/allocation/sta 1.1 200) 5 headers in 217 bytes (2 [pid: 487 app: 0 req: 64203/88821] 2014] GET /api/notifications?_=1416 0) 5 headers in 217 bytes (2 switch
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='1'
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='1'
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='1'
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='1'
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='1'
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='1'
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='8'
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='18'

puppet

anaconda

syslog

*Other install logs*

storage

kickstart-pre

kickstart-post

*Bootstrap logs*

dmesg

secure

messages

mcollective

agent

*Openstack logs*

nova-cert

nova-consoleauth

nova-scheduler

nova-conductor

nova-objectstore

nova-manage

keystone-all

## Logs

Logs Fuel Master Source Web backend Min. level INFO Show

Date	Level	Message
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='1' already has an IP address inside 'storage' network. [pid: 487 app: 0 req: 64202/88820] 2014] GET /api/nodes/allocation/stats?_=1416400501678 => generated 31 bytes in 24 msec (HTTP/ 1.1 200) 5 headers in 217 bytes (2 switches on core 0) [pid: 487 app: 0 req: 64203/88821] 172.17.42.1 () [44 vars in 856 bytes] [wed Nov 19 15:23:52 2014] GET /api/notifications?_=1416400501679 => generated 13008 bytes in 20 msec (HTTP/1.1 20 0) 5 headers in 217 bytes (2 switches on core 0)
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='17' already has an IP address inside 'storage' network.
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='16' already has an IP address inside 'storage' network.
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='15' already has an IP address inside 'storage' network.
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='14' already has an IP address inside 'storage' network.
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='13' already has an IP address inside 'storage' network.
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='12' already has an IP address inside 'storage' network.
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='10' already has an IP address inside 'storage' network.
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='8' already has an IP address inside 'storage' network.
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='18' already has an IP address inside 'public' network.
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='12' already has an IP address inside 'public' network.
2014-11-19 15:23:51	INFO	[7f15419e0740] (manager) Node id='10' already has an IP address inside 'public' network.

# Zabbix (1/2)

/etc/passwd has been changed on {HOST.NAME}

Ceilometer Agent Compute service is down on {HOST.NAME}

Ceilometer Alarm Agent Central service is down on {HOST.NAME}

Ceilometer Alarm Alarm Evaluator service is down on {HOST.NAME}

Ceilometer Alarm Notifier service is down on {HOST.NAME}

Ceilometer API Server service is down on {HOST.NAME}

Ceilometer Collector service is down on {HOST.NAME}

Cinder API Server process is not running on {HOST.NAME}

Cinder API Server service is down on {HOST.NAME}

Cinder API test failed

Cinder Scheduler process is not running on {HOST.NAME}

Cinder Volume process is not running on {HOST.NAME}

Configured max number of opened files is too low on {HOST.NAME}

Configured max number of processes is too low on {HOST.NAME}

Disk I/O is overloaded on {HOST.NAME}

DNS resolve error on {HOST.NAME}

Glance API Server process is not running on {HOST.NAME}

Glance API Server service is down on {HOST.NAME}

Glance API test failed on {HOST.NAME}

Glance Registry Server process is not running on {HOST.NAME}

Glance Registry Server service is down on {HOST.NAME}

Horizon HTTP Server process is not running on {HOST.NAME}

Horizon HTTP Server service is down on {HOST.NAME}

Host information was changed on {HOST.NAME}

Host name of zabbix\_agentd was changed on {HOST.NAME}

Hostname was changed on {HOST.NAME}

Keystone Admin API Server service is down on {HOST.NAME}

Keystone API Server service is down on {HOST.NAME}

Keystone API test failed on {HOST.NAME}

Keystone Server process is not running on {HOST.NAME}

Keystone Service API test failed on {HOST.NAME}

Lack of available memory on server {HOST.NAME}

Lack of free swap space on {HOST.NAME}

Less than 25% free in the configuration cache

Less than 25% free in the history cache

Less than 25% free in the text history cache

# Zabbix (2/2)

Less than 25% free in the trends cache	
Libvirtd process is not running on {HOST.NAME}	
Memcache service is down on {HOSTNAME}	Open vSwitch Server process is not running on {HOST.NAME}
Memcached process is not running on {HOST.NAME}	Processor load is too high on {HOST.NAME}
More than 100 items having missing data for more than 10 minutes	RabbitMQ EPMD service is down on {HOST.NAME}
MySQL is down	RabbitMQ Server process is not running on {HOST.NAME}
Neutron API test failed on {HOST.NAME}	RabbitMQ Server service is down on {HOST.NAME}
Neutron DHCP Agent process is not running on {HOST.NAME}	RsyslogD Server process is not running on {HOST.NAME}
Neutron L3 Agent process is not running on {HOST.NAME}	SSH Server process is not running on {HOST.NAME}
Neutron Metadata Agent process is not running on {HOST.NAME}	SSH Server service is down on {HOST.NAME}
Neutron Server process is not running on {HOST.NAME}	Swift Account Replicator process is not running on {HOST.NAME}
Neutron Server service is down on {HOST.NAME}	Swift Account Server process is not running on {HOST.NAME}
Nova API EC2 Server service is down on {HOST.NAME}	Swift Account Server service is down on {HOST.NAME}
Nova API OSAPI Compute Server service is down on {HOST.NAME}	Swift Container Replicator process is not running on {HOST.NAME}
Nova API process is not running on {HOST.NAME}	Swift Container Server process is not running on {HOST.NAME}
Nova API test failed on {HOST.NAME}	Swift Container Server service is down on {HOST.NAME}
Nova Cert process is not running on {HOST.NAME}	Swift Object Replicator process is not running on {HOST.NAME}
Nova Compute process is not running on {HOST.NAME}	Swift Object Server process is not running on {HOST.NAME}
Nova ConsoleAuth process is not running on {HOST.NAME}	Swift Object Server service is down on {HOST.NAME}
Nova Scheduler process is not running on {HOST.NAME}	
NTP Server process is not running on {HOST.NAME}	Swift Proxy Server process is not running on {HOST.NAME}

# Configurazione usata per i test

Icehouse su CentOS6.5

HA Multi-nodo

Neutron con GRE

Nodi:

- 1 fuel master
- 3 controller (con ceilometer)
- 2 compute
- 1 cinder
- 2 ceph
- 1 zabbix

# Componenti

- controller
  - neutron (rete)
  - glance (API RESTful per la gestione delle immagini di VM e metadati)
  - horizon (dashboard)
  - keystone (identity service)
- compute (su di loro vengono create le VM)
  - nova (modulo di OpenStack usato per i compute node)
  - HV
- ceph
  - backend storage (sia di nova che di glance) e delle immagini delle VM e dei dati
- cinder
  - serve per generare dei volumi storage da usare tramite le VM
- zabbix
  - monitoring

# Test effettuati

- Live migration OK → ceph
- HA: l'istanza rimane operativa finché almeno un controller risulta essere funzionante
- aggiungere togliere macchine a deploy effettuato: OK, anche se la macchina va rimossa a mano dal server Zabbix
- aggiornamento fuel e openstack a caldo: in corso
  - nota: l'aggiornamento può essere fatto solo partendo da IceHouse ad una successiva maintenance release, non è possibile aggiornare Havana o precedent ad Ice.
  - file scaricato per upgrade: c'è spazio solo in /var/tmp

# Problemi riscontrati

- Problemi conseguenti all'installazione di Zabbix: mysql non parte (service mysql start dà errore)
- workaround:
  - -cancellare il my.cnf
  - -cancellare i file /var/lib/mysql/ib\*
  - -ricreare il db
- Si rilancia il deployment che termina con successo
- Se il server zabbix viene aggiunto in un secondo momento (i.e. dopo il deploy iniziale) gli agenti non vengono installati sugli host
- Aggiornamento di zabbix fallisce a causa di conflitti di mysql-server
- Regioni attualmente non supportate
- I vari elementi del controller vanno installati assieme sulla stessa macchina

# Conclusioni

Fuel è un tool di installazione e gestione di Openstack

- facilita il lavoro di installazione grazie alla GUI
- dà ampia possibilità di configurazione dell'environment
- alcuni problem dovuti alle feature sperimentali

# “DEMO”

<https://agenda.infn.it/materialDisplay.py?contribId=26&sessionId=4&materialId=1&confId=8785>

# Domande

